

# ALUMINUM PROFILES



VOL I

Types of installation:



Material: Extruded aluminum  
Dimension: 25.1×11.9mm  
Length: MAX 6m

BLEIAP10001

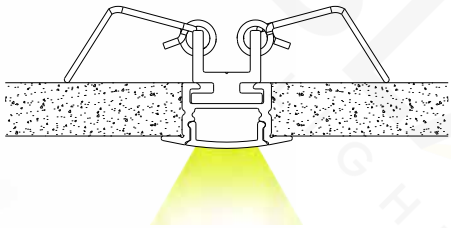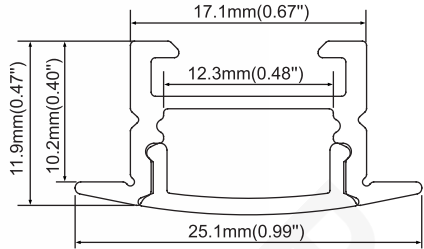

FINISH



Anod. aluminum



white



Black



IP20

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

ACCESSORIES



Spring clip



90° Horizontal connector



90° Vertical connector



135° Horizontal connector



180° Connector






135° Vertical connector

Types of installation:



Material: Extruded aluminum  
Dimension: 17.1×11.9mm  
Length: MAX 6m

BLEIAP10002

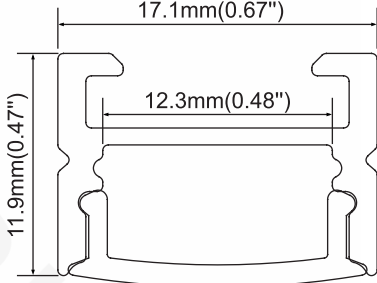

IP20

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

ACCESSORIES



Mounting clip (metal)



Magnet



Adjustable bracket



90° Vertical connector



90° Horizontal connector



180° Connector



135° Vertical connector



**BLEIAP10003**

Types of installation:

Material: Extruded aluminum  
Dimension: 17.1×18.5mm  
Length: MAX 6m


CE IP20

17.1mm(0.67")  
18.5mm(0.73")  
16.8mm(0.66")  
12.3mm(0.48")


FINISH

Anod. aluminum white Black


END CAPS

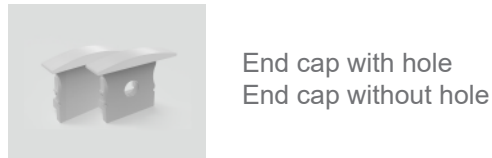

DIFFUSERS

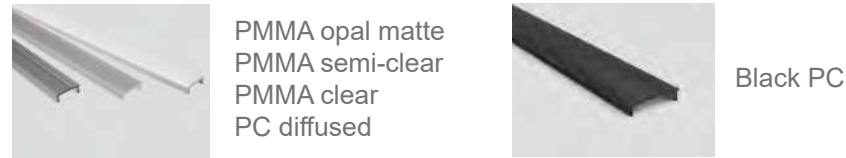

ACCESSORIES

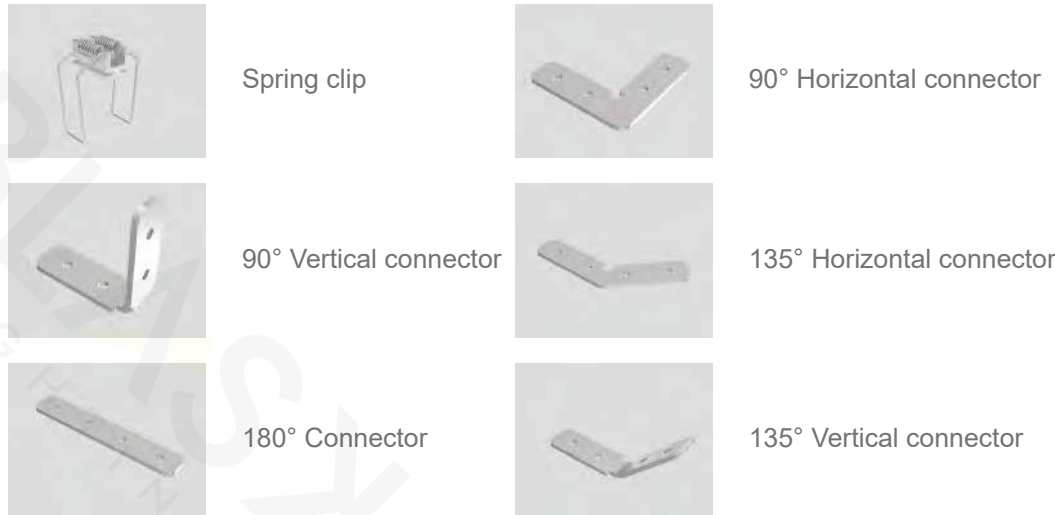

**BLEIAP10004**

Types of installation:

Material: Extruded aluminum  
Dimension: 17.1×18.5mm  
Length: MAX 6m

CE IP20


17.1mm(0.67")  
18.5mm(0.73")  
12.3mm(0.48")

120°


FINISH

Anod. aluminum white Black


END CAPS

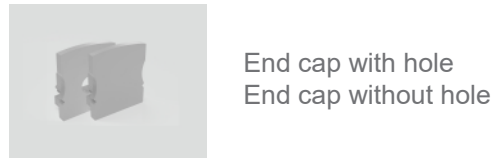


DIFFUSERS

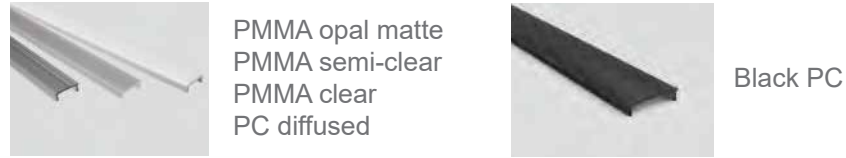


ACCESSORIES

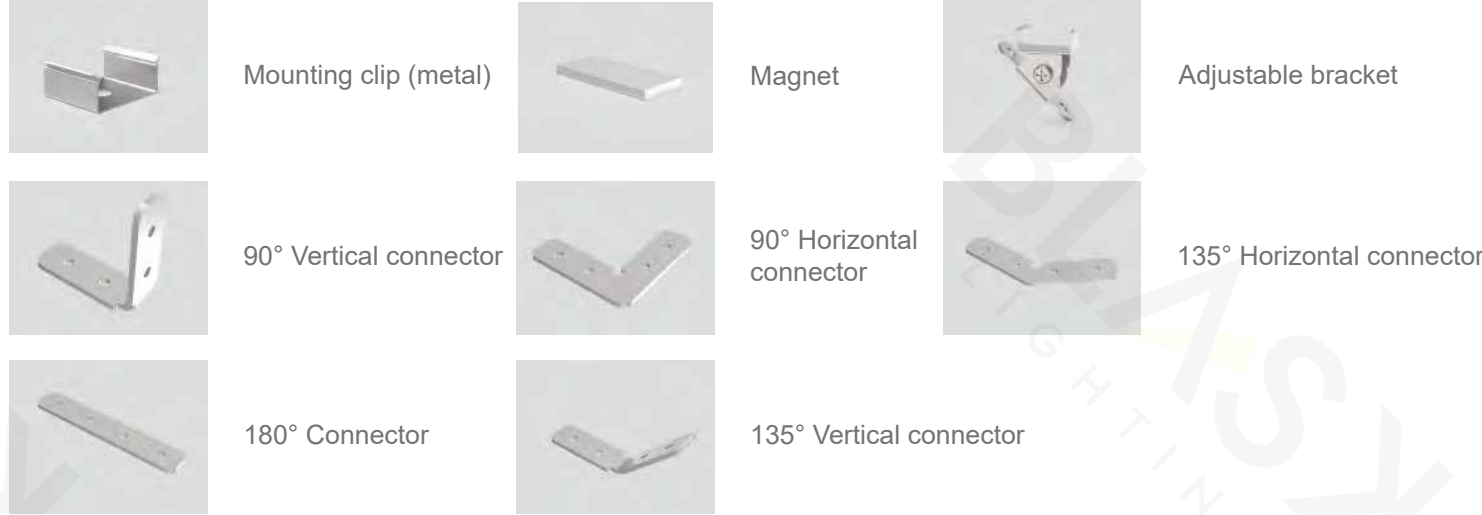


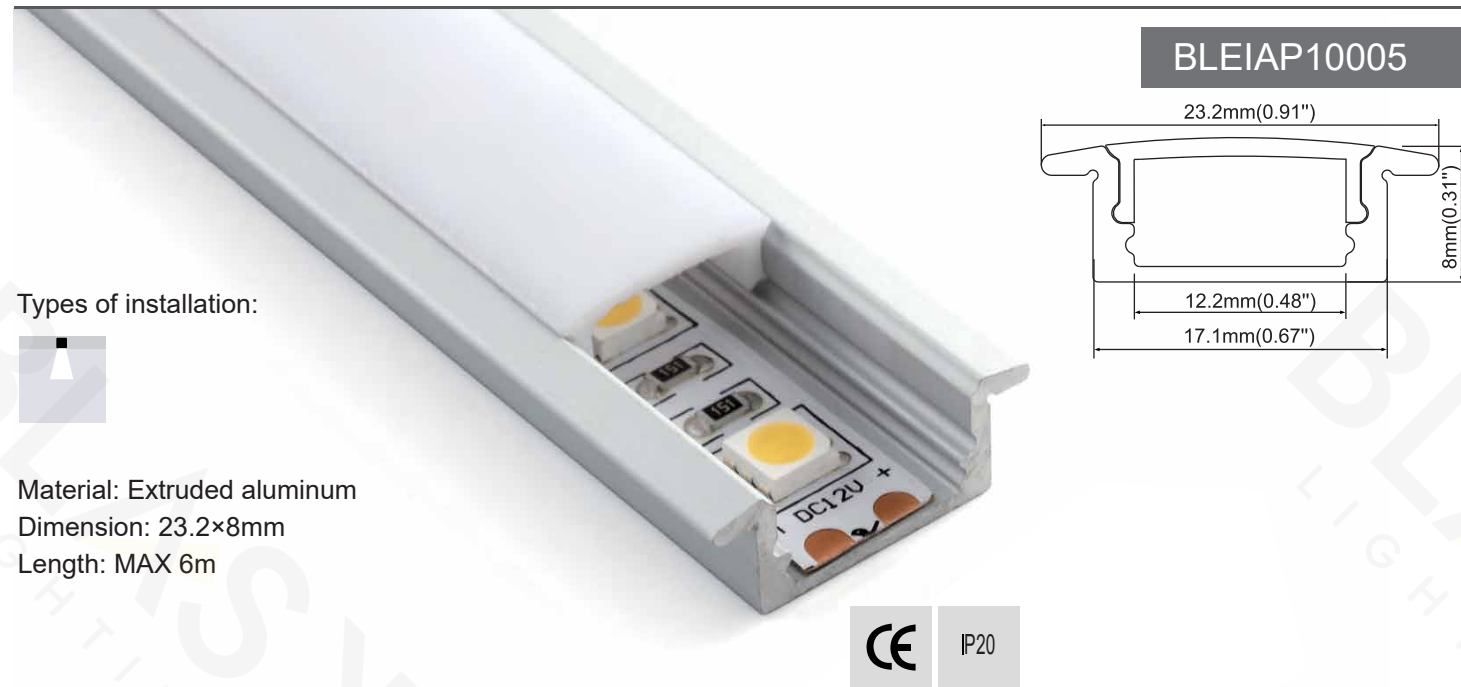

## END CAPS

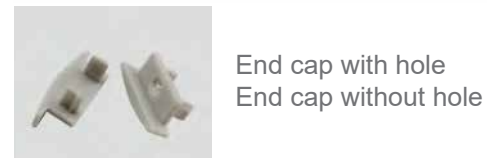

## DIFFUSERS

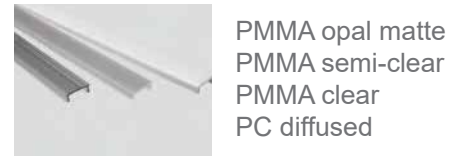


## INSTAIIATION STEPS








## END CAPS



## DIFFUSERS

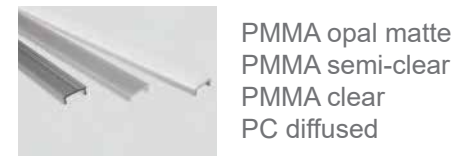


## ACCESSORIES

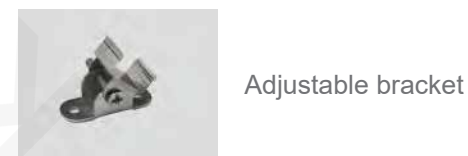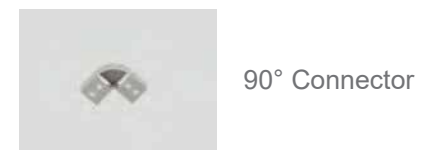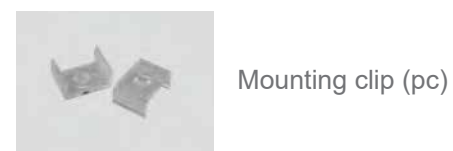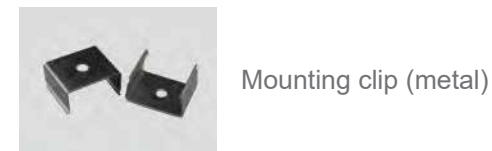






#### END CAPS

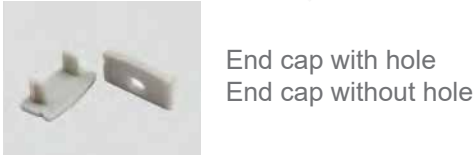


#### DIFFUSERS

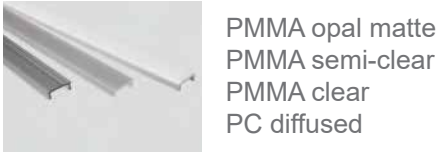

#### ACCESSORIES

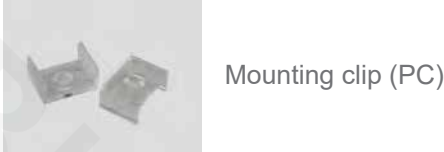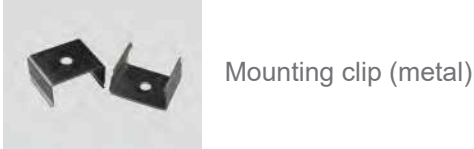

#### END CAPS

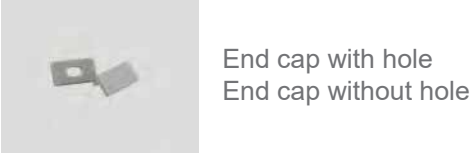

#### DIFFUSERS




#### ACCESSORIES







BLEIAP10009

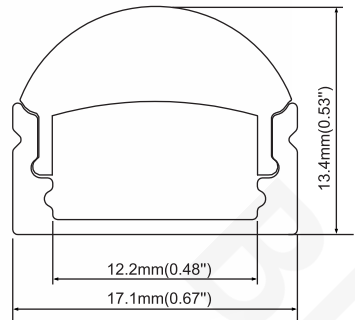

Types of installation:



Material: Extruded aluminum  
Dimension: 17.1×13.4mm  
Length: MAX 6m




#### END CAPS



End cap with hole  
End cap without hole


#### FINISH



#### DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
60 degrees



PC diffused

#### ACCESSORIES



Mounting clip (metal)




Mounting clip (PC)



180° Connector



BLEIAP10010

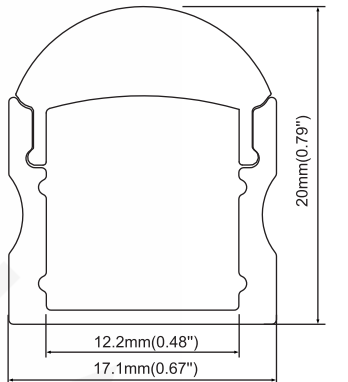

Types of installation:



Material: Extruded aluminum  
Dimension: 17.1×20mm  
Length: MAX 6m




#### END CAPS



End cap with hole  
End cap without hole

#### FINISH



#### DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
15 degrees



PC diffused

#### ACCESSORIES



Mounting clip (metal)



Mounting clip (PC)



180° Connector



Types of installation:



Material: Extruded aluminum  
Dimension: 23.2×15.3mm  
Length: MAX 6m



## END CAPS



End cap with hole  
End cap without hole

## DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

## INSTALLATION STEPS



step 01



step 02



Types of installation:



Material: Extruded aluminum  
Dimension: 17.1×15.3mm  
Length: MAX 6m



## END CAPS




End cap with hole  
End cap without hole

## DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

## FINISH



## ACCESSORIES



Mounting clip(metal)



Mounting clip (PC)



Adjustable bracket



90° Connector




180° Connector





BLEIAP10013




Types of installation:



Material: Extruded aluminum  
Dimension: 16×16mm  
Length: MAX 6m



FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PC diffused

DIFFUSERS



Mounting clip (PC)



Mounting clip (metal)

INSTALLATION STEPS



step 01



step 02




step 03



step 04

BLEIAP10014

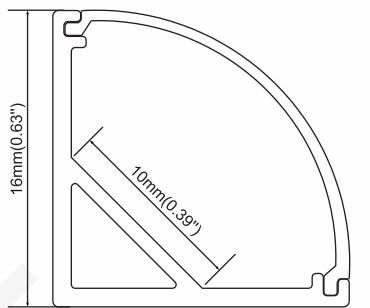

Types of installation:




Material: Extruded aluminum  
Dimension: 16×16mm  
Length: MAX 6m

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS




PMMA opal matte  
PMMA semi-clear  
PC diffused



Black PC

FINISH



ACCESSORIES



Mounting clip (metal)




Mounting clip (PC)





**BLEIAP10015**



Types of installation:



Material: Extruded aluminum  
Dimension: 18.4×18.4mm  
Length: MAX 6m




#### END CAPS



End cap with hole  
End cap without hole

#### DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

#### ACCESSORIES



Mounting clip (metal)




Mounting clip (PC)






**BLEIAP10016**



Types of installation:





Material: Extruded aluminum  
Dimension:  $\varnothing$ 20.8mm  
Length: MAX 6m




#### END CAPS



End cap with hole  
End cap without hole

#### DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PC diffused

#### ACCESSORIES



Mounting clip (metal)



Steel wire










**BLEIAP10020**



27mm(1.06")  
16mm  
16.7mm(0.66")  
20.3mm(0.80")

Types of installation:



Material: Extruded aluminum  
Dimension: 20.3×27mm  
Length: MAX 6m

**END CAPS**




End cap with hole  
End cap without hole

**DIFFUSERS**




PMMA opal matte  
PMMA semi-clear  
PC diffused

**ACCESSORIES**

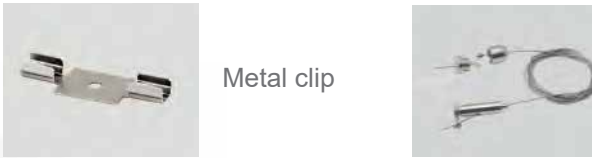

Metal clip  
Steel wire

**FINISH**




Anod. aluminum   white   Black

CE IP20



**BLEIAP10022**

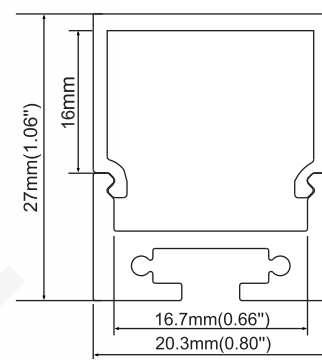


27mm(1.06")  
16mm  
16.7mm(0.66")  
20.3mm(0.80")

Types of installation:



Material: Extruded aluminum  
Dimension: 20.3×27mm  
Length: MAX 6m

**END CAPS**



End cap with hole  
End cap without hole

**DIFFUSERS**




PMMA opal matte  
PMMA semi-clear  
PC diffused

**ACCESSORIES**



Metal clip  
Steel wire

**FINISH**




Anod. aluminum   white   Black

CE IP20



**BLEIAP10021**



36.5mm(1.44")  
25mm(0.99")  
16.7mm(0.66")  
20.3mm(0.80")

Types of installation:



Material: Extruded aluminum  
Dimension: 20.3×36.5mm  
Length: MAX 6m

**END CAPS**




End cap without hole

**DIFFUSERS**




PC diffused

**ACCESSORIES**

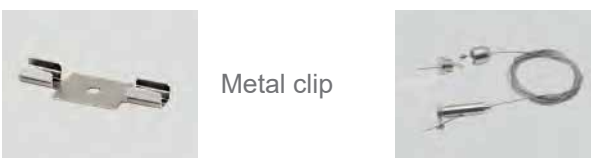

Metal clip  
Steel wire

**FINISH**



Anod. aluminum   white   Black

CE IP20







Types of installation:




Material: Extruded aluminum  
Dimension: 30.5×12.8mm  
Length: MAX 6m

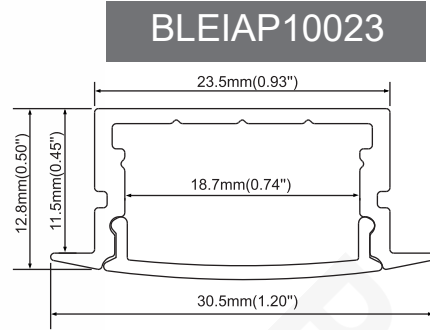

FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

ACCESSORIES



Spring clip




Mounting clip (metal)


Types of installation:



Material: Extruded aluminum  
Dimension: 23.5×12.8mm  
Length: MAX 6m

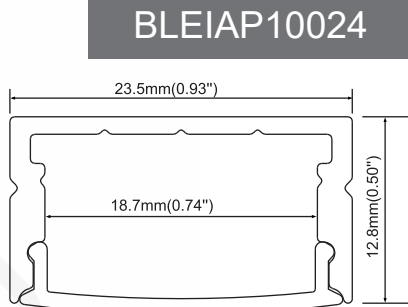

FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

ACCESSORIES



Mounting clip (PC)



Mounting clip (metal)



Adjustable bracket







#### END CAPS



End cap with hole  
End cap without hole

#### DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC



#### END CAPS



End cap with hole  
End cap without hole

#### DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

#### ACCESSORIES



Adjustable bracket



Mounting clip (PC)



Mounting clip (metal)




Types of installation:




Material: Extruded aluminum  
Dimension: 36×28mm  
Length: MAX 6m




FINISH



Anod. aluminum white Black

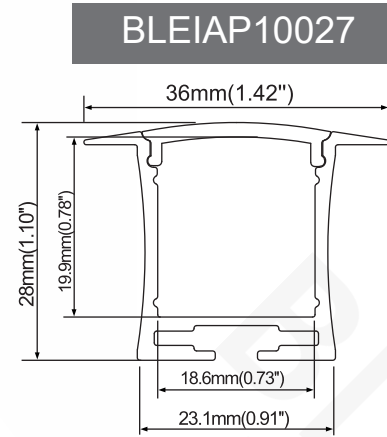

## END CAPS



End cap with hole  
End cap without hole

## DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused




Black PC


## ACCESSORIES



Spring clip

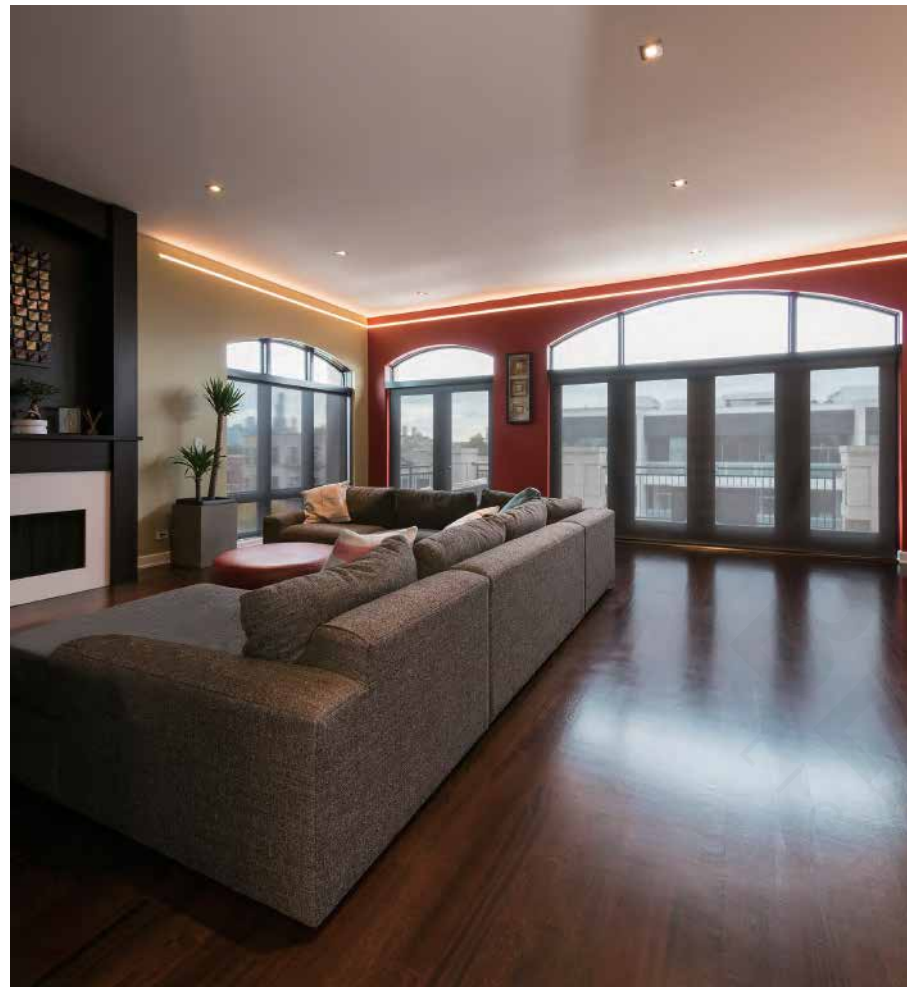


Types of installation:




Material: Extruded aluminum  
Dimension: 23.4×28mm  
Length: MAX 6m



FINISH



Anod. aluminum white Black

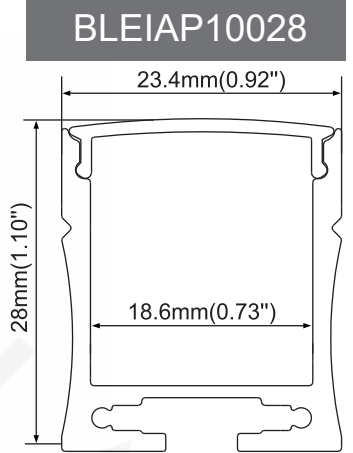

## END CAPS



End caps

## DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

## ACCESSORIES



Steel wire



Mounting clip (metal)








END CAPS




DIFFUSERS



ACCESSORIES

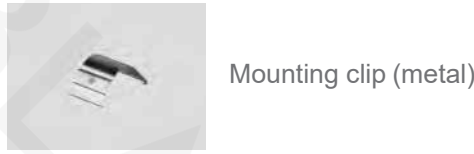




END CAPS

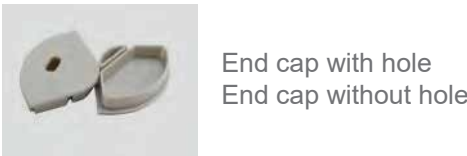

DIFFUSERS




ACCESSORIES

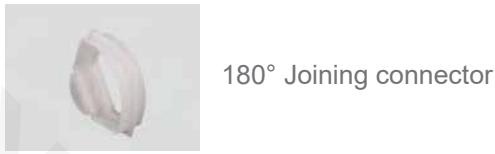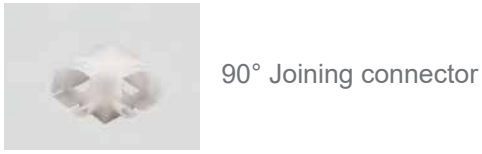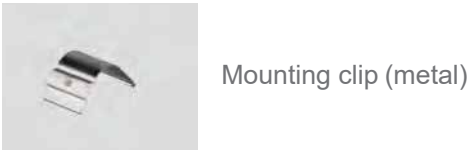



BLEIAP10031

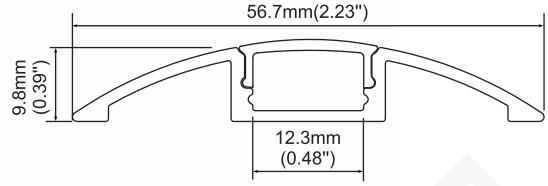


Types of installation:



Material: Extruded aluminum  
Dimension: 56.7×9.8mm  
Length: MAX 6m



FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused




Black PC

Types of installation:




Material: Extruded aluminum  
Dimension:  $\phi 33$ mm  
Length: MAX 6m

BLEIAP10032

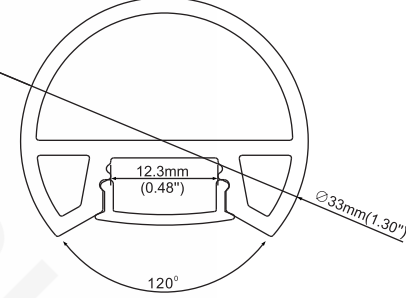

FINISH




END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




Hanging clip

**BLEIAP10033**

Types of installation:



Material: Extruded aluminum  
Dimension: 17.1×15mm  
Length: MAX 6m



**END CAPS**



End cap with hole  
End cap without hole

**FINISH**




Anod. aluminum white Black

**DIFFUSERS**



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

**ACCESSORIES**

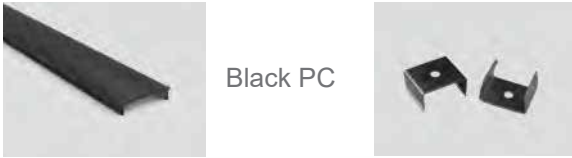


Black PC Mounting clip (metal)

**BLEIAP10034**

Types of installation:



Material: Extruded aluminum  
Dimension: 23.5×15mm  
Length: MAX 6m

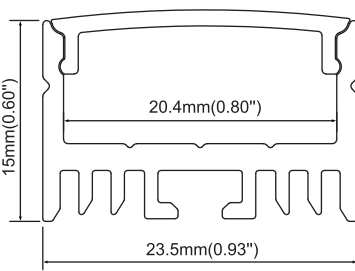

**END CAPS**



End cap with hole  
End cap without hole

**FINISH**




Anod. aluminum white Black

**DIFFUSERS**



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

**ACCESSORIES**

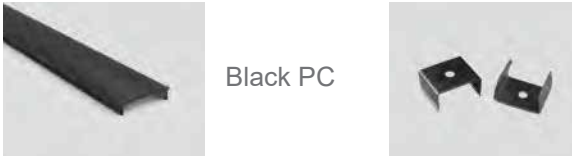


Black PC Mounting clip (metal)

**BLEIAP10035**

Types of installation:



Material: Extruded aluminum  
Dimension: 26×33mm  
Length: MAX 6m

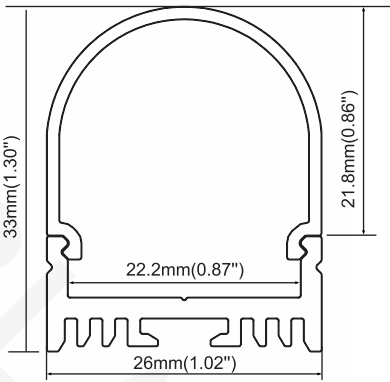

**END CAPS**



End cap with hole  
End cap without hole

**FINISH**




Anod. aluminum white Black

**DIFFUSERS**



PC diffused

**ACCESSORIES**

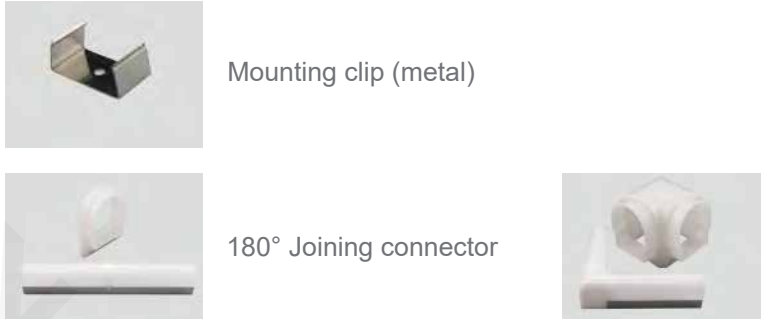


Mounting clip (metal) 180° Joining connector 90° Joining connector

**BLEIAP10036**

Types of installation:



Material: PMMA  
Dimension: 11.7×12mm  
Length: MAX 6m



**END CAPS**




End cap with hole  
End cap without hole

**ACCESSORIES**



Mounting clip (metal)



Rigid LED light bar

**FINISH**



white


CE IP20

**BLEIAP10037**

Types of installation:



Material: PMMA  
Dimension: 10×10mm  
Length: MAX 6m



**END CAPS**



End cap with hole  
End cap without hole

**ACCESSORIES**



Mounting clip (metal)




Rigid LED light bar

**FINISH**




white

CE IP20

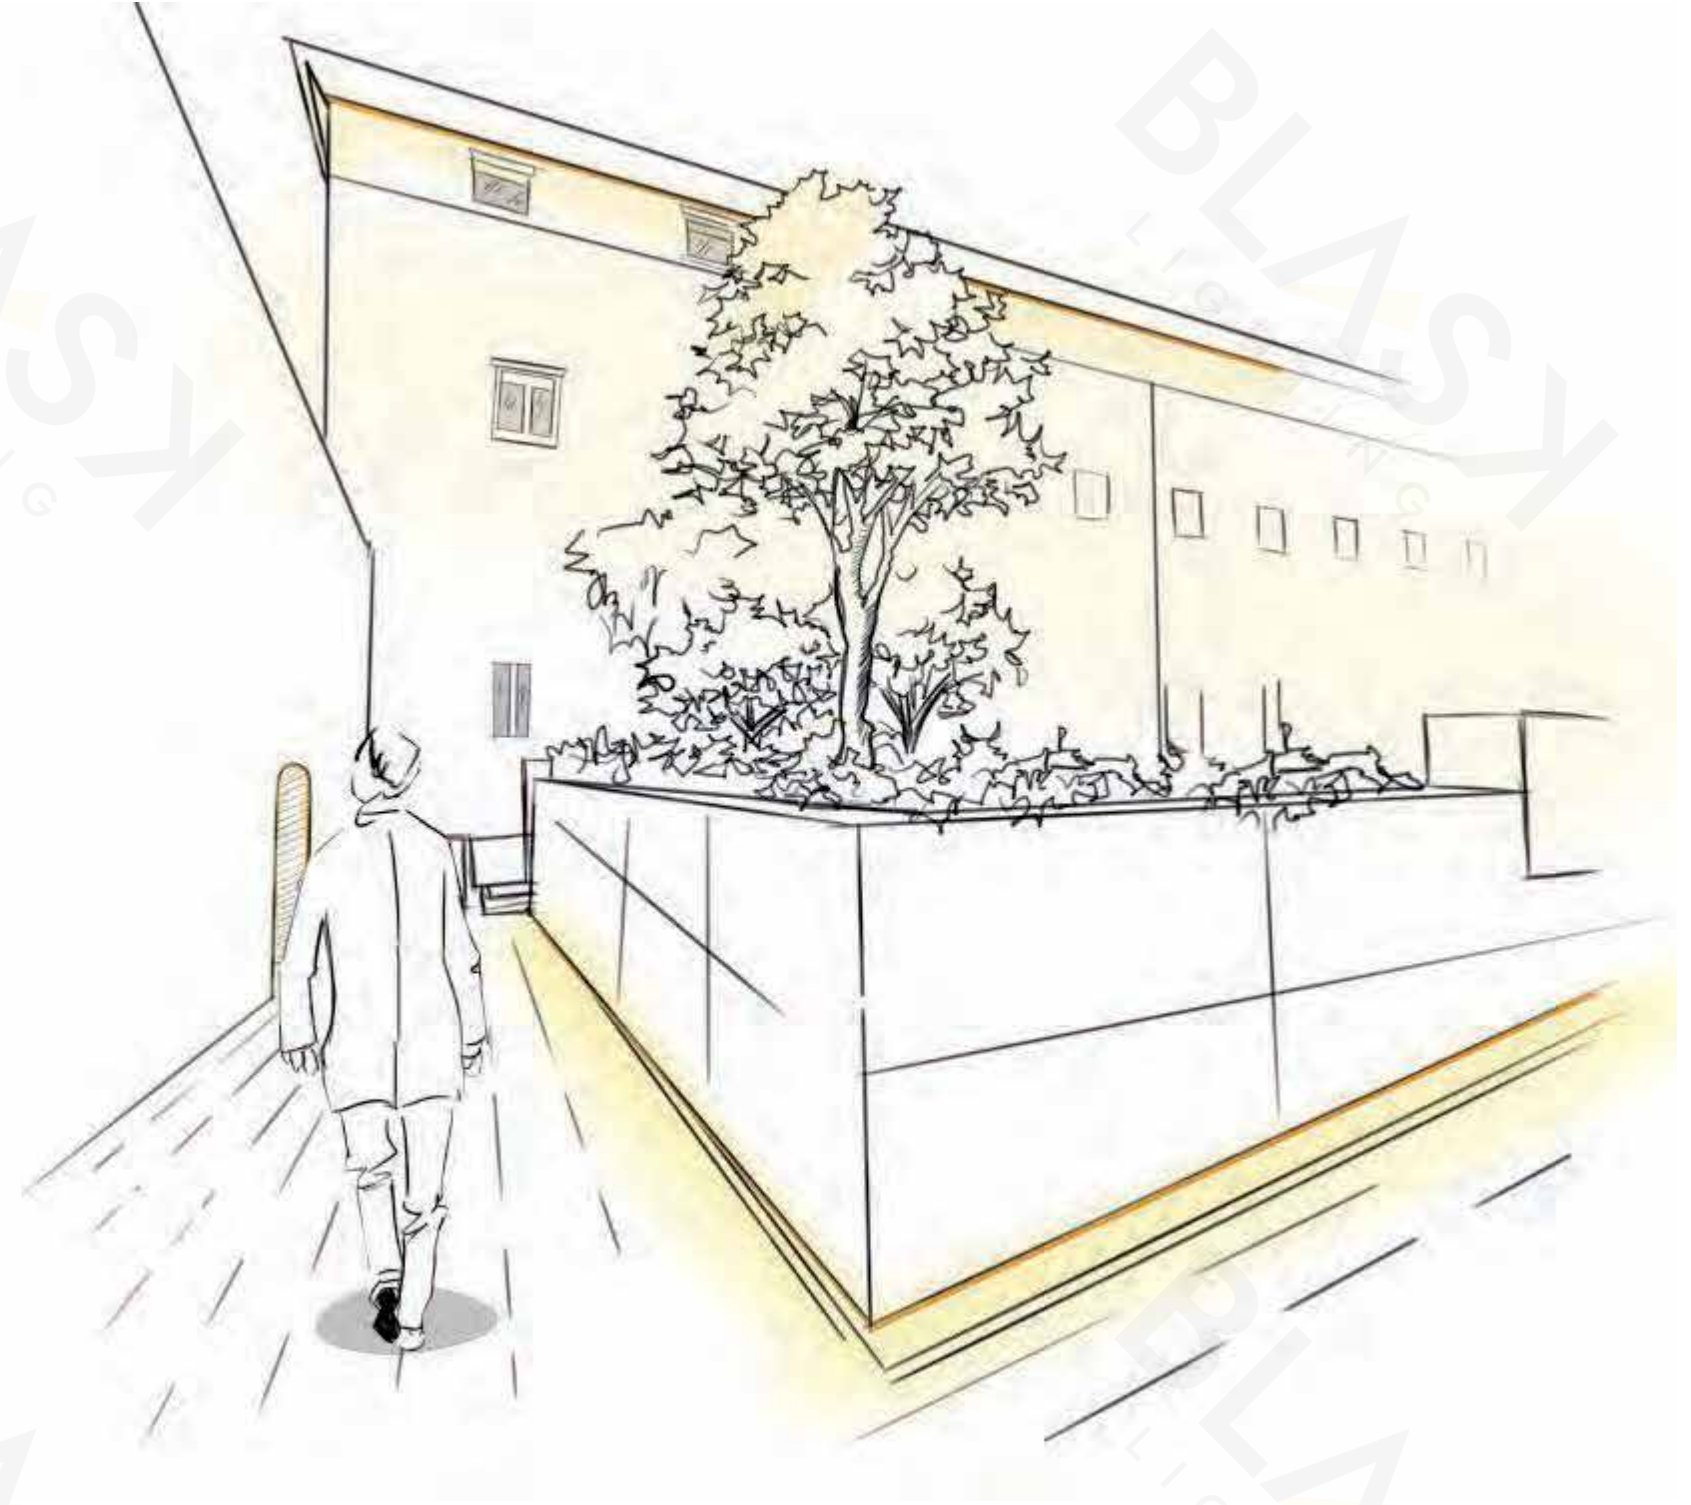



BLEIAP10038

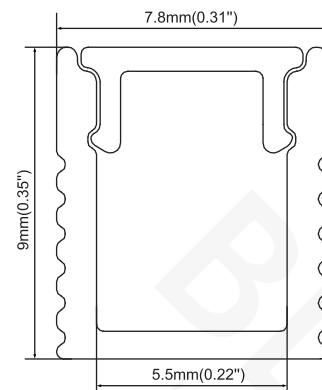

Types of installation:



Material: Extruded aluminum  
Dimension: 7.8×9mm  
Length: MAX 6m



IP20

FINISH



Anod. aluminum




white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused




Black PC

ACCESSORIES



Mounting clip (metal)

BLEIAP10039

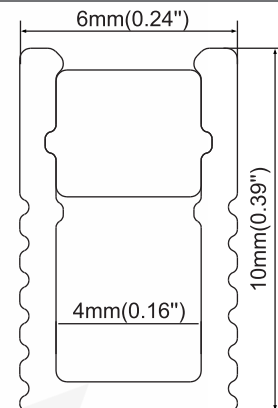

Types of installation:



Material: Extruded aluminum  
Dimension: 6×10mm  
Length: MAX 6m



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



Silicon

ACCESSORIES



3M tape 5mm wide

Types of installation:



Material: Extruded aluminum  
Dimension: 11×10mm  
Length: MAX 6m




FINISH



Anod. aluminum   white   Black

BLEIAP10040

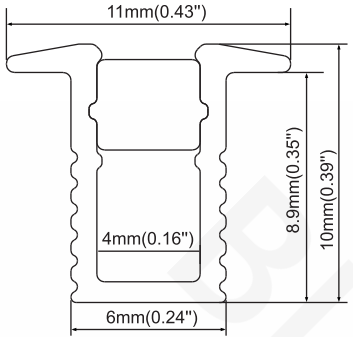

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS




Silicon


Types of installation:



Material: Extruded aluminum  
Dimension: 18×5.6mm  
Length: MAX 6m

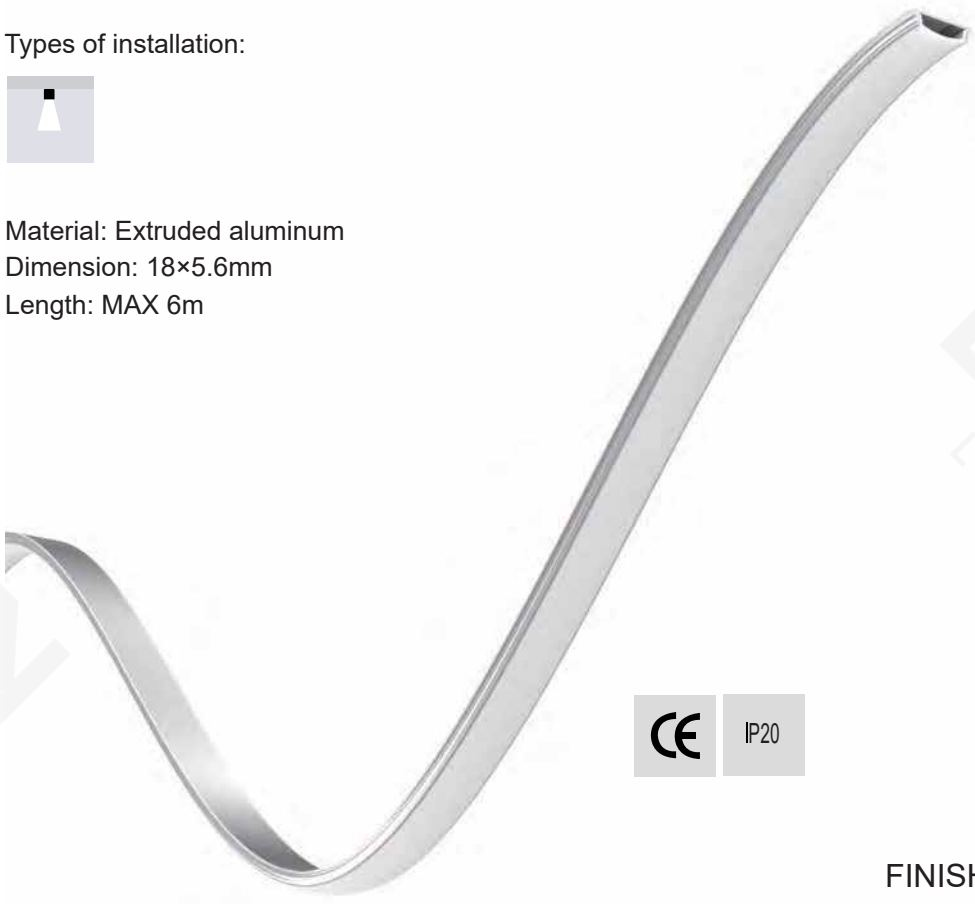


FINISH



Anod. aluminum   white   Black

BLEIAP10041

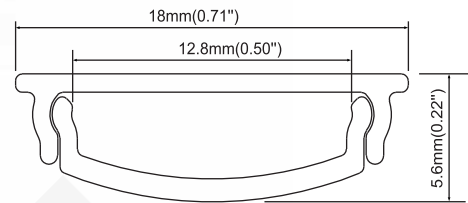

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)




Types of installation:



Material: Extruded aluminum  
Dimension: 7.8×12mm  
Length: MAX 6m

**BLEIAP10042**

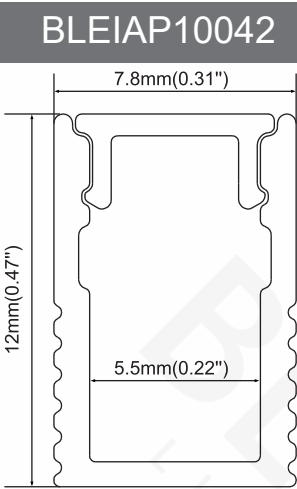

**FINISH**



Anod. aluminum    white    Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC frosted




Black PC

ACCESSORIES



Mounting clip(metal)

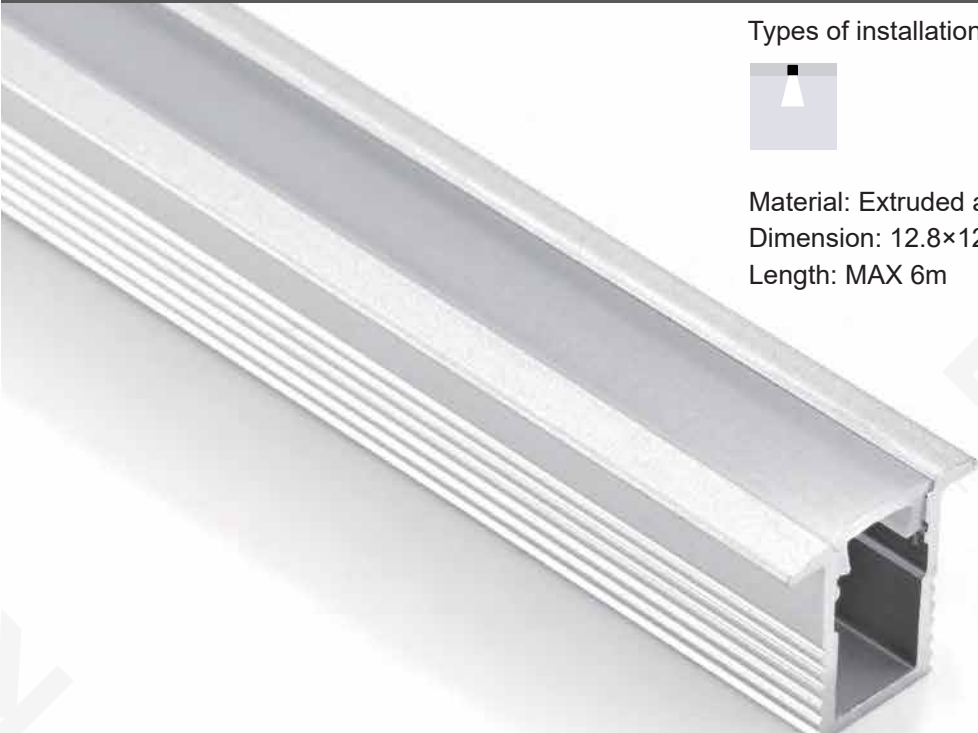


Types of installation:



Material: Extruded aluminum  
Dimension: 12.8×12mm  
Length: MAX 6m

**BLEIAP10043**

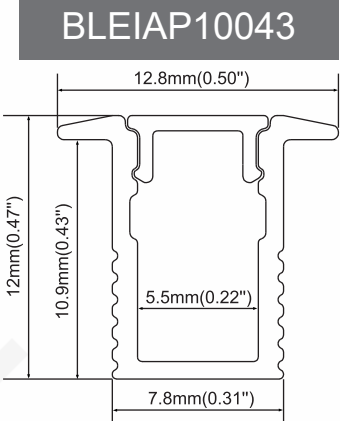

**FINISH**



Anod. aluminum    white    Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC frosted




Black PC





BLEIAP10044

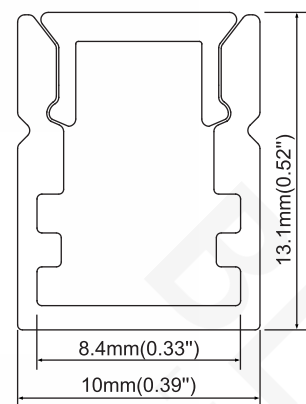


Types of installation:




Material: Extruded aluminum  
Dimension: 10×13.1mm  
Length: MAX 6m



FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA diffused



Black PC


ACCESSORIES




Mounting clip (metal)



BLEIAP10045

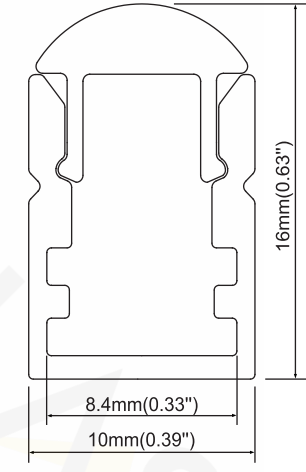


Types of installation:



Material: Extruded aluminum  
Dimension: 10×16mm  
Length: MAX 6m



FINISH



END CAPS



End cap with hole



End cap without hole

DIFFUSERS




PMMA forsted 15 degrees

ACCESSORIES



Mounting clip (matal)

BLEIAP10046

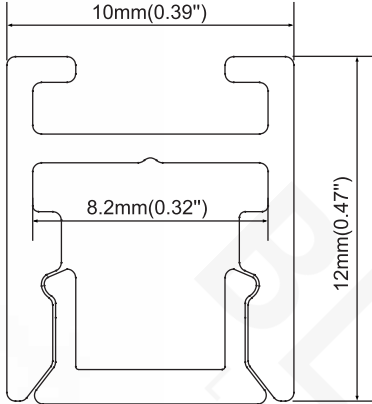

Types of installation:



Material: Extruded aluminum  
Dimension: 10×12mm  
Length: MAX 6m



FINISH



Anod. aluminum



white



Black



Golden

END CAPS



End Caps

DIFFUSERS



PC frosted



Black PC

ACCESSORIES



Steel wire



90° Horizontal connector




180° Connector



90° Vertical connector




BLEIAP10047

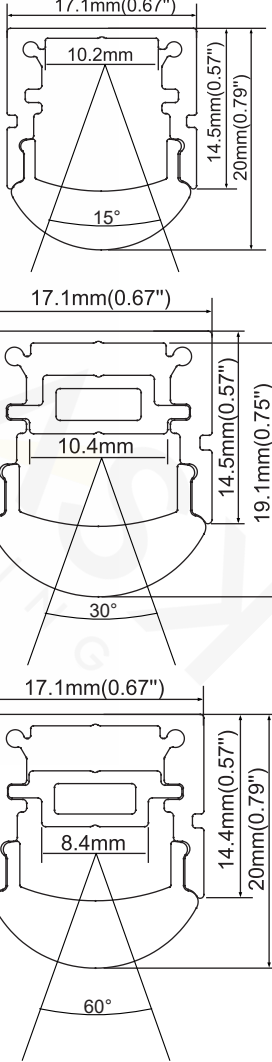


Types of installation:



Material: Extruded aluminum  
Dimension: 17.1×20mm  
Length: MAX 6m




0 degrees adjustable



15 degrees adjustable



30 degrees adjustable



45 degrees adjustable

END CAPS



End Caps

DIFFUSERS



PC or PMMA lens

ACCESSORIES



Mounting clip (metal)



Adjustable bracket

FINISH



Anod. aluminum



white




Black


Types of installation:



Material: Extruded aluminum  
Dimension: 29.5×13.4mm  
Length: MAX 6m

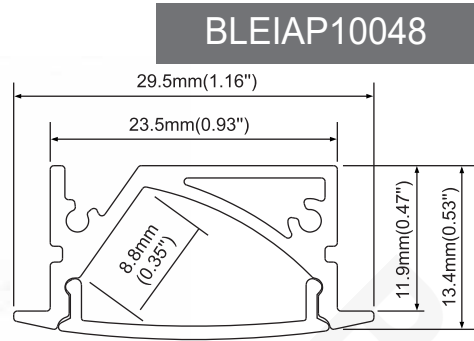

FINISH



## END CAPS



End Caps

## DIFFUSERS



PC diffused

## ACCESSORIES




Spring clip


Types of installation:



Material: Extruded aluminum  
Dimension: 36.1×18.5mm  
Length: MAX 6m

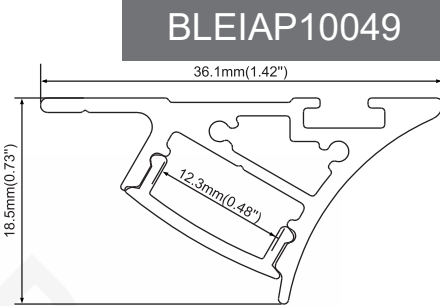

FINISH



## END CAPS



End cap with hole  
End cap without hole

## DIFFUSERS



PC diffused

## ACCESSORIES



3M tape 10mm wide




**BLEIAP10050**

Types of installation:



Material: Extruded aluminum  
Dimension: 18×16.2mm  
Length: MAX 6m



CE IP20

**END CAPS**



End cap with hole  
End cap without hole

**FINISH**



Anod. aluminum white Black

**DIFFUSERS**



PMMA opal matte  
PMMA semi clear


**ACCESSORIES**




Mounting clip (metal)

**BLEIAP10051**

Types of installation:



Material: Extruded aluminum  
Dimension: 18×15.2mm  
Length: MAX 6m



CE IP20

**END CAPS**



End cap with hole  
End cap without hole

**FINISH**




Anod. aluminum white Black

**DIFFUSERS**



30 degrees lens  
PMMA semi clear

**ACCESSORIES**




Mounting clip (metal)

**BLEIAP10052**

ypes of installation:



Material: Extruded aluminum  
Dimension: 18×15.3mm  
Length: MAX 6m



CE IP20

**END CAPS**



End cap with hole  
End cap without hole

**FINISH**




Anod. aluminum white Black

**DIFFUSERS**



60 degrees lens  
PMMA semi clear

**ACCESSORIES**




Mounting clip (metal)

**BLEIAP10053**

Types of installation:



Material: Extruded aluminum  
Dimension: 18×14mm  
Length: MAX 6m



CE IP20

**END CAPS**



End cap with hole  
End cap without hole

**FINISH**



Anod. aluminum white Black

**DIFFUSERS**



90 degrees lens  
PMMA semi clear

**ACCESSORIES**



Mounting clip (metal)



END CAPS



End Caps

DIFFUSERS




PMMA opal matte  
PMMA semi clear

ACCESSORIES



Mounting clip (metal)

FINISH



END CAPS



End Caps

DIFFUSERS




30 degrees lens  
PMMA semi clear

ACCESSORIES



Mounting clip (metal)

FINISH



END CAPS



End Caps

DIFFUSERS




60 degrees lens  
PMMA semi clear

ACCESSORIES



Mounting clip (metal)

FINISH



END CAPS



End Caps

DIFFUSERS




90 degrees lens  
PMMA semi clear


ACCESSORIES




Mounting clip (metal)

FINISH




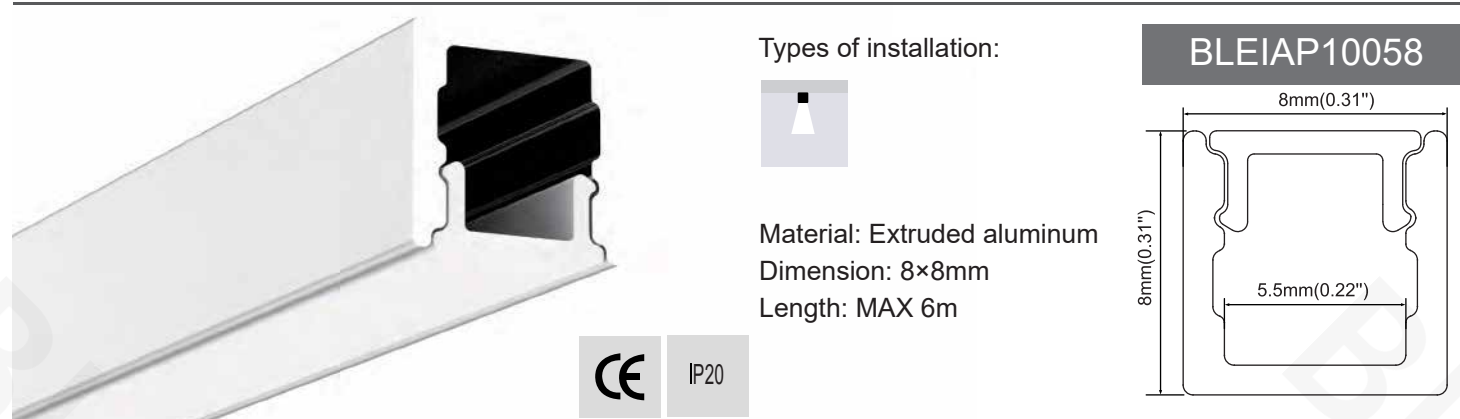


#### END CAPS

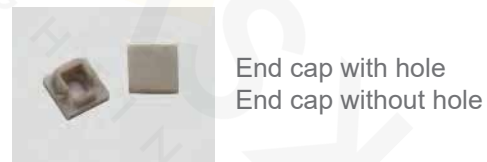


#### FINISH




#### DIFFUSERS




#### ACCESSORIES

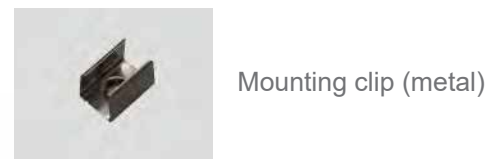


#### END CAPS

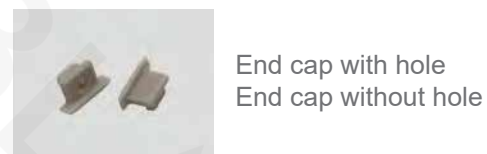


#### FINISH




#### DIFFUSERS




#### END CAPS

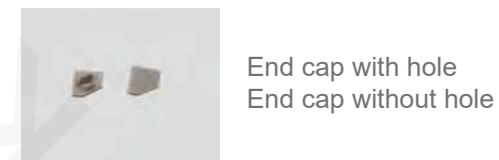


#### FINISH




#### DIFFUSERS

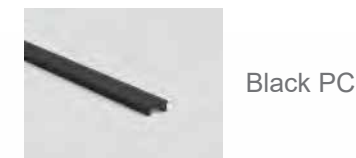


#### ACCESSORIES

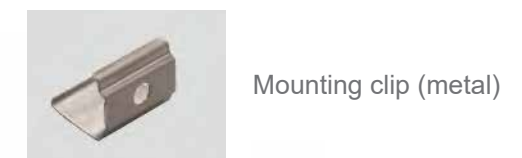


#### END CAPS

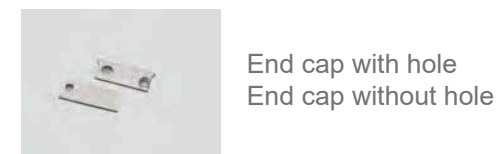

#### FINISH



#### DIFFUSERS

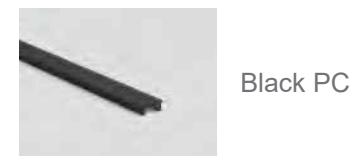



**BLEIAP10062**

Types of installation:

Material: Extruded aluminum  
Dimension: 25×14mm  
Length: MAX 6m

25mm(0.98")  
14mm(0.55")  
8mm(0.31")  
6mm(0.24")  
11mm(0.43")

CE IP20

**FINISH**

Anod. aluminum white Black

**END CAPS**

End cap with hole  
End cap without hole

**DIFFUSERS**

PC diffused

**BLEIAP10063**

Types of installation:

Material: Extruded aluminum  
Dimension: 19×12mm  
Length: MAX 6m

14mm(0.55")  
12mm(0.47")  
11.8mm(0.47")  
19mm(0.75")

CE IP20

**FINISH**

Anod. aluminum white Black

**END CAPS**

End cap with hole  
End cap without hole

**DIFFUSERS**

PC diffused

**ACCESSORIES**

Mounting clip (metal)

**BLEIAP10064**

Types of installation:

Material: Extruded aluminum  
Dimension: 27.9×20.4mm  
Length: MAX 6m

27.9mm(1.10")  
15mm(0.59")  
20.4mm(0.80")  
10.5mm(0.41")  
10mm(0.39")  
18.2mm(0.72")

CE IP20

**FINISH**

Anod. aluminum white Black

**END CAPS**

End cap with hole  
End cap without hole

**DIFFUSERS**

PC diffused

**BLEIAP10065**

Types of installation:

Material: Extruded aluminum  
Dimension: 27.9×27.6mm  
Length: MAX 6m

27.9mm(1.10")  
15mm(0.59")  
27.6mm(1.09")  
10.5mm(0.41")  
10mm(0.39")  
25.2mm(0.99")

CE IP20

**FINISH**

Anod. aluminum white Black

**END CAPS**

End cap with hole  
End cap without hole

**DIFFUSERS**

PC diffused




Types of installation:



Material: Extruded aluminum  
Dimension: 25.4×16mm  
Length: MAX 6m



FINISH



## END CAPS



End cap with hole  
End cap without hole

## DIFFUSERS



PC diffused

## ACCESSORIES



Mounting clip (metal)



90° Horizontal connector



90° Vertical connector



180° connector



Steel wire



Types of installation:



Material: Extruded aluminum  
Dimension: 25.4×23mm  
Length: MAX 6m



FINISH



## END CAPS



End Caps

## DIFFUSERS



PC diffused

## ACCESSORIES



Mounting clip (metal)



90° Vertical connector



180° Connector




90° Horizontal connector



Steel wire



FINISH



END CAPS




DIFFUSERS




ACCESSORIES




FINISH




END CAPS

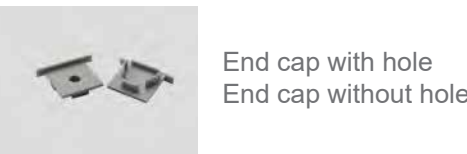

DIFFUSERS

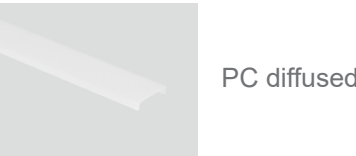

ACCESSORIES











END CAPS



DIFFUSERS




ACCESSORIES

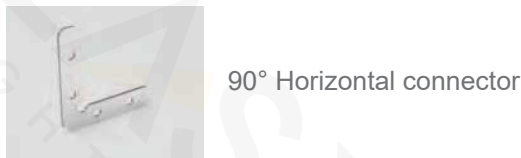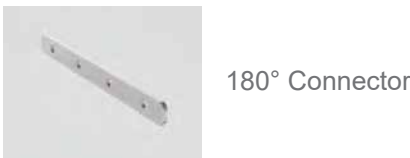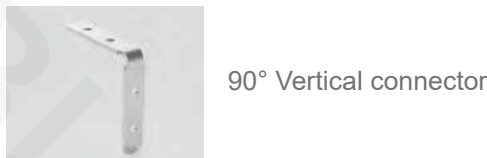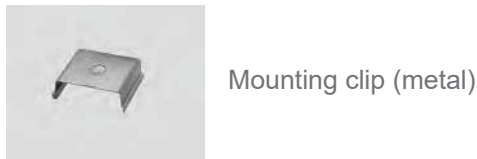





END CAPS




DIFFUSERS

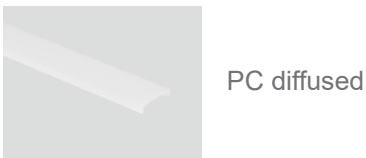

ACCESSORIES

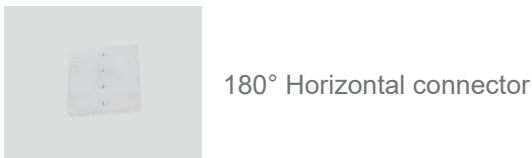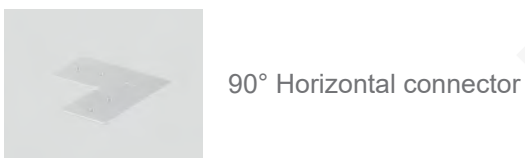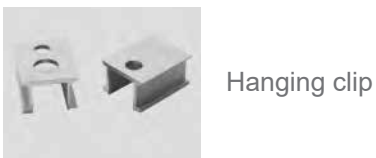

BLEIAP10072

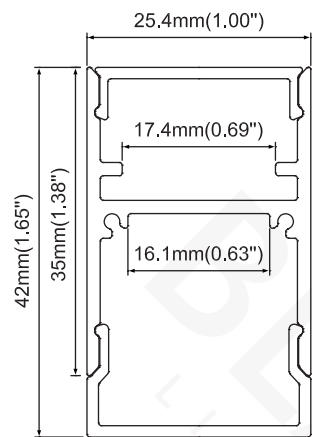

Types of installation:



Material: Extruded aluminum  
Dimension: 25.4×42mm  
Length: MAX 6m



FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused



PC diffused


ACCESSORIES



Hanging clip



Steel wire

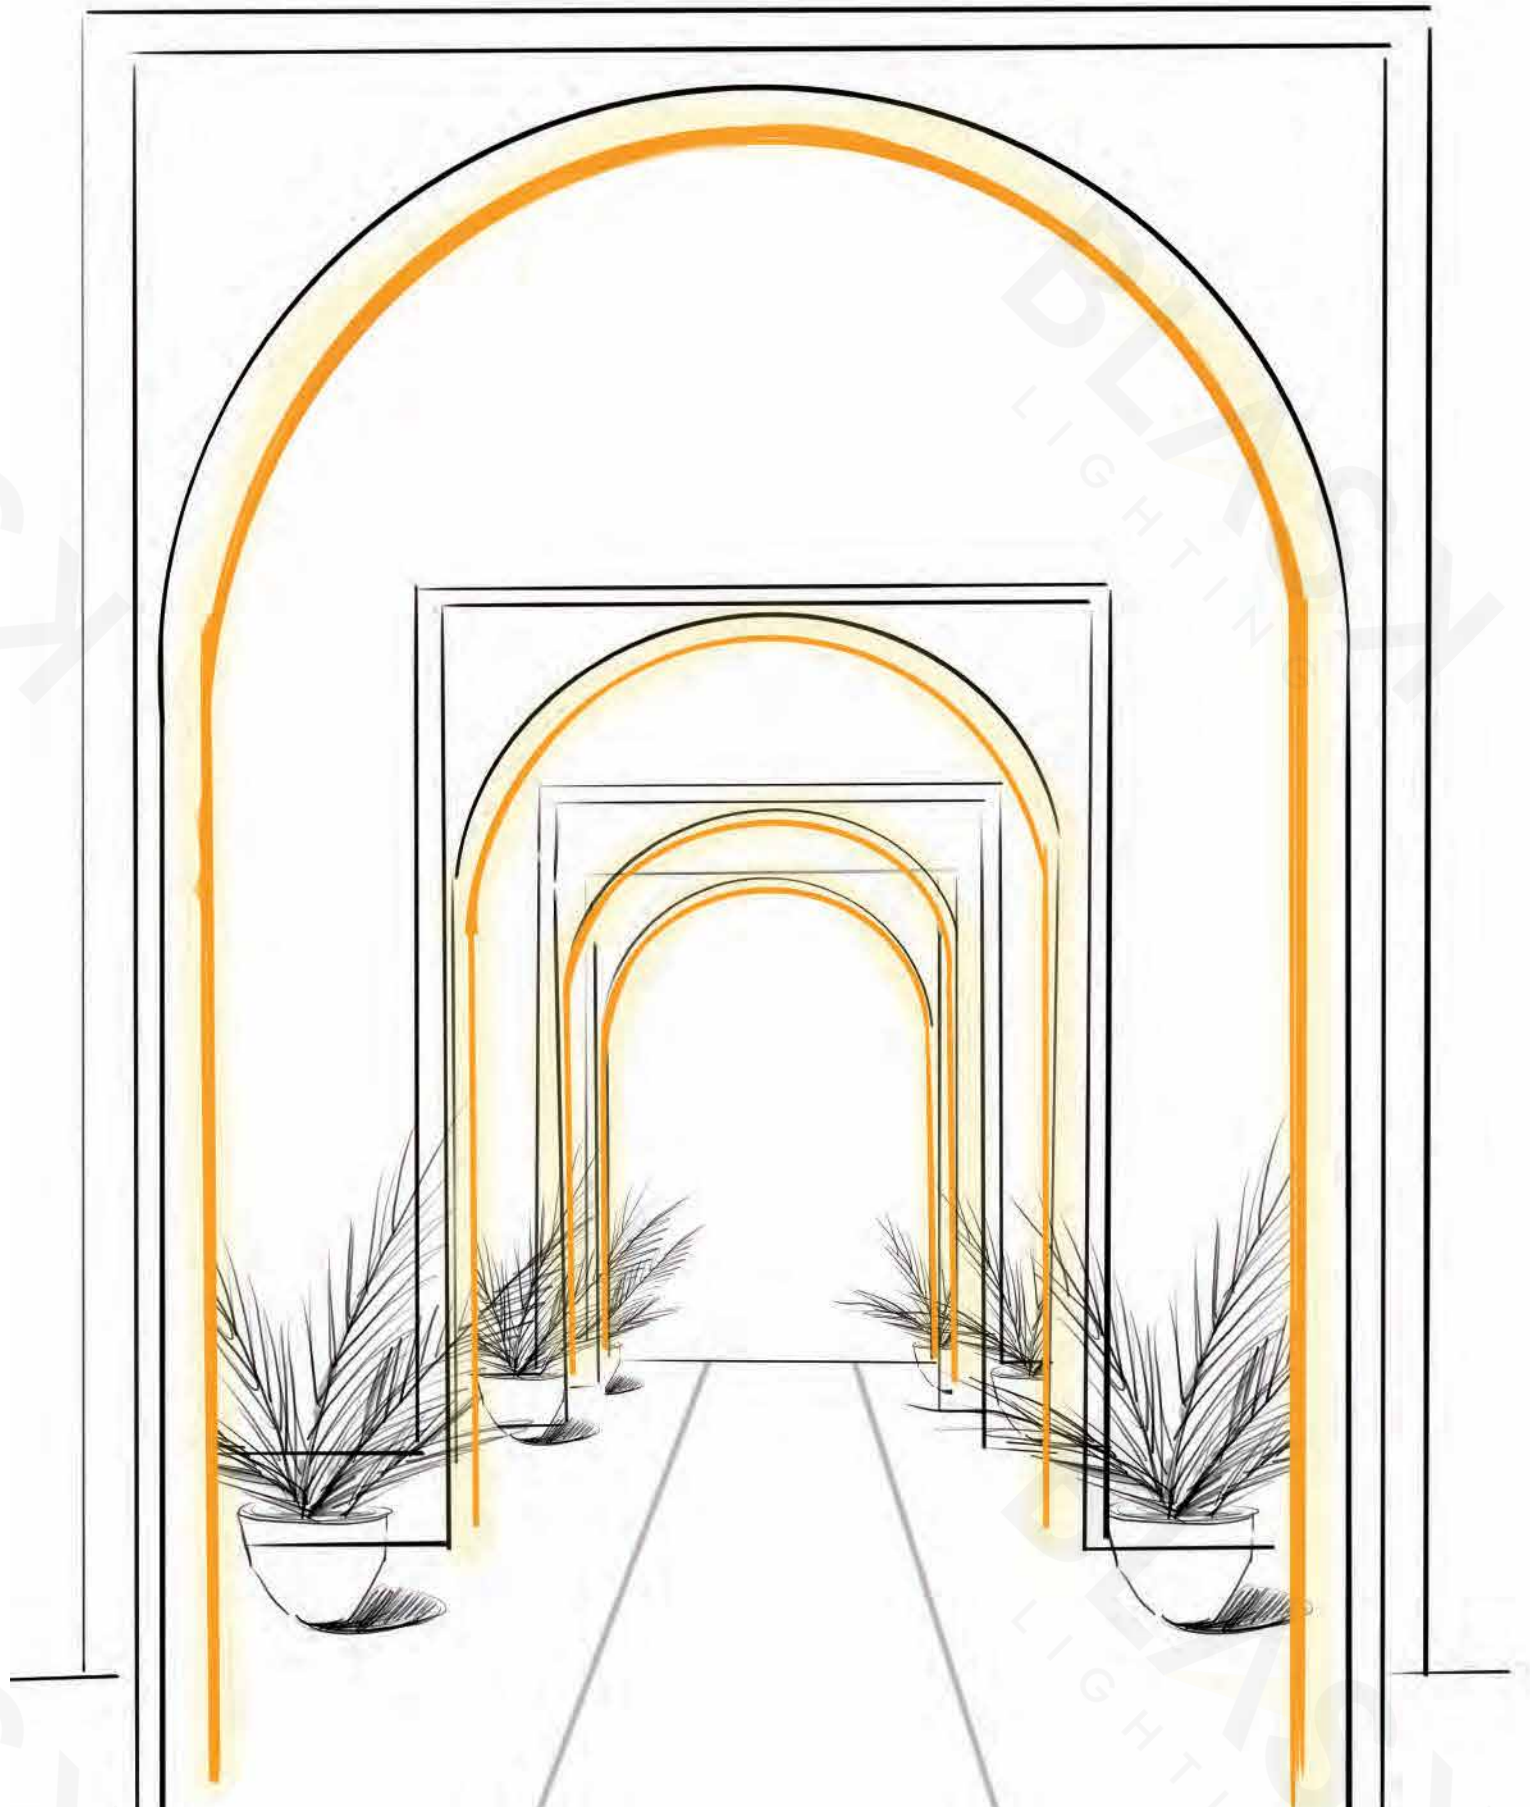


Types of installation:



Material: Extruded aluminum  
Dimension: 50×35mm  
Length: MAX.6m

BLEIAP10073

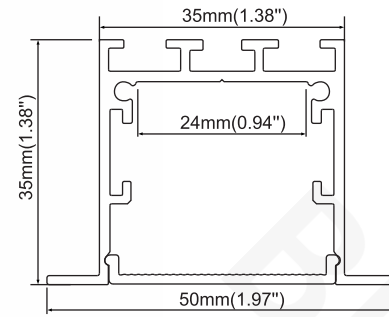

FINISH



Anod. aluminum



white



Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PC diffused



Black PC

ACCESSORIES



Spring clip



Connector T



Connector X



Connector IL




Types of installation:



Material: Extruded aluminum  
Dimension: 35×35mm  
Length: MAX 6m

BLEIAP10074

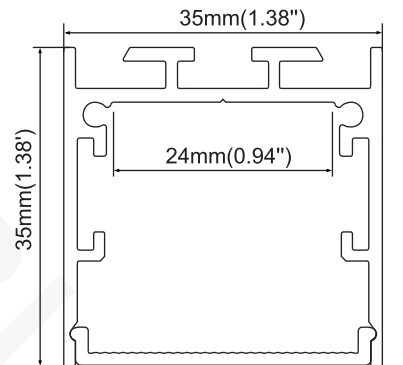

FINISH



Anod. aluminum




white



Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PC diffused



Black PC

ACCESSORIES



Mounting clip (metal)



Steel wire



Connector T



Connector X



Connector IL






Types of installation:



Material: Extruded aluminum  
Dimension: 65×35mm  
Length: MAX 6m

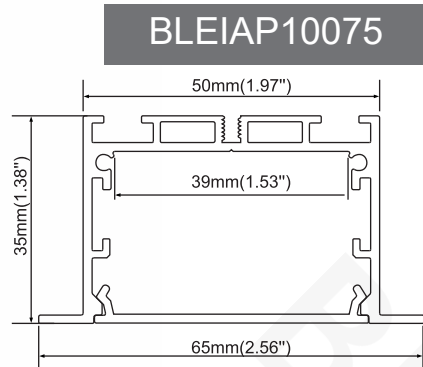

FINISH



Anod. aluminum



white




Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC diffused

ACCESSORIES



Spring clip



Connector X



Connector T




Connector IL

Types of installation:



Material: Extruded aluminum  
Dimension: 50×35mm  
Length: MAX 6m

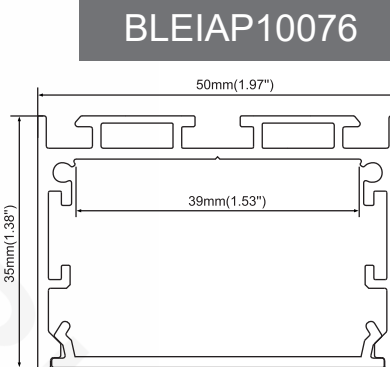

FINISH



Anod. aluminum



white




Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)



Steel wire



90° Horizontal connector



180° Connector




90° Vertical Connector



Connector T




Connector X




Connector IL


Types of installation:



Material: Extruded aluminum  
Dimension: 90×35mm  
Length: MAX 6m

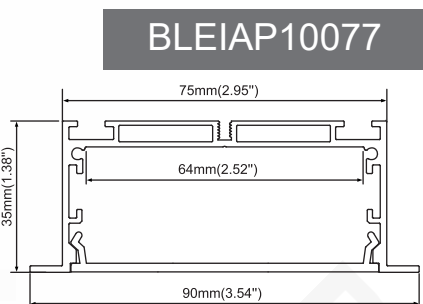

FINISH



END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC diffused

ACCESSORIES



Spring clip



Connector T



Connector X





Connector IL




Connector IL


Types of installation:



Material: Extruded aluminum  
Dimension: 75×35mm  
Length: MAX 6m

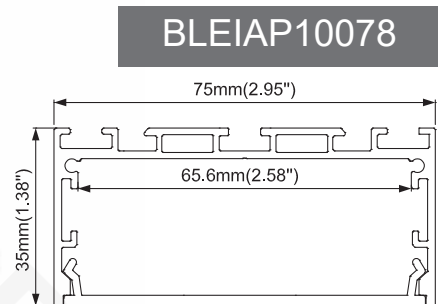

FINISH



END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)



Steel wire



Connector T



Connector X



Connector L




Connector IL

Types of installation:



Material: Extruded aluminum  
Dimension: 65×35mm  
Length: MAX 6m

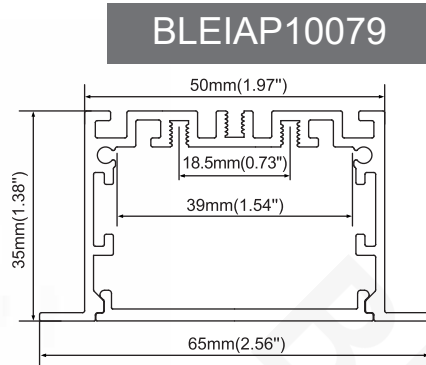

FINISH



Anod. aluminum   white   Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Spring clip



LED Module:  
2835LED 28W/1.2M



Connector T



Connector X



Connector L




Connector IL

Types of installation:



Material: Extruded aluminum  
Dimension: 50×35mm  
Length: MAX 6m

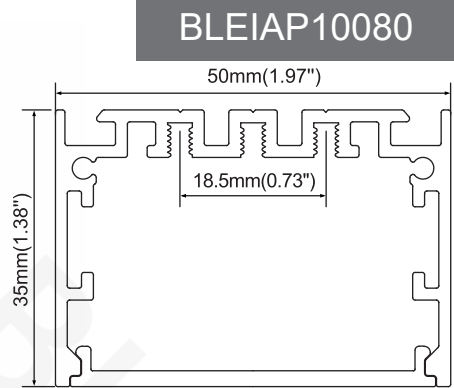

FINISH




Anod. aluminum   white   Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip (metal)



Steel wire



Connector T



Connector X



Connector L



Connector IL



LED Module:  
2835LED 28W/1.2M





Types of installation:



Material: Extruded aluminum  
Dimension: 42.28×85mm  
Length: MAX 6m

#### END CAPS



End Caps



IP20

#### FINISH



Anod. aluminum



white



Black

#### DIFFUSERS



PC diffused

#### ACCESSORIES



Mounting clip (metal)



Types of installation:




Material: Extruded aluminum  
Dimension: 50×90mm  
Length: MAX 6m

#### END CAPS



End Caps

#### DIFFUSERS



PC frosted



PC frosted



Prismatic

#### ACCESSORIES




Internal clip



Mounting clip (metal)



Steel wire



LED Module 2835LED  
28W/1.2M



IP20

#### FINISH



Anod. aluminum




white



Black

BLEIAP10083

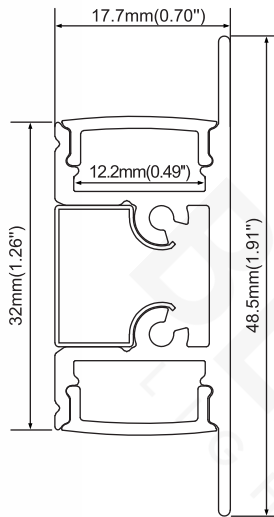

Types of installation:



Material: Extruded aluminum  
Dimension: 17.7×48.5mm  
Length: MAX 6m



FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS




PC semi clear

ACCESSORIES



Mounting clip (metal)

BLEIAP10084

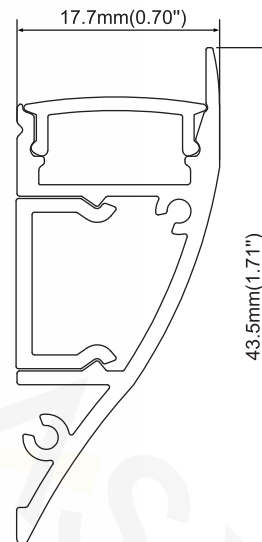

Types of installation:



Material: Extruded aluminum  
Dimension: 17.7×43.5mm  
Length: MAX 6m



END CAPS



End Caps

DIFFUSERS



PC semi clear

FINISH



Anod. aluminum



white




Black



Types of installation:



Material: Extruded aluminum  
Dimension: 30×32mm  
Length: MAX 6m

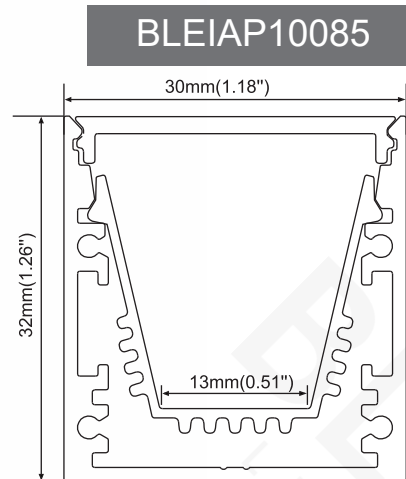

FINISH




Anod. aluminum   white   Black

END CAPS



End Cap

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire



180° Connector



90° Horizontal connector




90° Vertical connector

Types of installation:



Material: Extruded aluminum  
Dimension: 39×36mm  
Length: MAX 6m

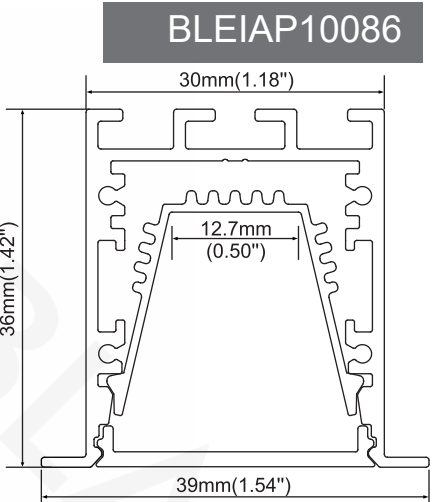

FINISH



Anod. aluminum   white   Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Spring clip



180° Connector



90° Horizontal connector





90° Vertical connector




Types of installation:



Material: Extruded aluminum  
Dimension: 70×32mm  
Length: MAX 6m

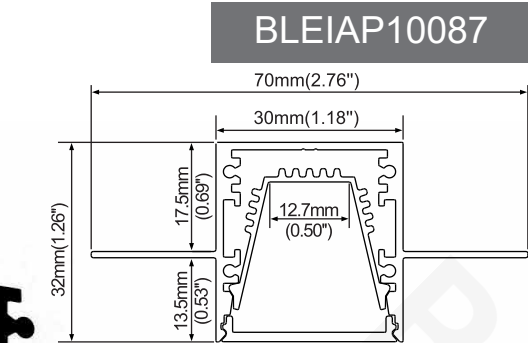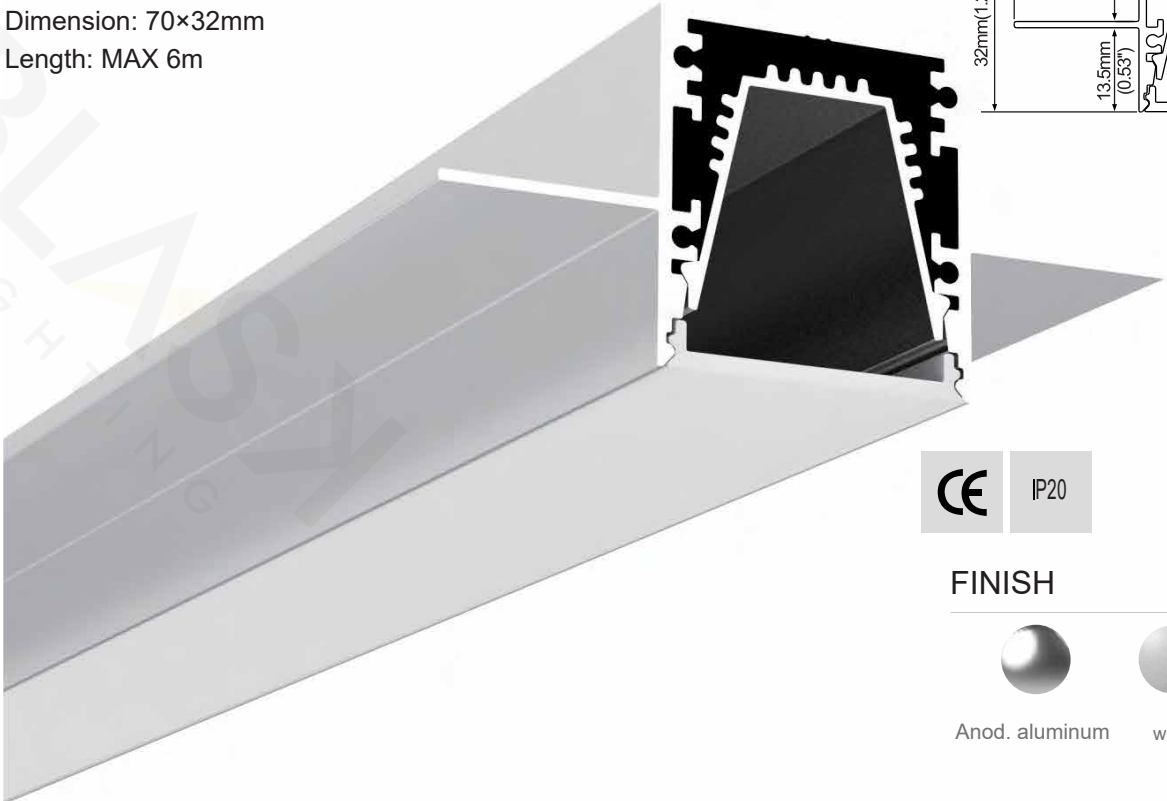

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



90° Horizontal connector



180° Connector





90° Vertical connector


Types of installation:



Material: Extruded aluminum  
Dimension: 70×32mm  
Length: MAX 6m

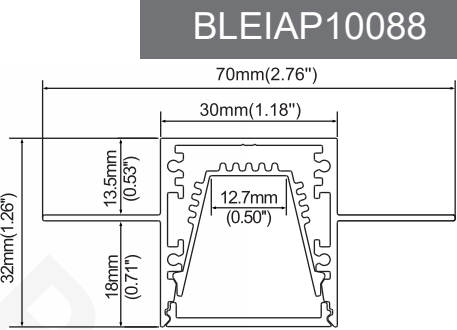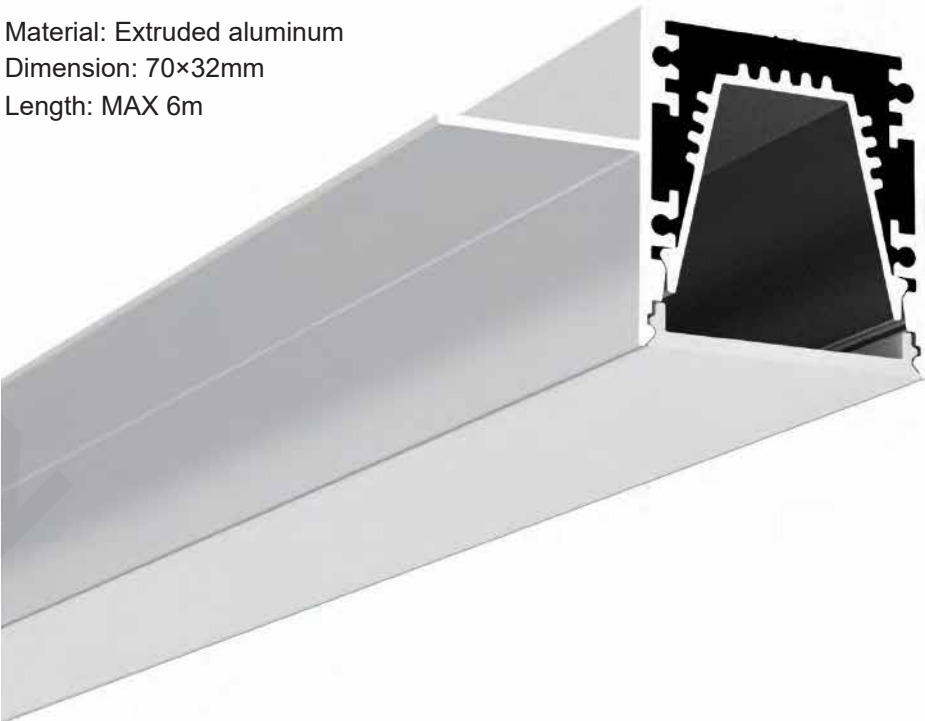

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



90° Horizontal connector



180° Connector




90° Vertical connector

Types of installation:



Material: Extruded aluminum  
Dimension: 60×60mm  
Length: MAX 6m

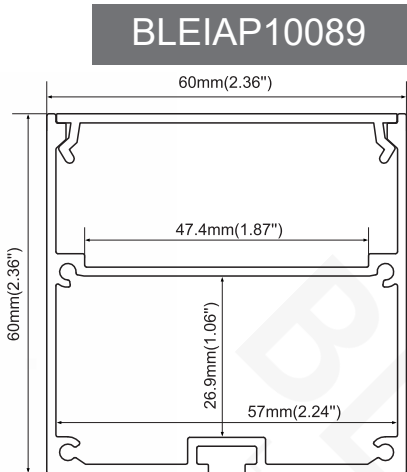

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES




Steel wire

Types of installation:



Material: Extruded aluminum  
Dimension: 60×60mm  
Length: MAX 6m

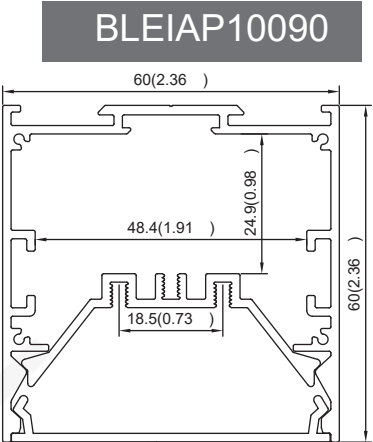

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip (metal)



90° Connector L



Steel wire




90° Connector IL



180° Connector

Types of installation:




Material: Extruded aluminum  
Dimension: 38.1×80mm  
Length: MAX 6m



FINISH




Anod. aluminum    white    Black

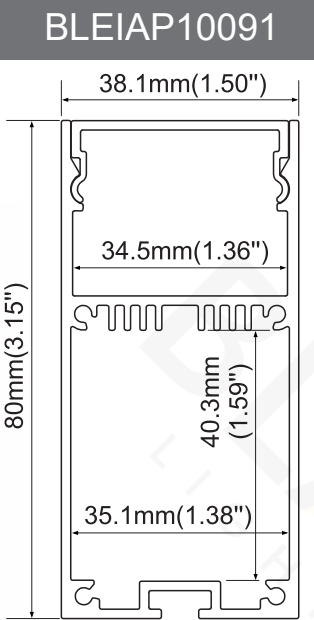

Types of installation:




Material: Extruded aluminum  
Dimension: 35.2×66.8mm  
Length: MAX 6m

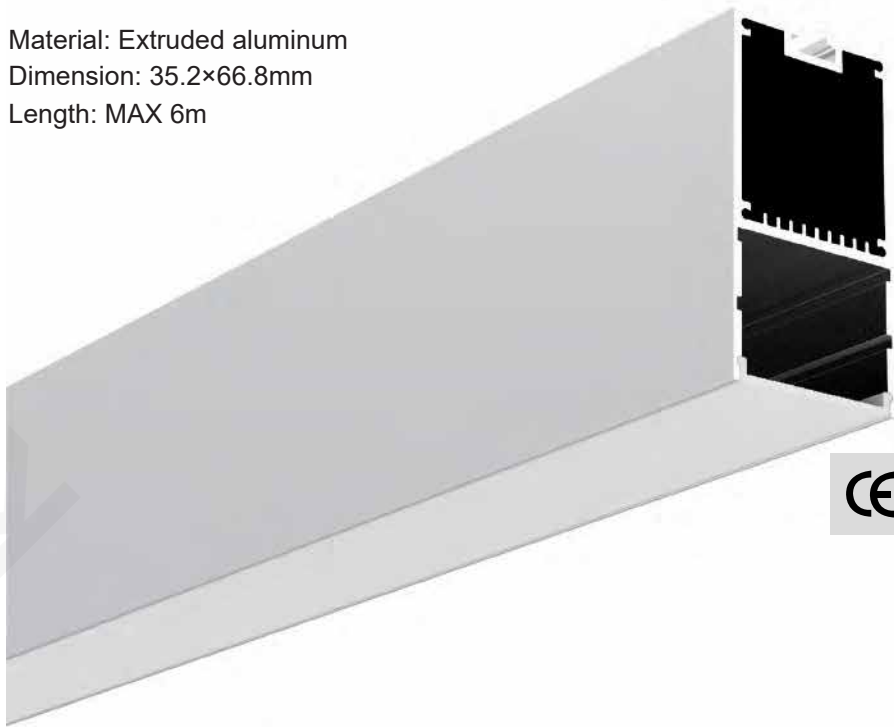

FINISH



Anod. aluminum    white    Black

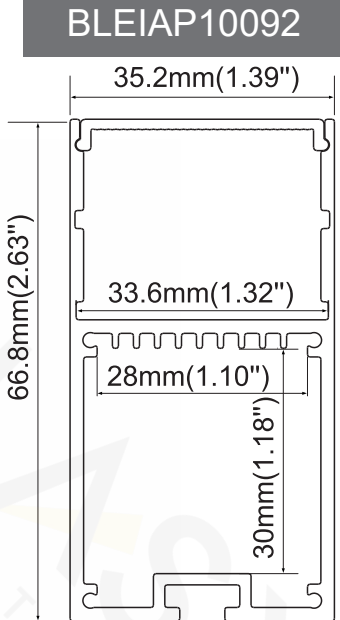

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire

END CAPS



End Caps

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PC diffused

ACCESSORIES




Steel wire




Types of installation:



Material: Extruded aluminum  
Dimension: 35×43.8mm  
Length: MAX 6m

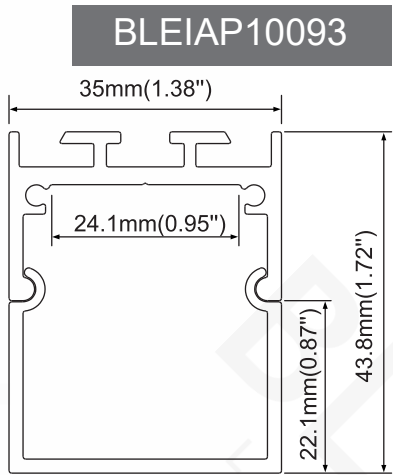

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused  
PC frosted

ACCESSORIES



Mounting clip (metal)




Steel wire


Types of installation:



Material: Extruded aluminum  
Dimension: 35×61.7mm  
Length: MAX 6m

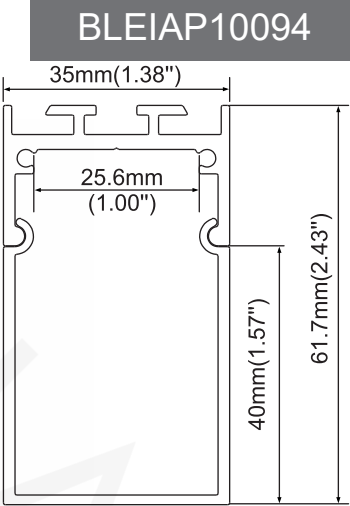

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused


ACCESSORIES



Mounting clip (metal)



Steel wire

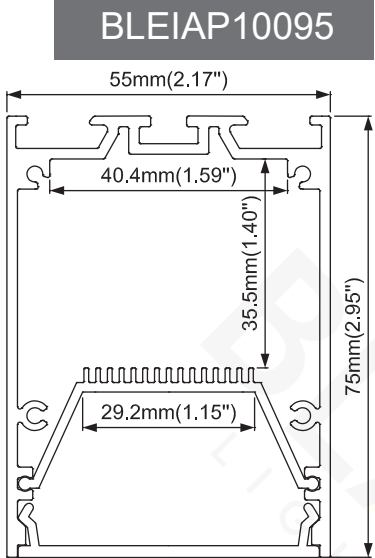

Types of installation:



Material: Extruded aluminum  
Dimension: 55×75mm  
Length: MAX 6m



**FINISH**



Anod. aluminum



white



Black

**END CAPS**



End Caps

**DIFFUSERS**



PC frosted


**ACCESSORIES**



Mounting clip (metal)



Steel wire

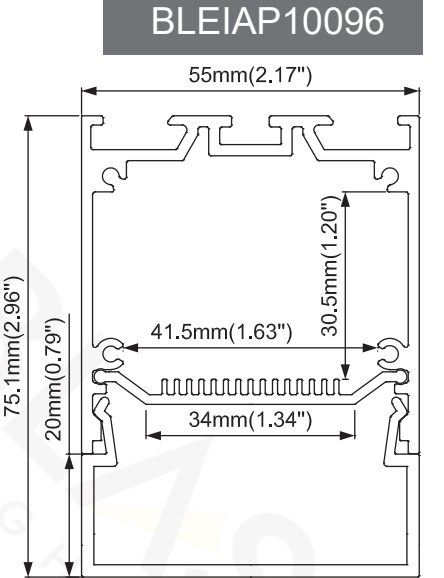

Types of installation:



Material: Extruded aluminum  
Dimension: 55×75.1mm  
Length: MAX 6m



**FINISH**



Anod. aluminum




white



Black

**END CAPS**



End Caps

**DIFFUSERS**



PC frosted

**ACCESSORIES**



Steel wire



Mounting clip (metal)



END CAPS



End Caps

DIFFUSERS



PC diffused  
PC semi-clear

ACCESSORIES



90° Connector



180° Connector



Steel wire



Types of installation:



Material: Extruded aluminum  
Dimension: 75×75mm  
Length: MAX 6m



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




Steel wire






Types of installation:



Material: Extruded aluminum  
Dimension: 38.1×75mm  
Length: MAX 6m



BLEIAP10099

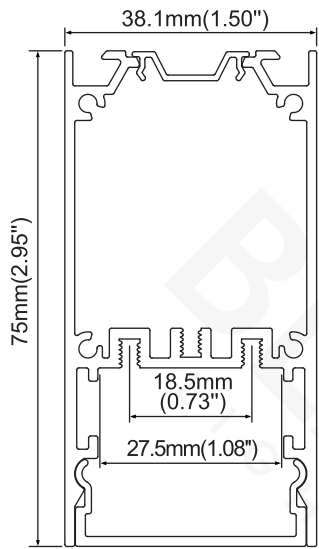

IP20

FINISH



Anod. aluminum



white



Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire




Mounting clip  
(metal)



Connector X



LED Module:2835LED  
28W/1.2M



Connector T




Connector L



Connector IL


Types of installation:



Material: Extruded aluminum  
Dimension: 38.1×95mm  
Length: MAX 6m



BLEIAP10100

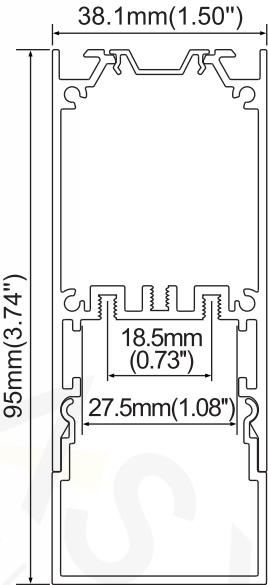

IP20

FINISH



Anod. aluminum



white



Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip (metal)



Steel wire




LED Module:2835LED  
28W/1.2M


Types of installation:



Material: Extruded aluminum  
Dimension: 50×75mm  
Length: MAX 6m

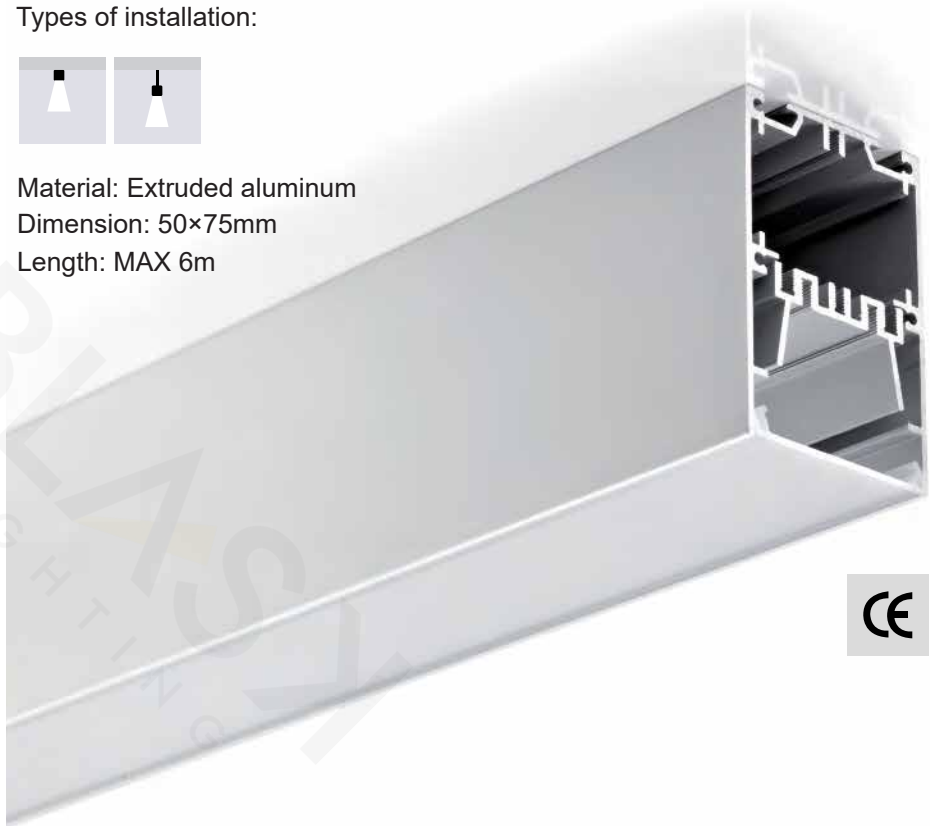

BLEIAP10101

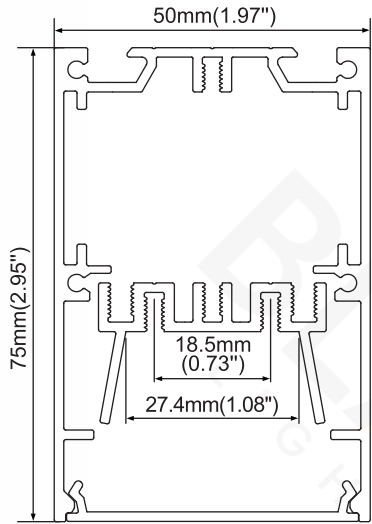

FINISH



Anod. aluminum white Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC frosted



Large lens



Anti glare cover

ACCESSORIES



Steel wire



LED Module:2835LED  
28W/1.2M



Trimless recessed clip



Mounting clip  
(metal)




Connector T



Internal Clip



Connector X



Connector L



Connector IL


Types of installation:



Material: Extruded aluminum  
Dimension: 50×95mm  
Length: MAX 6m



BLEIAP10102

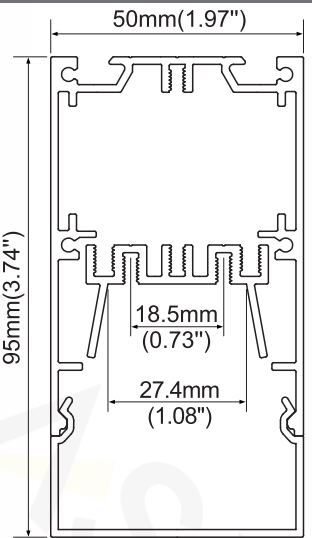

FINISH




Anod. aluminum white Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS




PC frosted

ACCESSORIES



Mounting clip (metal)



Steel wire



Internal clip




LED Module:2835LED  
28W/1.2M

Types of installation:




Material: Extruded aluminum  
Dimension: 50×75mm  
Length: MAX 6m

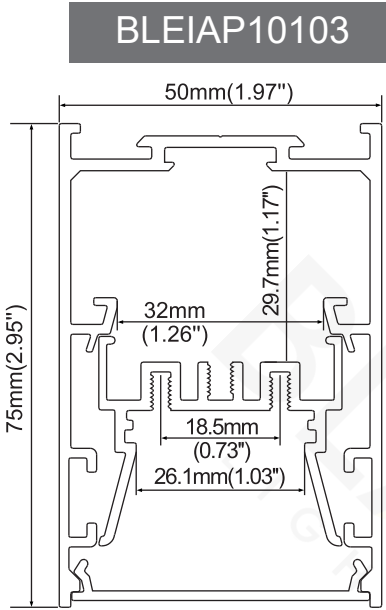

FINISH



END CAPS



Die cast end caps

DIFFUSERS



PC frosted



Anti glare cover

ACCESSORIES



Internal Clip



Outside clip



Safety wire




Steel wire



Types of installation:



Material: Extruded aluminum  
Dimension: 50×75mm  
Length: MAX 6m

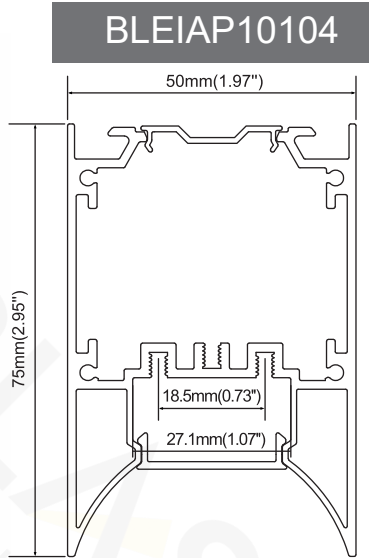

FINISH



END CAPS



Aluminium end cap  
without hole

DIFFUSERS




PC frosted

ACCESSORIES



Mounting clip  
(metal)



Steel wire






Types of installation:



Material: Extruded aluminum  
Dimension: 65×45mm  
Length: MAX 6m

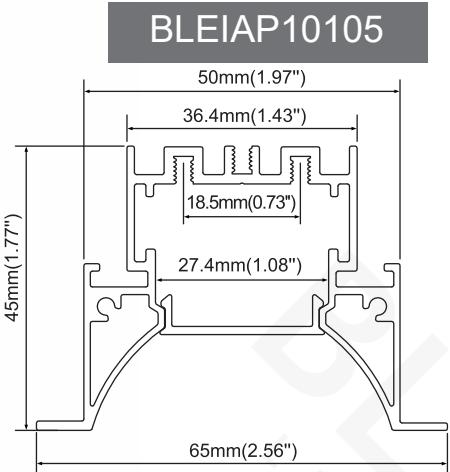

IP20

**FINISH**



Anod. aluminum



white



Black

**END CAPS**



End Caps

**DIFFUSERS**




PC frosted


**ACCESSORIES**



Spring clip



LED Module 2835LED  
28W/1.2M

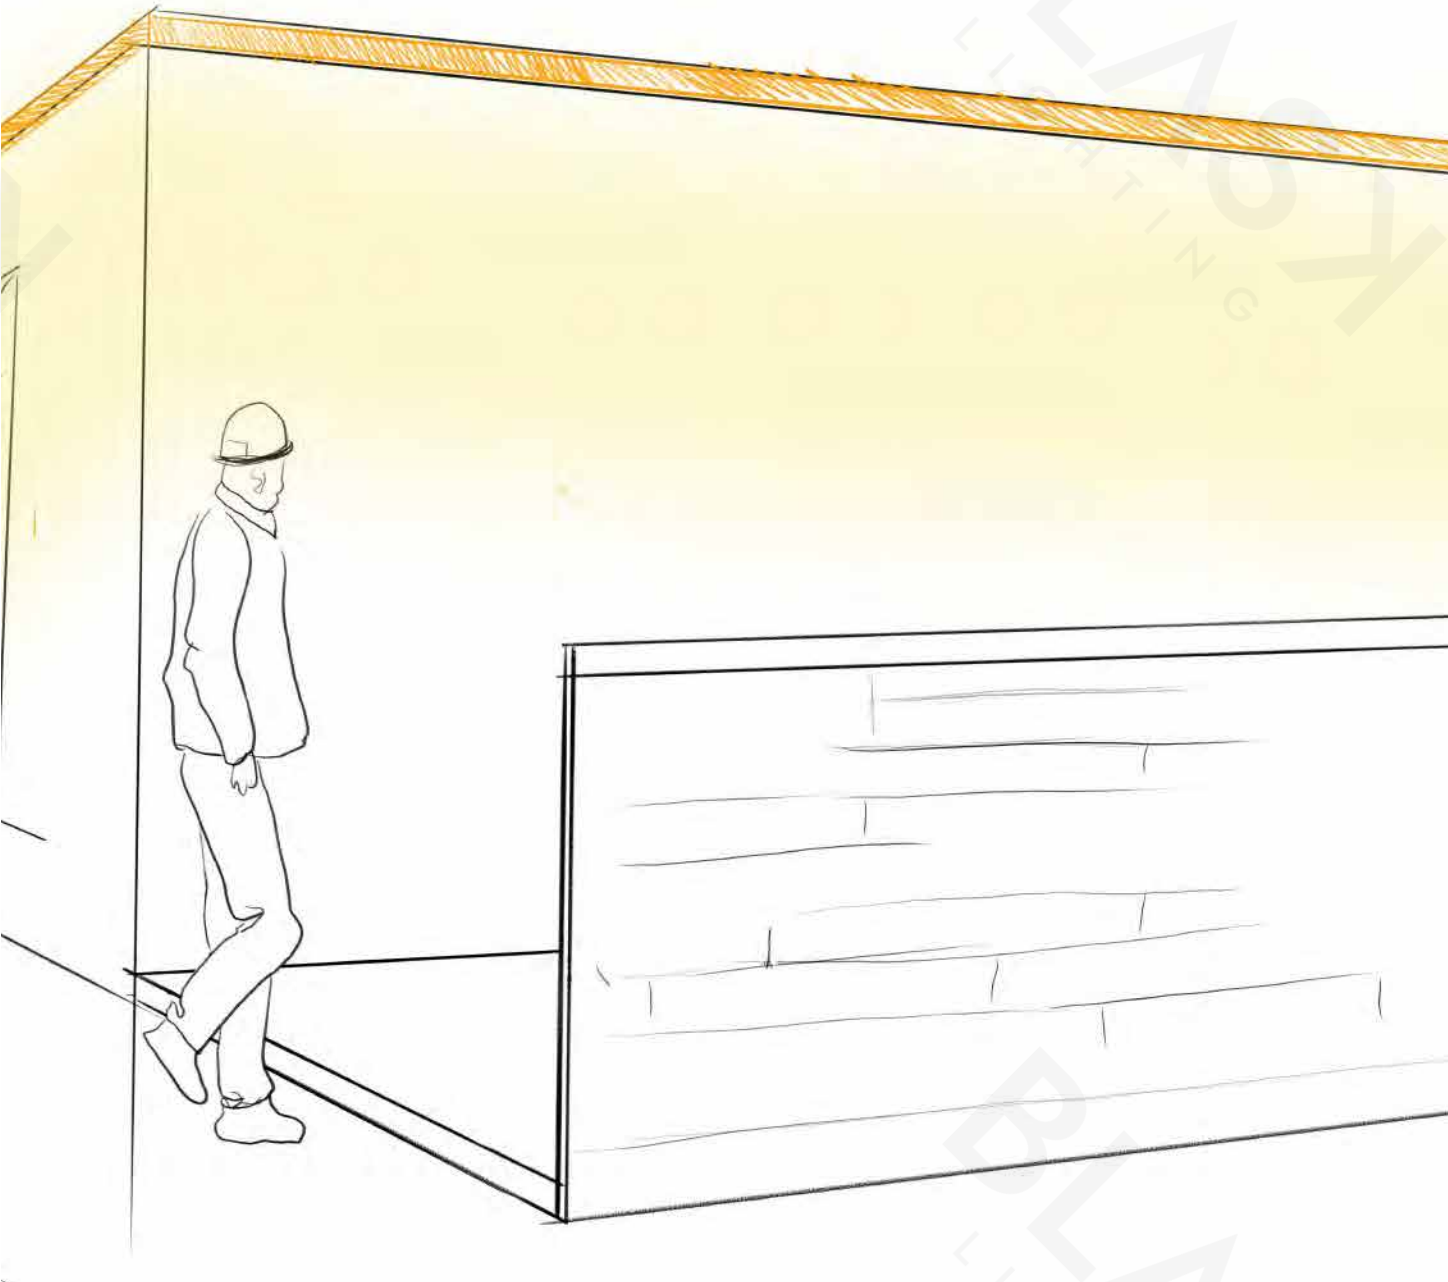




Types of installation:



Material: Extruded aluminum  
Dimension: 75×75mm  
Length: MAX 6m

BLEIAP10106

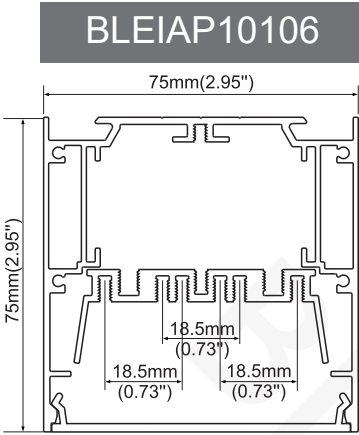




FINISH




Anod. aluminum   white   Black


END CAPS

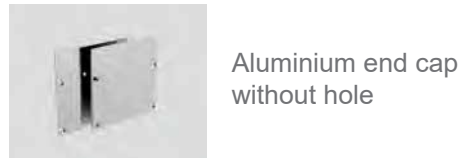

DIFFUSERS

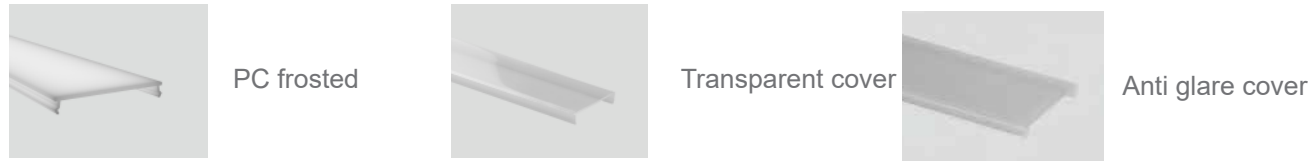

ACCESSORIES

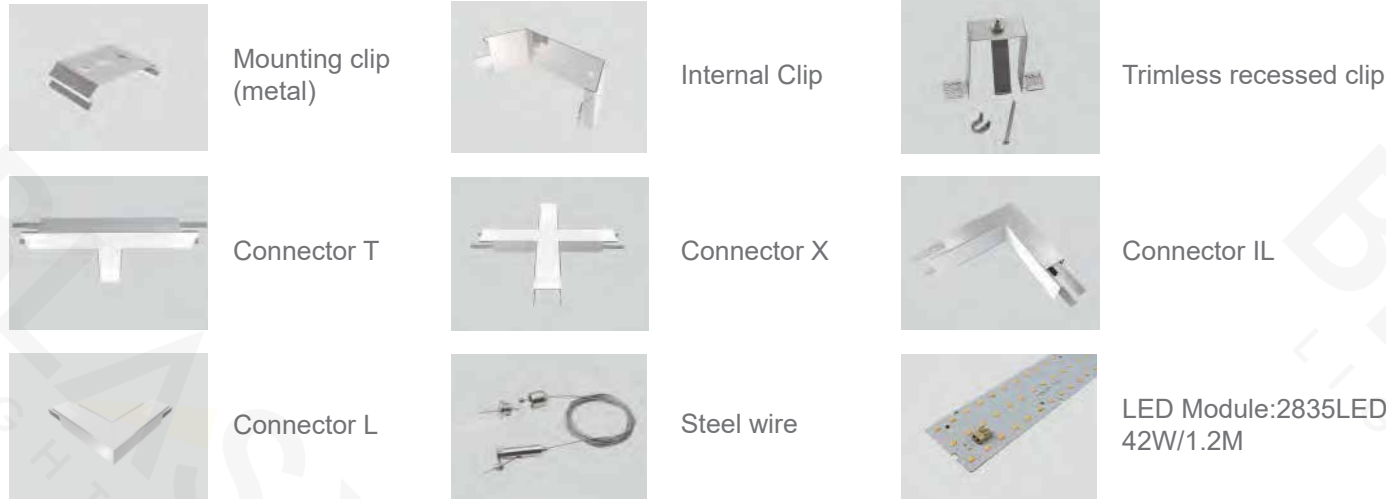




Types of installation:



Material: Extruded aluminum  
Dimension: 75×95mm  
Length: MAX 6m

BLEIAP10107

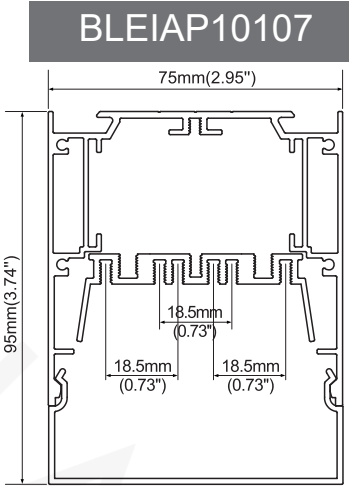




FINISH



Anod. aluminum   white   Black


END CAPS

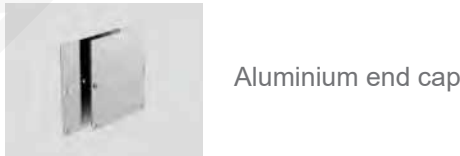

DIFFUSERS




ACCESSORIES

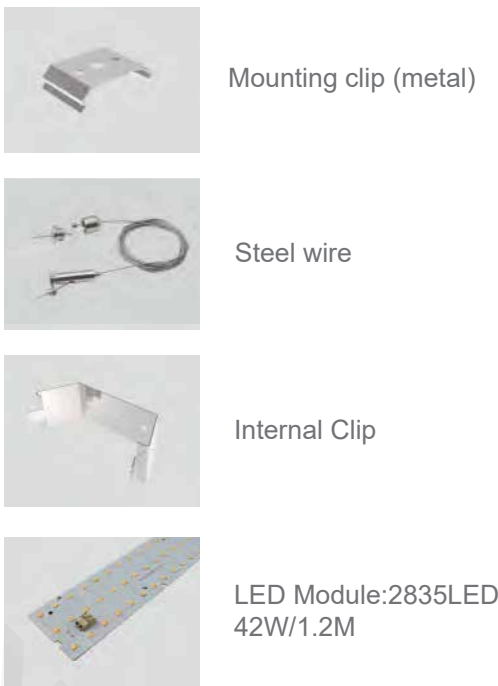

Types of installation:



Material: Extruded aluminum  
Dimension: 68×75mm  
Length: MAX 6m

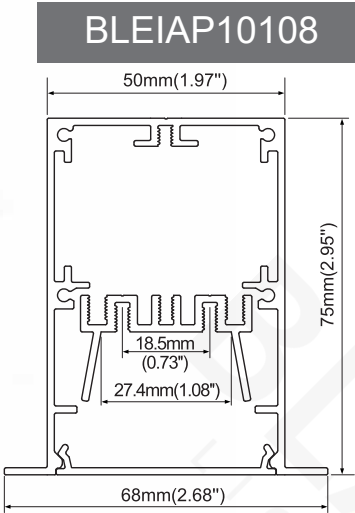

FINISH



Anod. aluminum   white   Black

END CAPS




Aluminium end cap  
without hole

DIFFUSERS



PC frosted



Anti glare cover

ACCESSORIES



Stainless Clip



Internal Clip



Connector L



Connector T



Connector X




Connector IL

Types of installation:



Material: Extruded aluminum  
Dimension: 68×95mm  
Length: MAX 6m

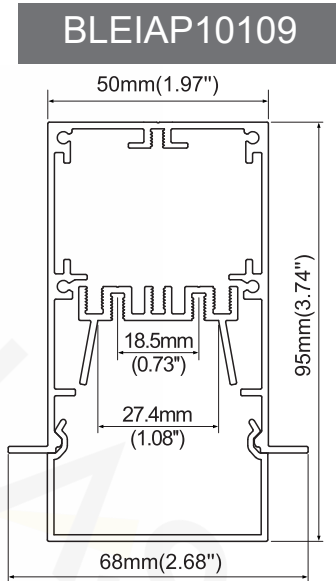

FINISH




Anod. aluminum   white   Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Stainless Clip



Internal Clip



LED Module 2835LED  
28W/1.2M




Types of installation:



Material: Extruded aluminum  
Dimension: 95×75mm  
Length: MAX 6m

BLEIAP10110

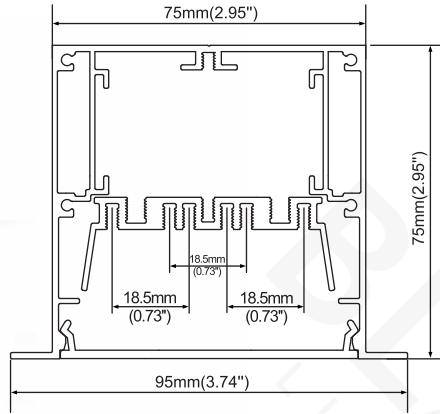

FINISH



Anod. aluminum



white




Black

END CAPS




Aluminium end cap  
without hole

DIFFUSERS



PC frosted



Anti glare cover

ACCESSORIES



Internal clip



Stainless Clip



Connector L



Connector IL



Connector T



Connector X




LED Module 2835LED  
42W/1.2M

Types of installation:



Material: Extruded aluminum  
Dimension: 95×95mm  
Length: MAX 6m

BLEIAP10111

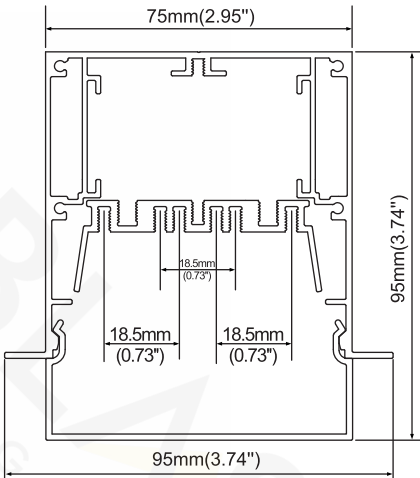

FINISH



Anod. aluminum



white




Black

END CAPS



Aluminium end cap

DIFFUSERS



PC frosted

ACCESSORIES



Stainless Clip



Internal Clip



LED Module 2835LED  
42W/1.2M






Types of installation:



Material: Extruded aluminum  
Dimension: 38×115mm  
Length: MAX 6m

**BLEIAP10112**

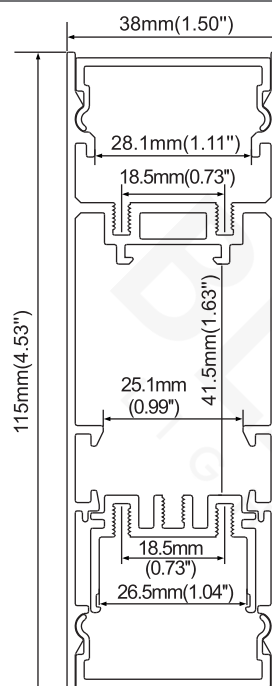




END CAPS



DIFFUSERS



ACCESSORIES

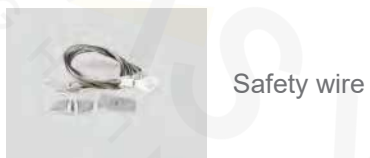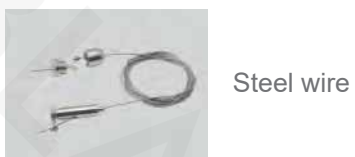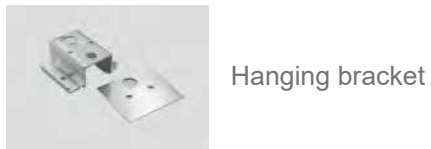


Types of installation:



Material: Extruded aluminum  
Dimension: 63×120mm  
Length: MAX 6m




END CAPS

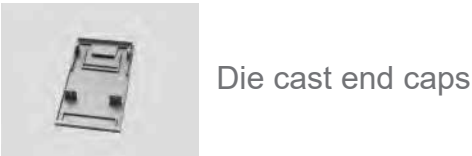

DIFFUSERS



ACCESSORIES

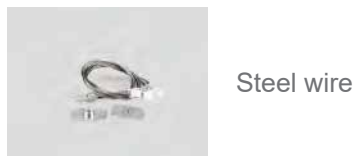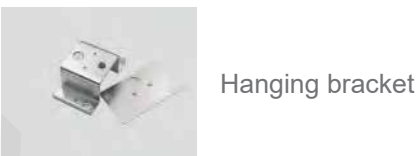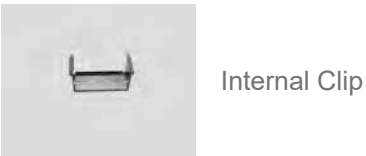






Types of installation:





Material: Extruded aluminum  
Dimension: 63×120mm  
Length: MAX 6m

**BLEIAP10113**

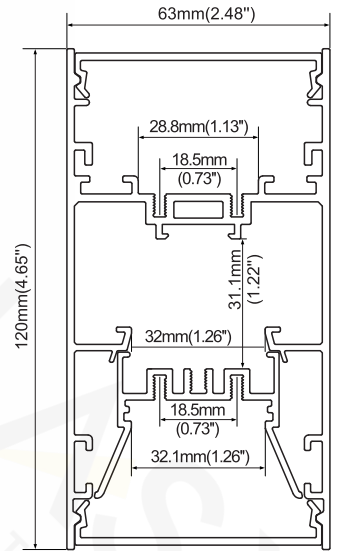

FINISH



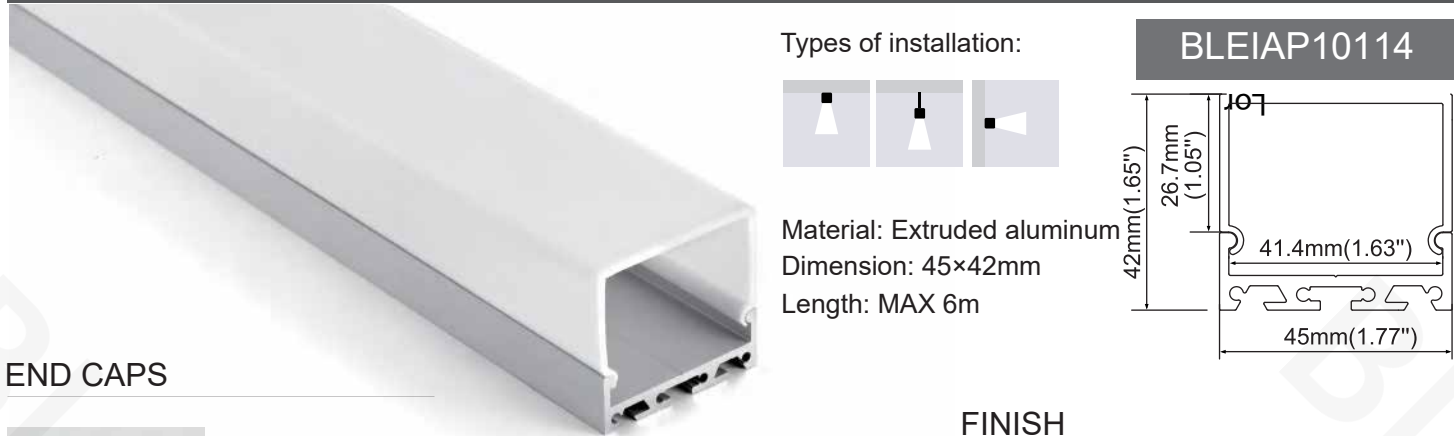

END CAPS



End Caps



IP20

FINISH



Anod. aluminum



white



Black

DIFFUSERS



PC diffused


ACCESSORIES



Mounting clip  
(metal)



Steel wire

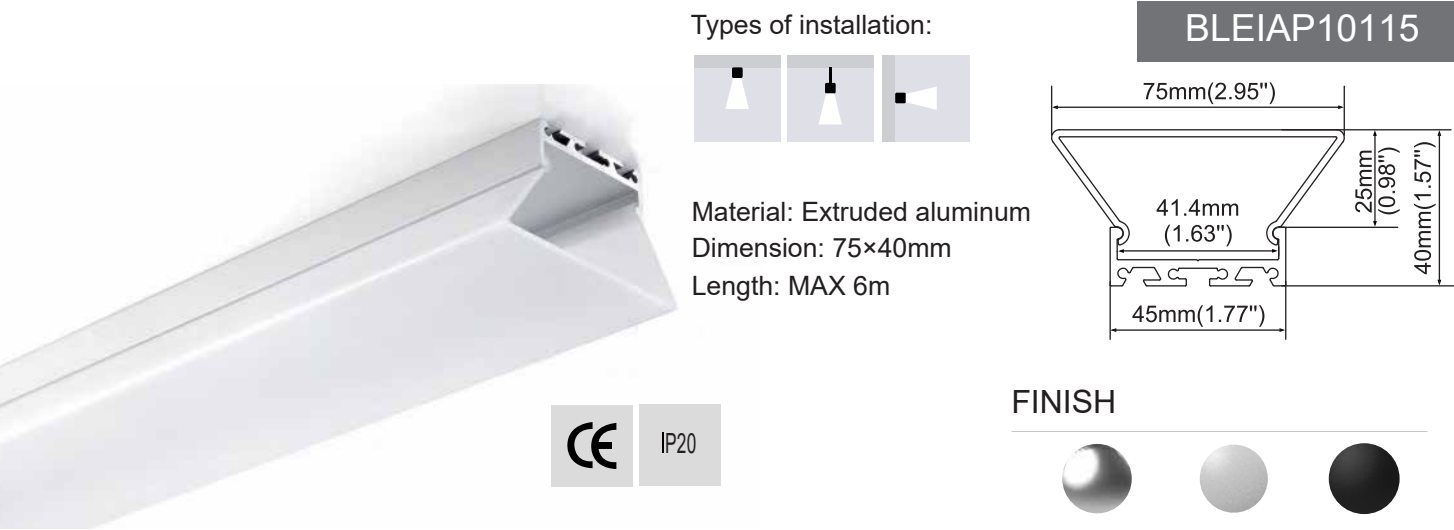

END CAPS



End Caps



IP20

FINISH



Anod. aluminum



white



Black

DIFFUSERS



PC diffused

ACCESSORIES




Mounting clip  
(metal)



Steel wire



Types of installation:



Material: Extruded aluminum  
Dimension: 45×42mm  
Length: MAX 6m



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)



Steel wire





Types of installation:



Material: Extruded aluminum  
Dimension:  $\phi 60\text{mm}$   
Length: MAX 6m

CE IP20

FINISH



Anod. aluminum white Black

BLEIAP10117

END CAPS

DIFFUSERS

ACCESSORIES



End Caps



PC diffused



Steel wire



Mounting clip (metal)



Types of installation:



Material: Extruded aluminum  
Dimension:  $\phi 40.2\text{mm}$   
Length: MAX 6m

CE IP20

FINISH



Anod. aluminum white Black

BLEIAP10118

END CAPS



End Caps

DIFFUSERS



PC diffused


ACCESSORIES



Steel wire



Mounting clip (metal)

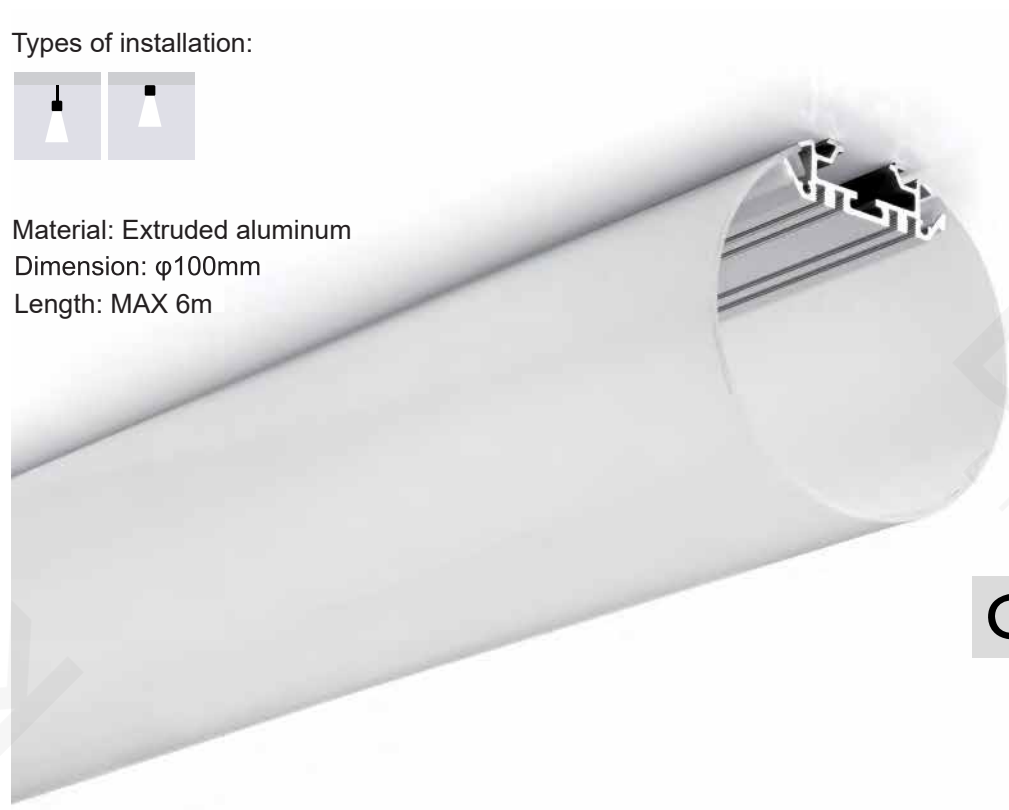

Types of installation:



Material: Extruded aluminum  
Dimension:  $\phi 100\text{mm}$   
Length: MAX 6m

CE IP20

FINISH



Anod. aluminum white Black

BLEIAP10119

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Steel wire



Mounting clip (metal)




Types of installation:




Material: Extruded aluminum  
Dimension:  $\varnothing 30\text{mm}$   
Length: MAX 6m

BLEIAP10120

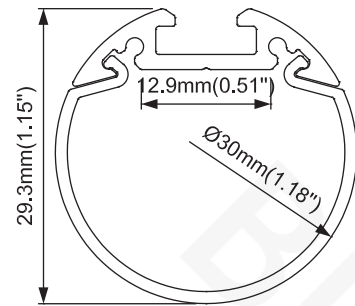

FINISH



Anod. aluminum   white   Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire



Metal clip



Surface mounting kit




Types of installation:




Material: Extruded aluminum  
Dimension:  $\varnothing 36\text{mm}$   
Length: MAX 6m

BLEIAP10121

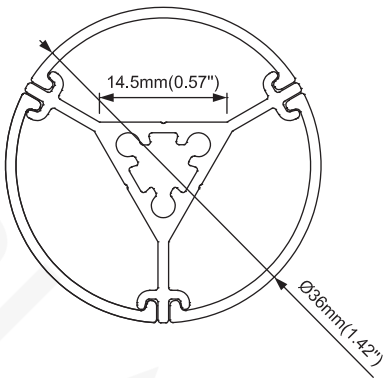

FINISH



Anod. aluminum   white   Black

END CAPS



End cap

DIFFUSERS



PC diffused



Black PC

ACCESSORIES



90° Connector



180° Connector



Connector X



Steel wire





#### END CAPS



Die cast end caps

#### DIFFUSERS



PC frosted

#### ACCESSORIES



Internal Clip



Wall clip



Steel wire




Hanging bracket



Safety wire

#### FINISH

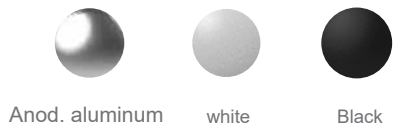

Anod. aluminum white Black



#### END CAPS



Die cast end caps

#### DIFFUSERS



PC frosted


#### ACCESSORIES



Internal Clip



Outside clip




Steel wire



Safety wire

#### FINISH

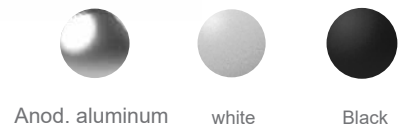

Anod. aluminum white Black




Types of installation:



Material: Extruded aluminum  
Dimension: 63×80mm  
Length: MAX 6m



BLEIAP10124

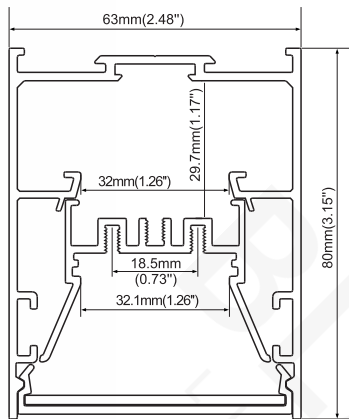

FINISH



Anod. aluminum   white   Black

END CAPS



Die cast end caps

DIFFUSERS




PC frosted



Prismatic

ACCESSORIES



Outside clip



Steel wire



Internal Clip




Safety wire


Types of installation:



Material: Extruded aluminum  
Dimension: 83×80mm  
Length: MAX 6m

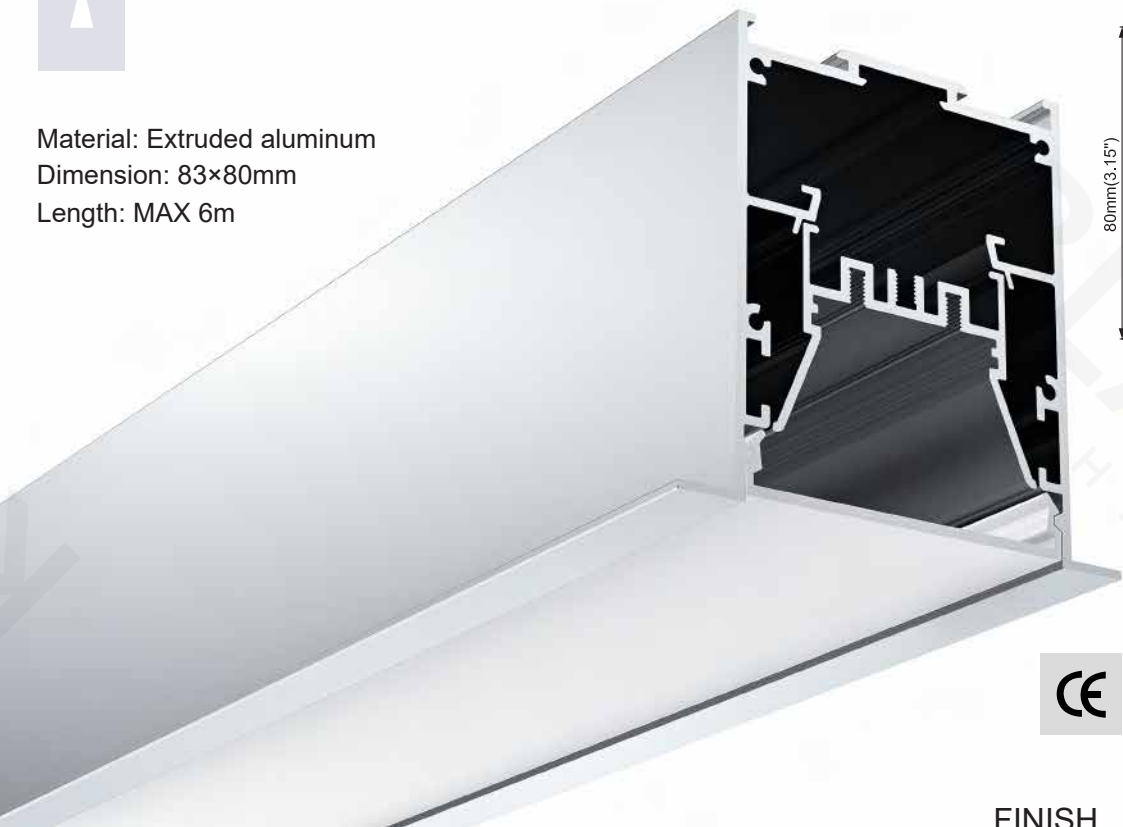

BLEIAP10125

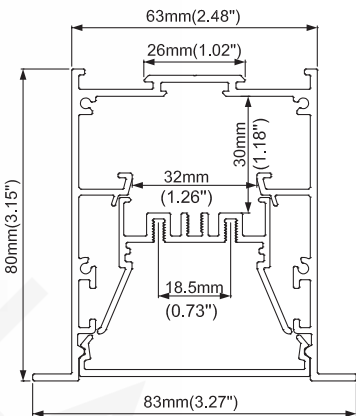


FINISH




Anod. aluminum   white   Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Stainless clip



Internal Clip


Types of installation:



Material: Extruded aluminum  
Dimension: 75×120mm  
Length: MAX 6m



BLEIAP10126

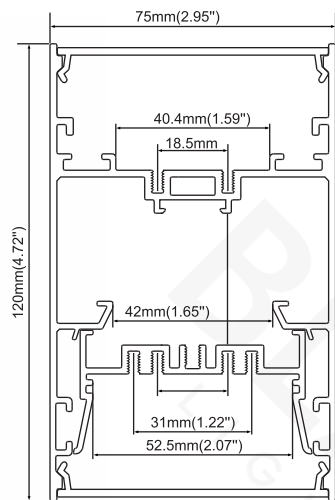

IP20

FINISH




Anod. aluminum

white

Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted


ACCESSORIES



Wall clip



Mounting clip (metal)



Steel wire



Safety wire



Hanging bracket


Types of installation:



Material: Extruded aluminum  
Dimension: 75×78mm  
Length: MAX 6m



BLEIAP10127

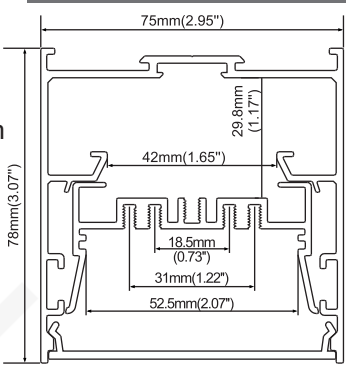

IP20

FINISH



Anod. aluminum

white

Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted



Anti glare cover

ACCESSORIES



Internal Clip



Outside clip




Steel wire



Safety wire



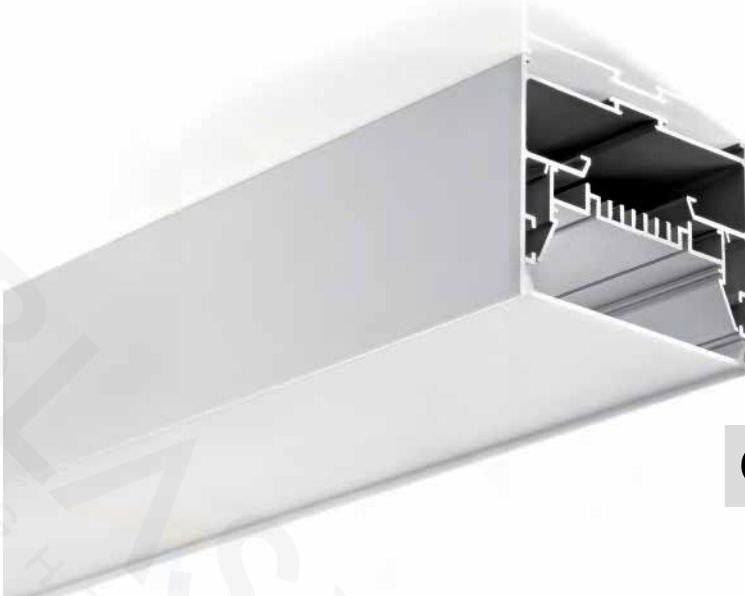


Types of installation:



Material: Extruded aluminum  
Dimension: 100×78mm  
Length: MAX 6m

CE IP20

BLEIAP10128



FINISH




Anod. aluminum    white    Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Outside clip



Steel wire



Safety wire






① Aluminum profile  
② Die cast end cap  
③ Anti light leakage plate  
④ Outer clip  
⑤ Suspension kit  
⑥ Heat sink  
⑦ LED module  
⑧ Inner clip with safety rope  
⑨ Driver  
⑩ PC frosted diffuser




Types of installation:



Material: Extruded aluminum  
Dimension: 100×120mm  
Length: MAX 6m

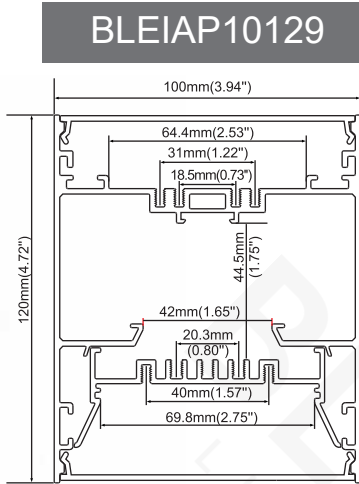


FINISH



Anod. aluminum   white   Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Hanging bracket



Steel wire



Safety wire





Wall clip


Types of installation:



Material: Extruded aluminum  
Dimension: 100×75mm  
Length: MAX 6m

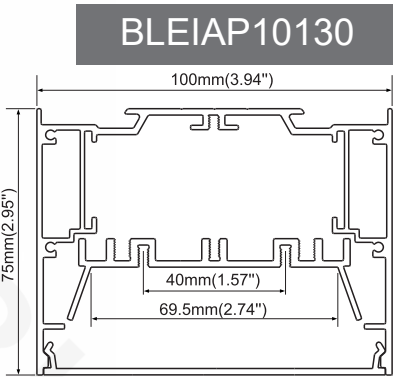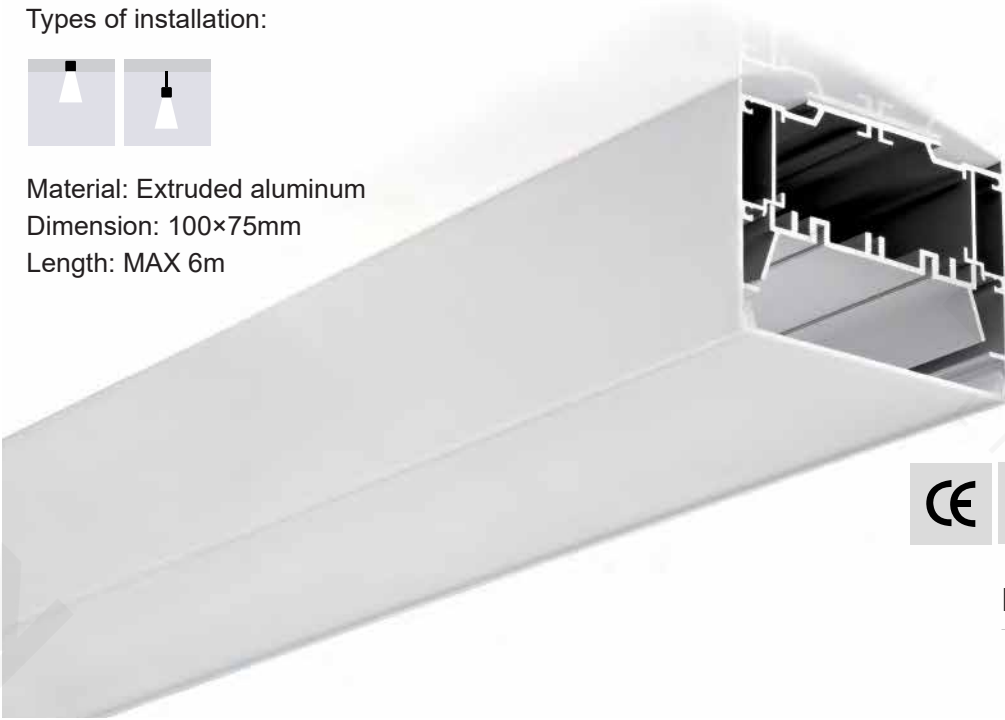

FINISH




Anod. aluminum   white   Black

END CAPS



Aluminium end cap  
without hole

DIFFUSERS




PC frosted

ACCESSORIES



Mounting clip (metal)



LED Module 2835LED  
54W/1.2M



Connector IL



Steel wire



Connector T



Connector L



Trimless recessed clip




Connector X



Internal Clip

BLEIAP10131

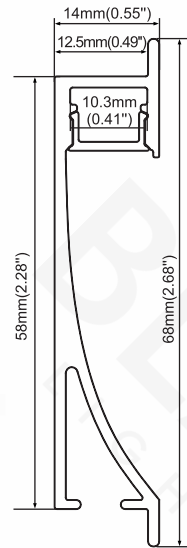

Types of installation:



Material: Extruded aluminum  
Dimension: 14×58mm  
Length: MAX 6m



FINISH



Anod. aluminum    white    Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

Types of installation:



Material: Extruded aluminum  
Dimension: 80×50mm  
Length: MAX 6m

END CAPS




End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PC diffused


BLEIAP10132

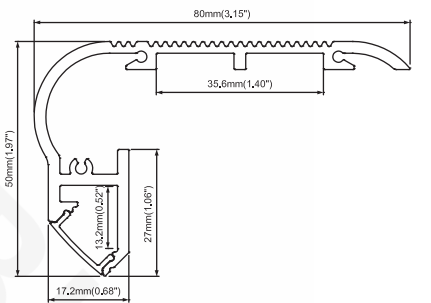

FINISH



Anod. aluminum    Black

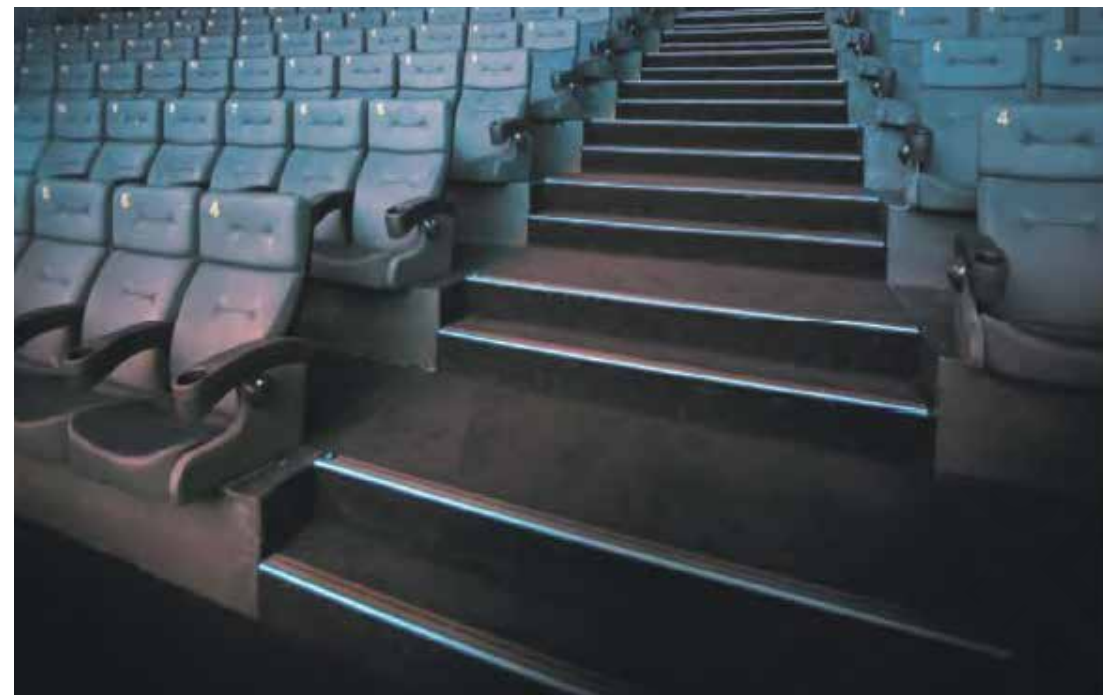



#### END CAPS



End cap with hole  
End cap without hole


#### DIFFUSERS



PC diffused



PVC anti-skid

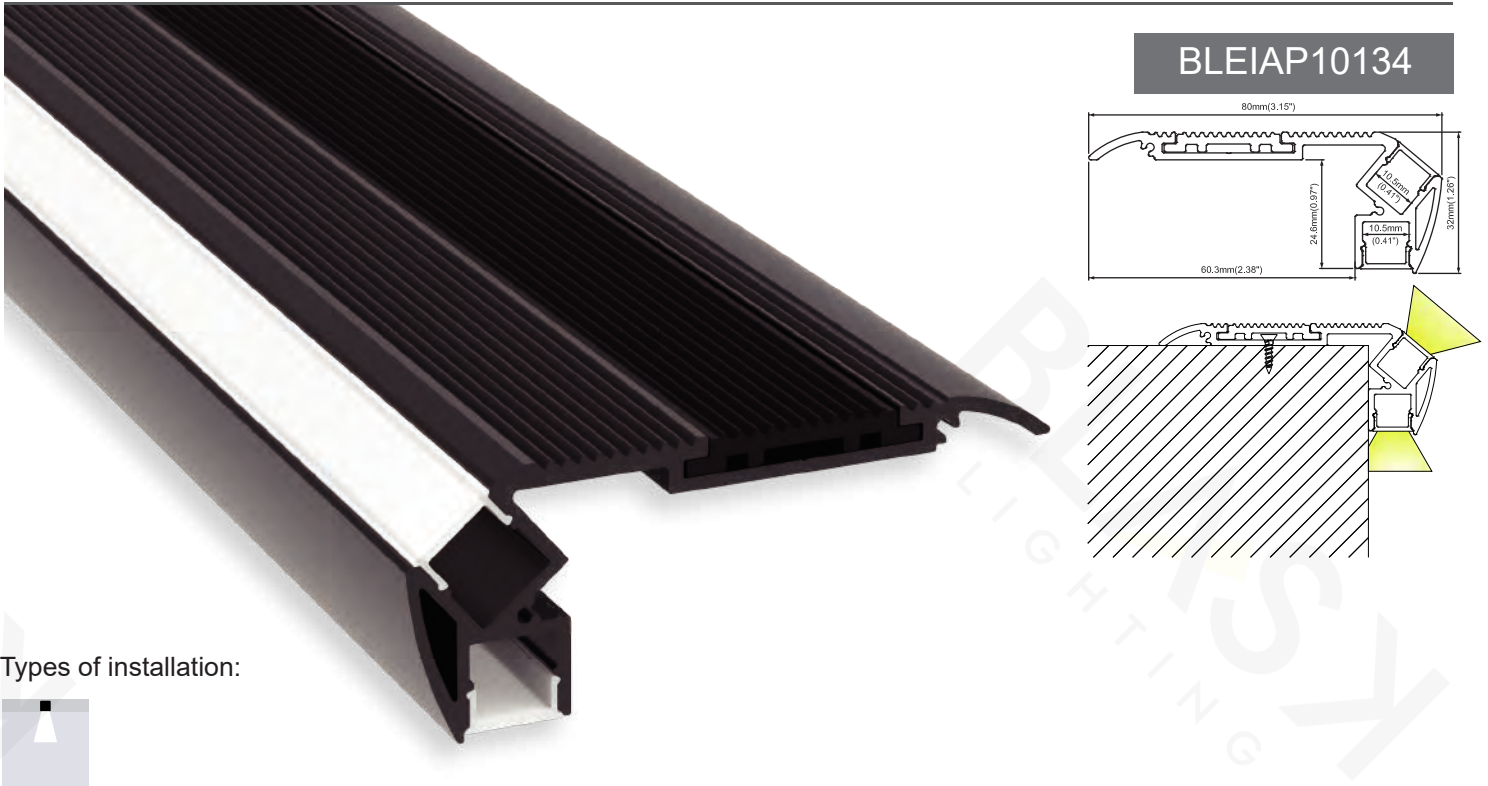

Material: Extruded aluminum  
Dimension: 80×32mm  
Length: MAX 6m



#### FINISH



Anod. aluminum



Black

#### END CAPS




End cap with hole  
End cap without hole

#### DIFFUSERS




PC diffused



PVC anti-skid



BLEIAP10135

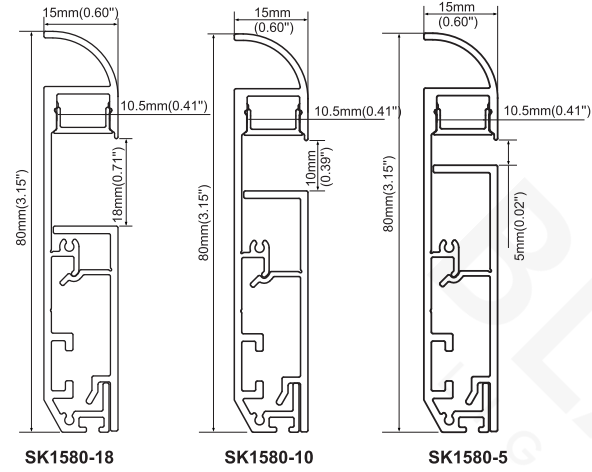


Types of installation:



Material: Extruded aluminum  
Dimension: 15×80mm  
Length: MAX 6m



FINISH



END CAPS




End Caps

DIFFUSERS



PC diffused

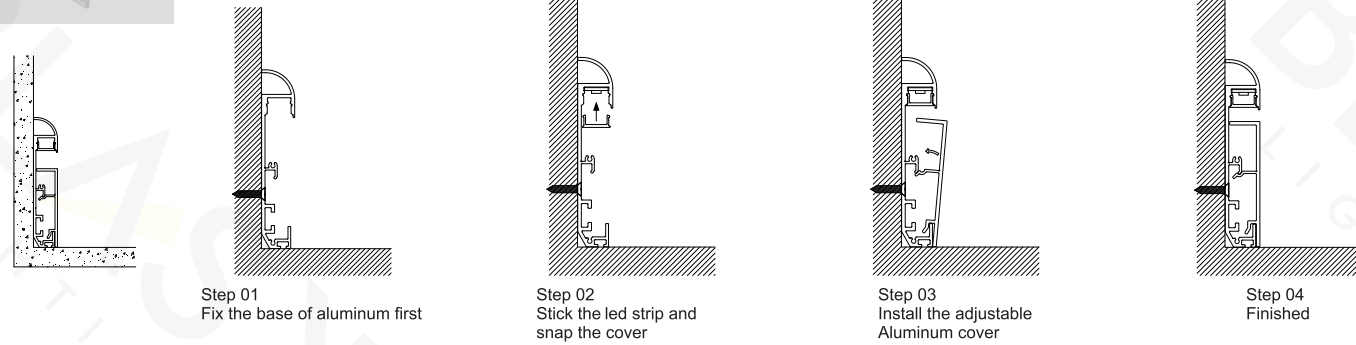


Types of installation:



Material: Extruded aluminum  
Dimension: 13.5×84mm  
Length: MAX 6m



FINISH



END CAPS




End cap with hole  
End cap without hole


DIFFUSERS




PC diffused

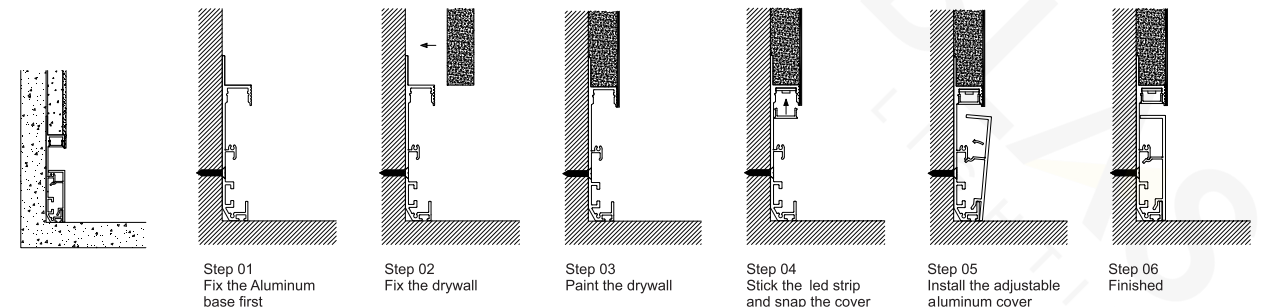


BLEIAP10136

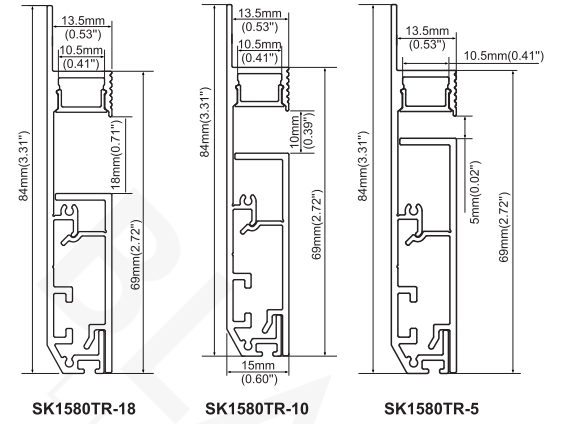


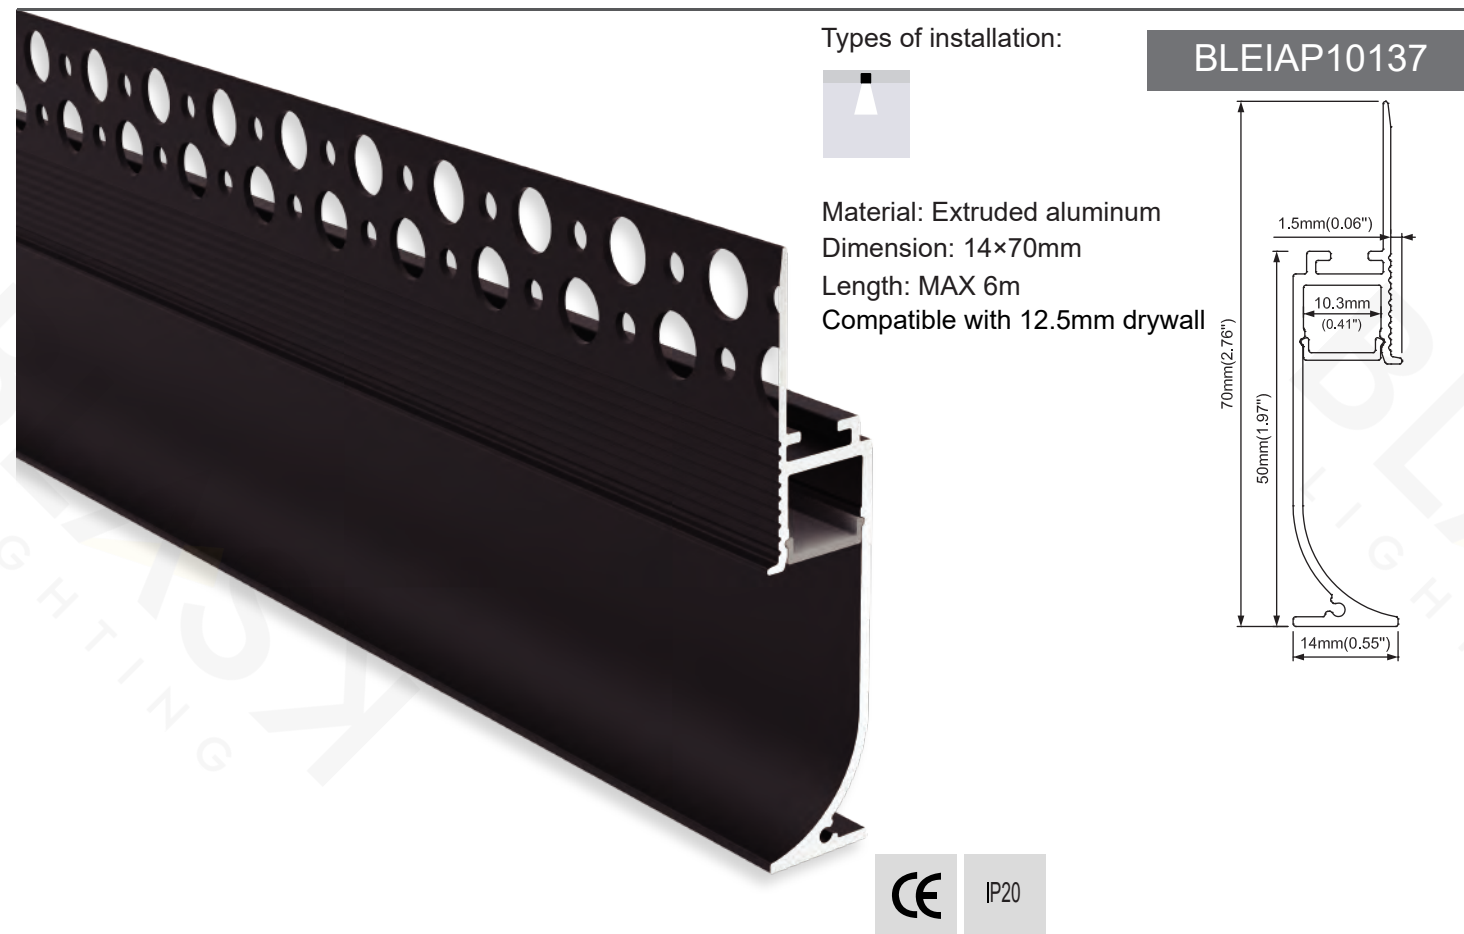

END CAPS

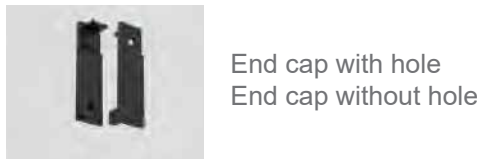



FINISH




DIFFUSERS



ACCESSORIES

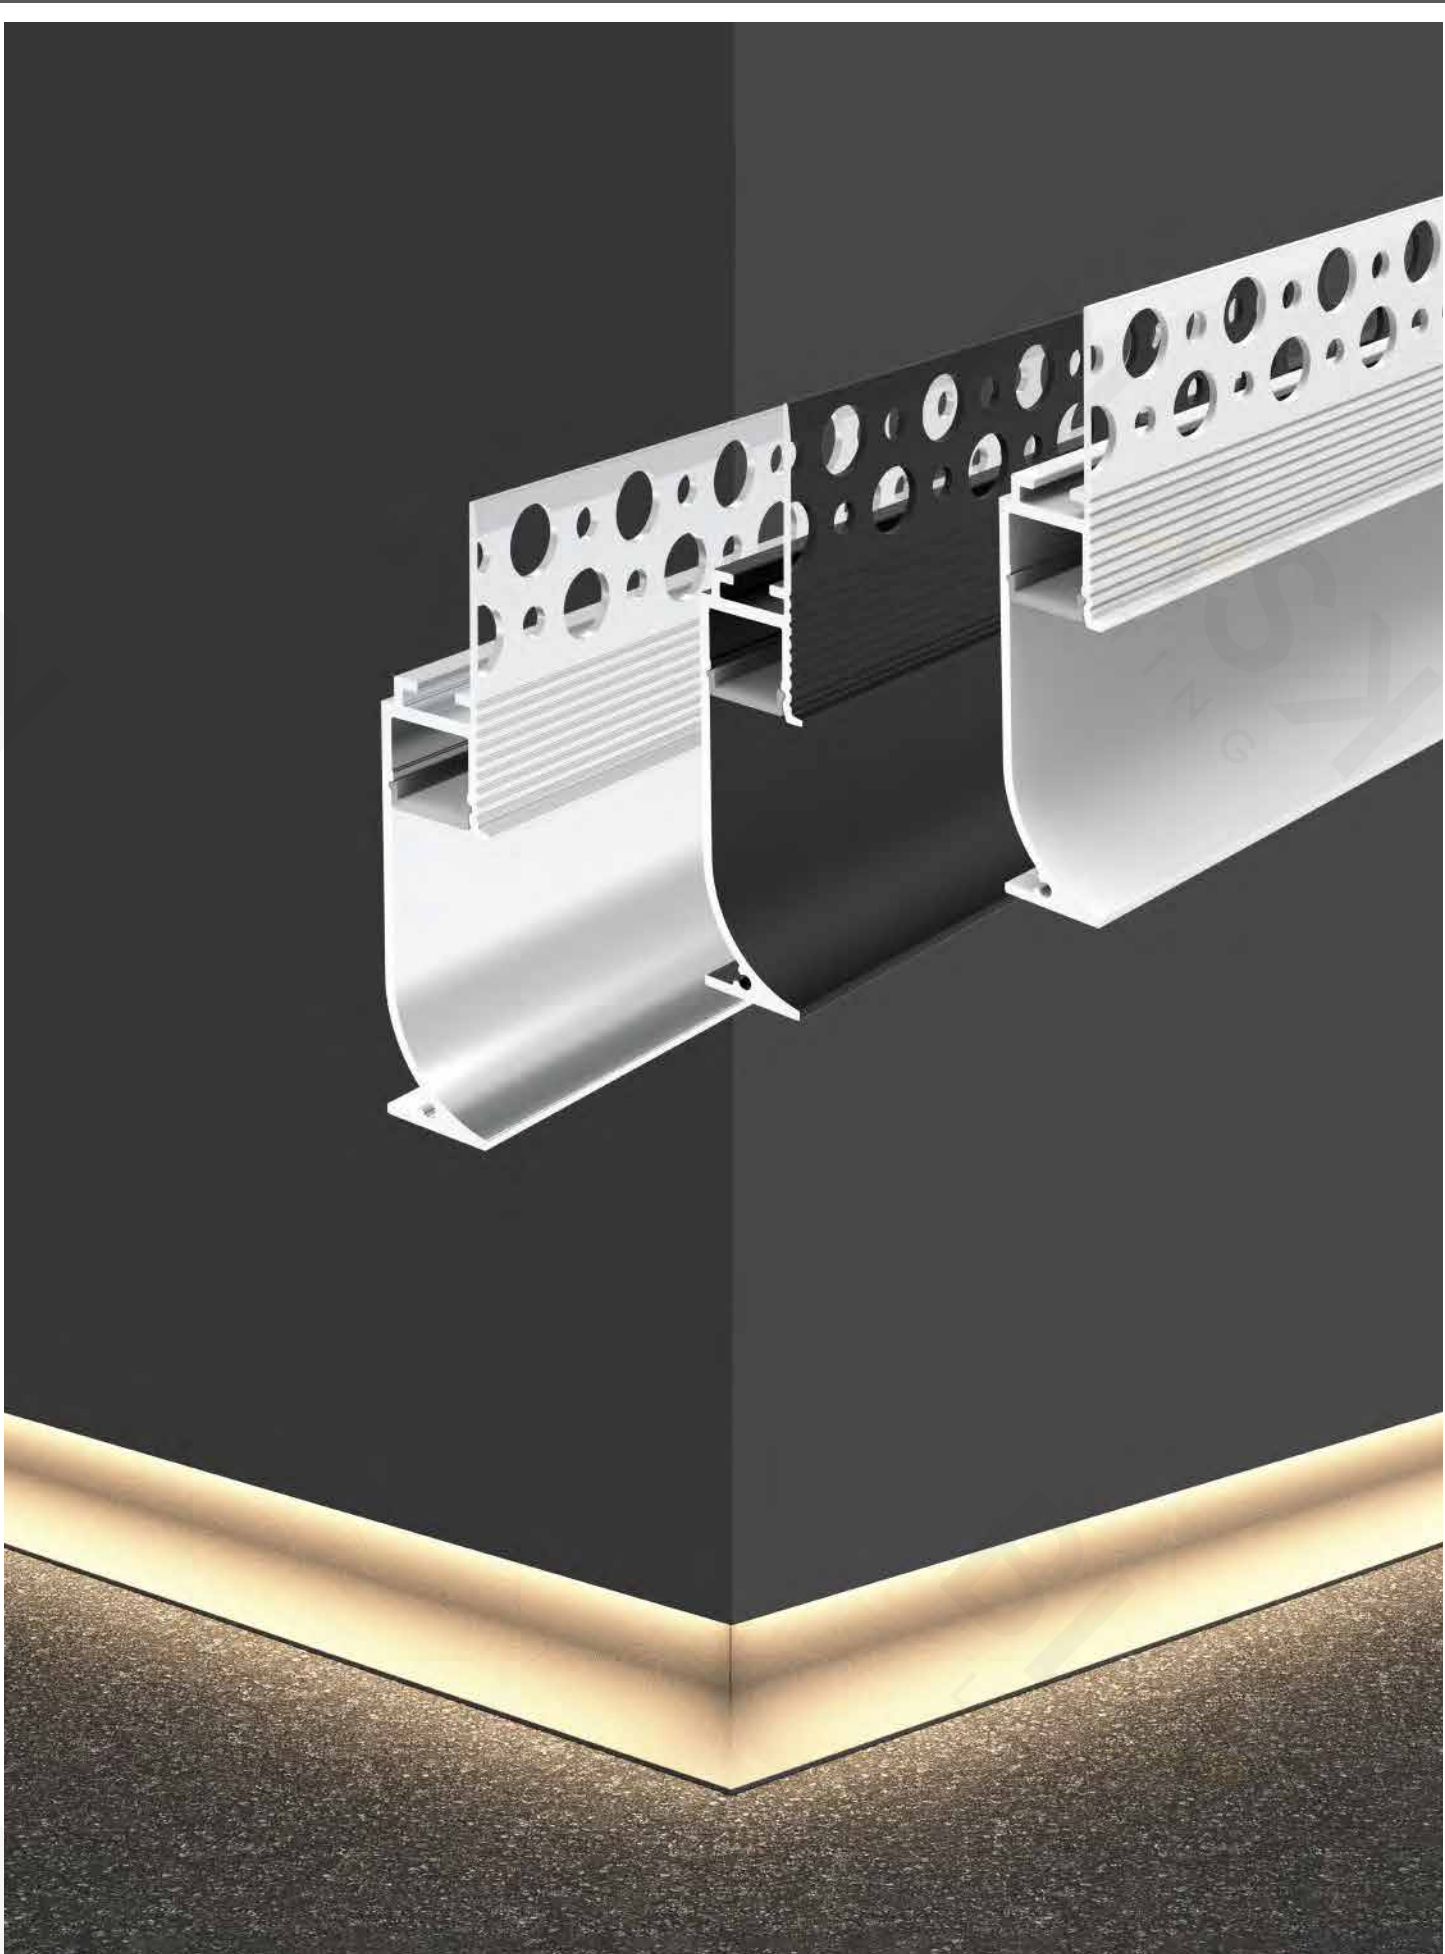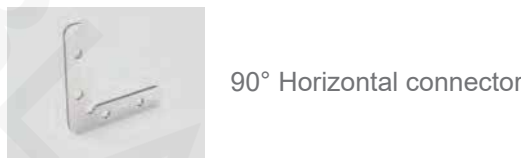

BLEIAP10138

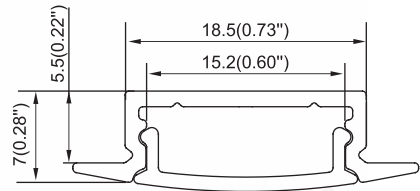

Types of installation:



Material: Extruded aluminum  
Dimension: 18.5×7mm  
Length: MAX 6m



FINISH



Anod. aluminum




white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

Types of installation:



Material: Extruded aluminum  
Dimension: 18.5×7mm  
Length: MAX 6m



FINISH



Anod. aluminum



white




Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Adjustable bracket





Mounting clip (metal)



45° Mounting clip


BLEIAP10139

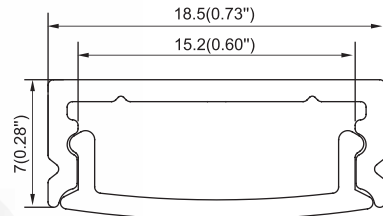





BLEIAP10140

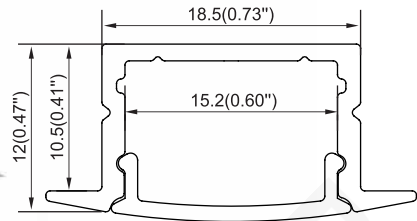


Types of installation:



Material: Extruded aluminum  
Dimension: 18.5×12mm  
Length: MAX 6m



FINISH



END CAPS



End cap with hole  
End cap without hole


DIFFUSERS



PC diffused




BLEIAP10141

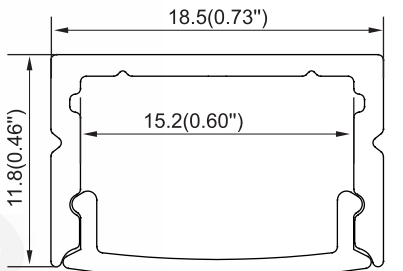


Types of installation:




Material: Extruded aluminum  
Dimension: 18.5×11.8mm  
Length: MAX 6m

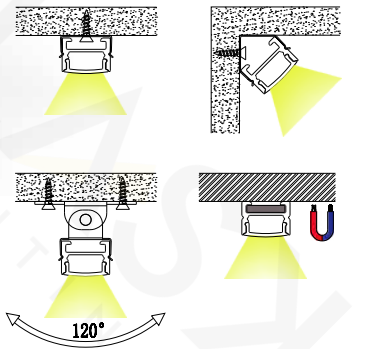

FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Adjustable bracket



Mounting clip (metal)




45° clip






#### END CAPS



End cap with hole  
End cap without hole

#### DIFFUSERS



PC diffused

#### ACCESSORIES



Spring clip



90° Vertical connector



135° Vertical connector



90° Horizontal connector




135° Horizontal connector



180° Connector




#### END CAPS



End cap with hole  
End cap without hole

#### DIFFUSERS



PC diffused

#### ACCESSORIES



Mounting clip (metal)



Magnet



90° Horizontal connector



135° Horizontal connector



Adjustable bracket



45° Clip



90° Vertical connector




135° Vertical Connector



180° Connector

#### FINISH




Types of installation:



BLEIAP10144

Material: Extruded aluminum  
Dimension: 64.1×13.6mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

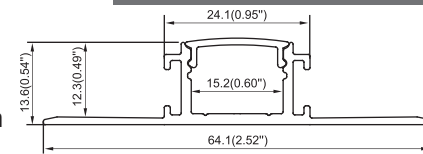

FINISH



Anod. aluminum



white



Black

## END CAPS



End cap with hole  
End cap without hole

## DIFFUSERS



PC diffused

## ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover




Types of installation:



BLEIAP10145

Material: Extruded aluminum  
Dimension: 13×69.4mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

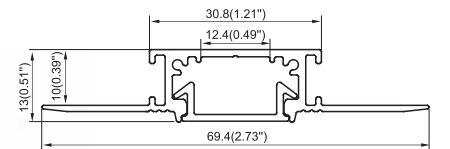

FINISH



Anod. aluminum



white



Black

## END CAPS



End cap with hole  
End cap without hole

## DIFFUSERS



PC diffused



Black diffused

## ACCESSORIES



90° Horizontal connector




90° Vertical connector




Types of installation:




Material: Extruded aluminum  
Dimension: 20.9×37mm  
Length: MAX 6m

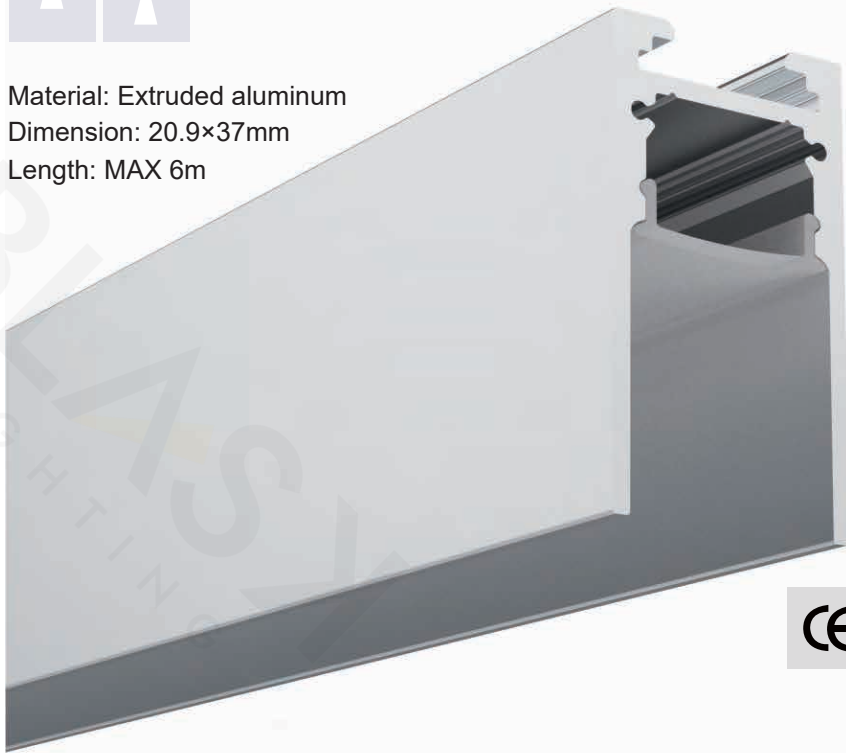

BLEIAP10146

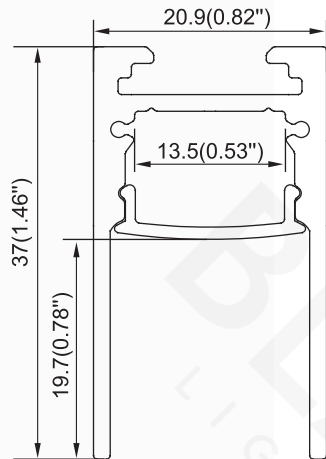

FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



Mounting clip (metal)



Hanging bracket



90° Horizontal connector



180° Connector




Steel wire


Types of installation:




Material: Extruded aluminum  
Dimension: 32.7×51mm  
Length: MAX 6m

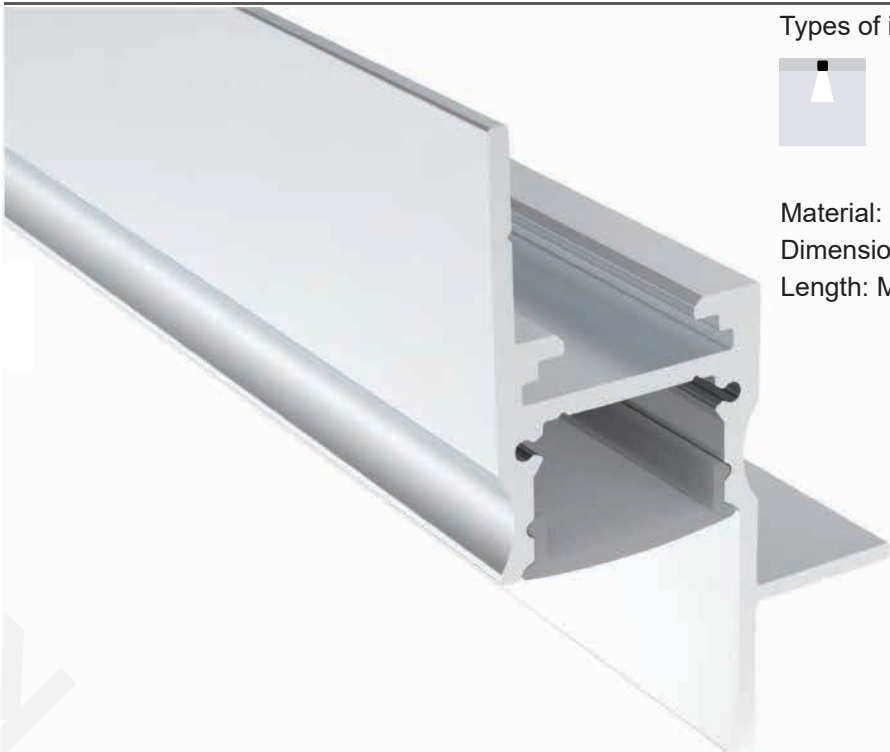

BLEIAP10147

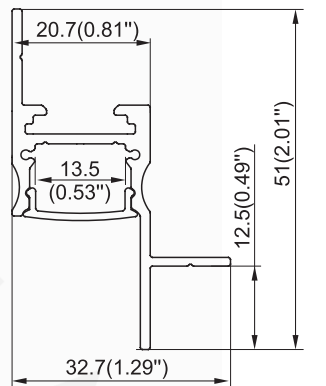

FINISH




END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector




180° Connector

Types of installation:



BLEIAP10148

Material: Extruded aluminum  
Dimension: 40.7×51mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

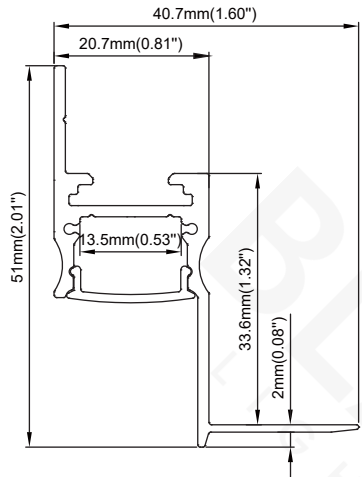

FINISH




Anod. aluminum



white



Black

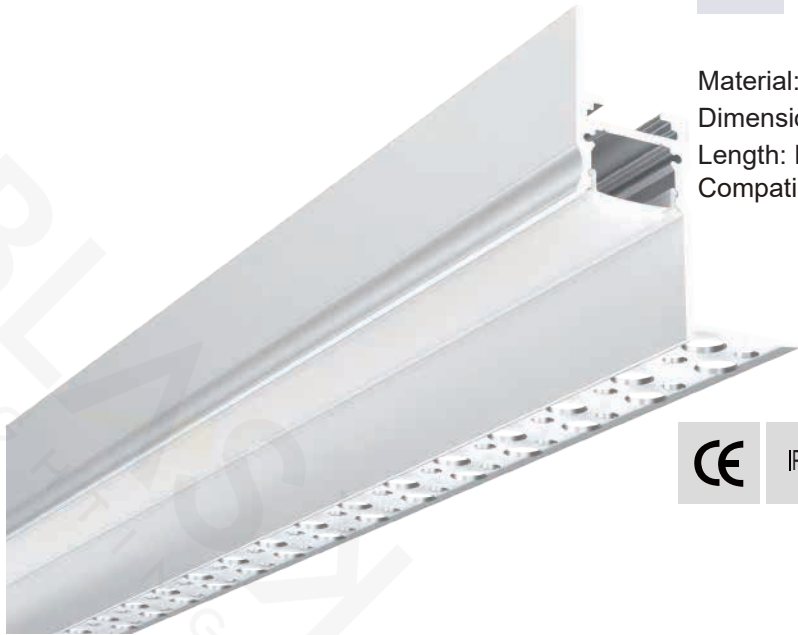


END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



180° Connector



Disposable cover




Types of installation:



BLEIAP10149

Material: Extruded aluminum  
Dimension: 42.2×48.1mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

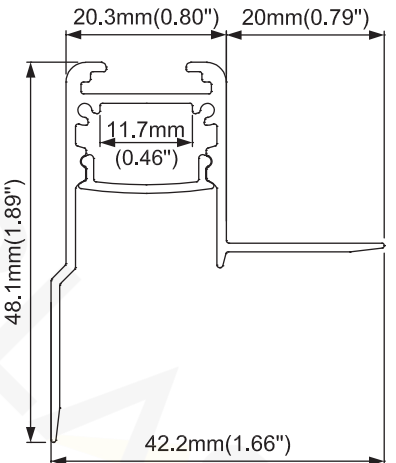

FINISH




Anod. aluminum



white



Black

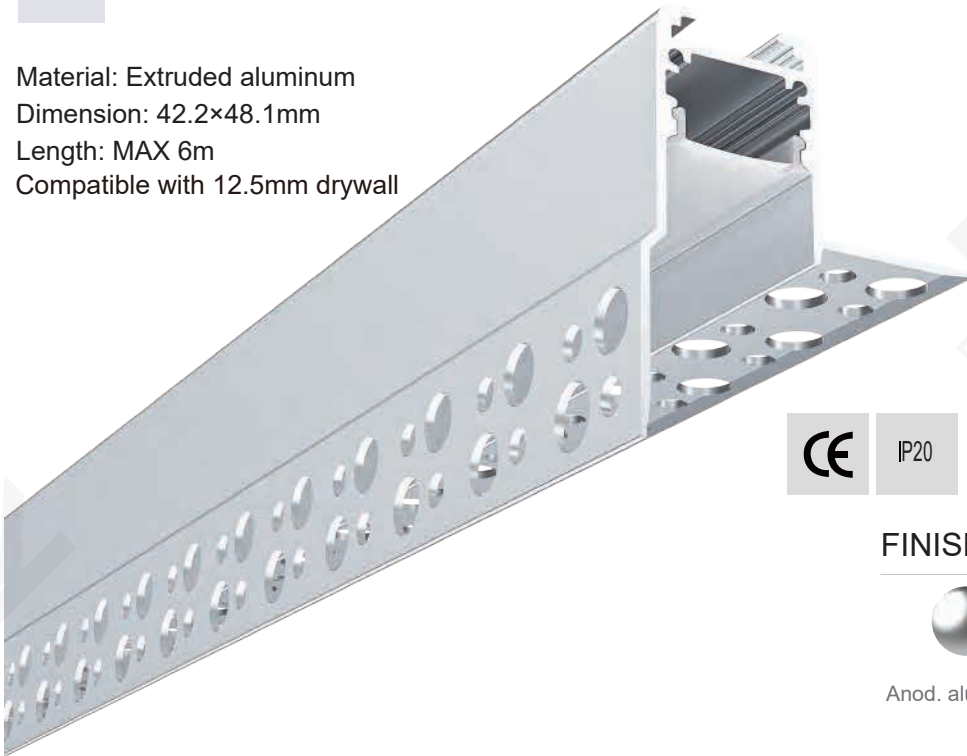

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



180° Connector



Disposable cover




END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



180° Connector



90° Vertical connector




END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES




90° Horizontal connector



180° Connector



90° Vertical connector





Disposable cover




Types of installation:



Material: Extruded aluminum  
Dimension: 39×38mm  
Length: MAX 6m

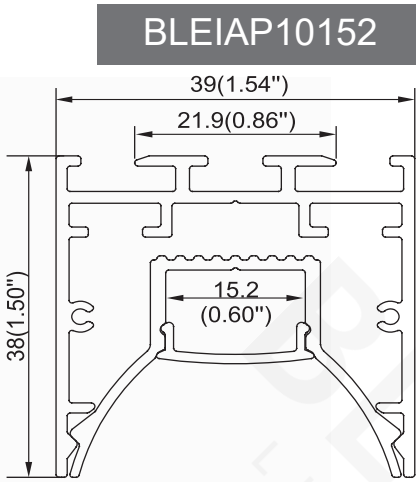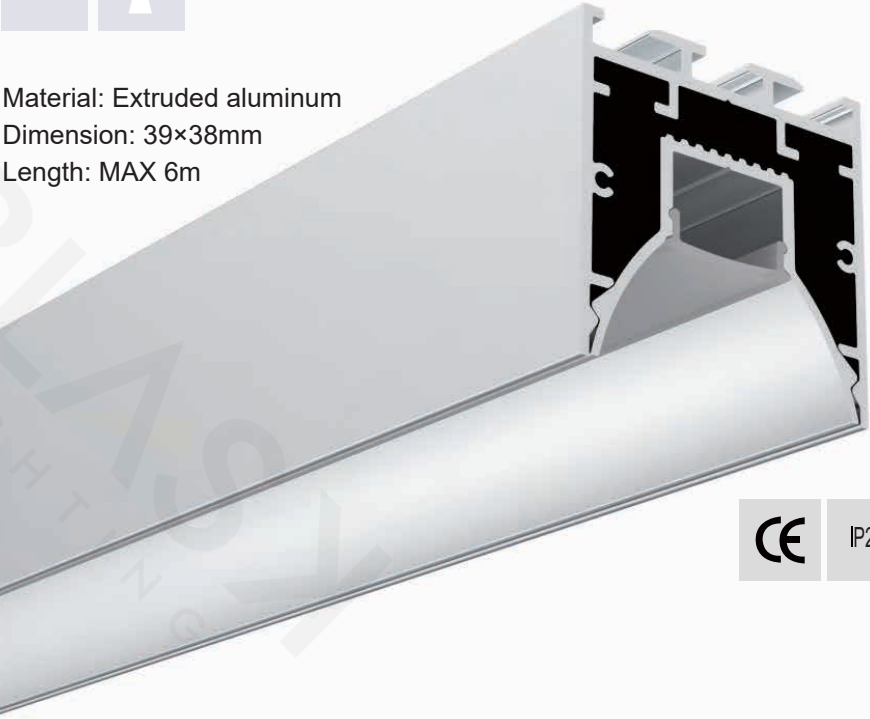

FINISH




Anod. aluminum   white   Black

END CAPS



End Caps

DIFFUSERS



PC diffused




Prismatic

ACCESSORIES



90° Horizontal connector



Steel wire



180° Connector





90° Vertical connector


Types of installation:



Material: Extruded aluminum  
Dimension: 49×38mm  
Length: MAX 6m

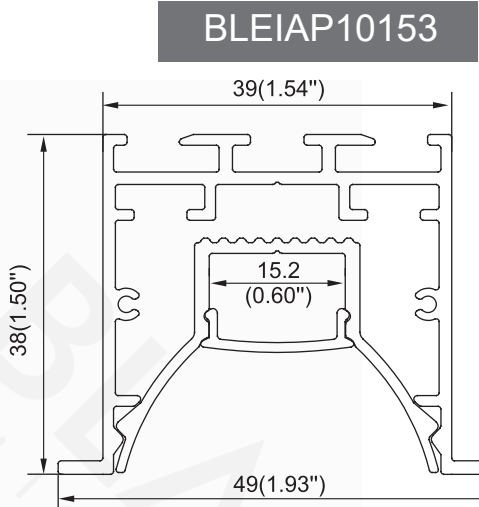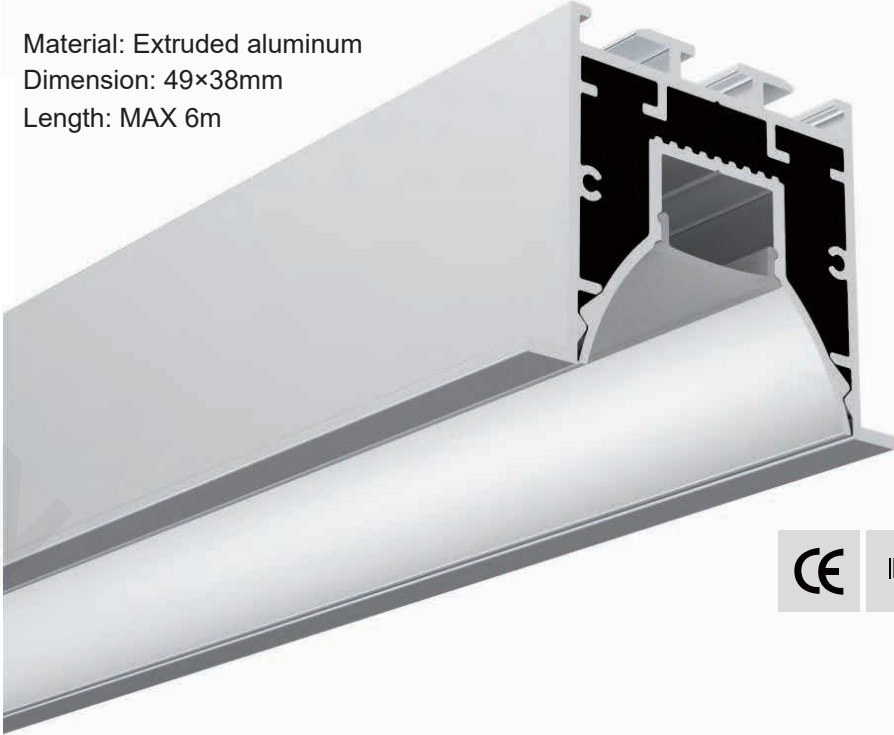

FINISH




Anod. aluminum   white   Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused




Prismatic

ACCESSORIES



90° Horizontal connector




Spring clip



180° Connector




90° Vertical connector

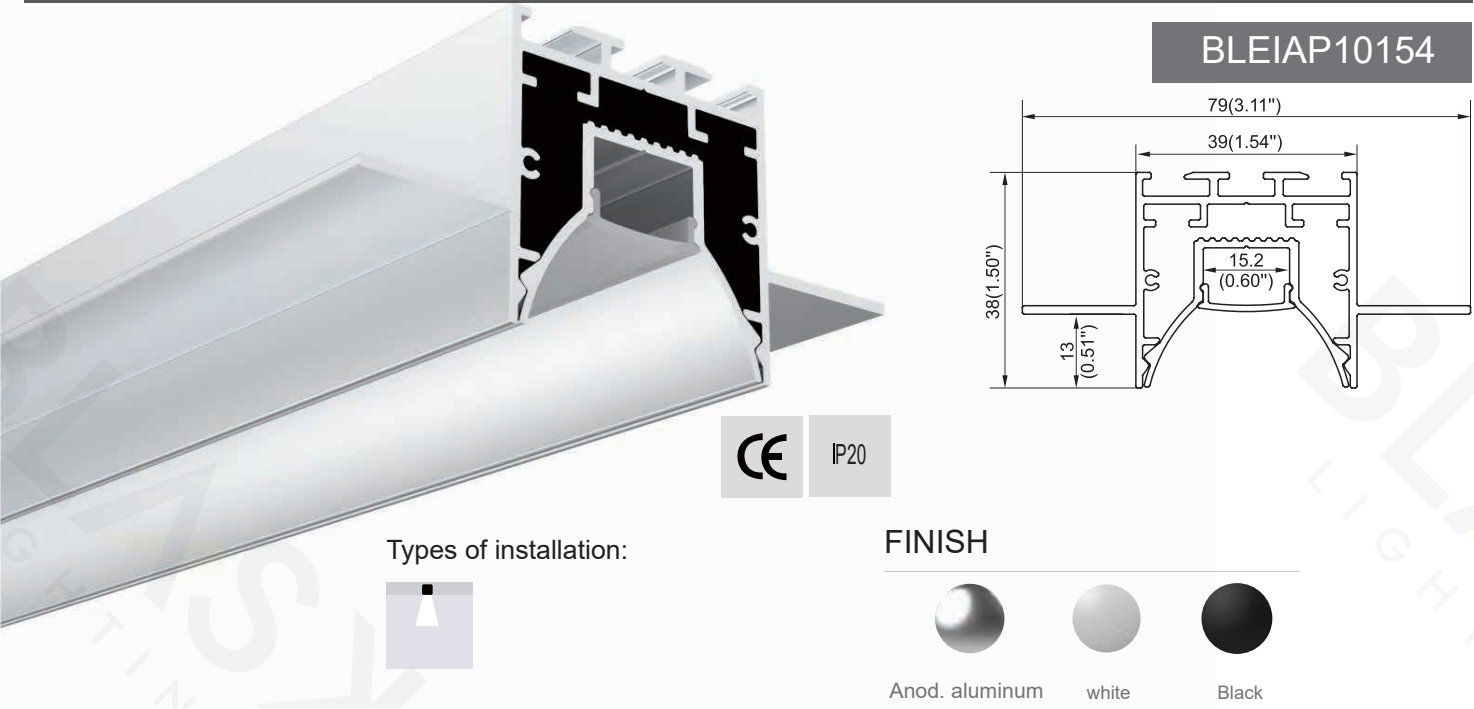

Types of installation:



FINISH




Material: Extruded aluminum  
Dimension: 79×38mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES




90° Horizontal connector



180° Connector



90° Vertical connector

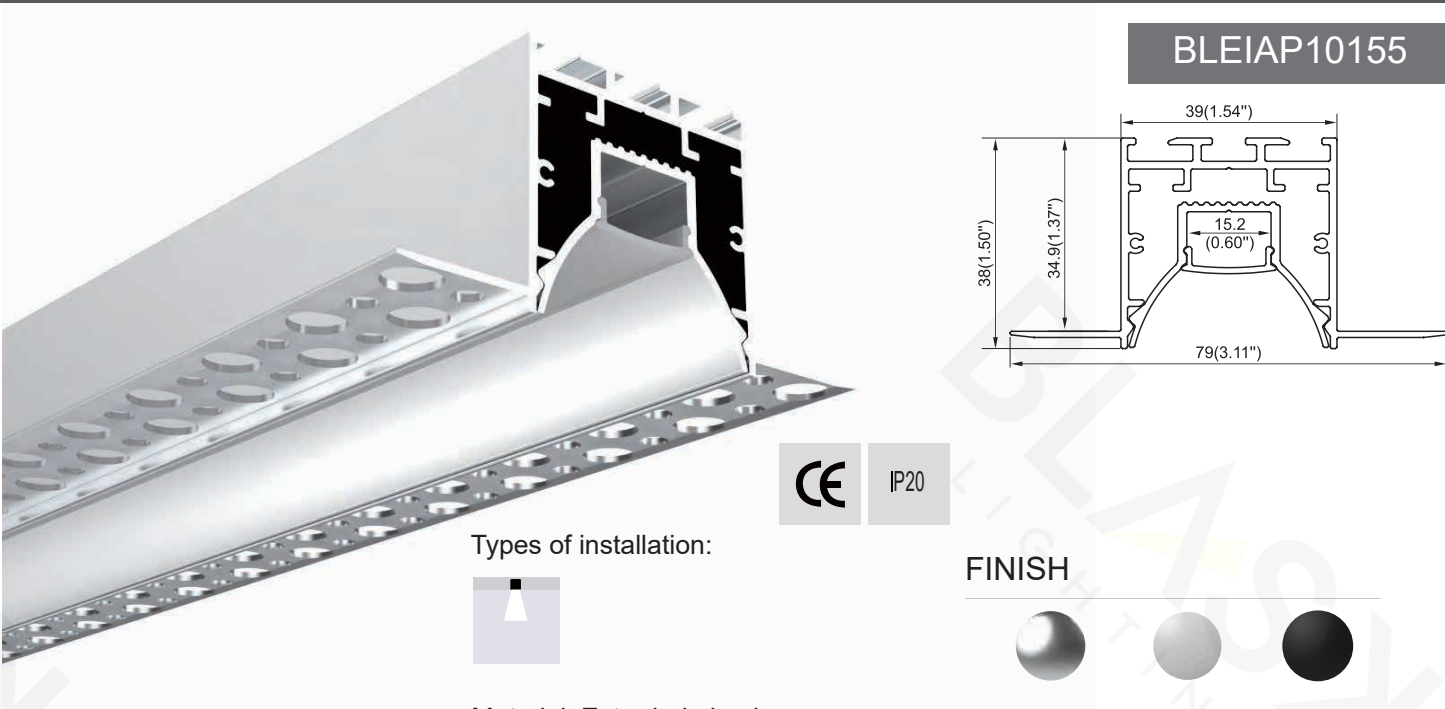

Types of installation:



FINISH



Material: Extruded aluminum  
Dimension: 79×38mm  
Length: MAX 6m  
Compatible with 12.5mm&16mm drywall

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



180° Connector



90° Vertical connector



Disposable cover




**Types of installation:**



**Material:** Extruded aluminum  
**Dimension:** 33×14mm  
**Length:** MAX 6m  
**Compatible with** 12.5mm drywall

CE IP20

**BLEIAP10156**

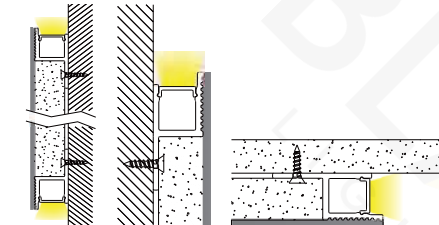

**END CAPS**



End cap with hole  
End cap without hole

**FINISH**



Anod. aluminum white Black

**DIFFUSERS**



PC diffused




**Types of installation:**



**Material:** Extruded aluminum  
**Dimension:** 14.2×147mm  
**Length:** MAX 6m  
**Compatible with** 12.5mm drywall

CE IP20

**BLEIAP10157**



**END CAPS**



End cap with hole  
End cap without hole

**FINISH**



Anod. aluminum white Black

**DIFFUSERS**




PC diffused

**ACCESSORIES**



Disposable cover

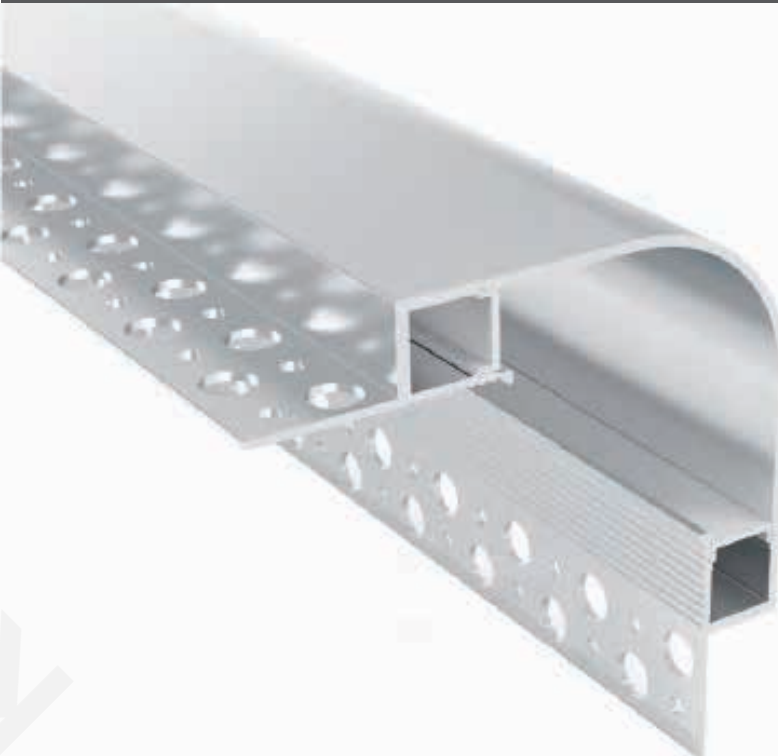


**Types of installation:**



**Material:** Extruded aluminum  
**Dimension:** 80×80mm  
**Length:** MAX 6m  
**Compatible with** 12.5mm drywall

CE IP20

**BLEIAP10158**

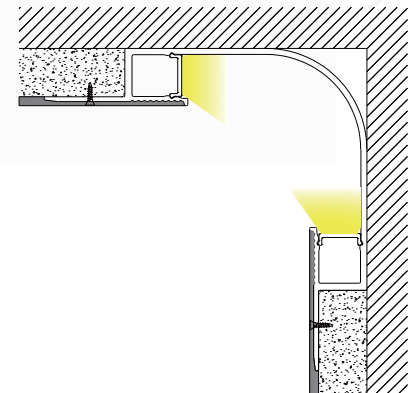

**END CAPS**



End cap with hole  
End cap without hole

**FINISH**



Anod. aluminum white Black

**DIFFUSERS**




PC diffused

**ACCESSORIES**




Disposable cover




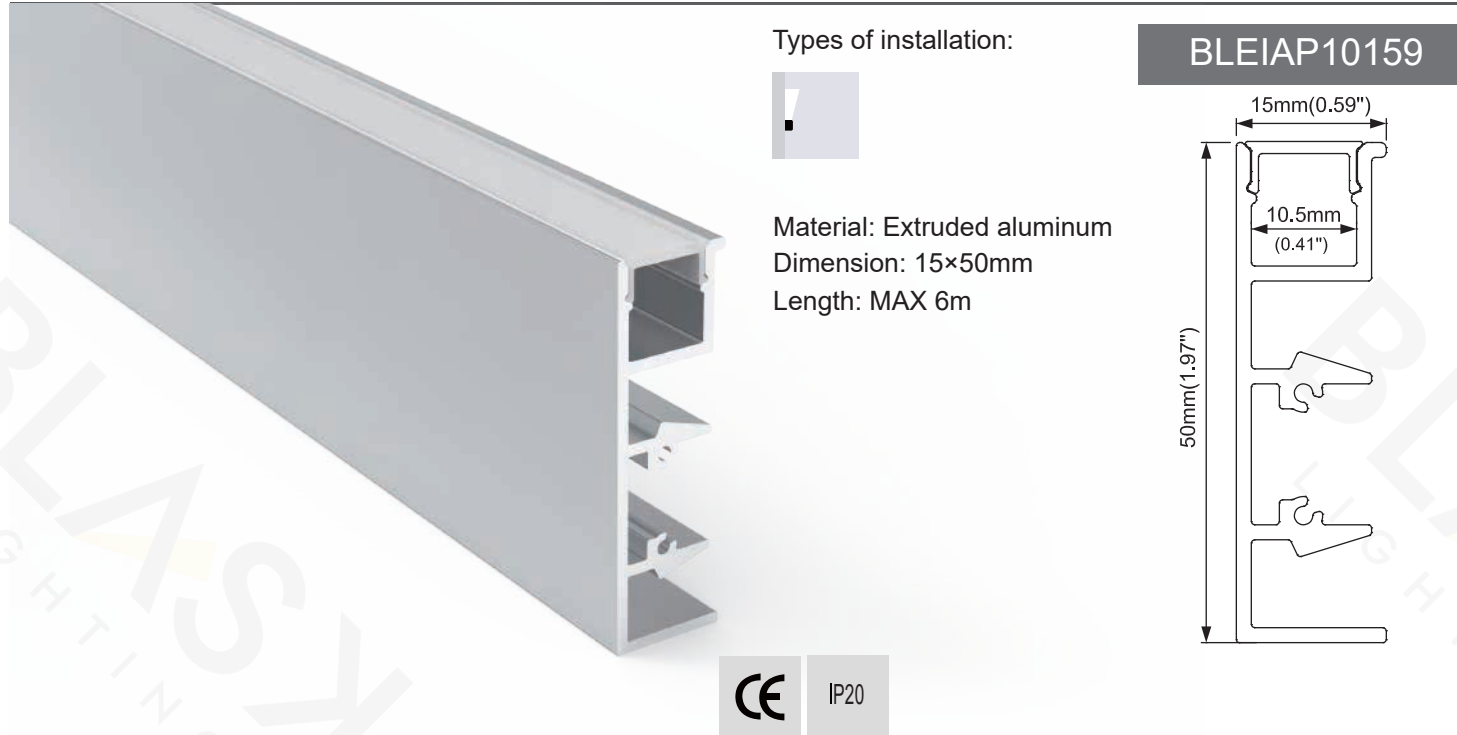

END CAPS

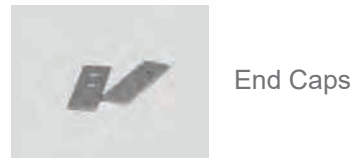






FINISH




DIFFUSERS




ACCESSORIES

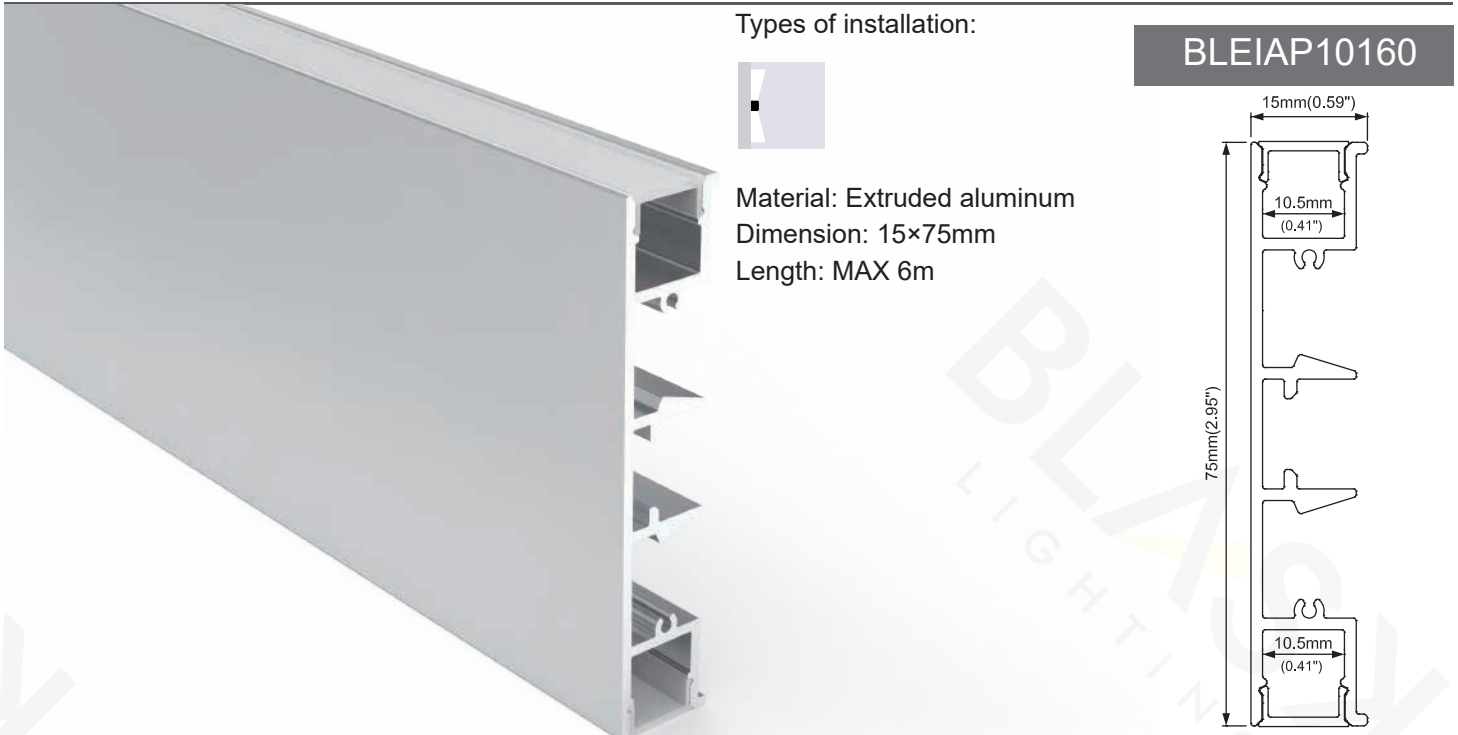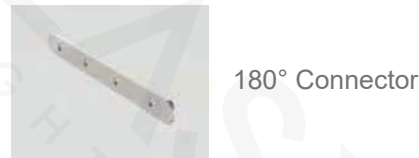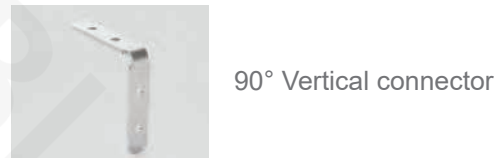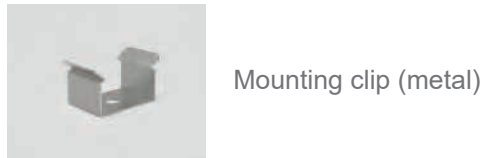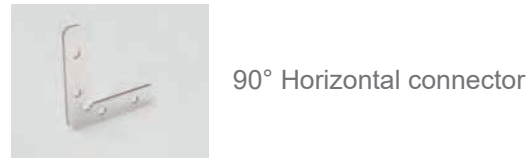

END CAPS

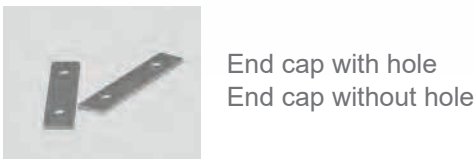






FINISH



DIFFUSERS



ACCESSORIES

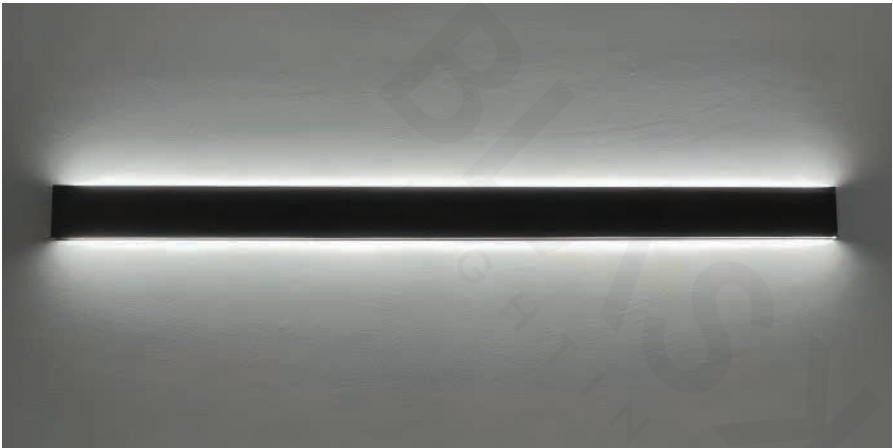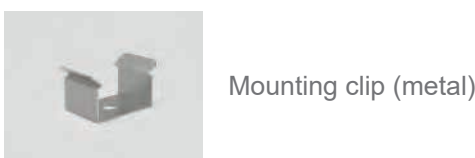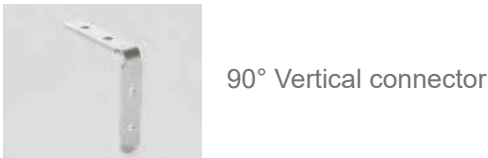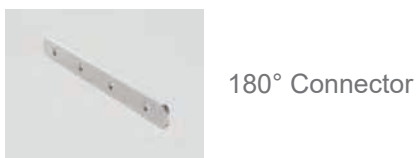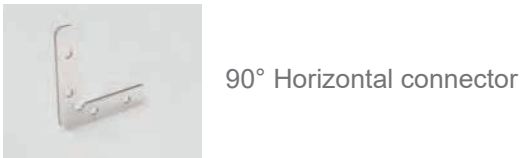


Types of installation:



Material: Extruded aluminum  
Dimension: 60.3×13.1mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10161

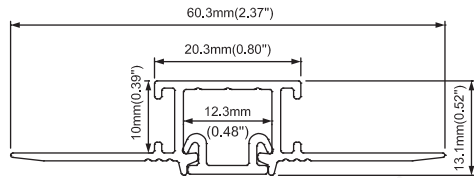

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector




Types of installation:



Material: Extruded aluminum  
Dimension: 75×13.1mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10162

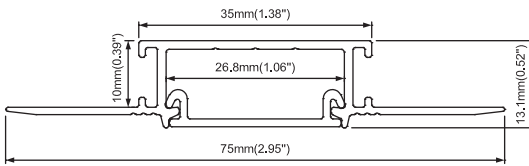

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector






Types of installation:



Material: Extruded aluminum  
Dimension: 90×18.6mm  
Length: MAX 6m  
Compatible with 16mm drywall

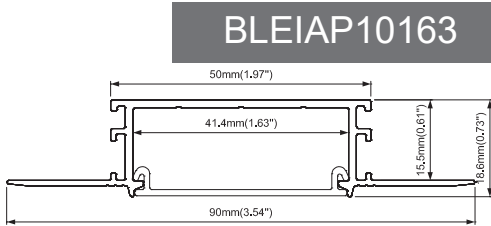

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector




180° Connector

Types of installation:



Material: Extruded aluminum  
Dimension: 100×18.6mm  
Length: MAX 6m  
Compatible with 16mm drywall

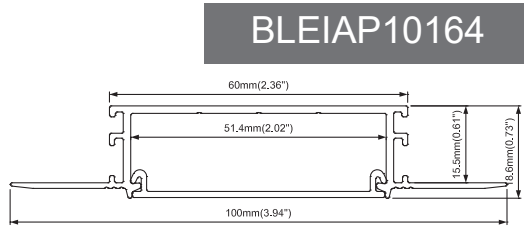

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector







Types of installation:



Material: Extruded aluminum  
Dimension: 33×26.2mm  
Length: MAX 6m

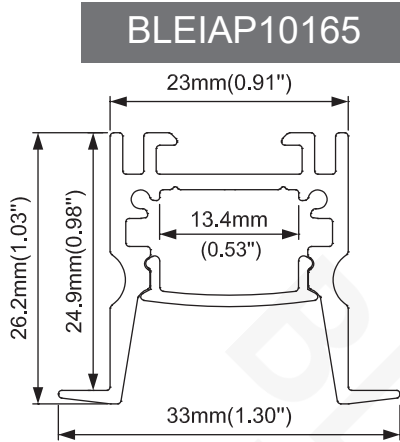

**FINISH**




**END CAPS**



End cap with hole  
End cap without hole

**DIFFUSERS**



PC diffused



Prismatic



Black PC

**ACCESSORIES**



90° Horizontal connector



180° Connector



90° Vertical connector




Spring clip


Types of installation:



Material: Extruded aluminum  
Dimension: 23×26.2mm  
Length: MAX 6m

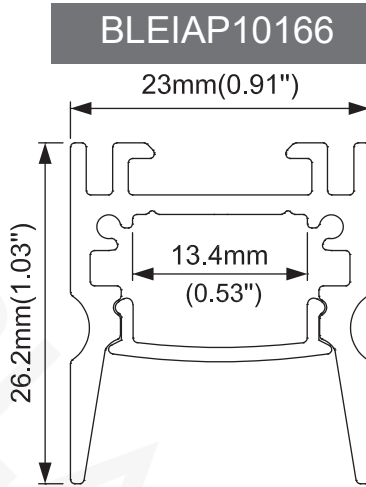

**FINISH**




**END CAPS**



End cap with hole  
End cap without hole

**DIFFUSERS**



PC diffused



Prismatic



Black PC

**ACCESSORIES**



90° Horizontal connector



Hanging bracket



180° Connector



Steel wire



90° Vertical connector




Mounting clip (surface)

Types of installation:



Material: Extruded aluminum  
Dimension: 63×26.2mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10167

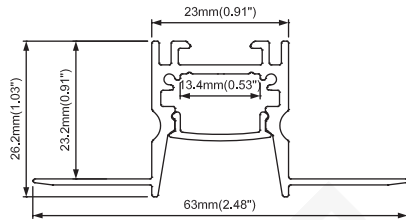

IP20

FINISH



Anod. aluminum



white




Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES




90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover




Types of installation:



Material: Extruded aluminum  
Dimension: 47.8×12mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10168

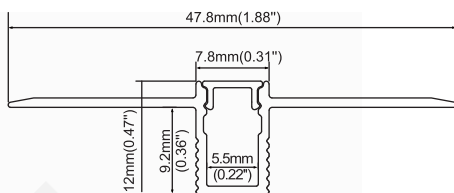

IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC frosted

ACCESSORIES




Disposable cover

Types of installation:



Material: Extruded aluminum  
Dimension: 44.1×22.2mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10169

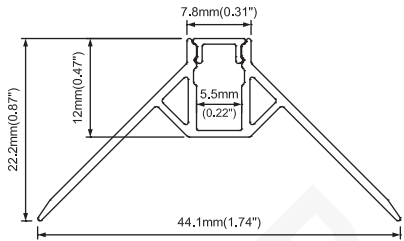

FINISH



Anod. aluminum




white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC frosted

ACCESSORIES




Disposable cover

Types of installation:



Material: Extruded aluminum  
Dimension: 39.6×24.4mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10170

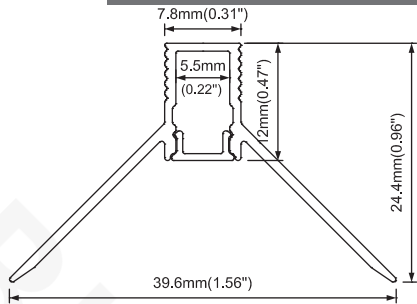

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC frosted

ACCESSORIES



Disposable cover




BLEIAP10171

Types of installation:



Material: Extruded aluminum  
Dimension: 36.1×14mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

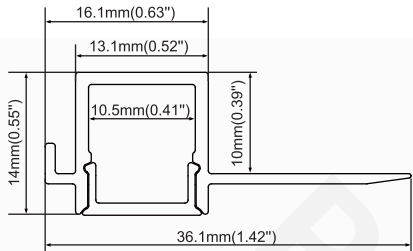

FINISH




Anod. aluminum   white   Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS




PC diffused



Black PC

ACCESSORIES





Disposable cover

BLEIAP10172

Types of installation:



Material: Extruded aluminum  
Dimension: 53×14mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

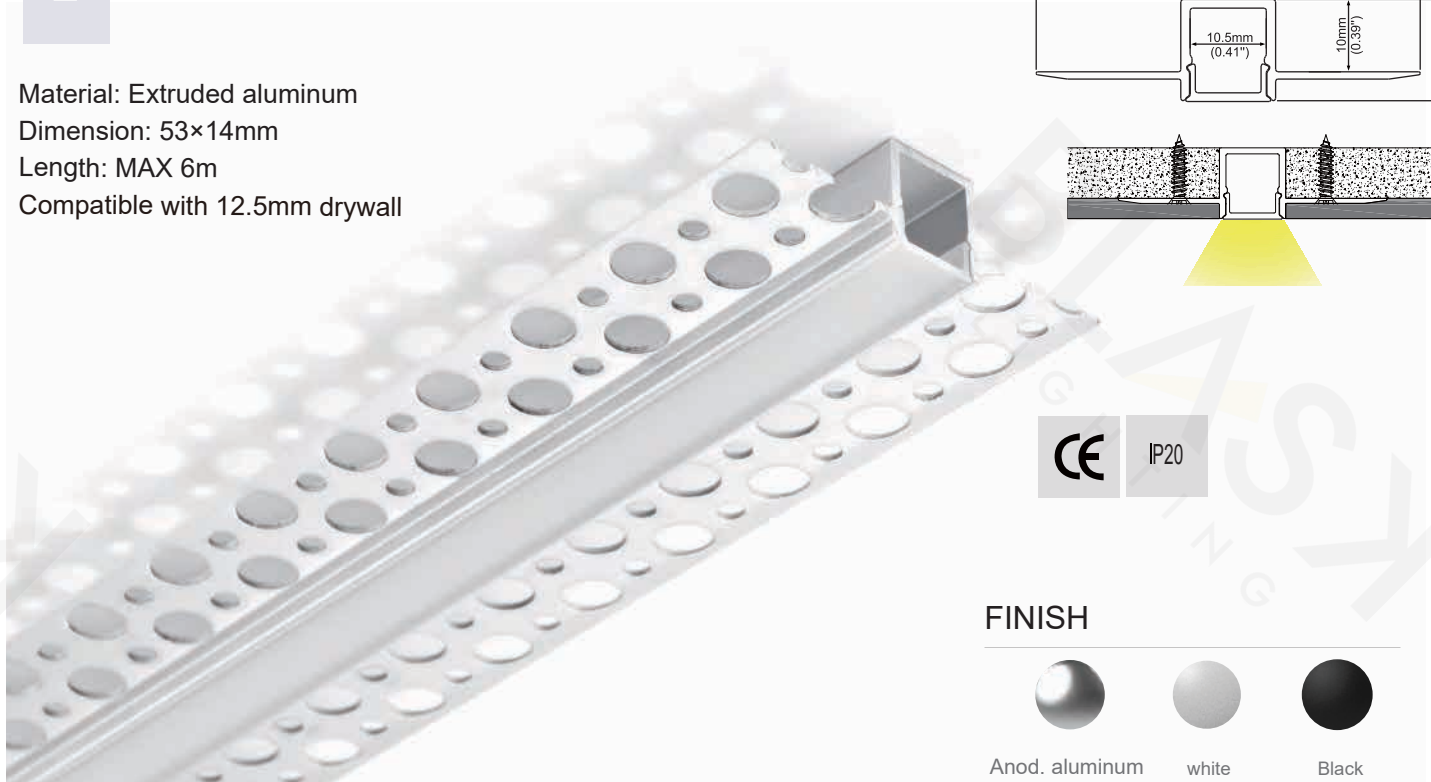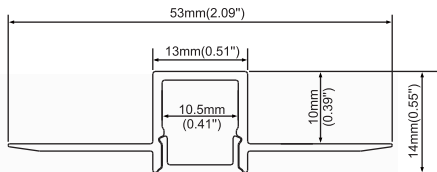

FINISH




Anod. aluminum   white   Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS




PC diffused



Black PC

ACCESSORIES





Disposable cover


Types of installation:



Material: Extruded aluminum  
Dimension: 46×26mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

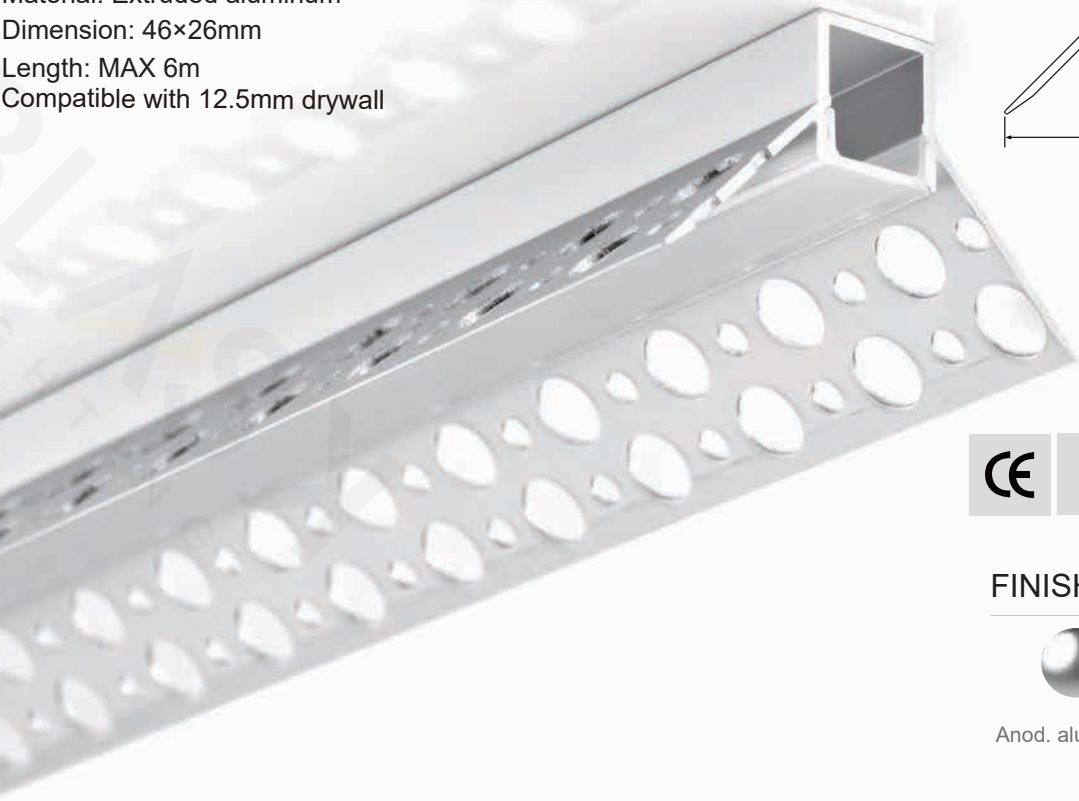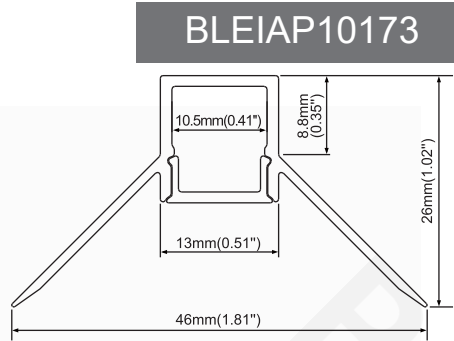

FINISH




END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused




Black PC



Prismatic

ACCESSORIES





Disposable cover


Types of installation:



Material: Extruded aluminum  
Dimension: 50.6×22.8mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

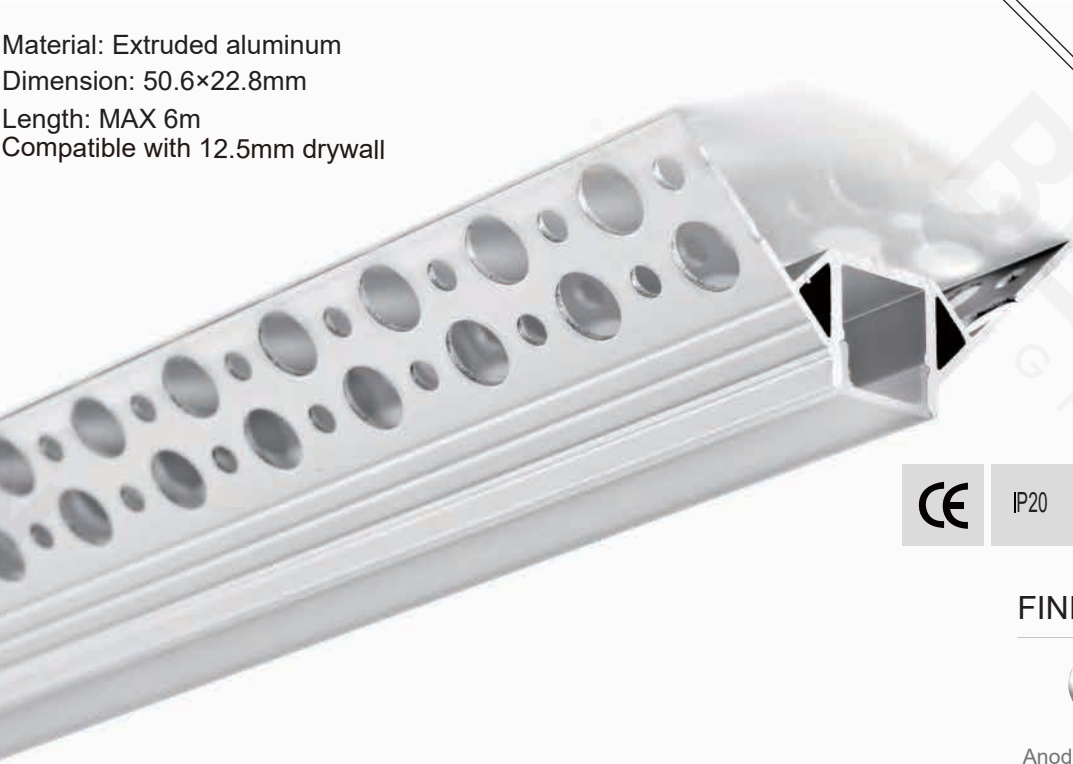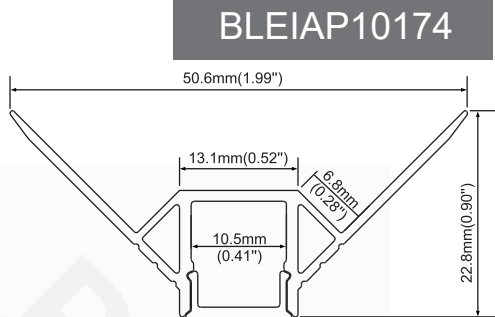

FINISH




END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused




Black PC





Prismatic

ACCESSORIES



Disposable cover

**BLEIAP10175**

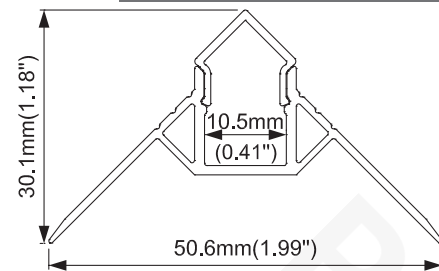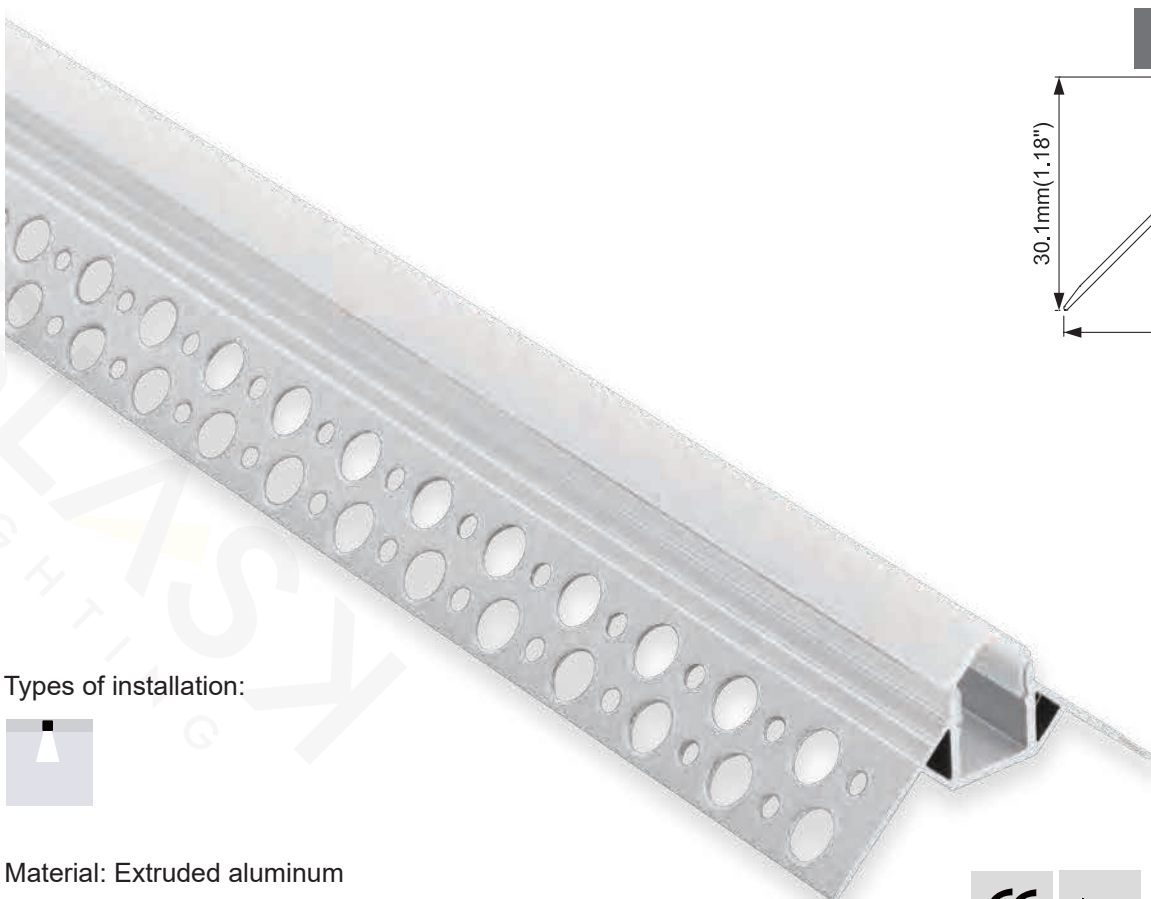


Types of installation:



Material: Extruded aluminum  
Dimension: 50.6×30.1mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

CE IP20


END CAPS

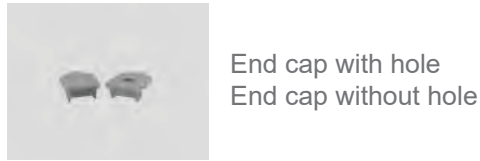


DIFFUSERS



ACCESSORIES

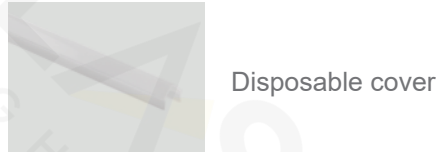

FINISH




Types of installation:




Material: Extruded aluminum  
Dimension: 58.7×14mm  
Length: MAX 6m  
Compatible with 12.5mm drywall





END CAPS

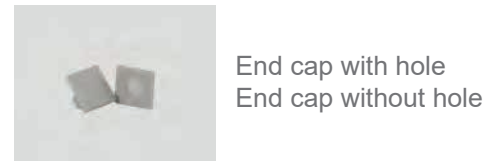

DIFFUSERS

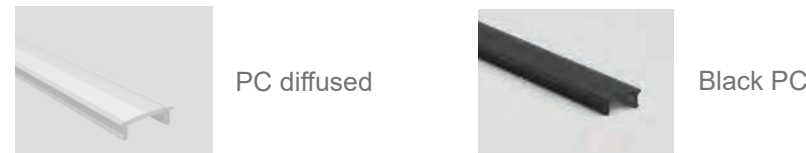

ACCESSORIES

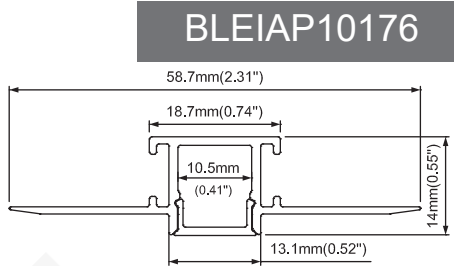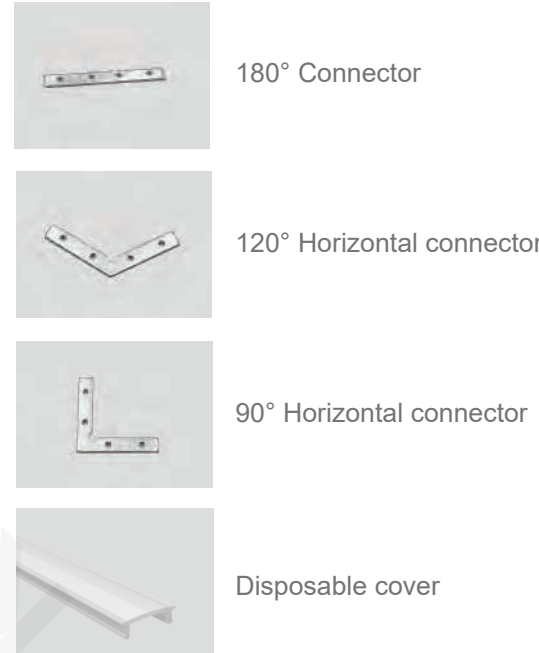

FINISH







Types of installation:




Material: Extruded aluminum  
Dimension: 35.9×14mm  
Length: MAX 6m  
Compatible with 12.5mm drywall


BLEIAP10177

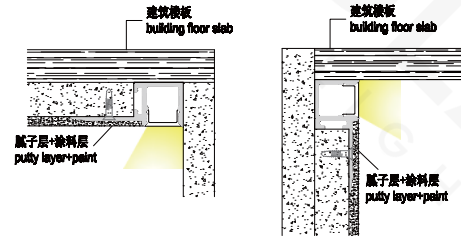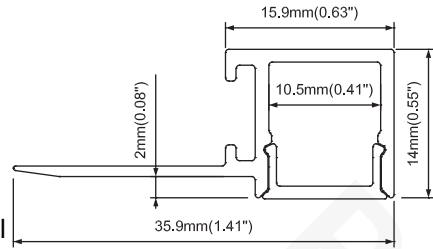

FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector




Disposable cover

Types of installation:




Material: Extruded aluminum  
Dimension: 13.1×13.7mm  
Length: MAX 6m

BLEIAP10178



FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES




Mounting clip (metal)

Types of installation:



Material: Extruded aluminum  
Dimension: 19.1×14mm  
Length: MAX 6m

BLEIAP10179

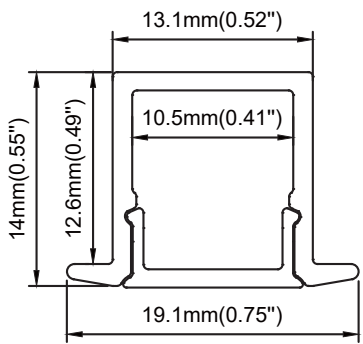

FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused




Prismatic


Types of installation:



Material: Extruded aluminum  
Dimension: 61.5×14mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

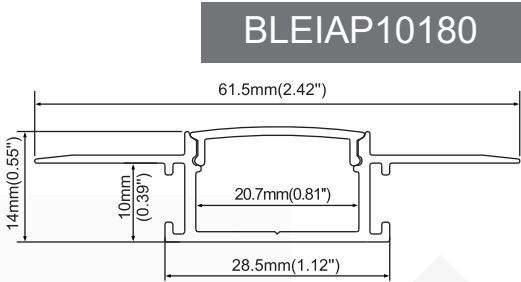

FINISH



Anod. aluminum   white   Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

ACCESSORIES




180° Connector



90° Horizontal connector



120° Horizontal connector





Disposable cover




Types of installation:




Material: Extruded aluminum  
Dimension: 49×34.9mm  
Length: MAX.6m  
Compatible with 12.5mm drywall

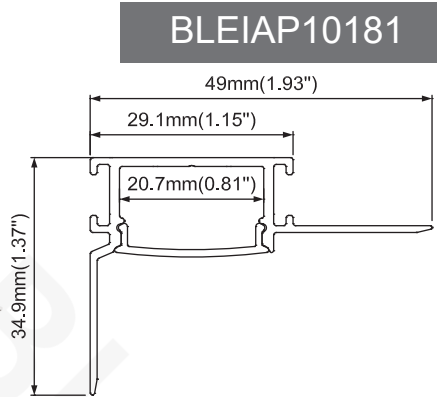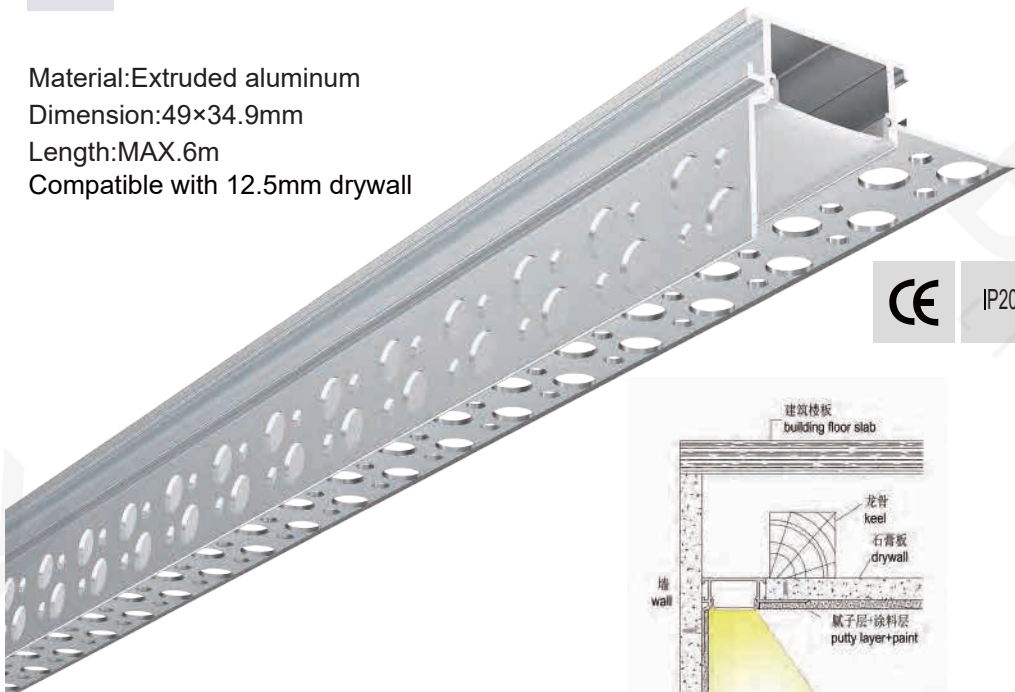

FINISH



Anod. aluminum   white   Black

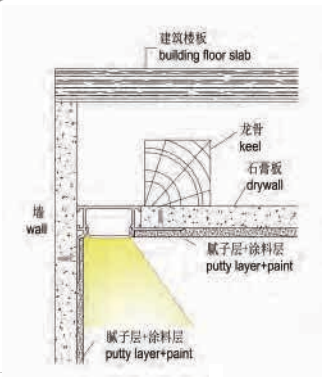

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover







Types of installation:



Material: Extruded aluminum  
Dimension: 73.4×18.5mm  
Length: MAX 6m  
Compatible with 16mm drywall

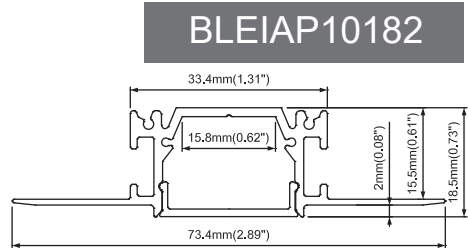

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



180° Connector



90° Horizontal connector



120° Horizontal connector




Disposable cover




Types of installation:



Material: Extruded aluminum  
Dimension: 88×18.5mm  
Length: MAX 6m  
Compatible with 16mm drywall

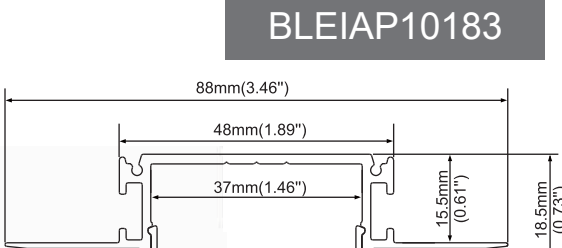

FINISH




END CAPS



End Caps

DIFFUSERS



PC diffused


ACCESSORIES




90° Outside connector



90° Inside connector



L connector



Disposable cover





BLEIAP10184



Types of installation:



END CAPS



End Caps

FINISH



white

DIFFUSERS



PC diffused

ACCESSORIES



180° Connector



90° Horizontal connector



120° Horizontal connector




Disposable cover

Types of installation:



Material: Extruded aluminum  
Dimension: 98×18.5mm  
Length: MAX 6m  
Compatible with 16mm drywall

BLEIAP10185

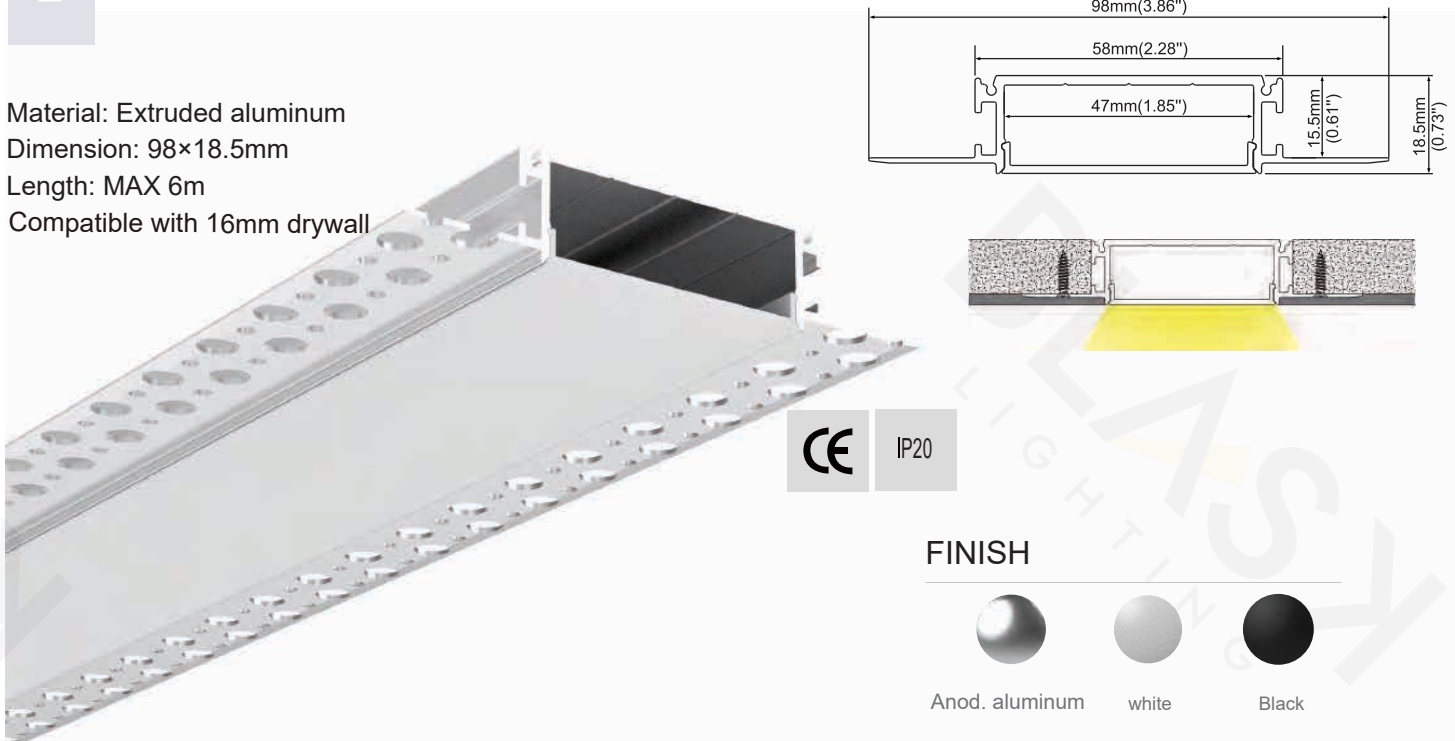


END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




180° Connector



90° Horizontal connector



120° Horizontal connector



Disposable cover



Types of installation:



Material: Extruded aluminum  
Dimension: 18.5×119mm  
Length: MAX 6m  
Compatible with 16mm drywall



#### FINISH



#### END CAPS



End cap with hole  
End cap without hole

#### DIFFUSERS



PC diffused

#### ACCESSORIES



180° Connector



90° Horizontal connector



120° Horizontal connector



Disposable cover



Types of installation:



Material: Extruded aluminum  
Dimension: 18.5×113.8mm  
Length: MAX 6m  
Compatible with 16mm drywall



#### FINISH



#### END CAPS



End Caps

#### DIFFUSERS



PC diffused

#### ACCESSORIES



180° Connector



90° Horizontal connector



120° Horizontal connector



Disposable cover




Types of installation:



Material: Extruded aluminum  
Dimension: 33.1×11mm  
Length: MAX 6m  
Compatible with 10mm tile



FINISH



Anod. aluminum   white   Black

END CAPS




End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Disposable cover




Types of installation:



Material: Extruded aluminum  
Dimension: 56.3×22.4mm  
Length: MAX 6m  
Compatible with 10mm tile



FINISH




Anod. aluminum   white   Black

END CAPS




End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Disposable cover





### BLEIAP10190



39.4mm(1.55")  
27.1mm(1.07")  
10mm(0.39")  
10.5mm(0.41")

Types of installation:



Material: Extruded aluminum  
Dimension: 39.4×27.1mm  
Length: MAX 6m  
Compatible with 10mm tile




FINISH



Anod. aluminum   white   Black


END CAPS

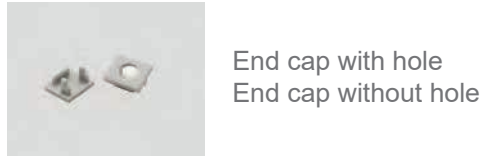

DIFFUSERS



ACCESSORIES

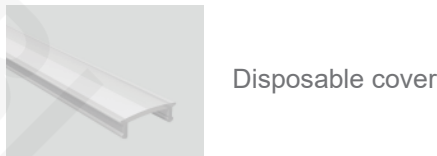



Types of installation:



Material: Extruded aluminum  
Dimension: 143×46mm  
Length: MAX 6m  
Compatible with 16mm drywall



### BLEIAP10191

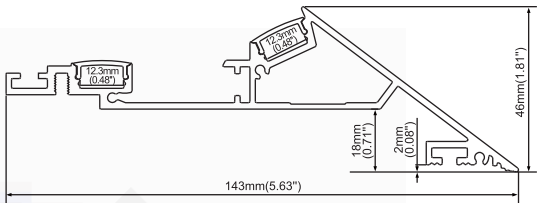

IP20

FINISH



Anod. aluminum

white

Black

END CAPS



DIFFUSERS



ACCESSORIES



180° Connector




90° Horizontal connector



120° Horizontal connector

BLEIAP10192

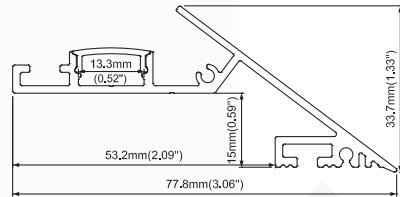

Types of installation:



Material: Extruded aluminum  
Dimension: 77.8×33.7mm  
Length: MAX 6m  
Compatible with 16mm drywall



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PMMA opal matte  
PMMA semi clear  
PMMA clear

ACCESSORIES



180° Connector




90° Horizontal connector



120° Horizontal connector

BLEIAP10193

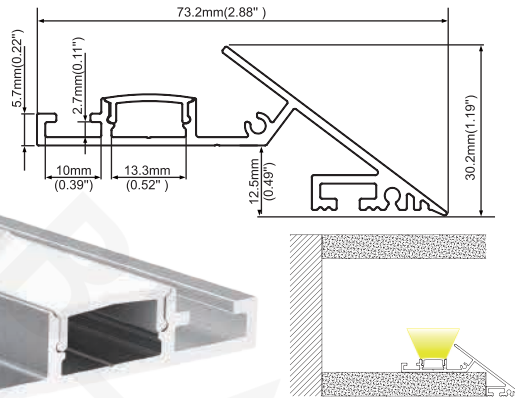

Types of installation:



Material: Extruded aluminum  
Dimension: 73.2×30.2mm  
Length: MAX 6m  
Compatible with 12.5mm drywall



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PMMA opal matte  
PMMA semi clear  
PMMA clear

ACCESSORIES



180° Connector



120° Horizontal connector



90° Horizontal connector






Types of installation:



Material: Extruded aluminum  
Dimension: 79×32mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

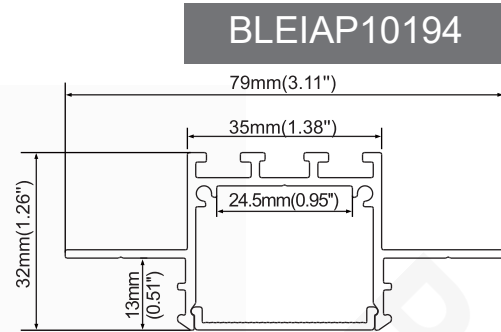

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS




PC diffused



Types of installation:



Material: Extruded aluminum  
Dimension: 88.1×32mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

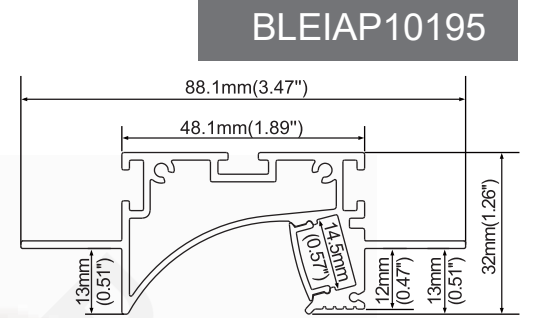

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PMMA opal matte  
PMMA semi clear  
PMMA clear

ACCESSORIES



180° Connector



90° Horizontal connector




120° Horizontal connector




Types of installation:



Material: Extruded aluminum  
Dimension: 98×35mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

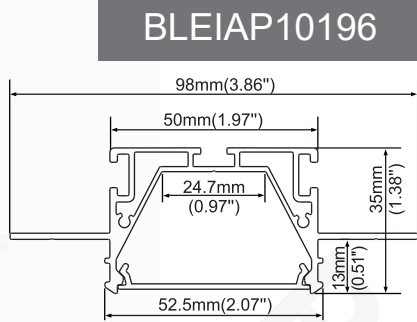

FINISH



## END CAPS



End Caps

## DIFFUSERS



PC diffused

## ACCESSORIES



180° Connector



90° Horizontal connector




120° Horizontal connector


Types of installation:



Material: Extruded aluminum  
Dimension: 125×39mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

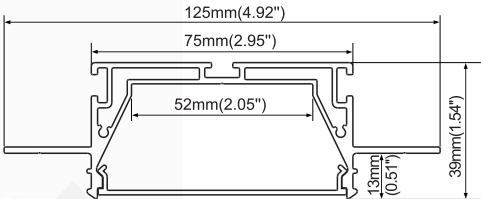

FINISH



## END CAPS




End Caps

## DIFFUSERS




PC diffused




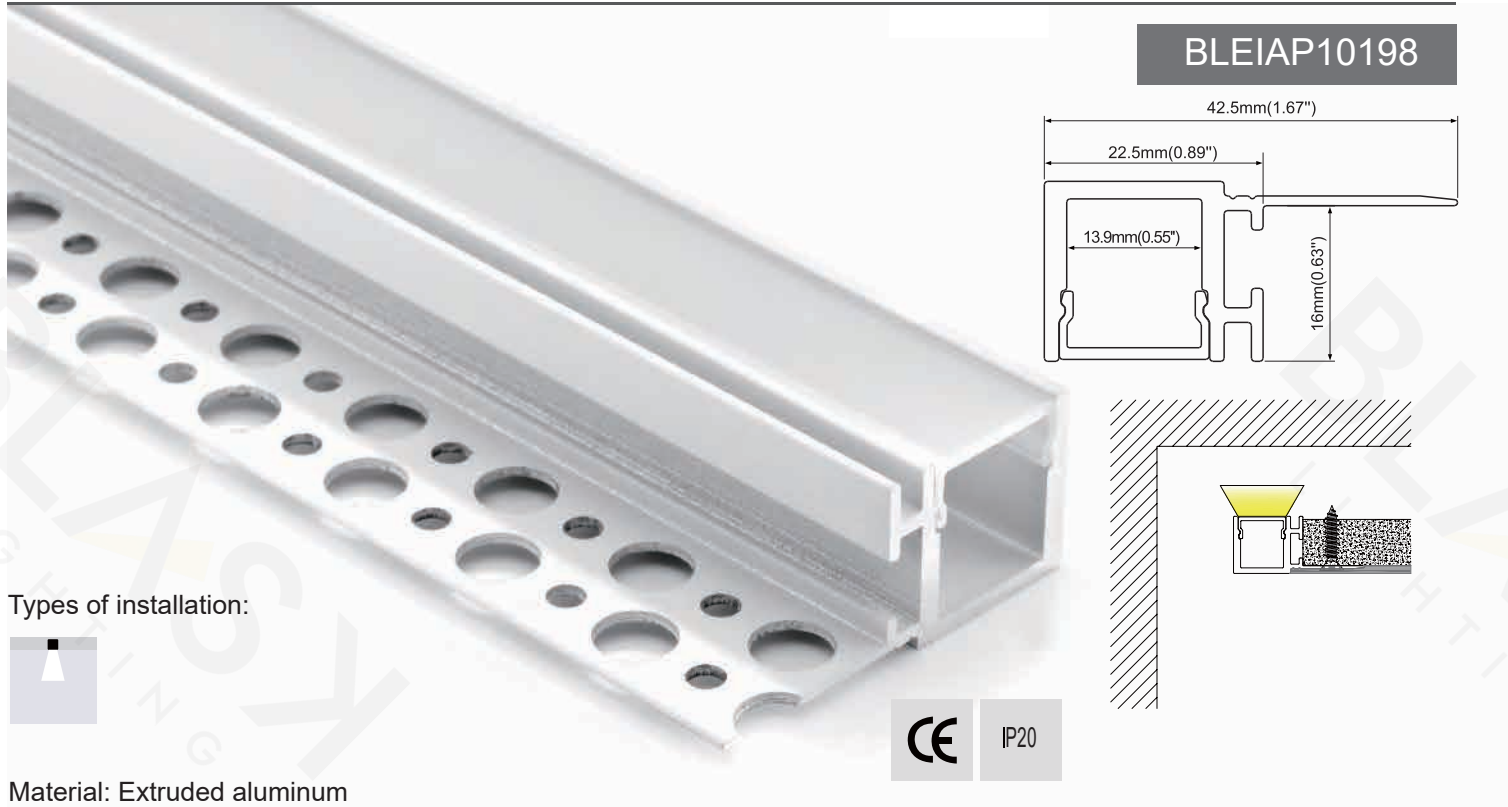

FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES






Disposable cover


Types of installation:



Material: Extruded aluminum  
Dimension: 19.5×42.5mm  
Length: MAX 6m  
Compatible with 16mm drywall

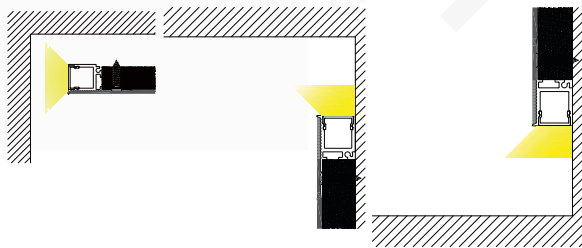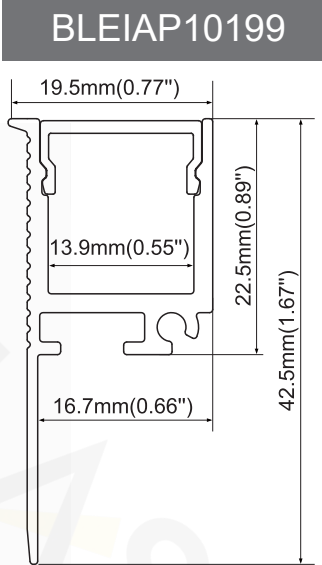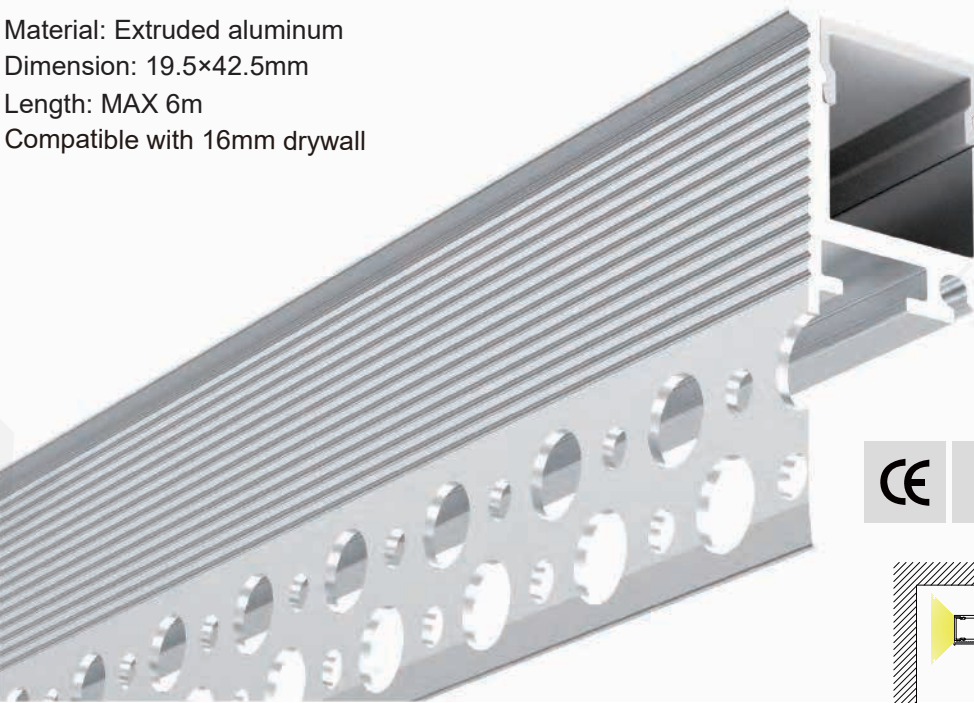

FINISH



END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Disposable cover






Types of installation:



Material: Extruded aluminum  
Dimension: 43.9×18.5mm  
Length: MAX 6m  
Compatible with 16mm drywall

BLEIAP10200

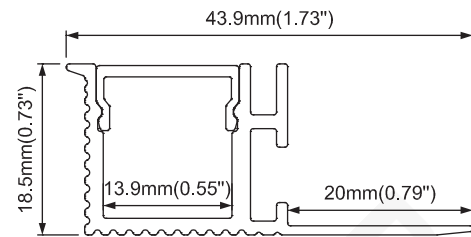

FINISH



Anod. aluminum




white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Disposable cover

Types of installation:



Material: Extruded aluminum  
Dimension: 53×18.5mm  
Length: MAX 6m  
Compatible with 16mm drywall

BLEIAP10201

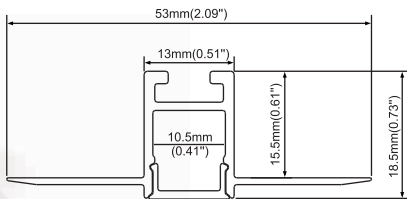

FINISH



Anod. aluminum



white




Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused


ACCESSORIES



90° Horizontal connector



180° Connector



Disposable cover






Types of installation:



**BLEIAP10202**

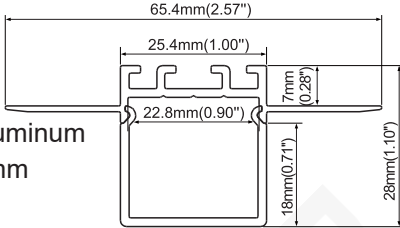

Material: Extruded aluminum  
Dimension: 65.4×28mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

**FINISH**





Anod. aluminum    white    Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES





Disposable cover


Types of installation:



Material: Extruded aluminum  
Dimension: 65.4×28mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

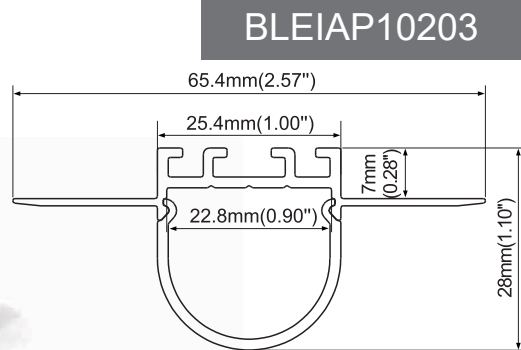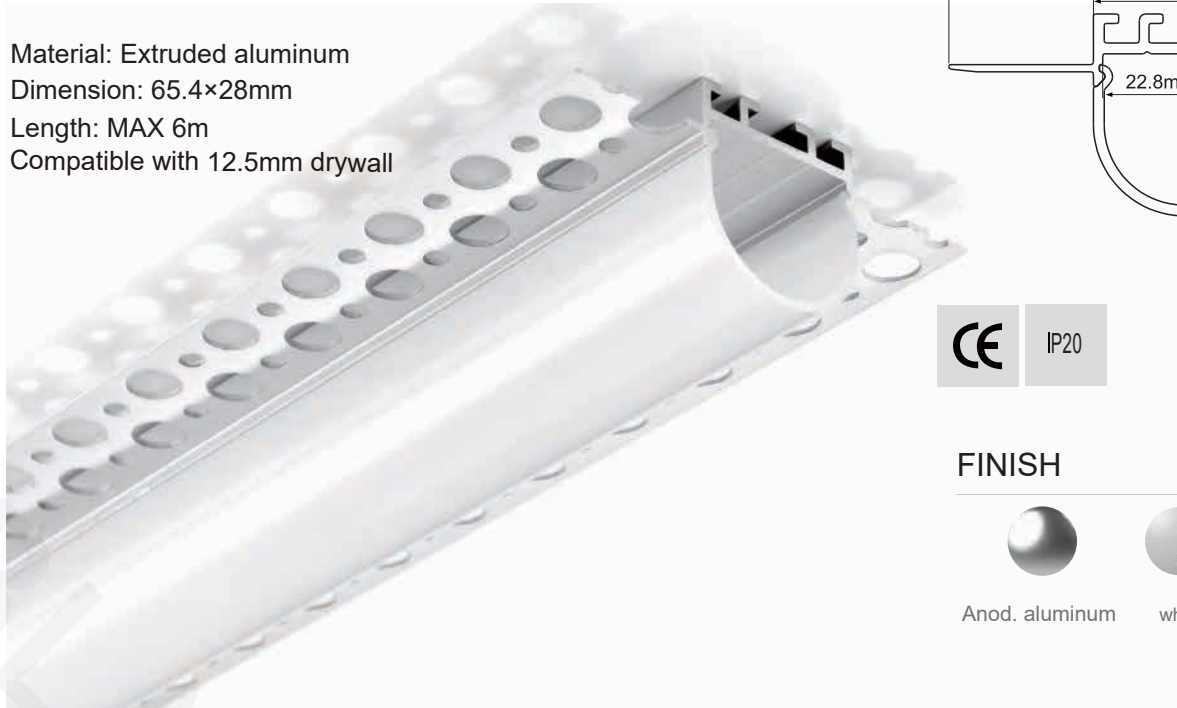

FINISH



Anod. aluminum    white    Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Disposable cover



Types of installation:



**BLEIAP10204**



Material: Extruded aluminum  
Dimension: 25.4×28mm  
Length: MAX 6m


**FINISH**





Anod. aluminum    white    Black

END CAPS



End cap with hole  
End cap without hole



ACCESSORIES



Mounting clip (metal)

DIFFUSERS




PC diffused



Types of installation:



**BLEIAP10205**

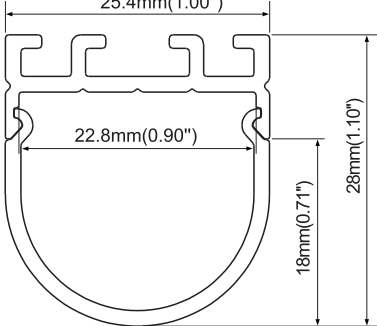

Material: Extruded aluminum  
Dimension: 25.4×28mm  
Length: MAX 6m

**FINISH**





Anod. aluminum    white    Black

END CAPS



End cap with hole  
End cap without hole




ACCESSORIES




Mounting clip (metal)

DIFFUSERS



PC diffused

BLEIAP10206

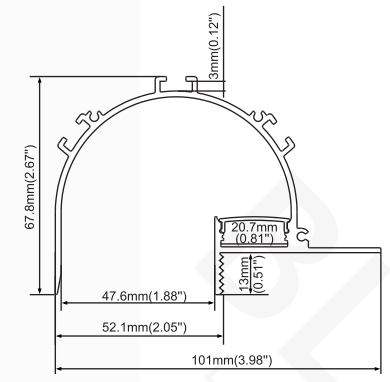

FINISH



white



Types of installation:



Material: Extruded aluminum  
Dimension: 101×67.8mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




Clip for ceiling



Clip for wall


BLEIAP10207

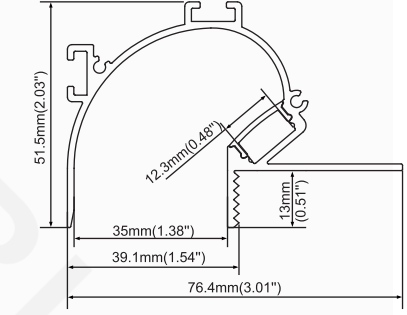

FINISH



white

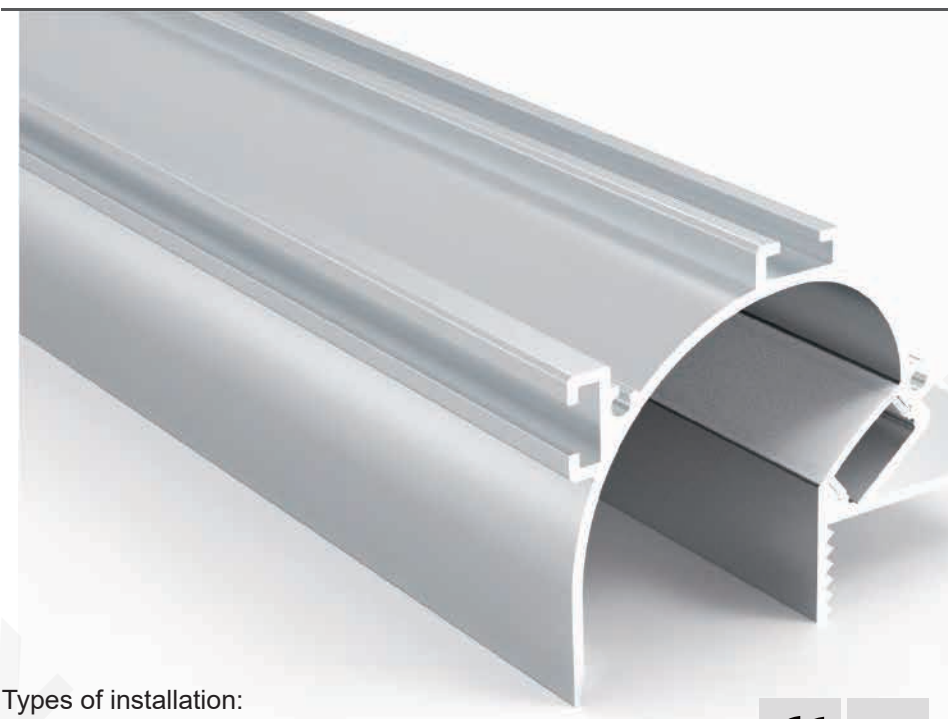

Types of installation:



Material: Extruded aluminum  
Dimension: 76.4×51.5mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Clip for wall




Clip for ceiling

Types of installation:



Material: Extruded aluminum  
Dimension: 94.4×34mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

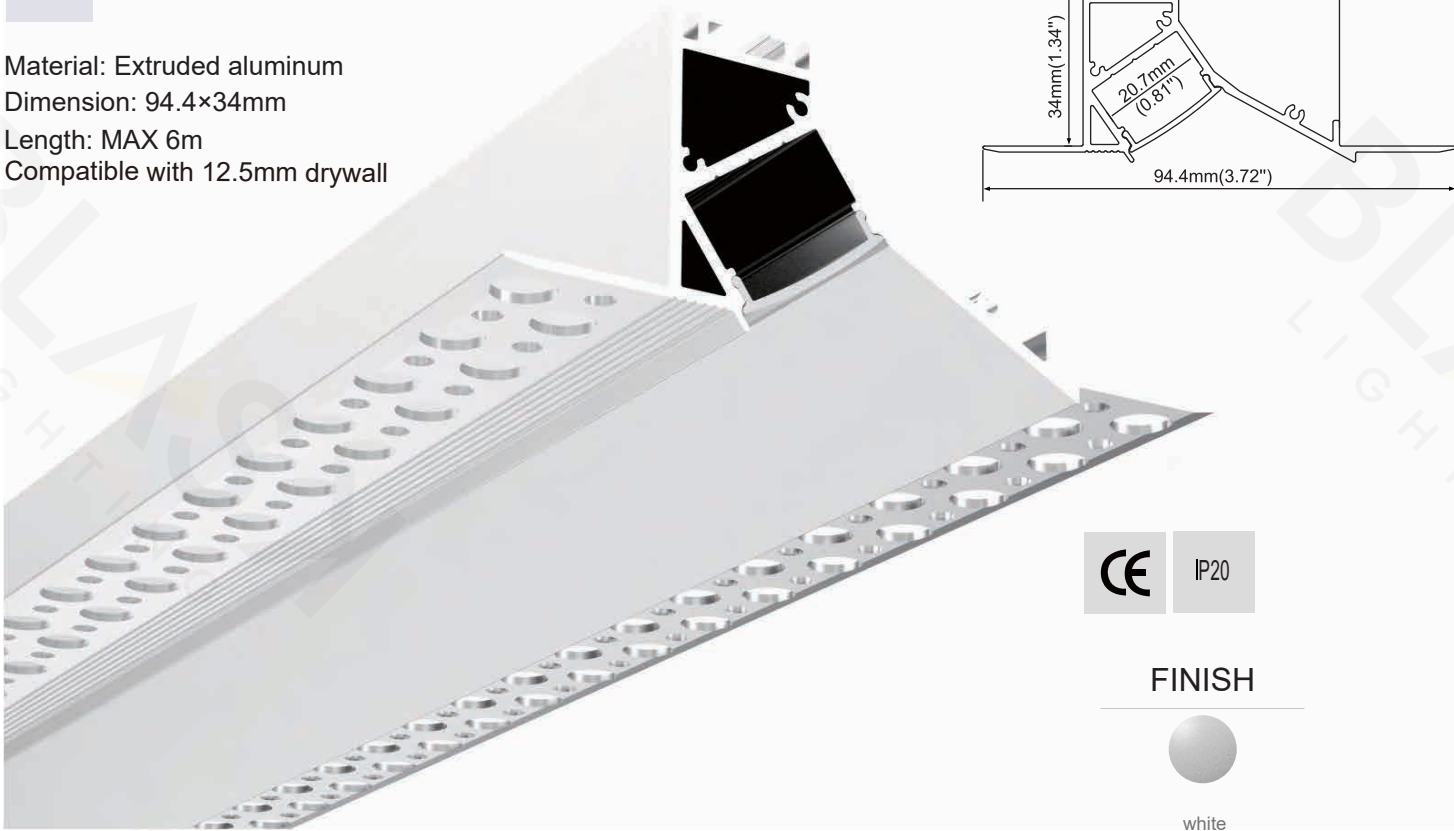

FINISH



white

## END CAPS



End cap with hole  
End cap without hole

## DIFFUSERS



PC diffused  
PC semi clear



## ACCESSORIES



Disposable cover



BLEIAP10208

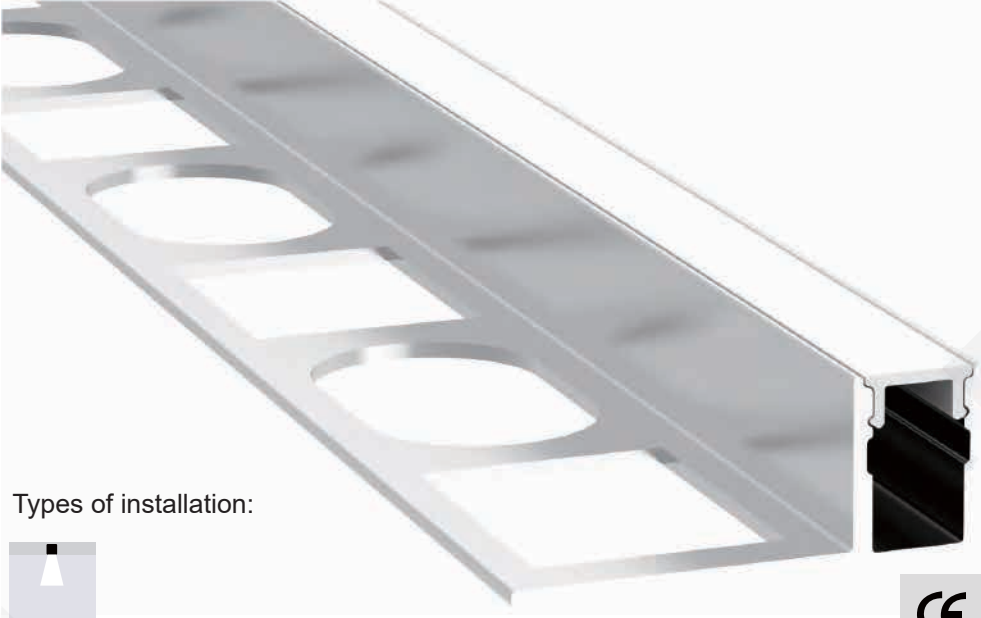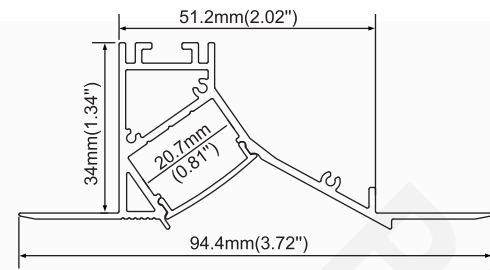

Types of installation:



Material: Extruded aluminum  
Dimension: 27.8×11mm  
Length: MAX 6m  
Compatible with 10mm tile



IP20

FINISH



Anod. aluminum




white



Black

BLEIAP10209

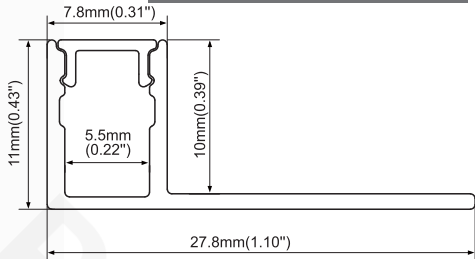

## END CAPS




End cap with hole  
End cap without hole

## DIFFUSERS




PC frosted

## ACCESSORIES



Disposable cover



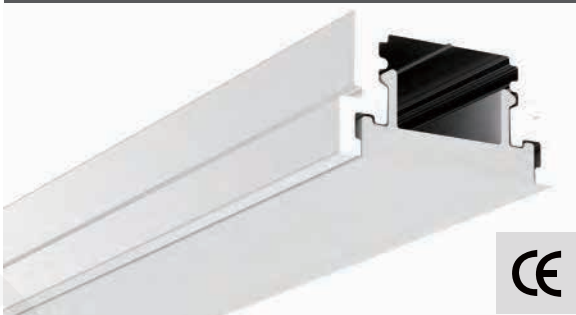

Types of installation: 

Material: Extruded aluminum  
Dimension: 22×13mm  
Length: MAX 6m

CE IP20

**BLEIAP10210**

22mm(0.87")  
13mm(0.51")  
12.3mm(0.48")

**END CAPS**

 End cap with hole  
End cap without hole

**DIFFUSERS**

 PC diffused

**FINISH**

 Anod. aluminum  white  Black



Types of installation: 

Material: Extruded aluminum  
Dimension: 41×13mm  
Length: MAX 6m  
Compatible with 10mm tile

CE IP20

**BLEIAP10211**

41mm(1.61")  
22mm(0.87")  
12mm(0.47")  
12.3mm(0.48")

**END CAPS**

 End cap with hole  
End cap without hole

**DIFFUSERS**

 PC diffused

**ACCESSORIES**

 Disposable cover

**FINISH**

 Anod. aluminum  white  Black



Types of installation: 

Material: Extruded aluminum  
Dimension: 62×13mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

CE IP20

**BLEIAP10212**

62mm(2.44")  
22mm(0.87")  
10mm(0.39")  
12.3mm(0.48")

**END CAPS**

 End cap with hole  
End cap without hole

**DIFFUSERS**

 PC diffused

**ACCESSORIES**

 Disposable cover

**FINISH**

 Anod. aluminum  white  Black



Types of installation: 

Material: Extruded aluminum  
Dimension: 27.06×11mm  
Length: MAX 6m

CE IP20

**BLEIAP10213**

27.06mm(1.06")  
11mm(0.43")  
12.2mm(0.48")  
21.4mm(0.84")  
3mm(0.12")

**END CAPS**

 End Cap with hole  
End cap without hole

**DIFFUSERS**

 PC diffused

**FINISH**

 Anod. aluminum  white  Black



Types of installation: 


Material: Extruded aluminum  
Dimension: 21.3×26.1mm  
Length: MAX 6m

CE IP20

**BLEIAP10214**

21.3mm(0.84")  
26.1mm(1.03")  
12.2mm(0.48")

**END CAPS**

 End Cap with hole  
End cap without hole


**DIFFUSERS**

 PC diffused

**FINISH**

 Anod. aluminum  white  Black

BLEIAP10215

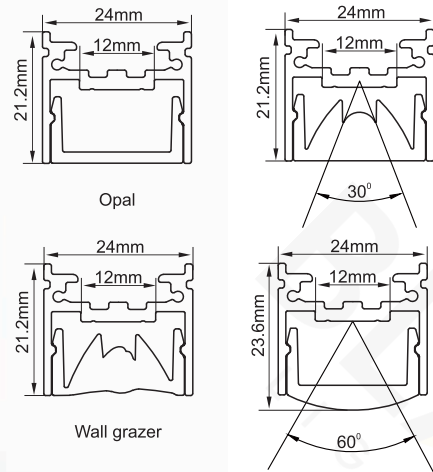

Types of installation:



Material: Extruded aluminum  
Dimension: 24×21.2mm  
Length: MAX 6m




END CAPS



End Caps

FINISH



DIFFUSERS



PC diffused



PMMA lens


ACCESSORIES



Mounting clip (metal)



Adjustable bracket

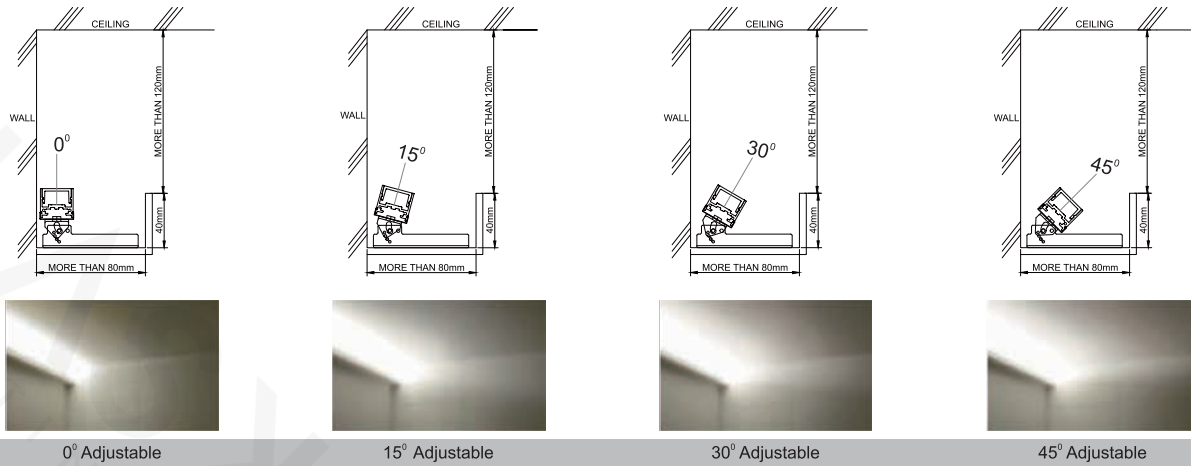

0° Adjustable

15° Adjustable

30° Adjustable

45° Adjustable

Types of installation:



Material: Extruded aluminum  
Dimension:  $\varnothing 28$ mm  
Length: MAX 6m



END CAPS



End Caps



Hanging end caps

DIFFUSERS



PC diffused



PC clear



PMMA lens

ACCESSORIES



Black PC clip





Clear PC clip




Steel wire

BLEIAP10216

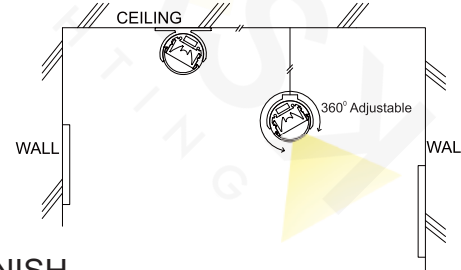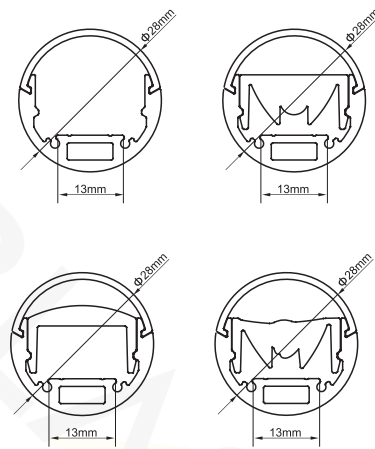

FINISH







Types of installation:



Material: Extruded aluminum  
Dimension: 41.2×5.8mm  
Length: MAX 6m

#### END CAPS



End Caps

#### DIFFUSERS



PC diffused

#### ACCESSORIES



Black PC clip




90° Horizontal connector




Clear PC clip



180° Connector



0° Adjustable



15° Adjustable




30° Adjustable



45° Adjustable

#### FINISH



Anod. aluminum

white

Black



Types of installation:



Material: Extruded aluminum  
Dimension: 106×49mm  
Length: MAX 6m

#### END CAPS



End Caps

#### DIFFUSERS



PC diffused

#### ACCESSORIES



Black PC clip



90° Horizontal connector




Clear PC clip



180° Connector

#### FINISH



Anod. aluminum

white


Black




Types of installation:




Material: Extruded aluminum  
Dimension: 24×25.2mm  
Length: MAX 6m

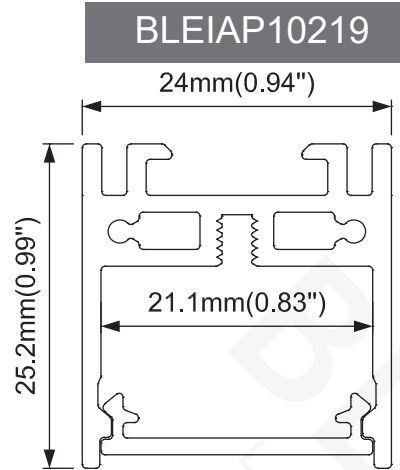

FINISH



Anod. aluminum   white   Black

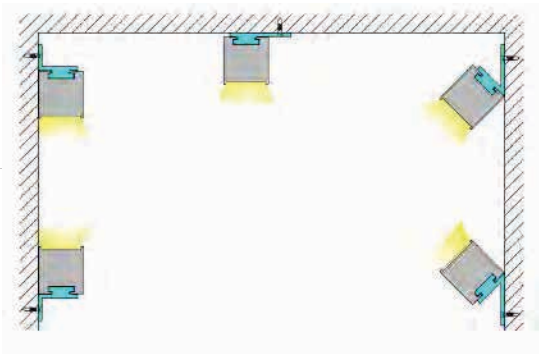

END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Black Reflector 30° or 55°  
**LEDiL**



White Reflector 30° or 55°



Chrome Reflector 30° or 55°



Surface clip



T-bar clip



Steel wire




Hanging clip


Types of installation:



Material: Extruded aluminum  
Dimension: 24×30.4mm  
Length: MAX 6m

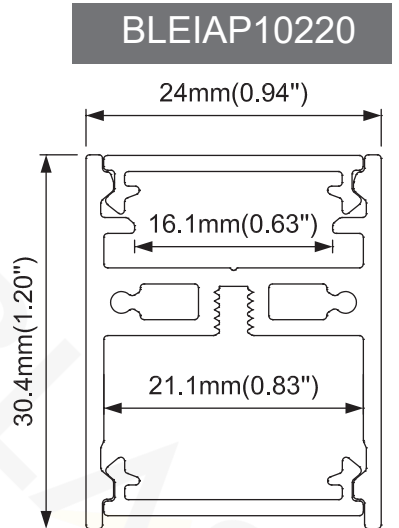

FINISH



Anod. aluminum   white   Black

END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Black Reflector 30° or 55°  
**LEDiL**



White Reflector 30° or 55°



Chrome Reflector 30° or 55°



Steel wire



Hanging bracket


Types of installation:




Material: Extruded aluminum  
Dimension: 34×25.2mm  
Length: MAX 6m



BLEIAP10221

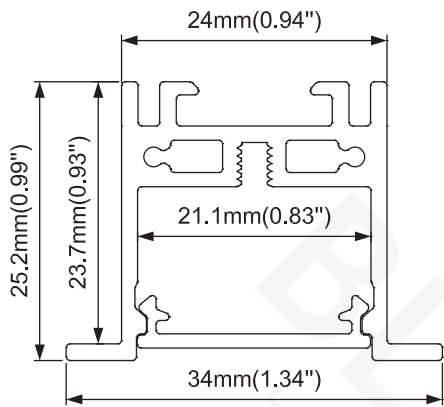

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Black Reflector 30° or 55°  
**LEDiL**



White Reflector 30° or 55°



Chrome Reflector 30° or 55°



Spring clip


Types of installation:




Material: Extruded aluminum  
Dimension: 24×90mm  
Length: MAX 6m



BLEIAP10222

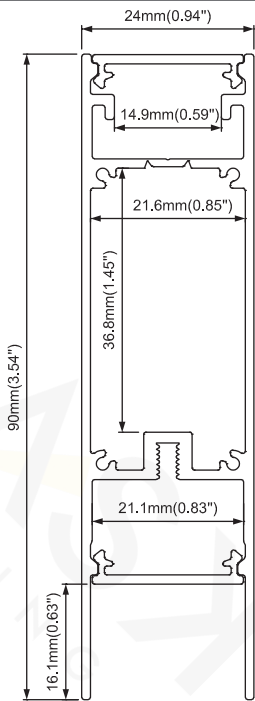

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Hanging bracket



Steel wire



Chrome Reflector 30° or 55°



Black Reflector 30° or 55°  
**LEDiL**



White Reflector 30° or 55°

Types of installation:

Material: Extruded aluminum  
Dimension: 24×75mm  
Length: MAX 6m

**BLEIAP10223**

24mm(0.94")  
14.9mm(0.59")  
21.6mm(0.85")  
36.8mm(1.45")  
75mm(2.95")  
21.1mm(0.83")

CE IP20


**FINISH**

Anod. aluminum white Black


**END CAPS**



DIFFUSERS

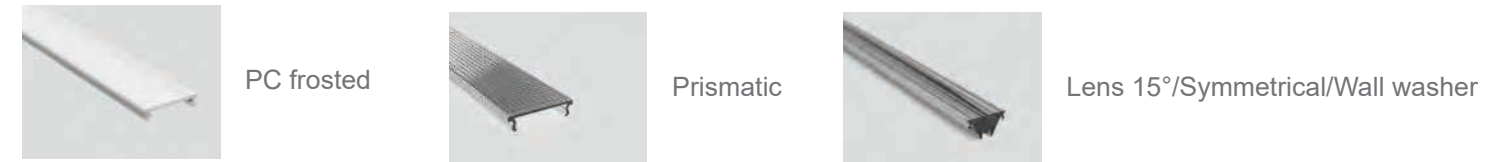

ACCESSORIES

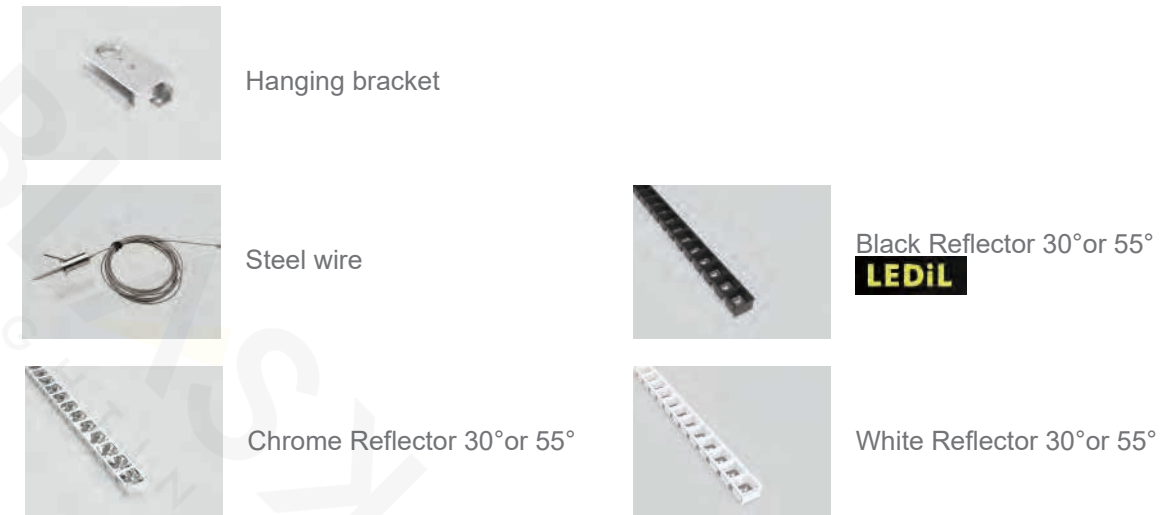

Types of installation:

Material: Extruded aluminum  
Dimension: 64×25.2mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

**BLEIAP10224**


24mm(0.94")  
25.2mm(0.99")  
22mm(0.87")  
21.1mm(0.83")

CE IP20


**FINISH**

Anod. aluminum white Black

**END CAPS**

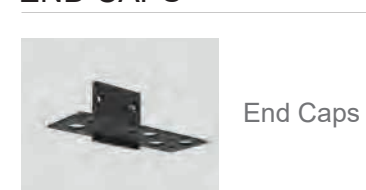

DIFFUSERS

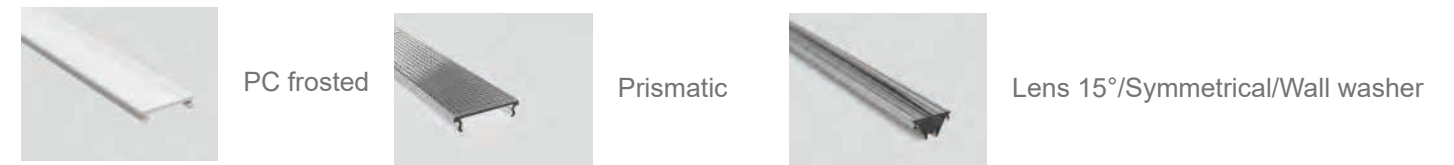

ACCESSORIES







Types of installation:



Material: Extruded aluminum  
Dimension: 78×50mm  
Length: MAX 6m  
Compatible with 16mm drywall

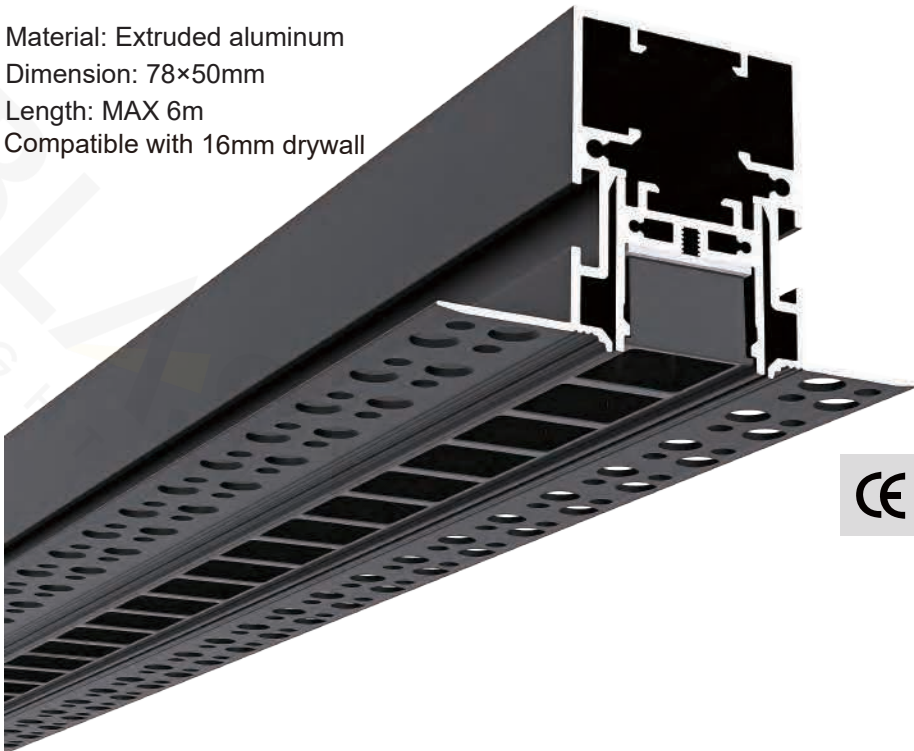

BLEIAP10225

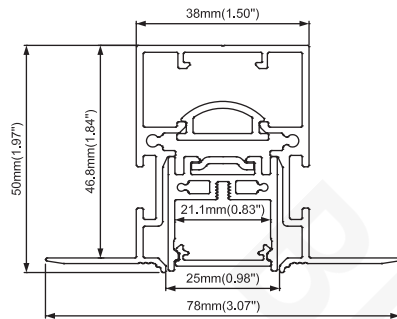

FINISH



Anod. aluminum   white   Black

END CAPS




End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Outside clip



Chrome Reflector 30° or 55°



Black Reflector 30° or 55°  
**LEDiL**



White Reflector 30° or 55°




PVC cover

Types of installation:



Material: Extruded aluminum  
Dimension: 22.2×42.8mm  
Length: MAX 6m


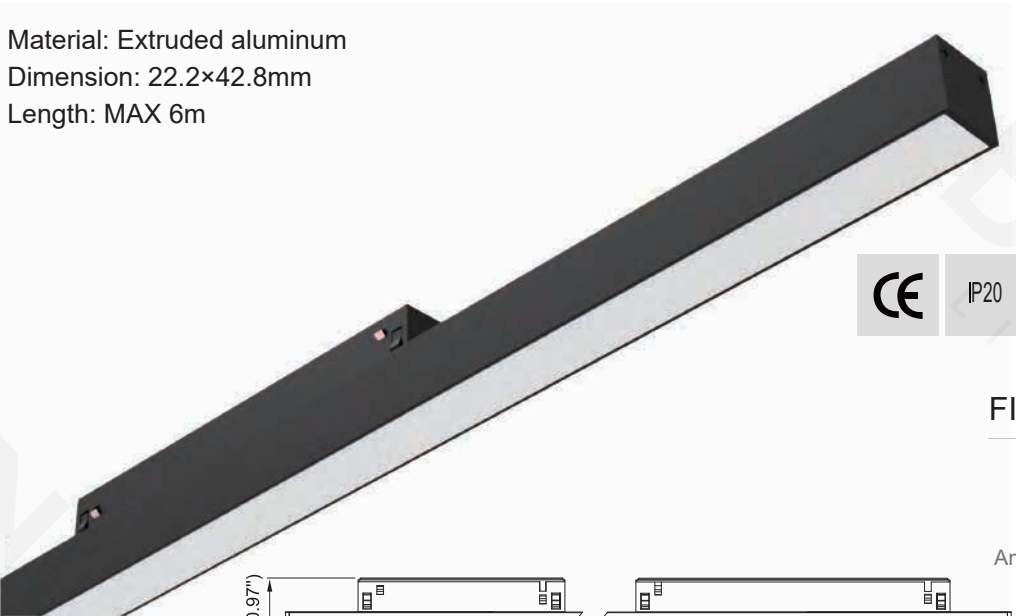


FINISH



Anod. aluminum   white   Black

BLEIAP10226

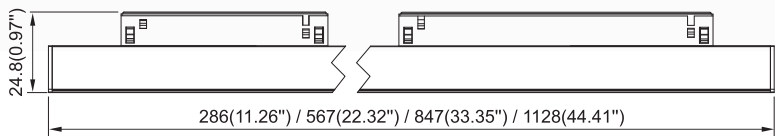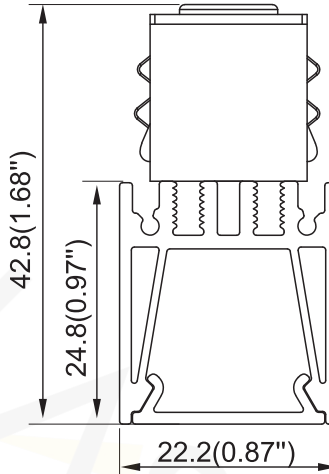

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Magnet track head



PCB board




Built in driver board

Types of installation:



Material: Extruded aluminum  
Dimension: 22.2×42.8mm  
Length: MAX 6m

BLEIAP10227

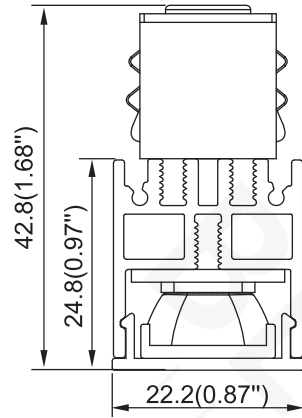

FINISH




Anod. aluminum



white



Black



END CAPS



End Caps

ACCESSORIES



Magnet track head



LED board



Built in driver board




Lens 20° /30° /60° /20-45°

Types of installation:



Material: Extruded aluminum  
Dimension: 22.5×42.8mm  
Length: MAX 6m

BLEIAP10228

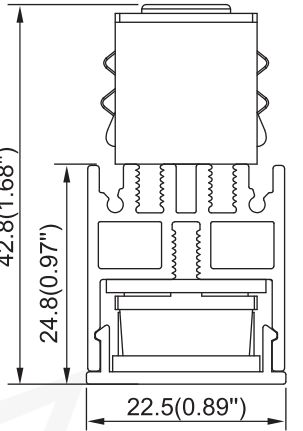

FINISH




Anod. aluminum



white



Black



END CAPS



End Caps

ACCESSORIES



Magnet track head



LED board



Built in driver board



Reflector UGR<19


Types of installation:



Material: Extruded aluminum  
Dimension: 26.2×29mm  
Length: MAX 6m




FINISH



Anod. aluminum    white    Black

BLEIAP10229

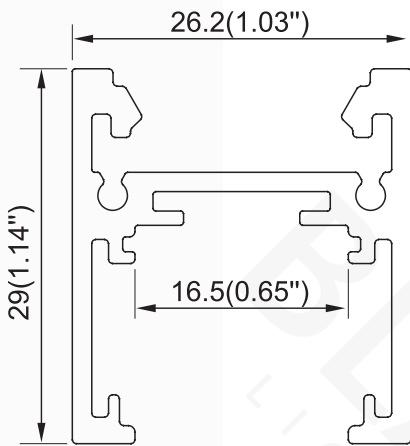

END CAPS



End Caps

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Hanging bracket



Steel wire


Types of installation:



Material: Extruded aluminum  
Dimension: 26.2×54mm  
Length: MAX 6m




FINISH



Anod. aluminum    white    Black

BLEIAP10230

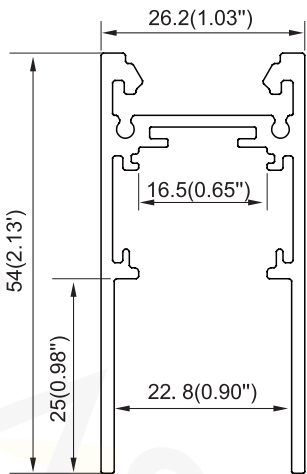

END CAPS



End Caps

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Hanging bracket




Steel wire




Types of installation:



Material: Extruded aluminum  
Dimension: 73×50.3mm  
Length: MAX 6m

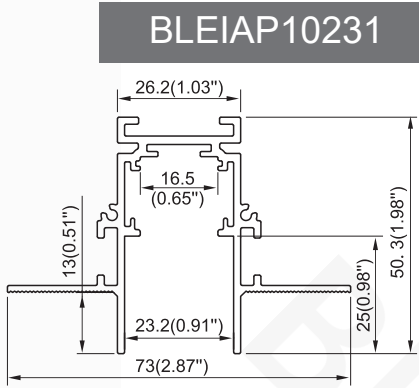

FINISH



END CAPS



End Caps

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Hanging bracket





Types of installation:



Material: Extruded aluminum  
Dimension: 43.9×70mm  
Length: MAX 6m



BLEIAP10232

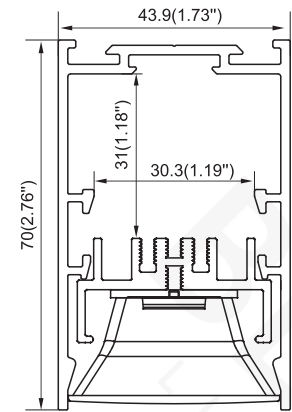

UGR values  
X=4H, Y=8H S=0.2H  
Radiant class 70/50/20  
Transverse 13.4  
Longitudinal 13.9

FINISH



Anod. aluminum white Black Golden

END CAPS



End Caps

ACCESSORIES



Bind cover



Wall washer



Safety wire



Internal Clip



Louver optic(7x1 or 28x1)  
**LEDiL**



Steel wire



Mounting clip  
(metal)



LED module




Types of installation:



Material: Extruded aluminum  
Dimension: 43.9×75mm  
Length: MAX 6m

BLEIAP10233

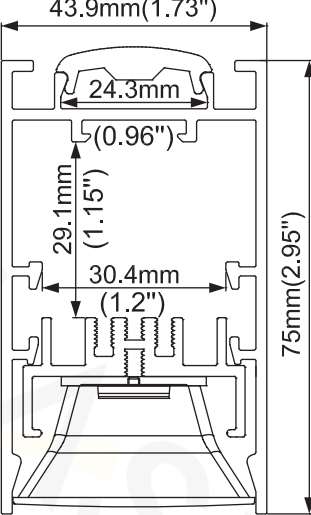

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Hanging clip



Wall washer



Safety wire



Internal Clip



Louver optic(7x1 or 28x1)  
**LEDiL**



Steel wire



Types of installation:



Material: Extruded aluminum  
Dimension: 58.9×32.8mm  
Length: MAX 6m



BLEIAP10234

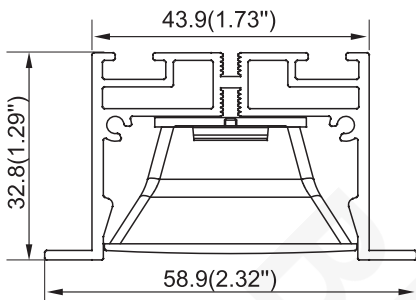

UGR values  
X=4H, Y=8H S=0.2H  
Radiant class 7

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

ACCESSORIES



Blind cover



Wall washer



LED module



Stainless clip



Louver optic(7x1 or 28x1)


Types of installation:



Material: Extruded aluminum  
Dimension: 24×58mm  
Length: MAX 6m



BLEIAP10235

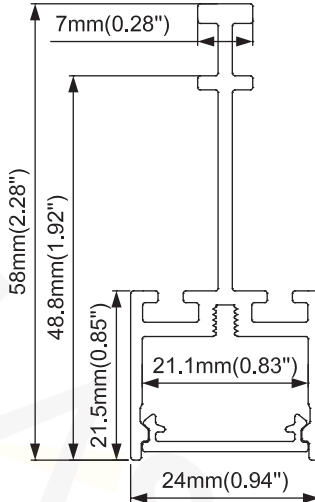

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Black Reflector 30°or 55°



White Reflector 30°or 55°




Connector



Chrome Reflector 30°or 55°



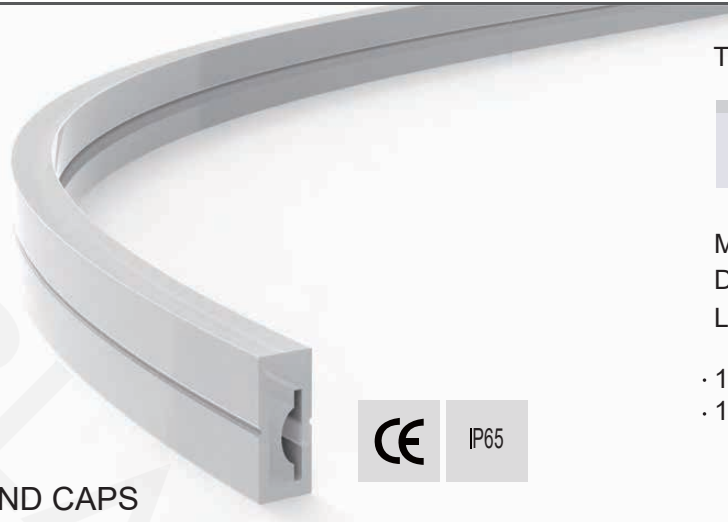


Types of installation:



Material: Silicon Co-extrusion  
Dimension: 10.4×18mm  
Length: MAX 100m

- 10mm PCB
- 14W at maximum

**BLEIAP10236**



10.4mm(0.41")  
18mm(0.71")  
11.2mm(0.44")  
1.5mm(0.06")

**FINISH**




white

**END CAPS**



CE IP65

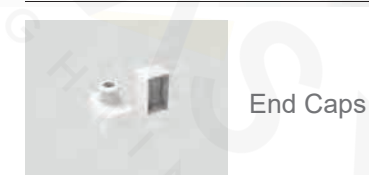

ACCESSORIES






Types of installation:



Material: Silicon Co-extrusion  
Dimension: 16×16mm  
Length: MAX 100m

- 10mm PCB
- 14W at maximum

**BLEIAP10237**



16mm(0.63")  
16mm(0.63")  
11.2mm(0.44")  
1.5mm(0.06")

**FINISH**




white

**END CAPS**




CE IP65

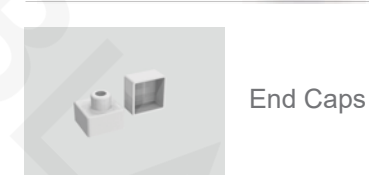

ACCESSORIES



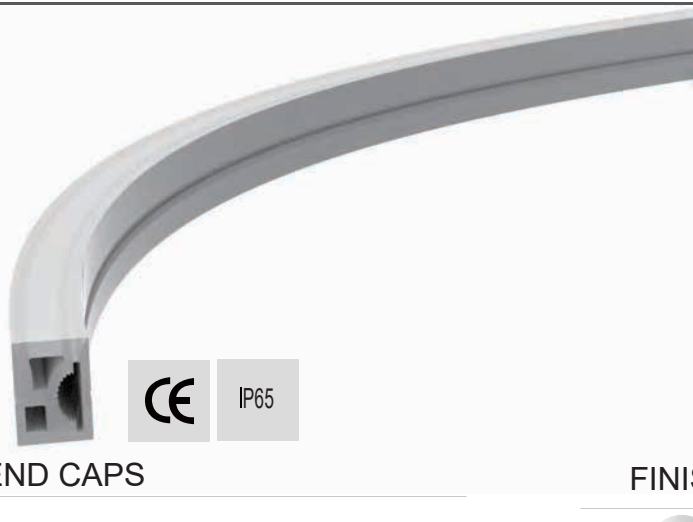


Types of installation:



Material: Silicon Co-extrusion  
Dimension: 16×16mm  
Length: MAX 100m

- 10mm PCB
- 14W at maximum

**BLEIAP10238**



16(0.63")  
16(0.63")  
10.8(0.43")  
1.5(0.06")

**FINISH**




white


**END CAPS**



CE IP65

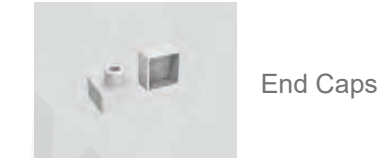

ACCESSORIES

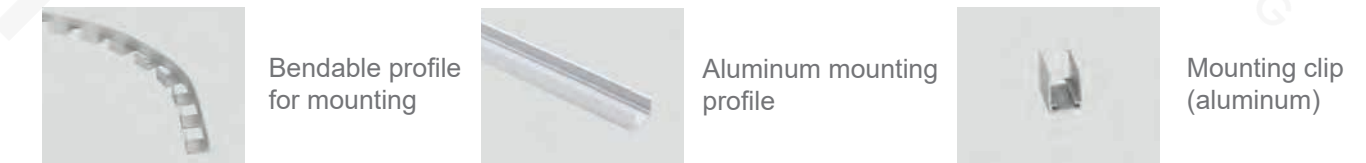




Types of installation:



Material: Silicon Co-extrusion  
Dimension: 16×16mm  
Length: MAX 100m

- 10mm PCB
- 14W at maximum

**BLEIAP10239**



16mm(0.63")  
16mm(0.63")  
10.8mm(0.43")  
1.5mm(0.06")

**FINISH**



white


**END CAPS**



CE IP65



ACCESSORIES

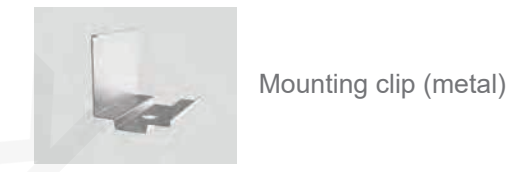



Types of installation:



Material: Silicon Co-extrusion  
Dimension: 4×10mm  
Length: MAX 100m

- 6mm PCB
- 14W at maximum

CE IP65

END CAPS



End Cap with hole  
End cap without hole

ACCESSORIES




Mounting clip (aluminum)

FINISH



white

BLEIAP10240



4mm(0.16")  
7mm(0.28")  
10mm(0.39")  
1.3mm(0.05")



Types of installation:



Material: Silicon Co-extrusion  
Dimension: 6×12mm  
Length: MAX 100m

- 8mm PCB
- 14W at maximum

CE IP65

END CAPS



End Cap with hole  
End cap without hole

ACCESSORIES




Mounting clip (aluminum)

FINISH



white

BLEIAP10241

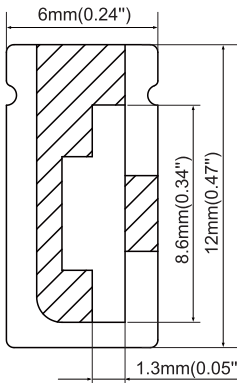

6mm(0.24")  
8.6mm(0.34")  
12mm(0.47")  
1.3mm(0.05")



Types of installation:



Material: Silicon Co-extrusion  
Dimension: 10×10mm  
Length: MAX 100m

- 6mm PCB
- 14W at maximum

CE IP65

END CAPS



End Cap with hole  
End cap without hole

ACCESSORIES




Mounting clip (aluminum)

FINISH



white

BLEIAP10242



10mm(0.39")  
7mm(0.28")  
10mm(0.39")  
1.3mm(0.05")



Types of installation:



Material: Silicon Co-extrusion  
Dimension: 30×21.5mm  
Length: MAX 100m

- 15mm PCB
- 14W at maximum

CE IP65

END CAPS



End Cap with hole  
End cap without hole

ACCESSORIES




Mounting clip

FINISH



white

BLEIAP10243



21.5mm(0.85")  
16mm(0.63")  
30mm(1.18")  
3.1mm(0.12")





Features

- Made of highly flexible silicone, 360° light emission, matt surface
- Free cutting, minimum cutting distance of 5mm
- Choice of 2 color temperatures (3000K/4000K)
- 14w/m, 850lm/W, in door use, 24V

END CAPS



Surface

DIFFUSERS



Vertical ceiling surface



Channel surface


ACCESSORIES





Clip



Steel wire

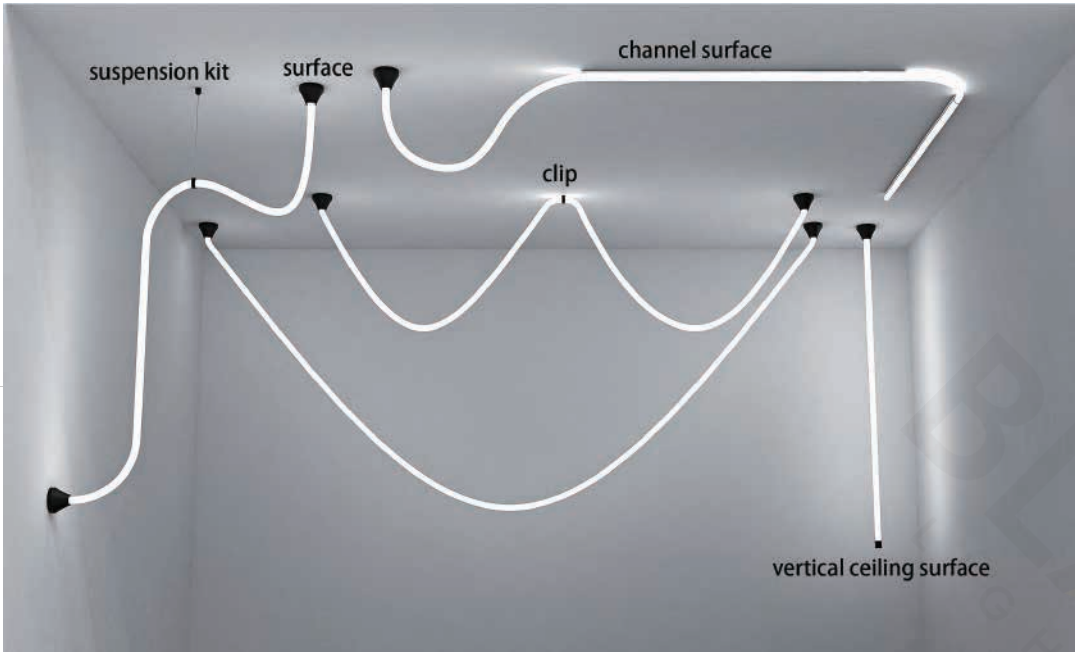

BLEIAP10244



Types of installation:



Material: Silicon Co-extrusion  
Dimension: 16×16mm  
Length: MAX 100m



Features

- Top bend and side bend, allowing any shape and conceive creative designs
- Outdoor rated luminaire, IP67, with flexible bending possibilities
- 7W/m, 310lm/w, 24V
- 3 years warranty, life span over 36000 hours

FINISH



white

END CAPS



End Caps

ACCESSORIES





Mounting clip (metal)



Moldable groove

BLEIAP10245

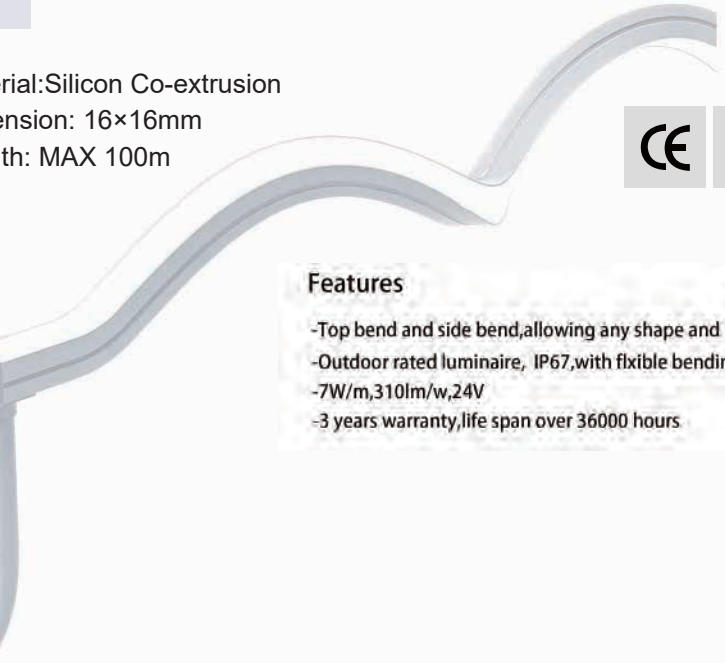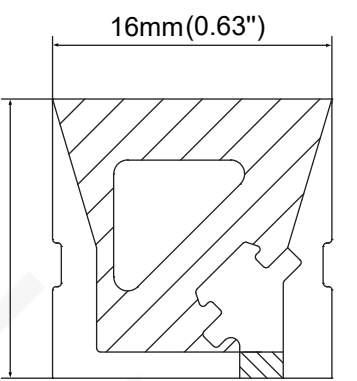




Types of installation:



Material: Silicon Co-extrusion  
Dimension:  $\varnothing 20\text{mm}$   
Length: MAX 100m



BLEIAP10246

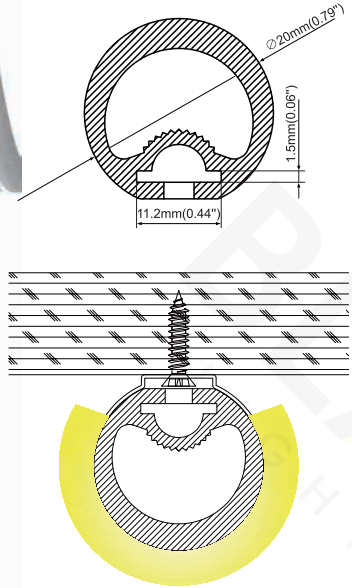

FINISH



white

END CAPS



End Cap with hole  
End cap without hole

ACCESSORIES





Clip

Types of installation:



Material: PC+TPV  
Dimension: 18×7.7mm  
Length: MAX 6m

BLEIAP10247

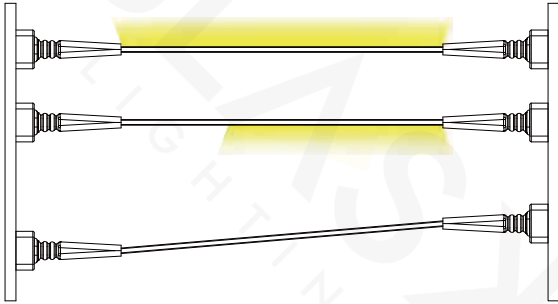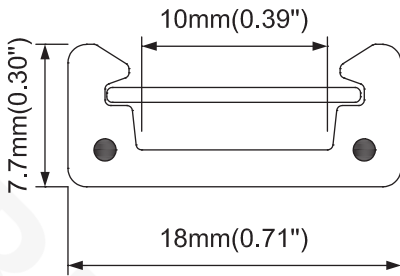

DIFFUSERS




PC diffused

ACCESSORIES



Mounting kit (Metal)




Wrench Key



Decorative Box (Metal+Silicone)



Mounting Screw



Wrench



Terminal

BLEIAP10248

Free combination

Types of installation:



Material: Extruded aluminum  
Dimension: 33.6×75mm  
Length: MAX 6m



FINISH




Anod. aluminum



white



Black

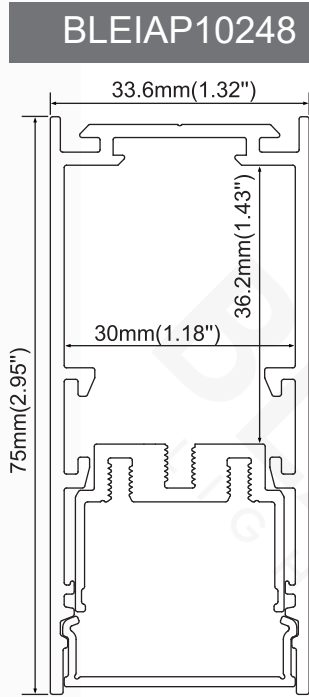

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Internal Clip



Outside clip



Blind cover



Safety wire



Steel wire



Reflector: 15°, 30°, 45°




90° Horizontal connector




180° Connector




LED module

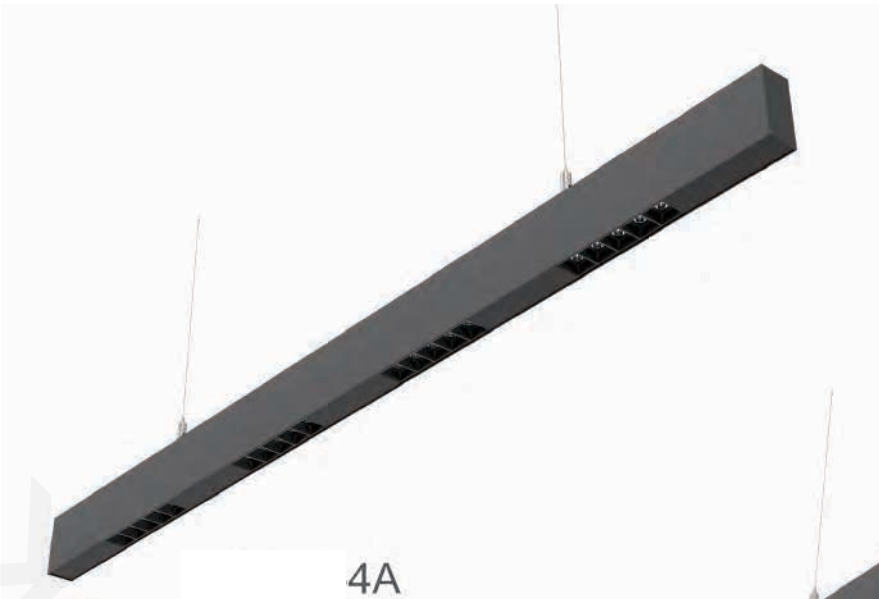

4A

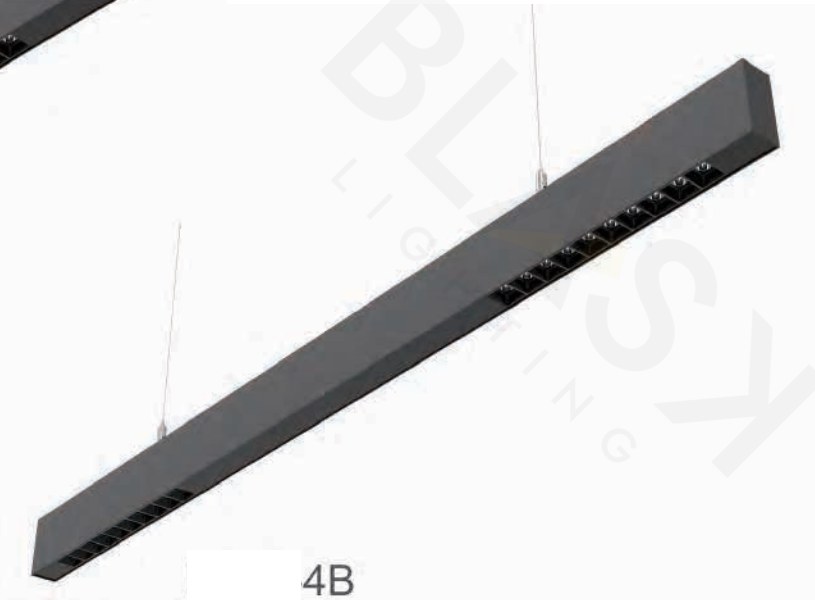

4B

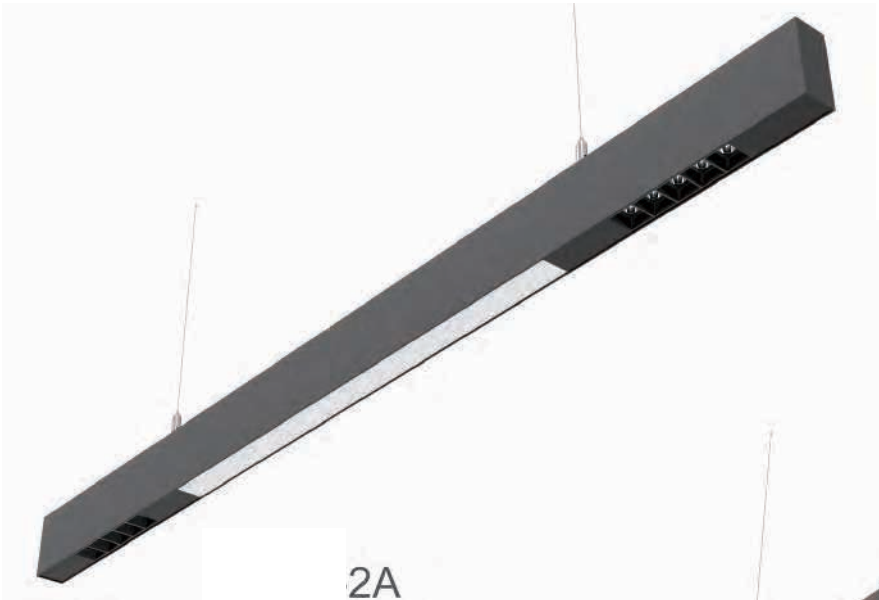

2A




8A

Types of installation:



Material: Extruded aluminum  
imension: 48.6×32.5mm  
Length: MAX 6m

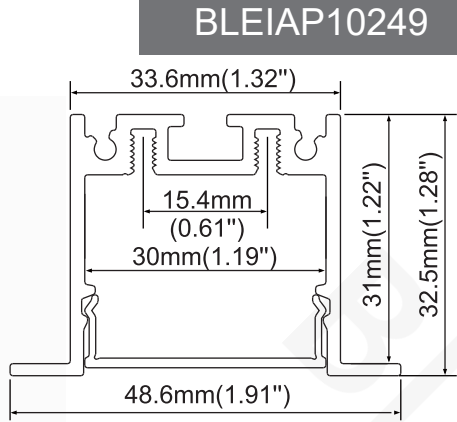

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Blind cover



Reflector: 15°, 30°, 45°




Spring clip

Types of installation:



Material: Extruded aluminum  
Dimension: 73.6×32.5mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10250

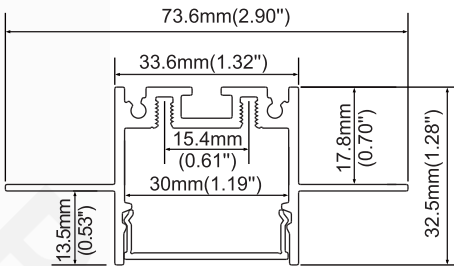

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Reflector: 15°, 30°, 45°



Blind cover




Types of installation:



Material: Extruded aluminum  
Dimension: 41.4×75mm  
Length: MAX 6m

BLEIAP10251

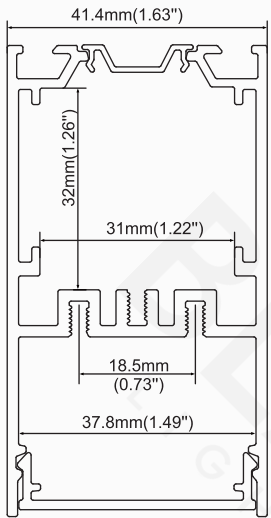

IP20

FINISH



Anod. aluminum



white



Black

END CAPS




End Caps

DIFFUSERS



PC frosted



Transparent cover



Anti glare cover

ACCESSORIES



Mounting clip  
(metal)



Steel wire



Blind cover



Lens



Reflector



LED Board

Free combination



2A



2B




6A




PC


BLEIAP10252

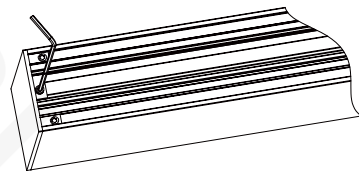

Step 01:  
Lock the end caps

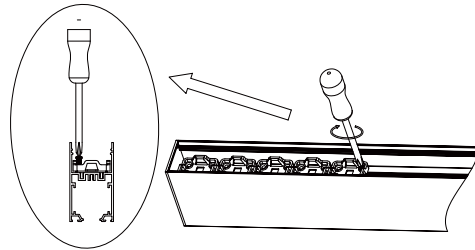

Step 02:  
Fix the base of the reflector



Step 03:  
Snap the reflector on the top of the base




Step 04:  
Press the blind cover into the profile




Step 05:  
Fix the driver on the back of the profile



Step 06:  
Press the aluminum cover into the backside

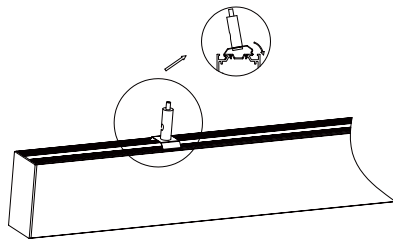

Step 07:  
Install the outside clip

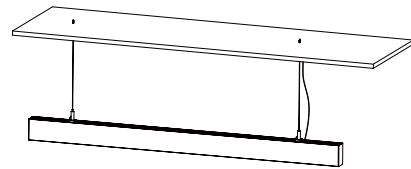

Step 08:  
Hang the fixtures on the ceiling




Types of installation:




Material: Extruded aluminum  
Dimension: 56.5×36mm  
Length: MAX 6m




FINISH



BLEIAP10253



Optics:



END CAPS



End Caps

DIFFUSERS




PC frosted

ACCESSORIES



Spring clip


Types of installation:




Material: Extruded aluminum  
Dimension: 41×36mm  
Length: MAX 6m




FINISH



BLEIAP10254



Optics:



END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES




Steel wire


Types of installation:




Material: Extruded aluminum  
Dimension: 81.5×36mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

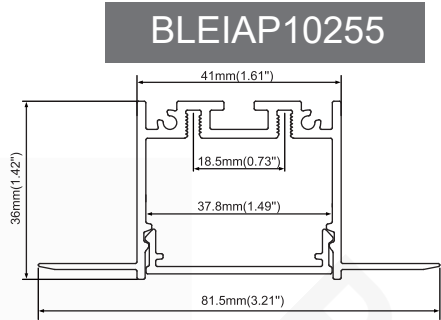

Optics:

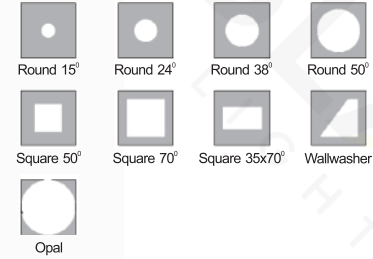

FINISH




Types of installation:




Material: Extruded aluminum  
Dimension: 53.8×80mm  
Length: MAX 6m

BLEIAP10256

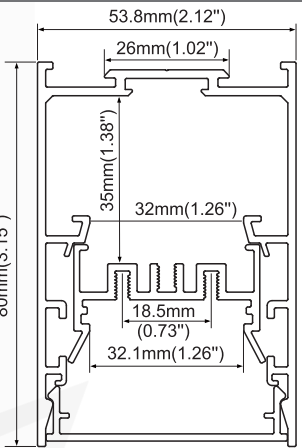

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted

END CAPS



Magnet end caps


DIFFUSERS



PC frosted



Large lens



Anti glare cover



Prismatic

ACCESSORIES



Internal Clip



Outside clip



High reflective louver



Safety wire



Steel wire



Reflector:15°,30°,45°



Blind cover



180° Connector



90° Horizontal connector



BLEIAP10256


Free combination




LS50-2A



LS50-2B

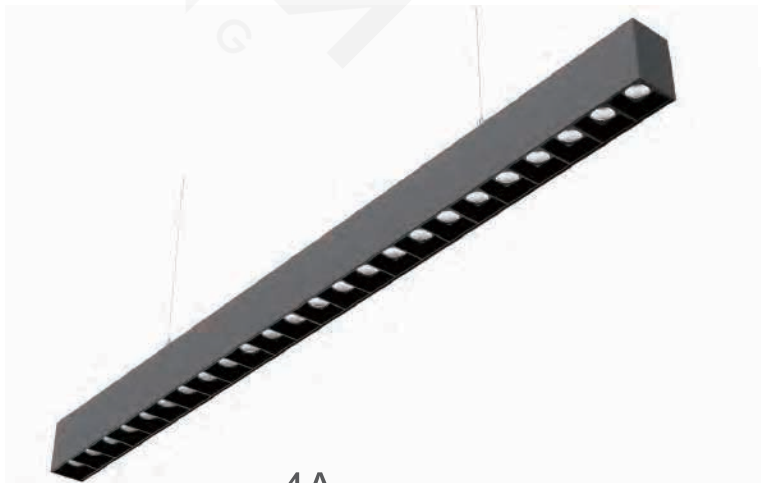

4A

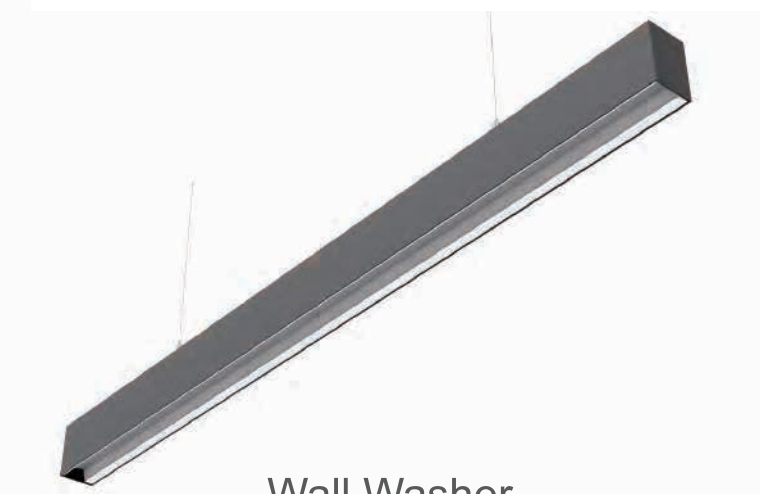

Wall Washer




Reflective Louver



Prismatic Cover



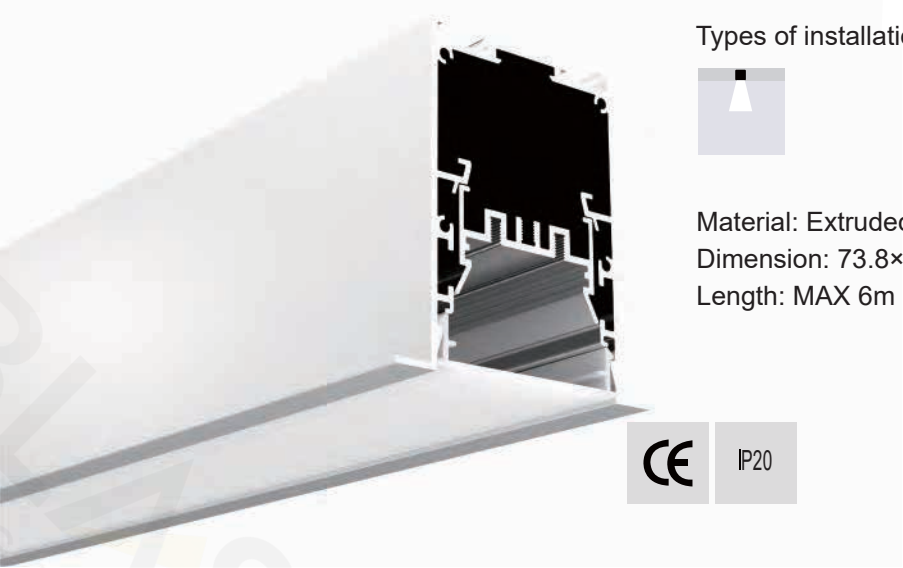


Types of installation:



Material: Extruded aluminum  
Dimension: 73.8×80mm  
Length: MAX 6m



**BLEIAP10257**

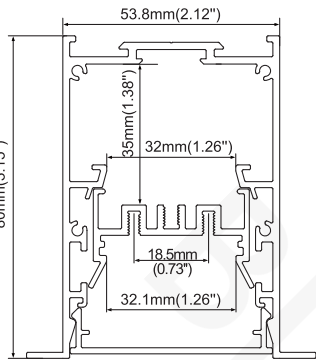

FINISH



Anod. aluminum    white    Black

END CAPS



End Caps

All of the accessories will be the same as LS50 except for END CAPS


Types of installation:



Material: Extruded aluminum  
Dimension: 93.8×80mm  
Length: MAX 6m



**BLEIAP10258**

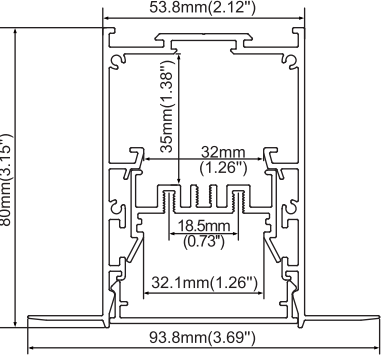

FINISH




Anod. aluminum    white    Black

END CAPS



End Caps

All of the accessories will be the same as LS50 except for END CAPS

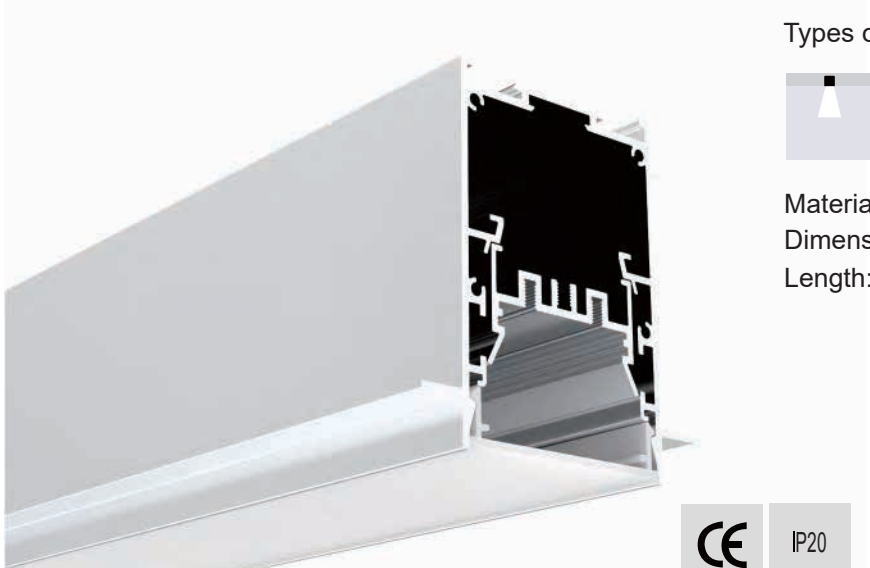


Types of installation:



Material: Extruded aluminum  
Dimension: 73.8×80mm  
Length: MAX 6m



**BLEIAP10259**

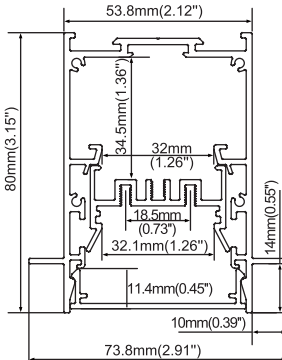

FINISH



Anod. aluminum    white    Black

END CAPS



End Caps


All of the accessories will be the same as LS50 except for END CAPS



Material: Extruded aluminum  
Dimension: 53.8×90mm  
Length: MAX 6m



**BLEIAP10260**

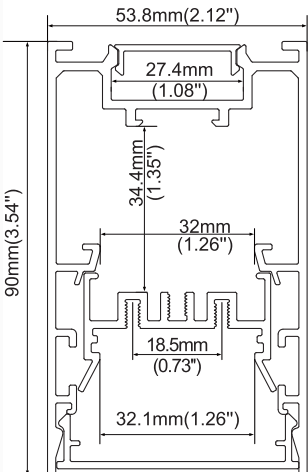

FINISH



Anod. aluminum    white    Black

END CAPS



ACCESSORIES



End Caps

Hanging clip



All of the accessories will be the same as LS50 except for END CAPS



Types of installation:



Material: Extruded aluminum  
Dimension: 53.8×80mm  
Length: MAX 6m

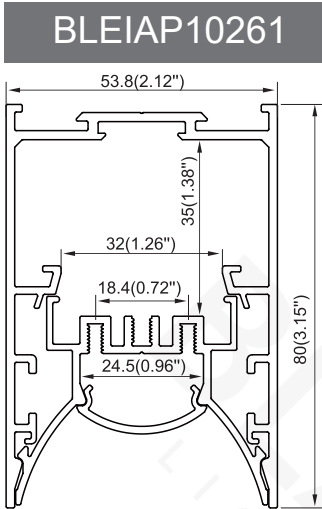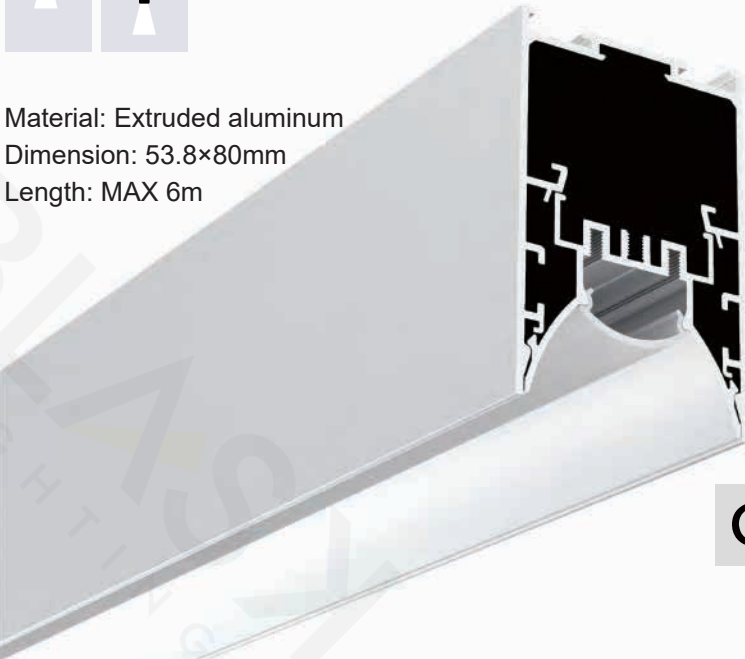

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused




Prismatic

ACCESSORIES



Internal Clip



Wall washer lens



Outside clip



Symmetrical lens







Steel wire



Lens 40° degrees



Lens 60° degrees

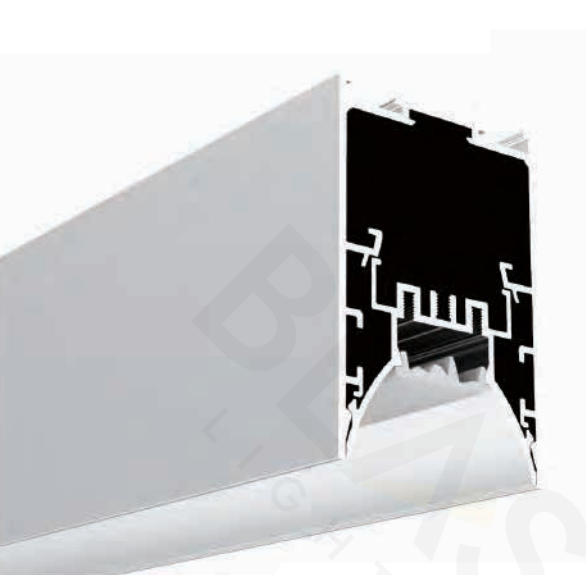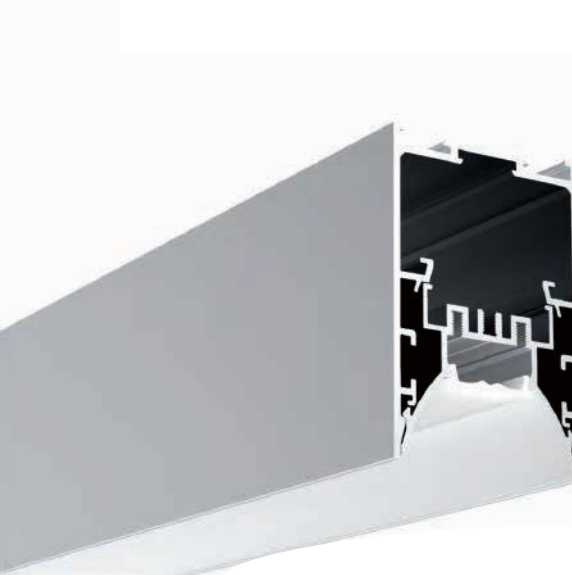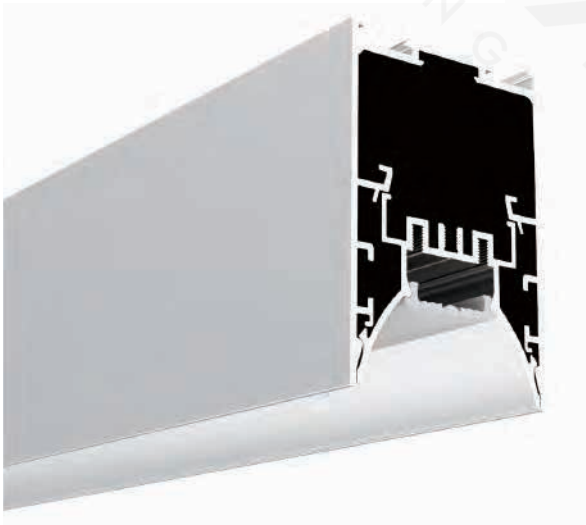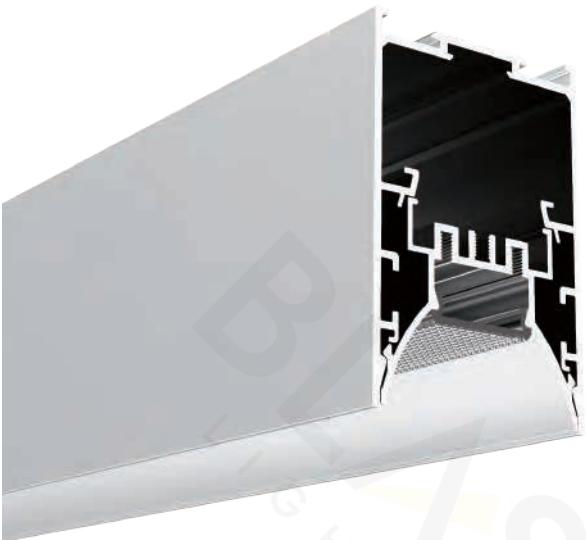




Types of installation:



Material: Extruded aluminum  
Dimension: 72.3×58.9mm  
Length: MAX 6m  
Compatible with 12.5mm drywall


BLEIAP10262

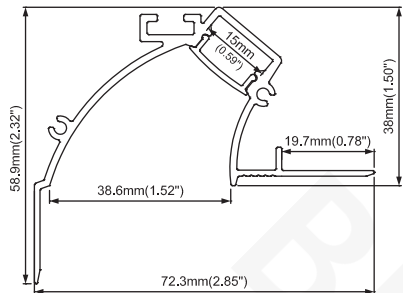

FINISH



white

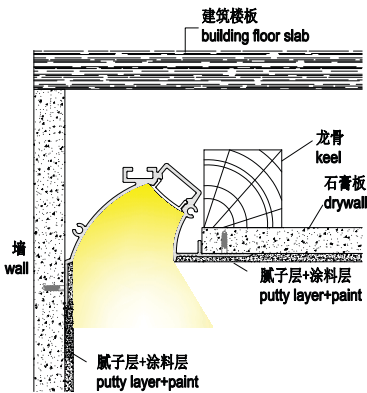

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector


Disposable cover

Types of installation:



Material: Extruded aluminum  
Dimension: 88×23.7mm  
Length: MAX 6m


BLEIAP10263

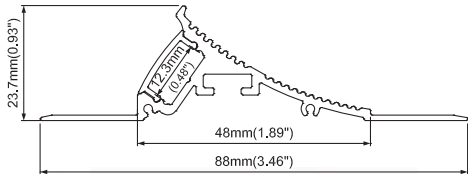

FINISH



white

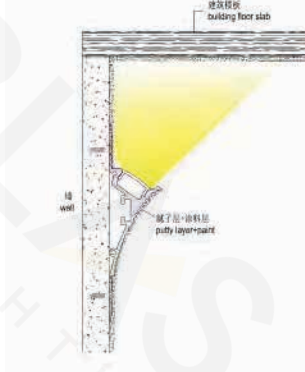

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector


Disposable cover

Types of installation:



BLEIAP10264

Material: Extruded aluminum  
Dimension: 85.5×56.8mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

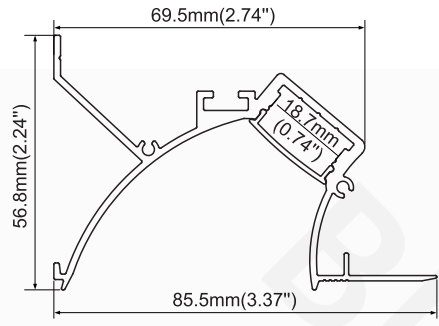

IP20

FINISH



white

END CAPS



End Caps

DIFFUSERS




PC diffused  
PC semi clear


ACCESSORIES



Disposable cover

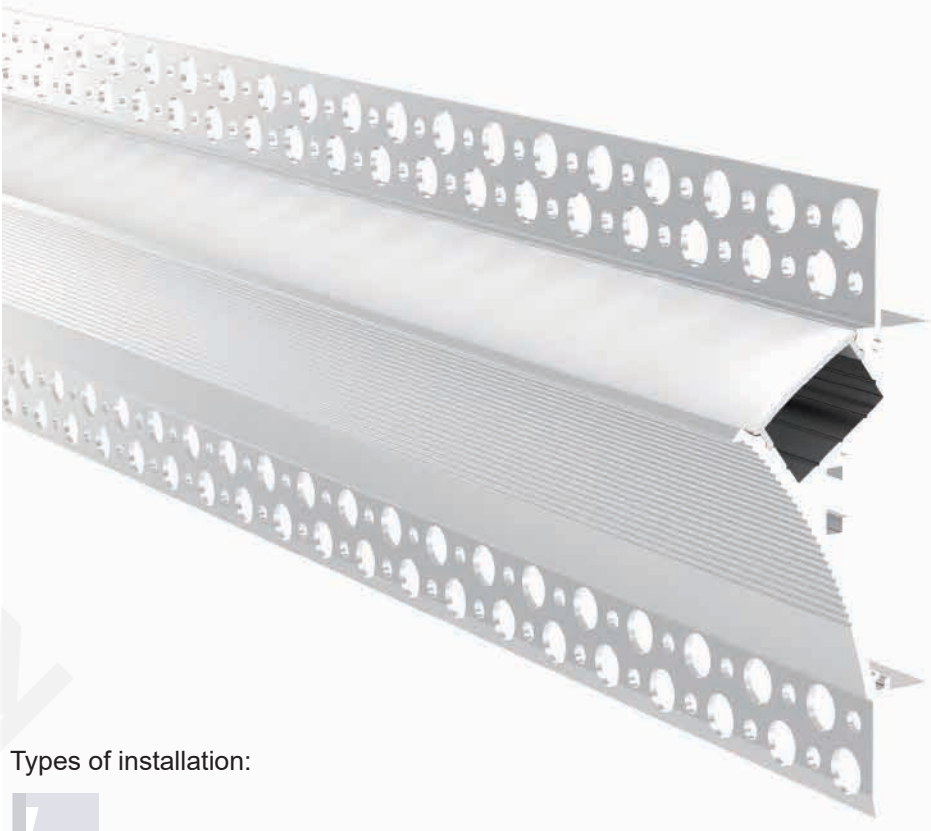

BLEIAP10265

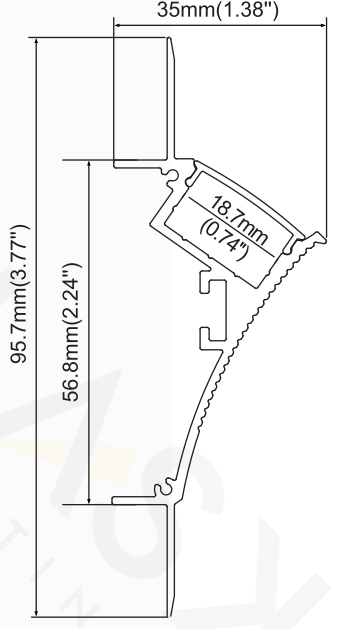

Types of installation:



Material: Extruded aluminum  
Dimension: 35×95.7mm  
Length: MAX 6m  
Compatible with 12.5mm drywall



IP20

FINISH



white

END CAPS



End Caps

DIFFUSERS




PC diffused

ACCESSORIES



Disposable cover

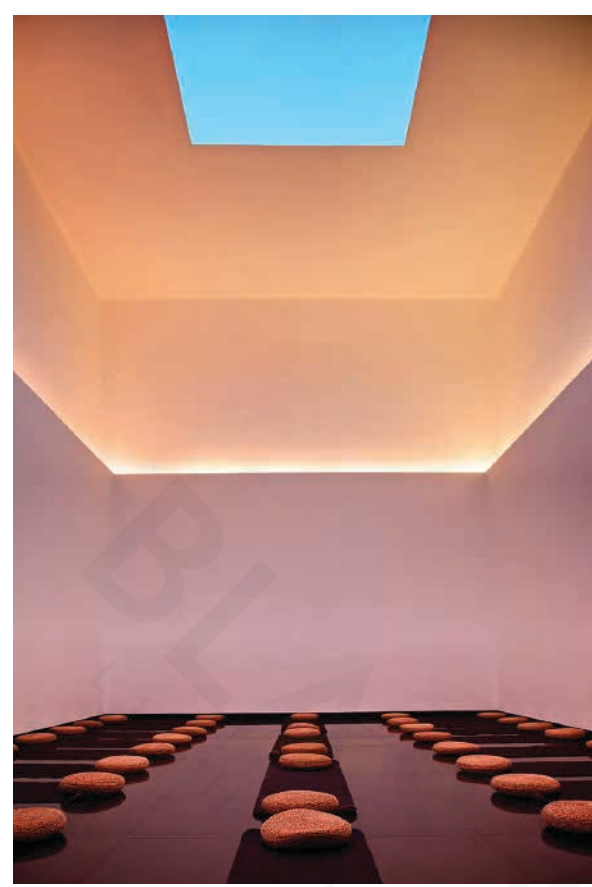



Types of installation:





Material: Extruded aluminum  
Dimension: 42×35mm  
Length: MAX 6m



IP20

BLEIAP10266

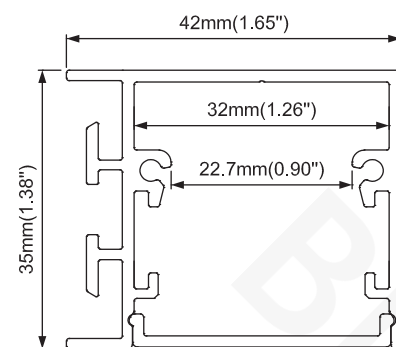

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Mounting clip (metal)

Types of installation:





Material: Extruded aluminum  
Dimension: 40.1×22mm  
Length: MAX 6m  
Compatible with 8mm tile



IP20

BLEIAP10267

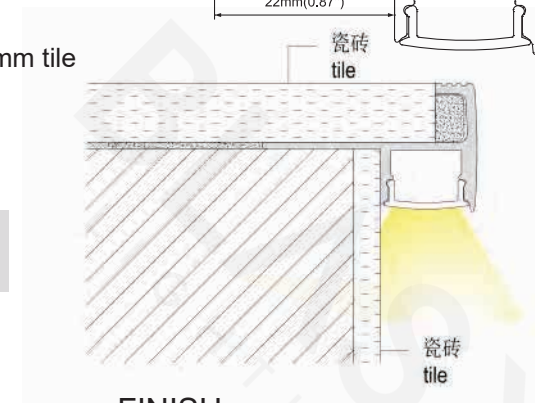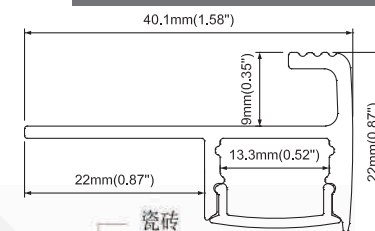

FINISH



Anod. aluminum



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Disposable cover

Types of installation:




Material: Extruded aluminum  
Dimension: 40.1×24mm  
Length: MAX 6m  
Compatible with 10mm tile

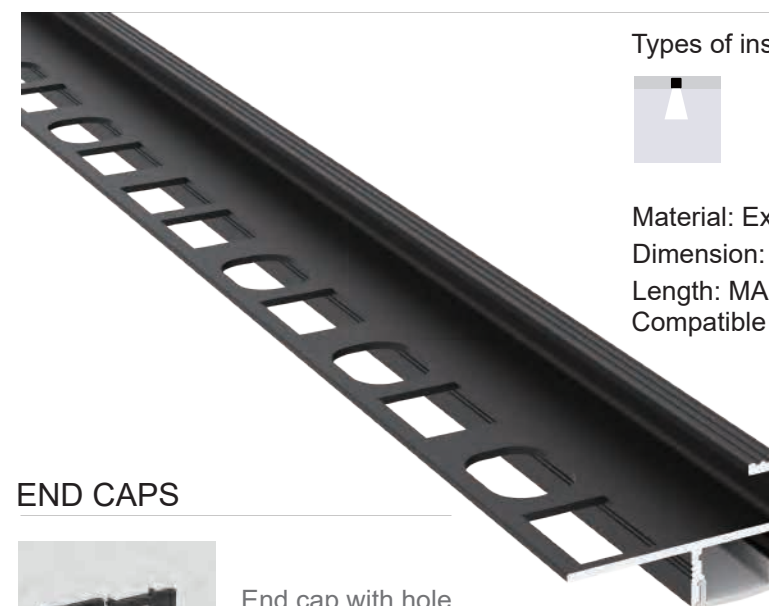

IP20

BLEIAP10268

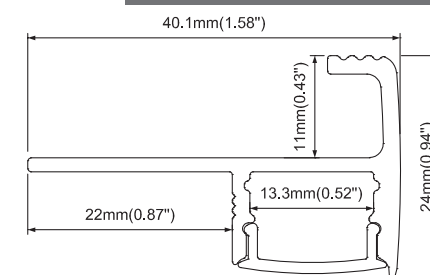

FINISH



Anod. aluminum



Black

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Disposable cover





Types of installation:



Material: Extruded aluminum  
Dimension: 14.8×38.5mm  
Length: MAX 6m  
Compatible with 12.5mm drywall



BLEIAP10269

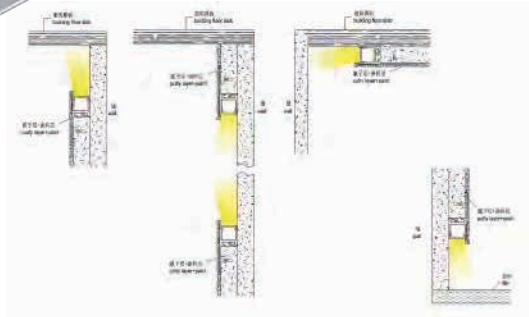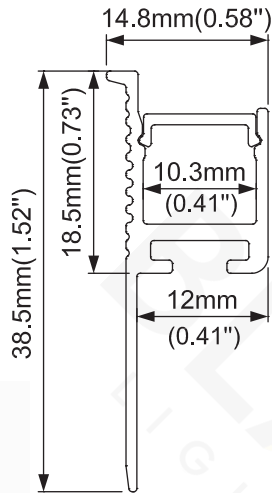

FINISH



Anod. aluminum    white    Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover




Types of installation:



Material: Extruded aluminum  
Dimension: 14.8×90.8mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10270



腻子层 涂料层  
putty layer+paint

FINISH



white

腻子层 涂料层  
putty layer+paint

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover




Types of installation:



Material: Extruded aluminum  
Dimension: 14.5×75mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

BLEIAP10271

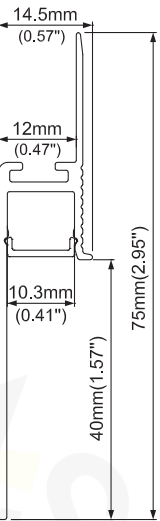

FINISH



Anod. aluminum



white



Black



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector




90° Vertical connector



180° Connector



Disposable cover


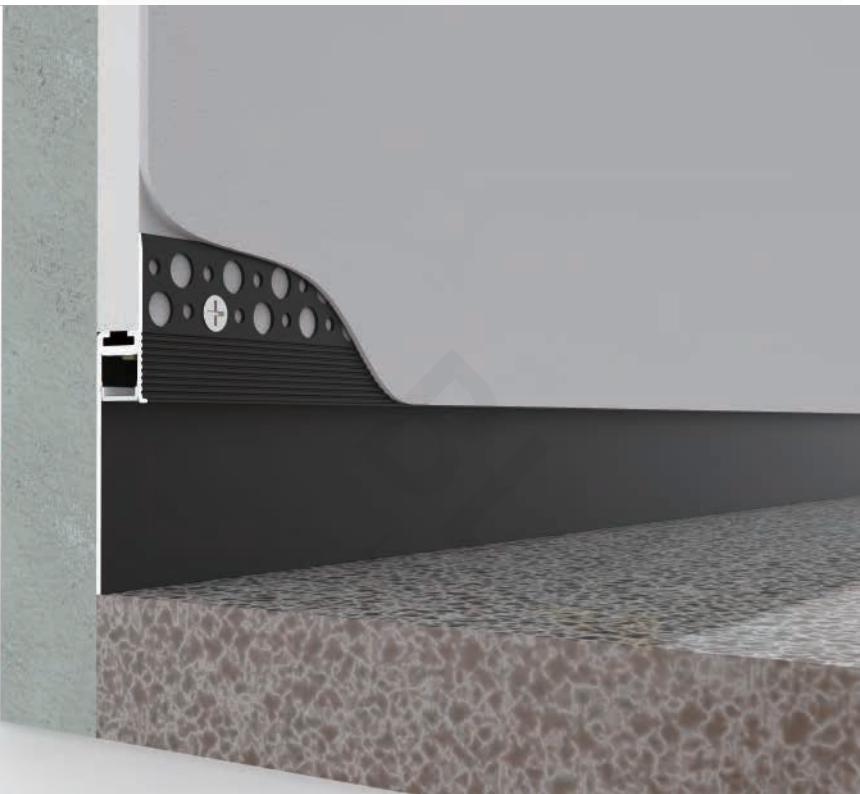





Types of installation:



Material: Extruded aluminum  
Dimension: 23.5×57.8mm  
Length: MAX 6m

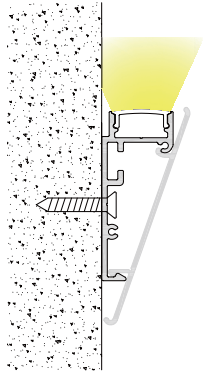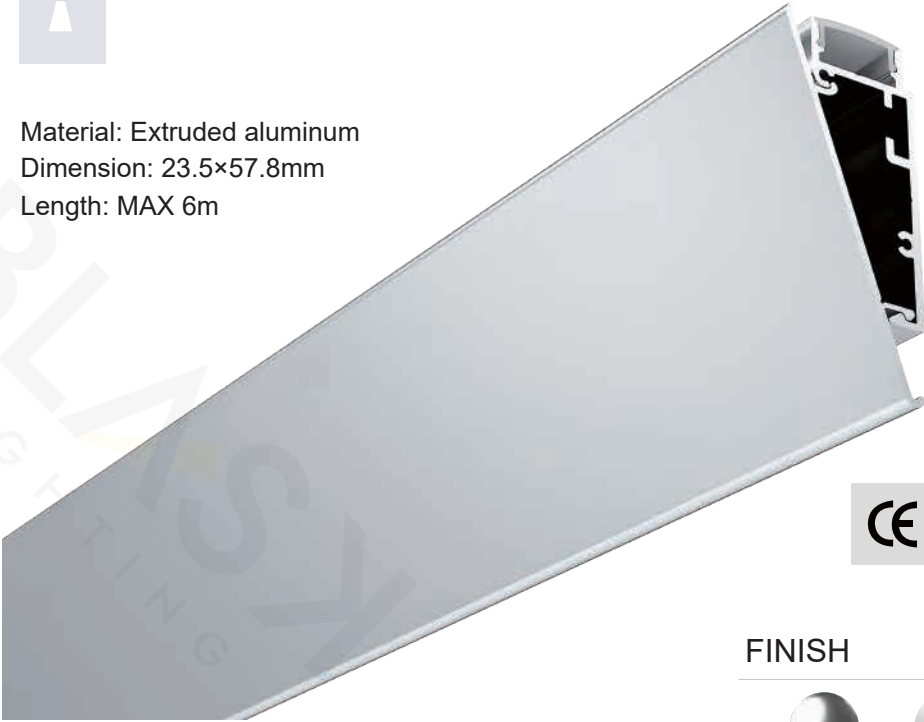

BLEIAP10272

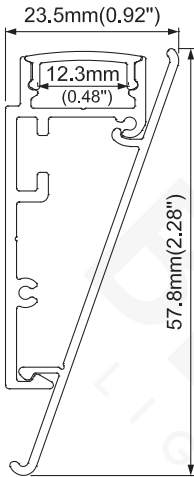

IP20

FINISH



Anod. aluminum



white



Black



Bronze



Golden

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




90° Horizontal connector



90° Vertical connector



180° Connector

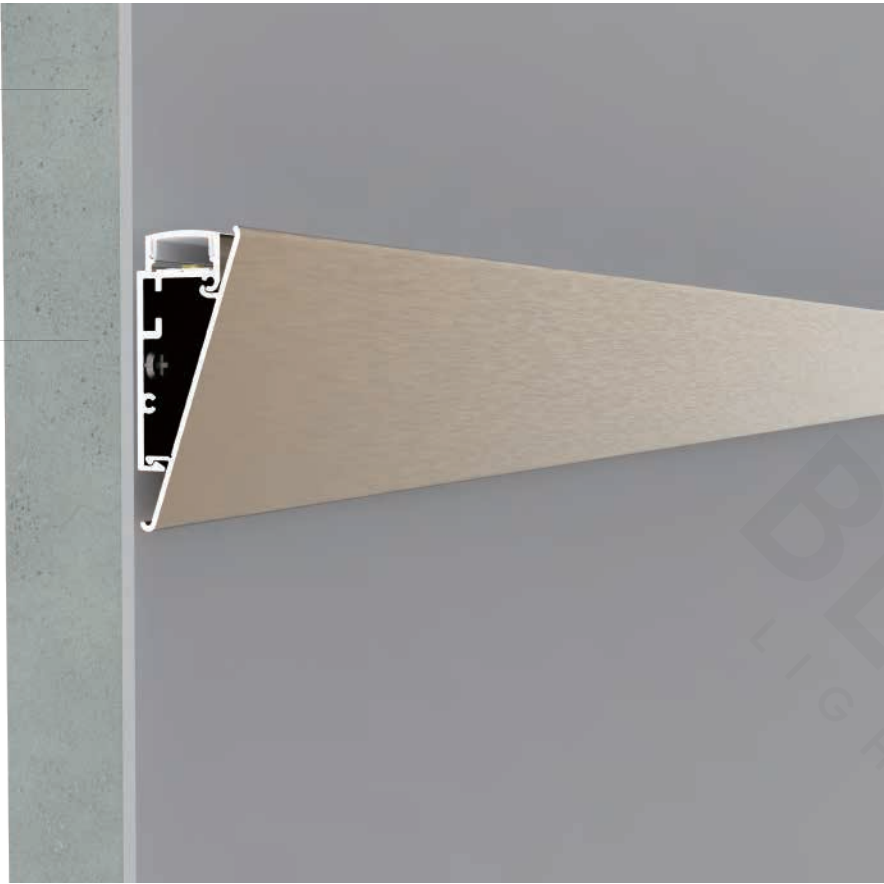


Types of installation:



Material: Extruded aluminum  
Dimension: 36.9×60mm  
Length: MAX 6m



BLEIAP10273

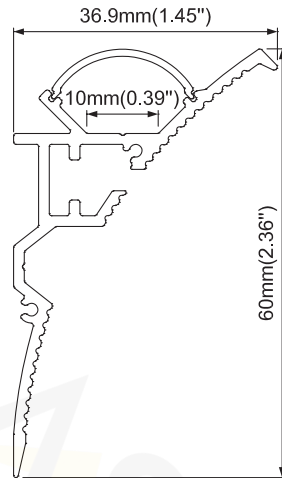

IP20

FINISH



white

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




90° Horizontal connector



90° Vertical connector



180° Connector

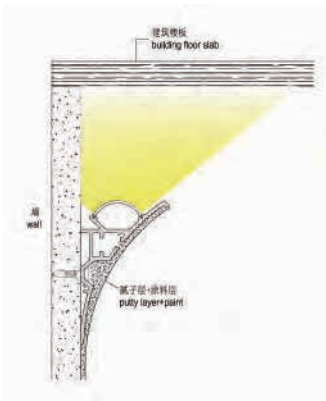




Types of installation:



Material: Extruded aluminum  
Dimension: 76.2×76.2mm  
Length: MAX 6m

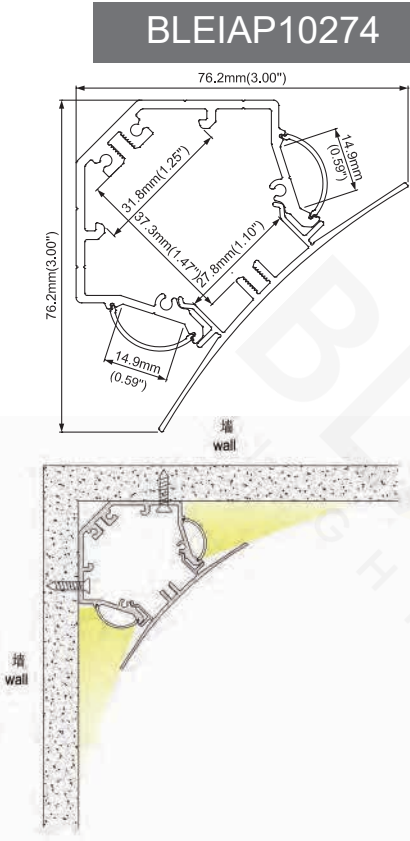

FINISH



Anod. aluminum   white   Black

END CAPS



End Caps

DIFFUSERS




PC diffused



Types of installation:



Material: Extruded aluminum  
Dimension: 38.7×39mm  
Length: MAX 6m

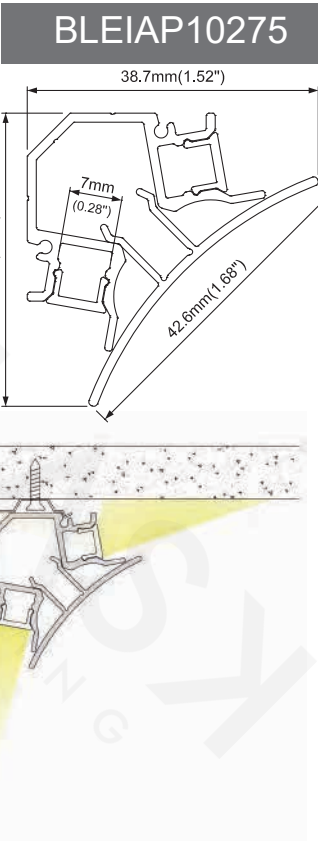

FINISH



Anod. aluminum   white   Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




Mounting clip (metal)





FINISH



END CAPS





End Caps


DIFFUSERS



PC diffused

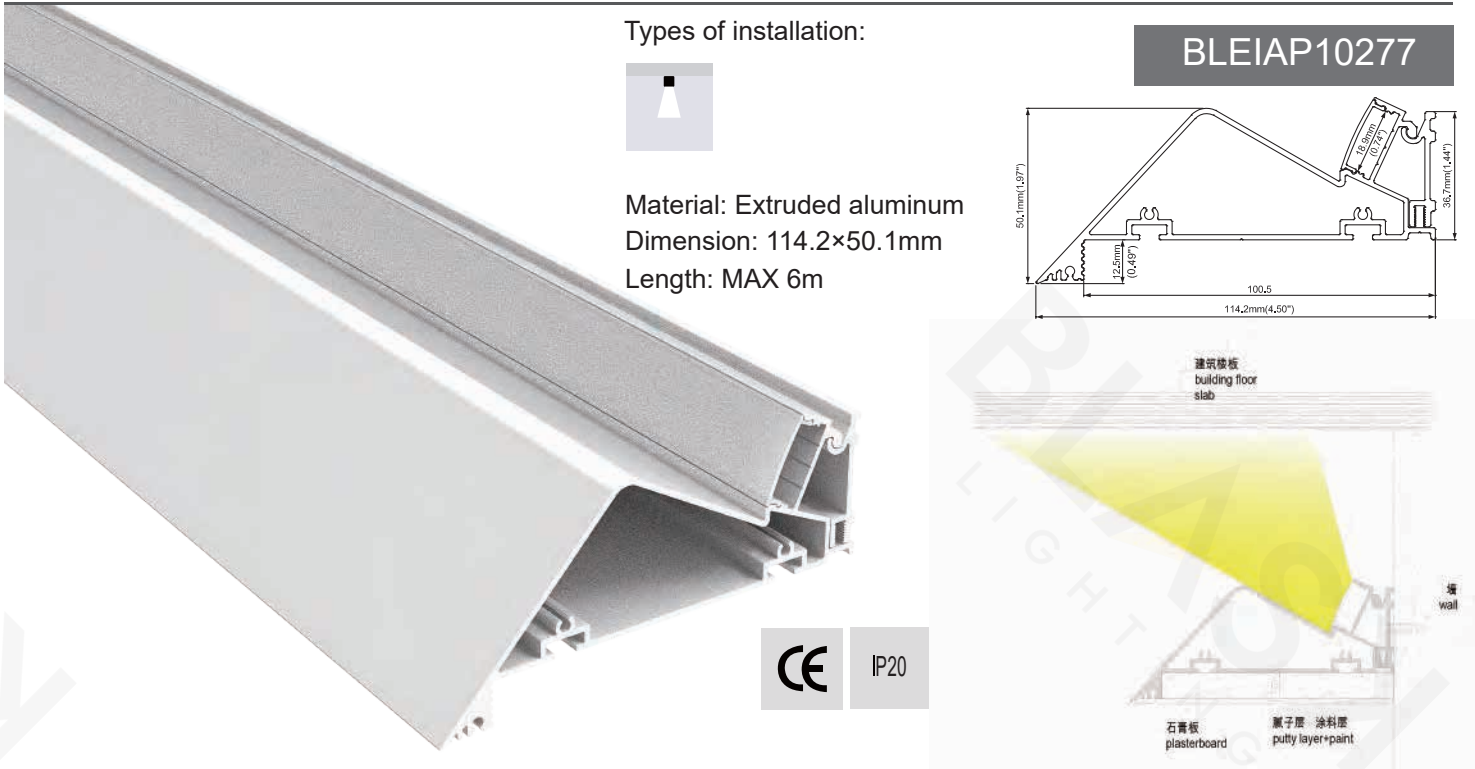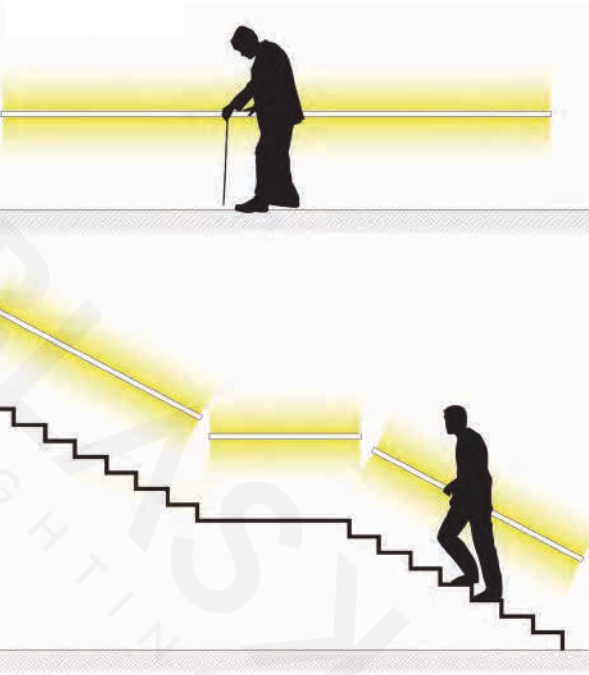

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Connector



90° Vertical connector



180° Connector







Types of installation:



Material: Extruded aluminum  
Dimension: 104.6×66mm  
Length: MAX 6m

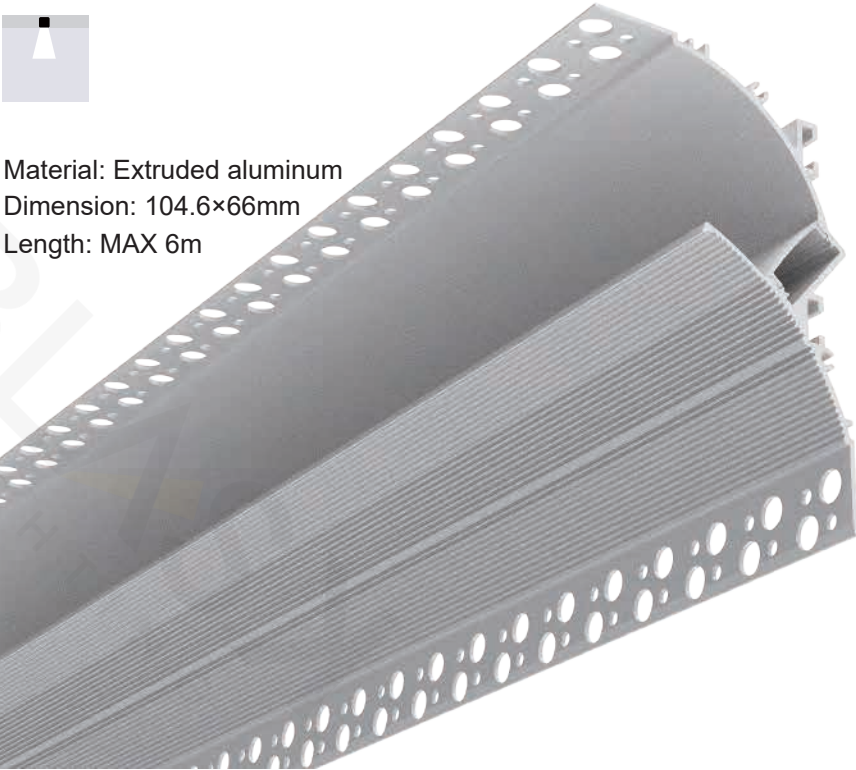

BLEIAP10278

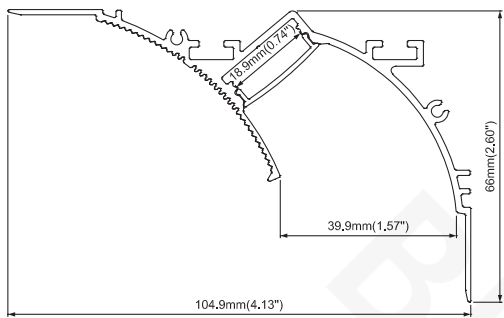

FINISH



white



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover




Types of installation:



Material: Extruded aluminum  
Dimension: 15.4×32.2mm  
Length: MAX 6m



BLEIAP10279

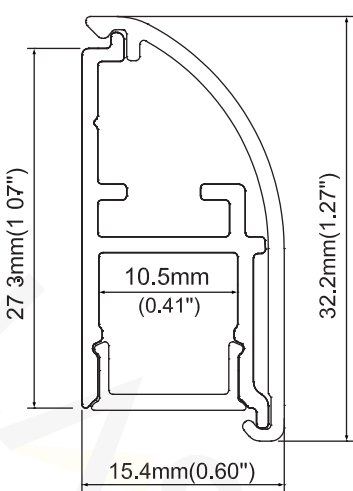

FINISH




Anod. aluminum



white



Black

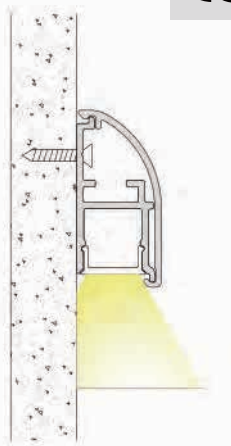

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector






Types of installation:



Material: Extruded aluminum  
Dimension: 23.5×22.6mm  
Length: MAX.6m



BLEIAP10280

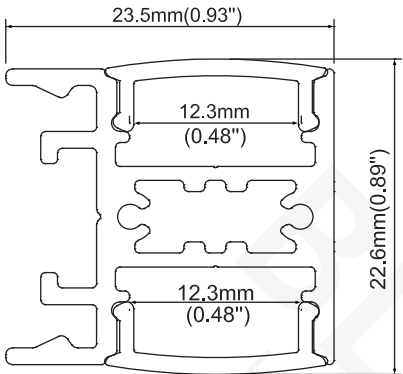

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Connector




90° Vertical connector




180° Connector



Mounting clip (metal)

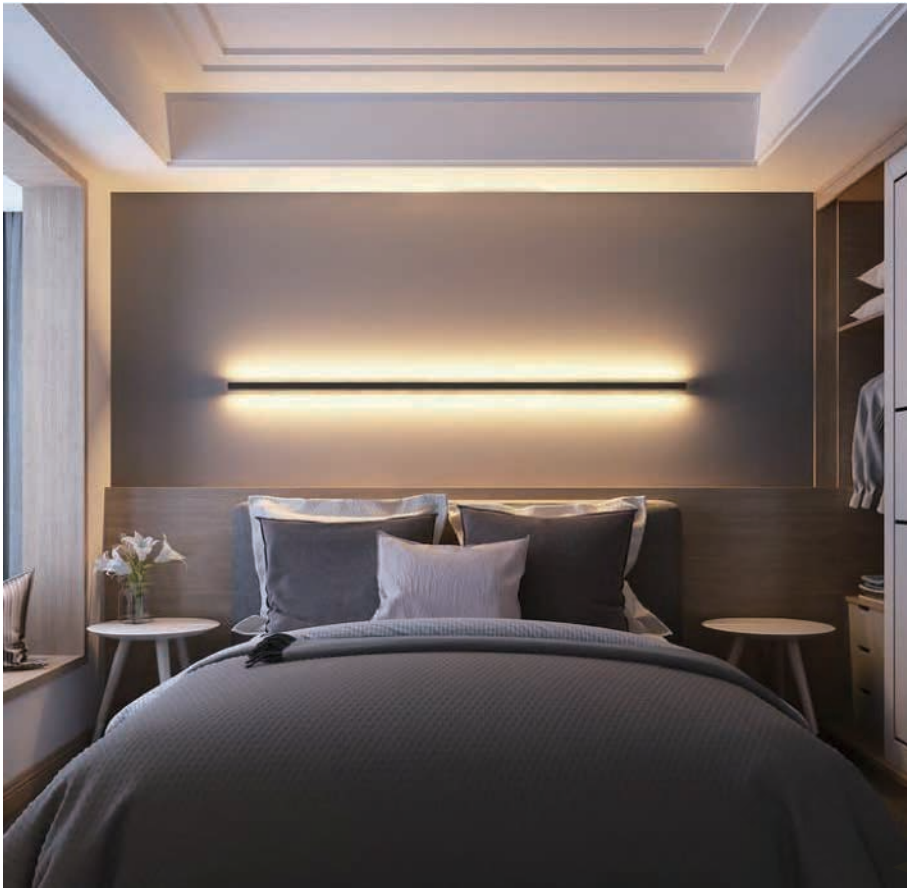

BLEIAP10281

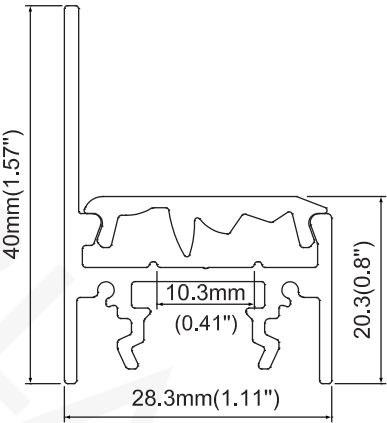

Types of installation:



Material: Extruded aluminum  
Dimension: 28.3×40mm  
Length: MAX.6m

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

ACCESSORIES



Mounting clip (metal)




Spring clip





Lens



BLEIAP10282

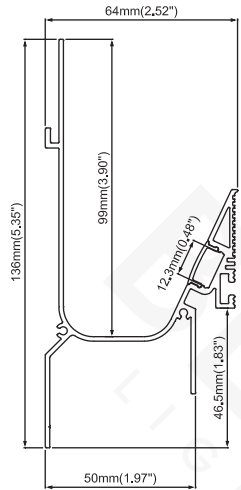

FINISH

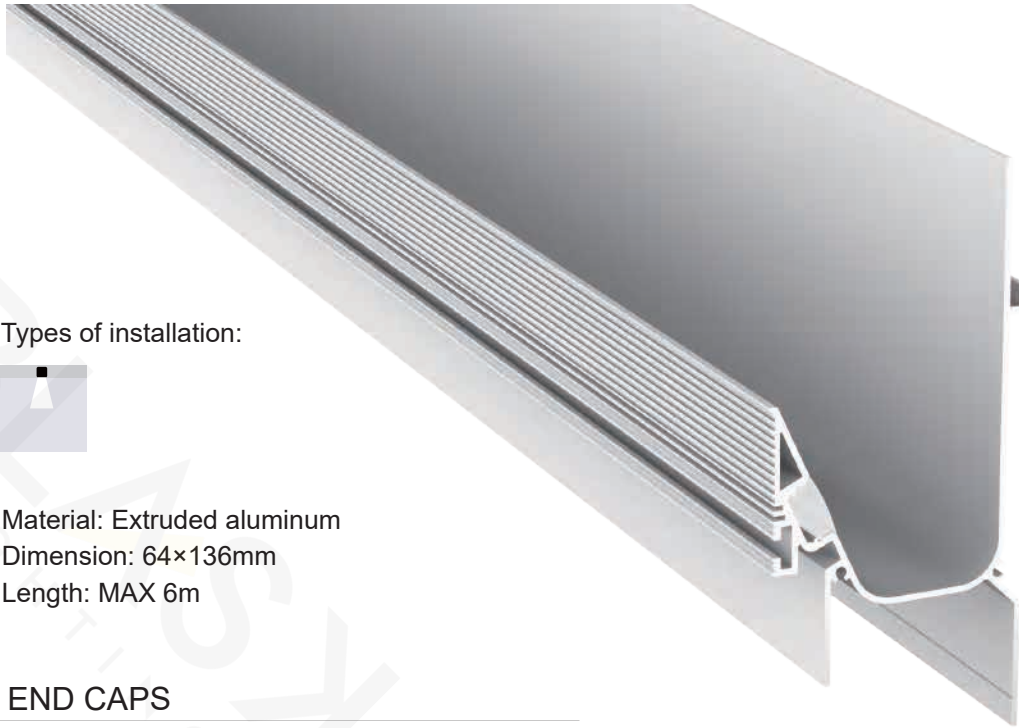

Types of installation:



Material: Extruded aluminum  
Dimension: 64×136mm  
Length: MAX 6m

END CAPS



End cap with hole  
End cap without hole




DIFFUSERS




PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

ACCESSORIES



90° Inside Connector



90° Outside Connector




180° Connector




Clip



BLEIAP10283

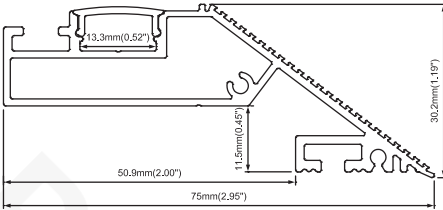

FINISH



Types of installation:



Material: Extruded aluminum  
Dimension: 75×30.17mm  
Length: MAX 6m

END CAPS



End caps

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

ACCESSORIES





90° Outside Connector



90° Inside Connector




180° Connector

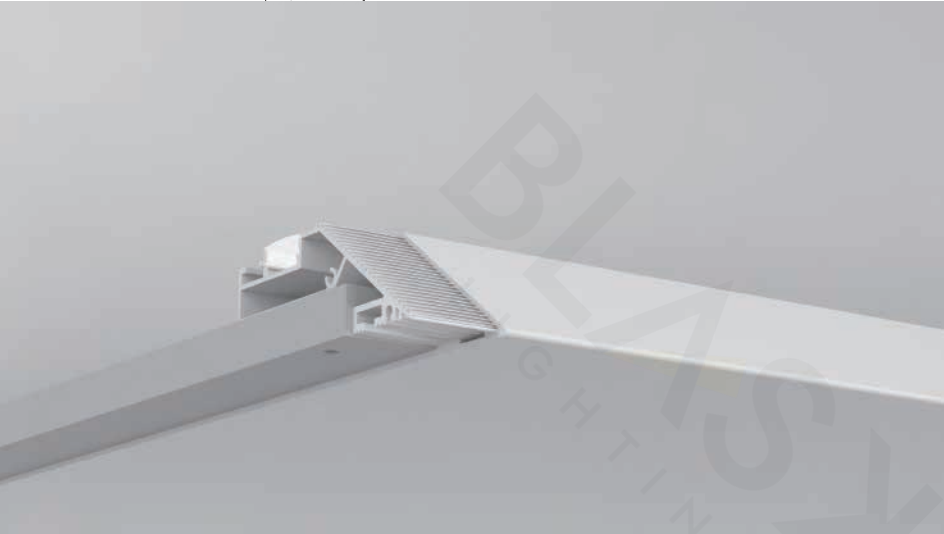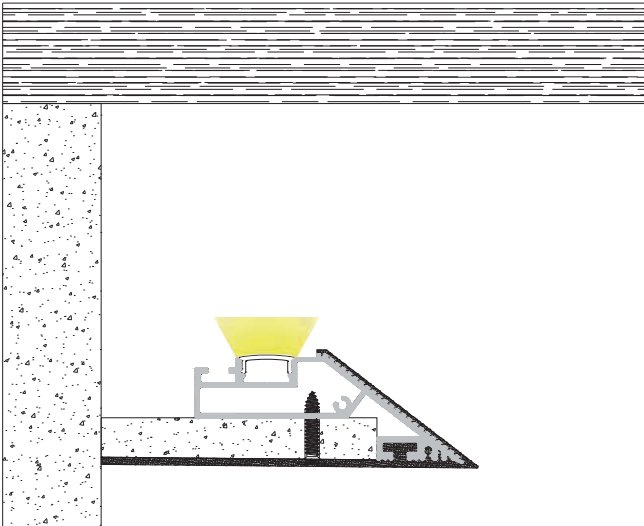



BLEIAP10284

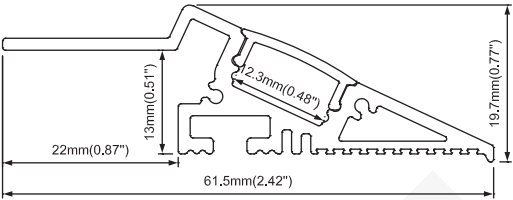

Types of installation:



Material: Extruded aluminum  
Dimension: 61.5×19.7mm  
Length: MAX 6m

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

ACCESSORIES




90° Inside Connector



90° Outside Connector



180° Connector

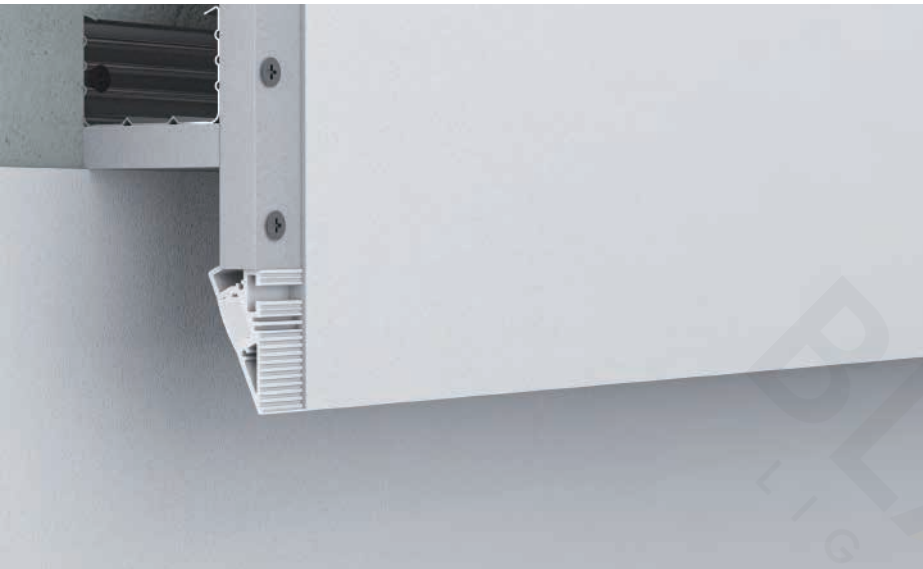


FINISH



Anod. aluminum




white

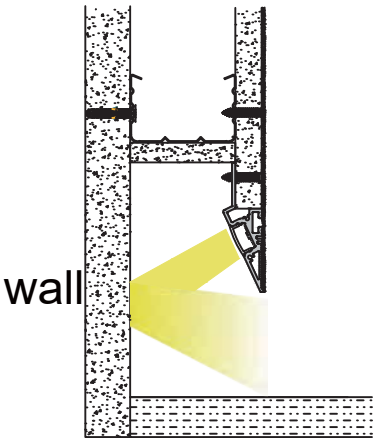

wall

BLEIAP10285

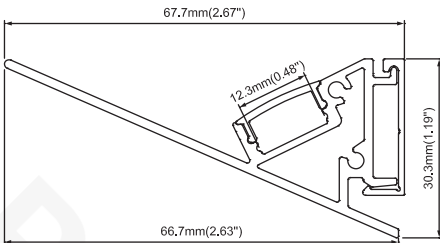

Types of installation:



Material: Extruded aluminum  
Dimension: 67.7×30.3mm  
Length: MAX 6m

END CAPS




End caps

DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

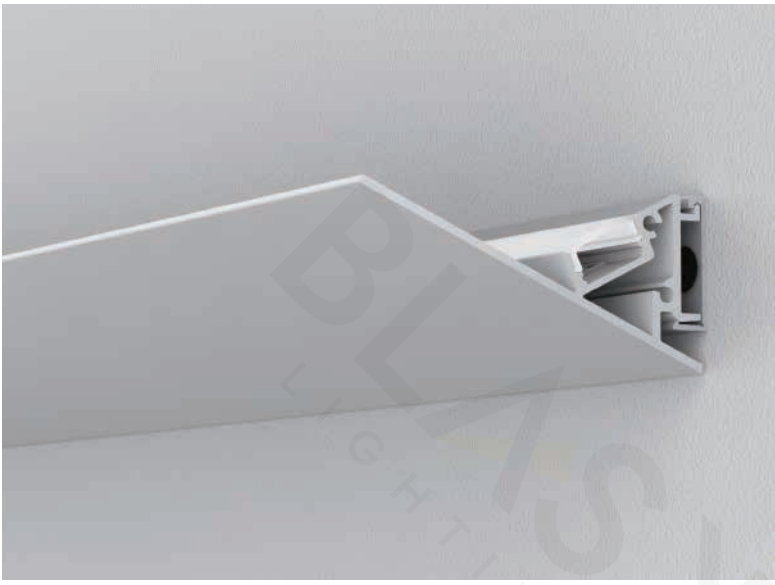

IP20

FINISH




Anod. aluminum



white




Black





BLEIAP10286

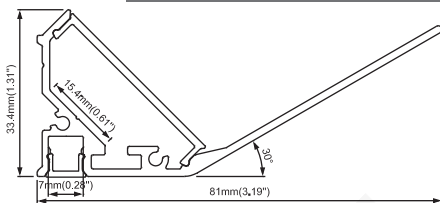


Types of installation:



Material: Extruded aluminum  
Dimension: 81×33.4mm  
Length: MAX 6m



FINISH



END CAPS



End caps

DIFFUSERS



PC diffused



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector




Types of installation:



Material: Extruded aluminum  
Dimension: 21×10mm  
Length: MAX 6m

BLEIAP10287

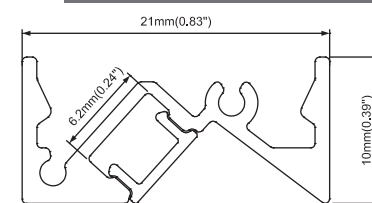

FINISH



END CAPS



End caps

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip (metal)






Types of installation:



Material: Extruded aluminum  
Dimension: 12×12mm  
Length: MAX 6m



FINISH



#### END CAPS



End caps

#### ACCESSORIES



3M tape



Types of installation:



Material: Extruded aluminum  
Dimension: 69.3×68mm  
Length: MAX 6m



FINISH



#### END CAPS



End caps



plastic  
End caps



silicone pad

#### ACCESSORIES




Antifouling cover



Aluminium  
PCB tray




Waterproof Cable  
Grommet



Aluminium  
profile




Clip

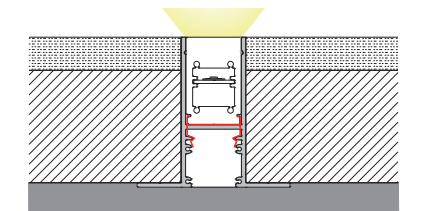



## BLEIAP10290

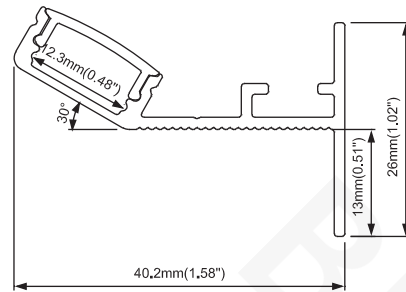

Types of installation:



Material: Extruded aluminum  
Dimension: 40.25×26mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

### END CAPS



End cap with hole  
End cap without hole

### DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused

### ACCESSORIES



90° Inside Connector






90° Outside Connector




180° Connector

### FINISH

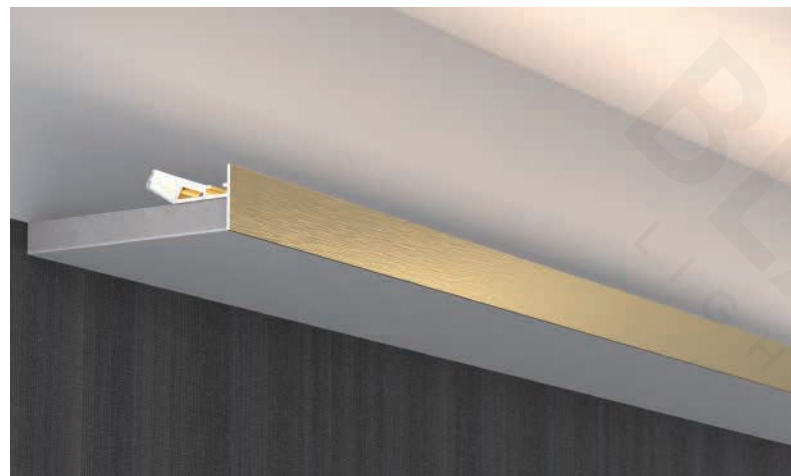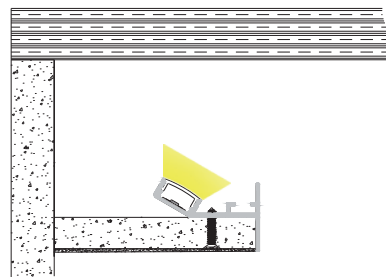

## BLEIAP10291

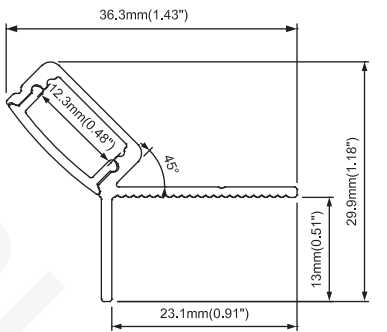

Types of installation:



Material: Extruded aluminum  
Dimension: 36.3×29.9mm  
Length: MAX 6m  
Compatible with 12.5mm drywall

### END CAPS







End cap with hole  
End cap without hole

### DIFFUSERS



PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused


### FINISH

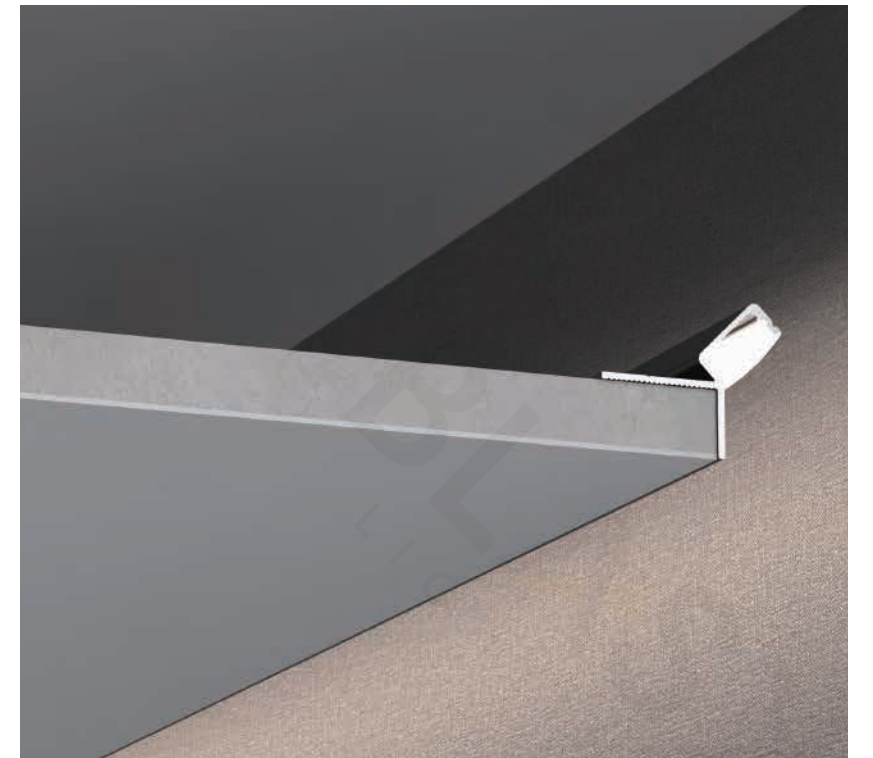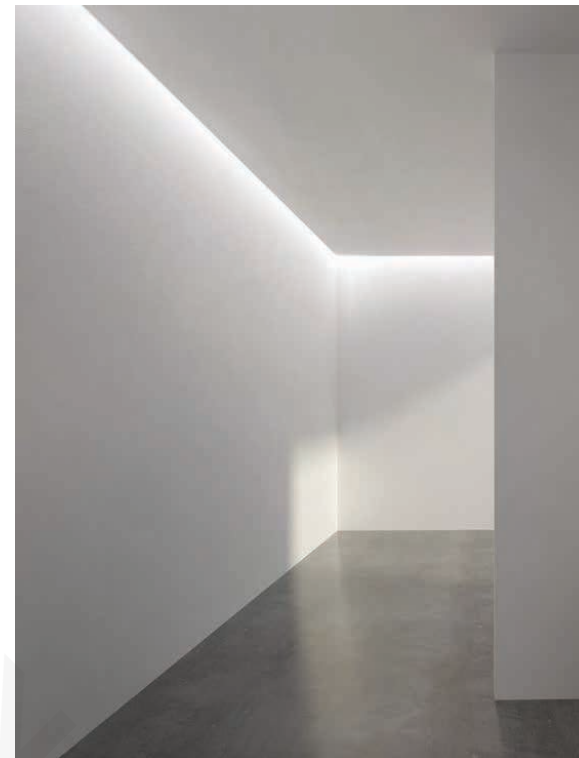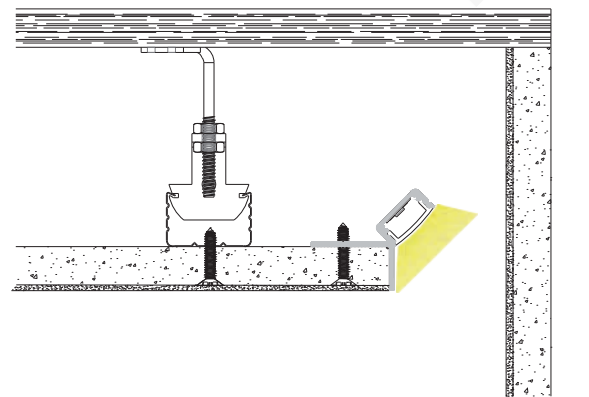





BLEIAP10292

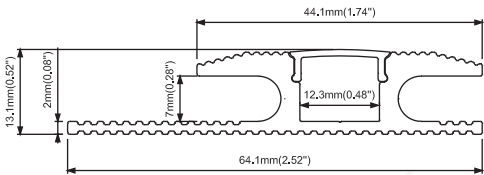

Types of installation:



Material: Extruded aluminum

Dimension: 64.1×13.1mm

Length: MAX 6m

END CAPS



End cap with hole

End cap without hole

CE

IP20

FINISH




Anod. aluminum

Black

DIFFUSERS



PMMA opal matte


PMMA semi-clear

PMMA clear

PC diffused



Black PC

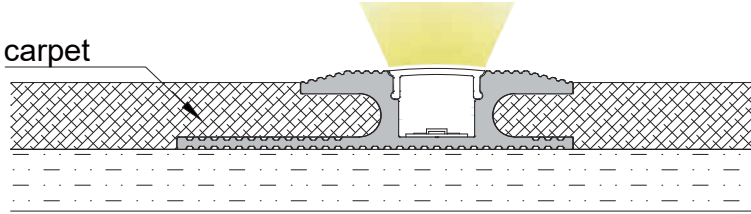


carpet





BLEIAP10293

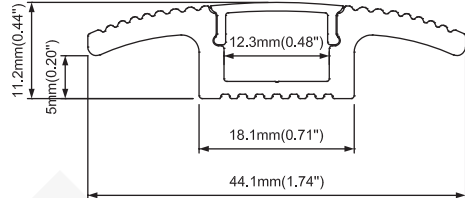

Types of installation:



Material: Extruded aluminum

Dimension: 44.1×11.2mm

Length: MAX 6m

END CAPS



End cap with hole

End cap without hole

CE

IP20

FINISH




Anod. aluminum

Black

DIFFUSERS



PMMA opal matte


PMMA semi-clear

PMMA clear

PC diffused



Black PC

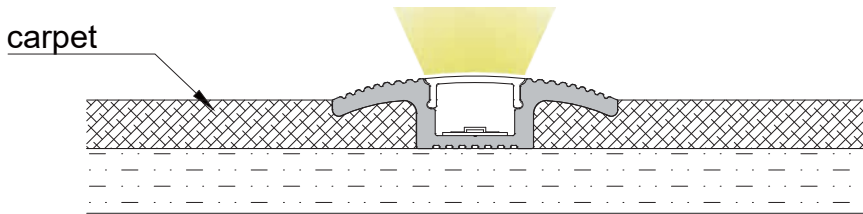


carpet



138



BLEIAP10294



Types of installation:



Material: Extruded aluminum  
Dimension: 62.1×11.2mm  
Length: MAX 6m

END CAPS



End cap with hole  
End cap without hole

DIFFUSERS




PMMA opal matte  
PMMA semi-clear  
PMMA clear  
PC diffused



Black PC

carpet

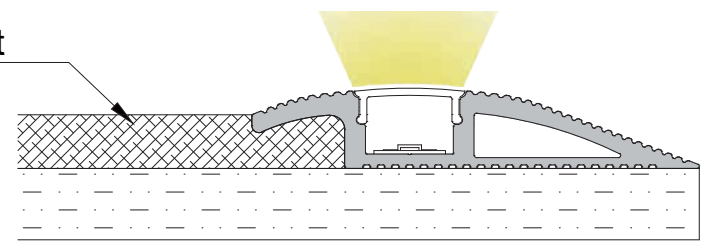

FINISH




Anod. aluminum Black

Types of installation:



Material: Extruded aluminum  
Dimension: 23×26.2mm  
Length: MAX 6m


BLEIAP10295

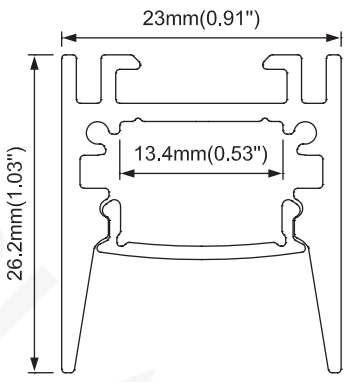

FINISH



Anod. aluminum white Black

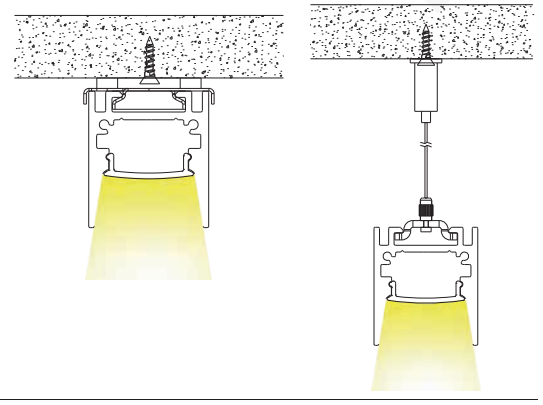


END CAPS



End cap with hole  
End cap without hole

DIFFUSERS



PC diffused



Prismatic



Black PC

ACCESSORIES



90° Horizontal connector



180° Connector



90° Vertical connector



Hanging bracket




Steel wire




Mounting clip (surface)



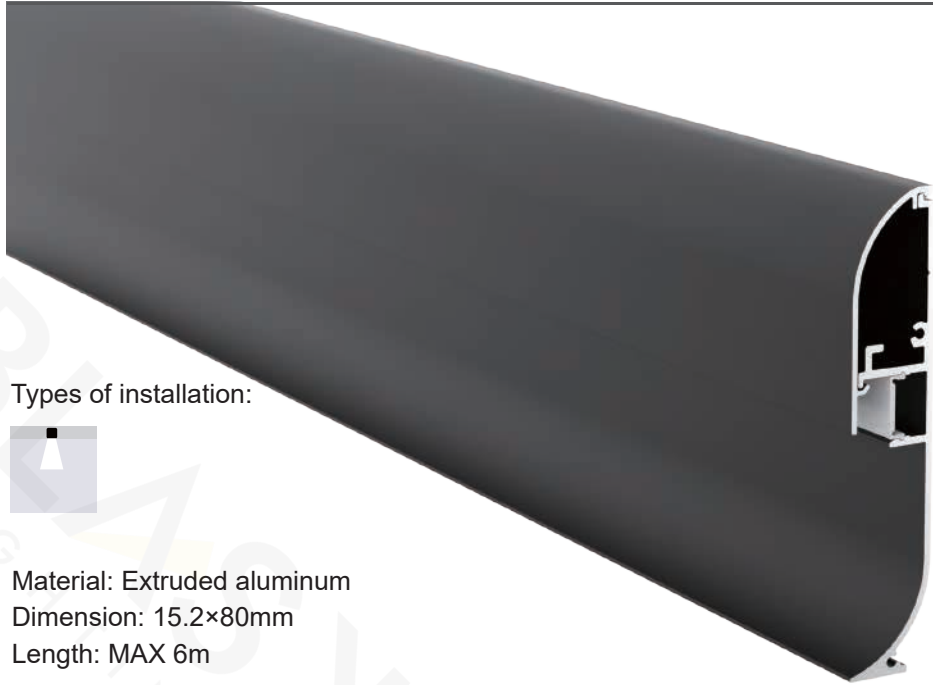

BLEIAP10296

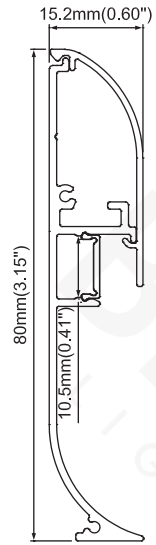

Types of installation:




Material: Extruded aluminum  
Dimension: 15.2×80mm  
Length: MAX 6m

#### END CAPS



IP20


#### FINISH



Anod. aluminum

white

Black

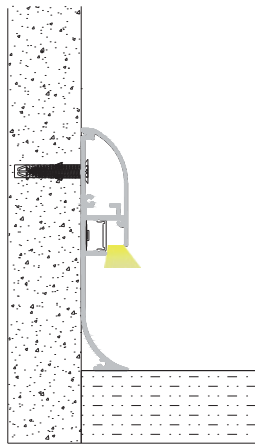

End caps

#### DIFFUSERS



PC diffused

#### ACCESSORIES




90° Outside Connector



90° Inside Connector



180° Connector

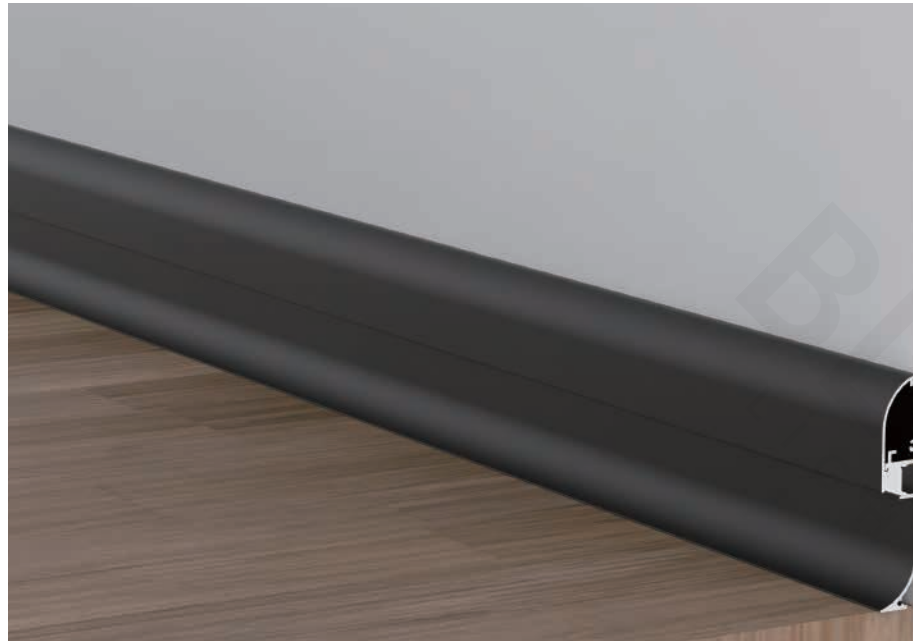

## Track system








Types of installation:



Material: Extruded aluminum  
Dimension: 46.3×78mm  
Length: MAX 6m

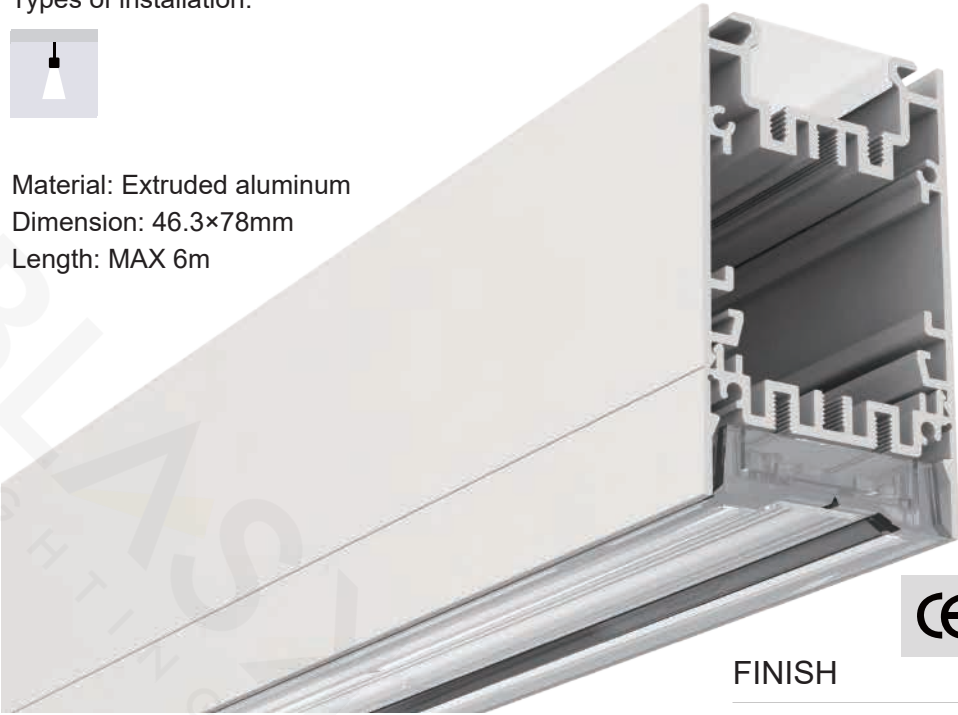

BLEIAP10297

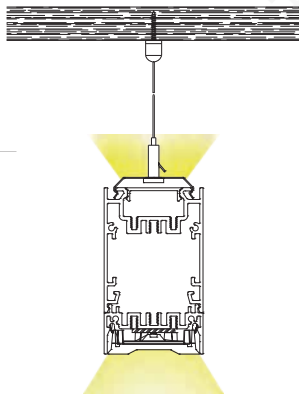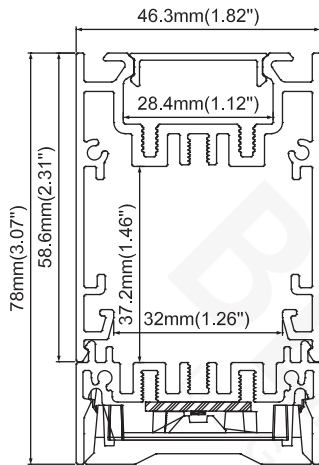

IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End caps

DIFFUSERS



Linear Optics  
VS LIGHTING SOLUTIONS



PC frosted

ACCESSORIES



Blind cover



Safety wire



Connector X



Mounting clip  
(metal)



Connector T



Connector L



Steel wire




LED  
module


Types of installation:



Material: Extruded aluminum  
Dimension: 46.3×78mm  
Length: MAX 6m

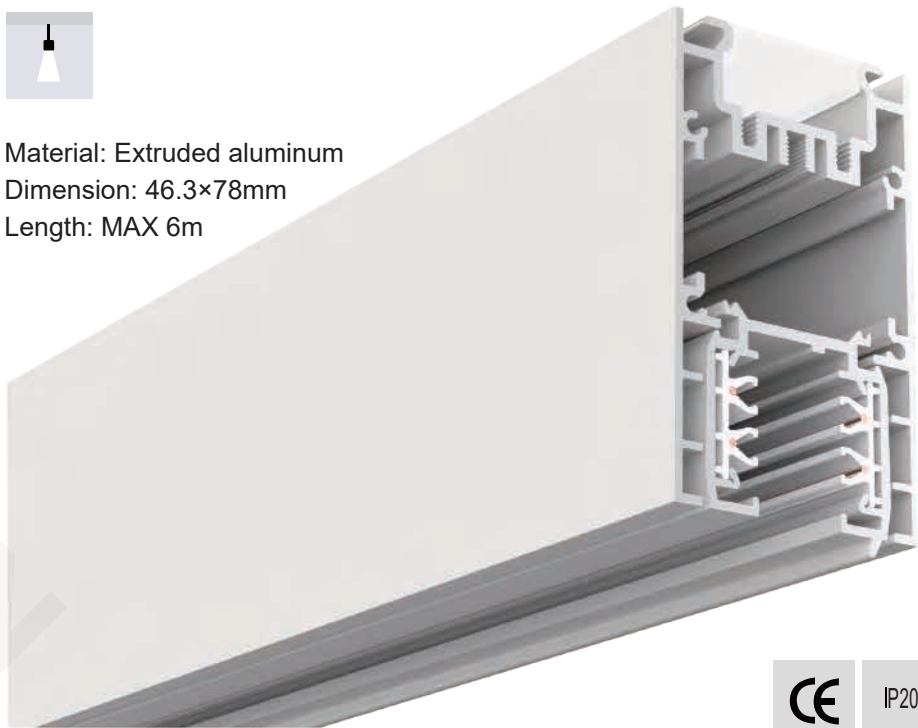

BLEIAP10298

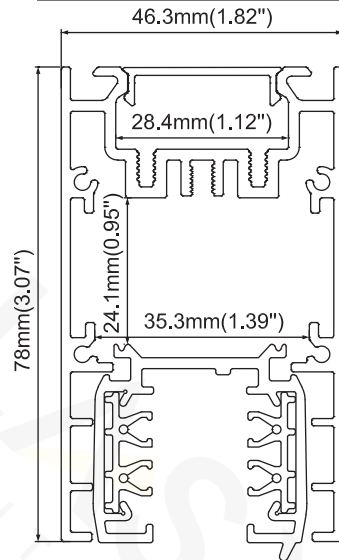

FINISH



Anod. aluminum



white



Black

END CAPS



End caps

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip  
(metal)



Safety wire



Connector X



TRACK



Steel wire



Connector T



Spot lighting  
(15° 24° 36°)



Clip



Connector L




Types of installation:



Material: Extruded aluminum  
Dimension: 59.8×78mm  
Length: MAX 6m




BLEIAP10299

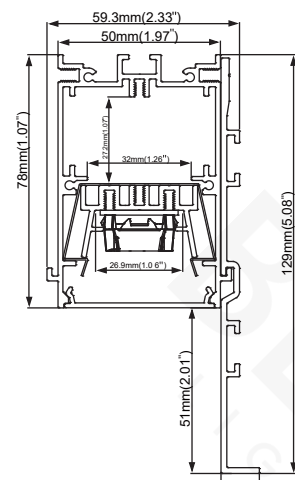

FINISH




Anod. aluminum white Black

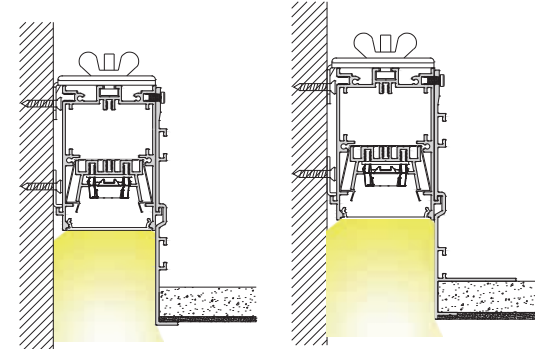

END CAPS



End caps



DIFFUSERS



PC clear



Linear Optics  
**LEDiL**

ACCESSORIES



Clip




Safety wire



Recessed Trim



Recessed Trimless

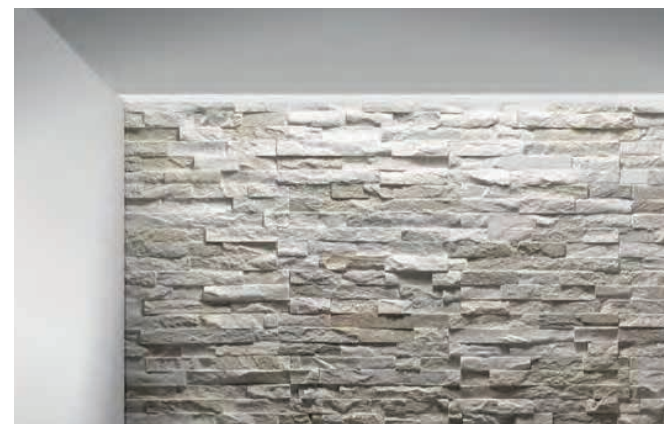


Types of installation:



Material: Extruded aluminum  
Dimension: 46.3×60mm  
Length: MAX.6m



BLEIAP10300

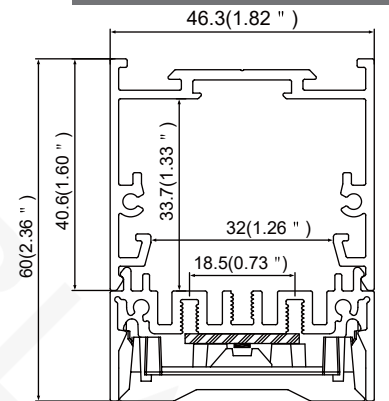

FINISH



Anod. aluminum white Black



END CAPS



End Caps

ACCESSORIES



VS lens



Connector L




Connector T



Connector I




Safety wire

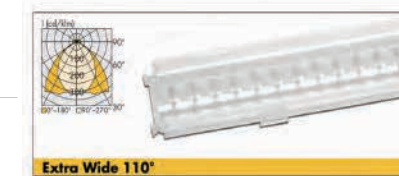

Extra Wide 110°




Wide 90°

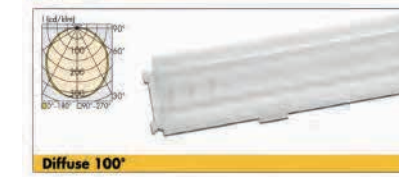

Diffuse 100°



Medium 60°

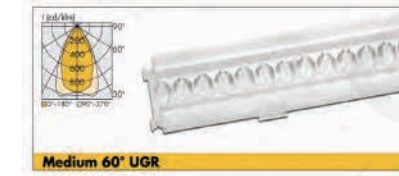

Medium 60° UGR



Narrow 30°



Retail SYM 1



Retail SYM 2




Retail ASYM

Types of installation:



Material:Extruded aluminum  
Dimension:55×80mm  
Length:MAX.6m

BLEIAP10301

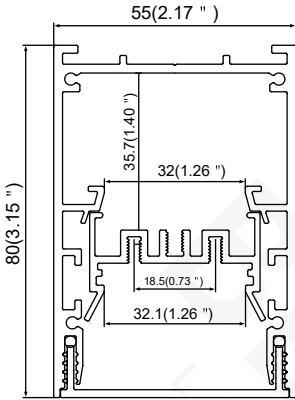

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Steel wire




Hanging clip

Types of installation:



Material:Extruded aluminum  
Dimension:79×80mm  
Length:MAX.6m

BLEIAP10302

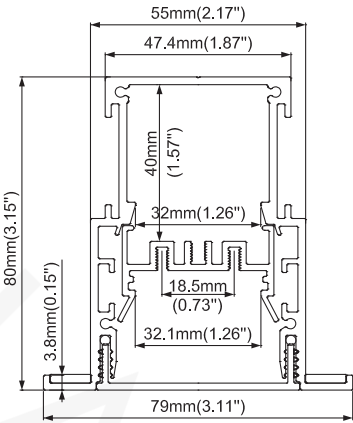

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip





Types of installation:







Material: Extruded aluminum  
Dimension: 25.4×25.4mm  
Length: MAX 6m



FINISH



white Black

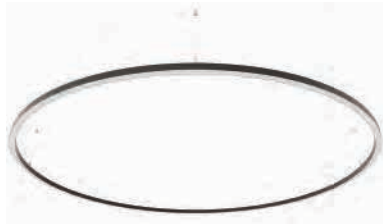

DIFFUSERS



PMMA frosted

ACCESSORIES




Connetor



Slider



Steel wire

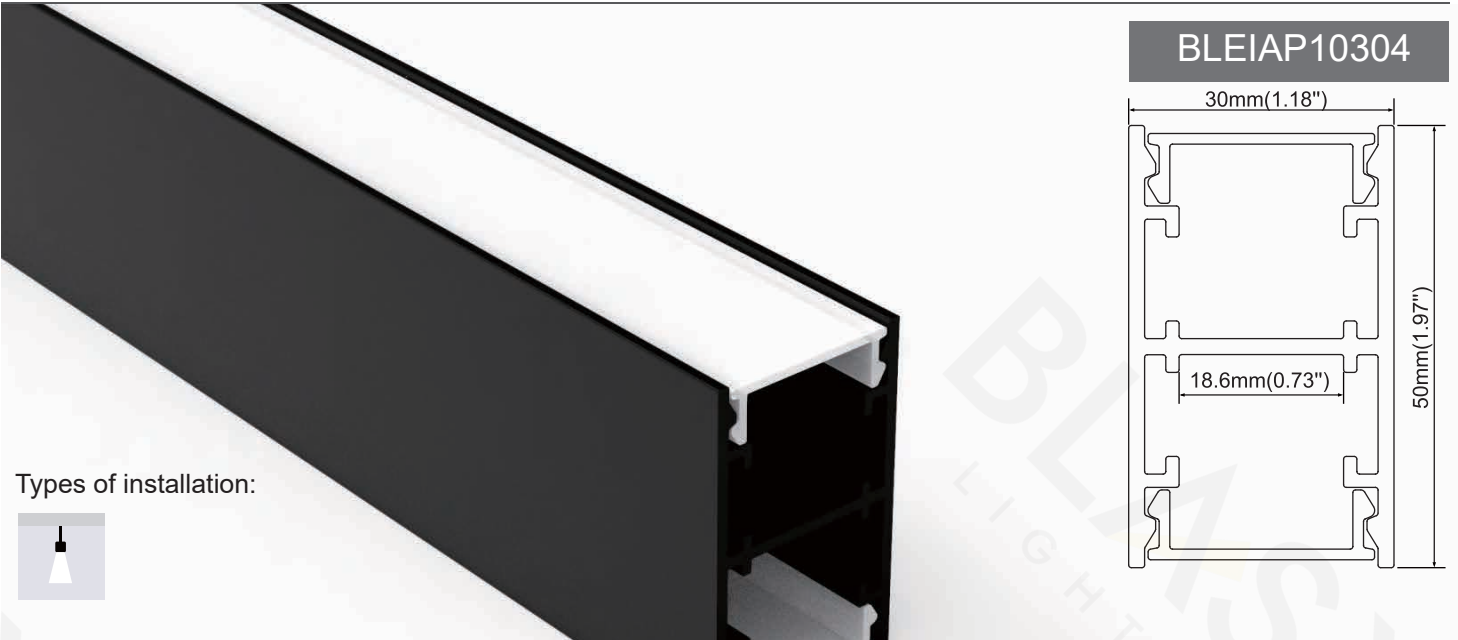

Types of installation:








Material: Extruded aluminum  
Dimension: 30×50mm  
Length: MAX 6m




FINISH



white Black



DIFFUSERS



PMMA frosted

ACCESSORIES



Hanging bracket



Connector



Steel wire



BLEIAP10305

53.6mm(2.11")

41.4mm(1.63")

50mm(1.97")

60.4mm(2.38")



IP20

FINISH




white

Black

Types of installation:



Material: Extruded aluminum  
Dimension: 53.6×60.4mm  
Length: MAX 6m



## DIFFUSERS



PMMA frosted

## ACCESSORIES




Hanging bracket




Connector



Steel wire



Step 01:  
Slide the U shape hanging  
clip into the profile

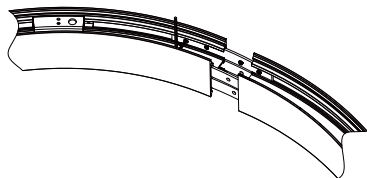


Step 02:  
Connecting the curved  
profile by connector




Step 03:  
Stick the led board inside  
the profile(down light)



Step 04:  
Press the curved cover into  
the profile(down light)




Step 05:  
Stick the led board inside  
the profile(up light)




Step 06:  
Lock the U shape clip




Step 07:  
Press the curved cover(after drilling  
the hole) into the profile(up light)



Step 08:  
Fix the U shape clip on  
suitable position by screws




Step 09:  
Hang the circle by the steel wire



Step 10:  
Connecting the driver

BLEIAP10306

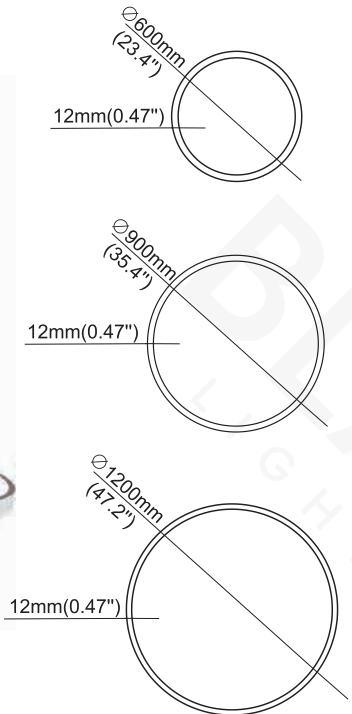

Types of installation:




Material: Extruded aluminum  
Dimension: 12×30mm  
Length: MAX 6m

FINISH



Black

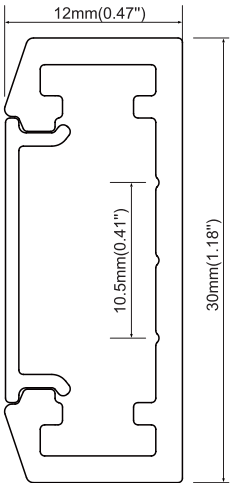

IP20

DIFFUSERS



PC diffused


ACCESSORIES



Steel wire



BLEIAP10307

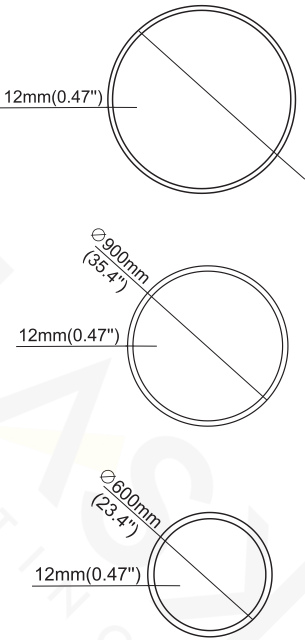

Types of installation:




Material: Extruded aluminum  
Dimension: 12×30mm  
Length: MAX 6m

FINISH



Black

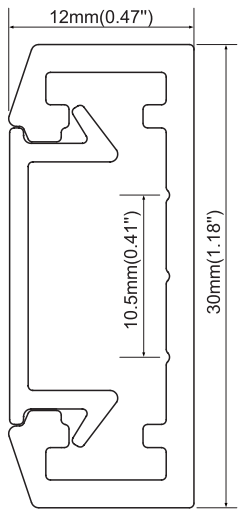

IP20

DIFFUSERS



PC diffused

ACCESSORIES




Steel wire





BLEIAP10308



Aluminum board for heat dissipation  
12x2mm  
about 14W/M

FINISH




Anod. aluminum



IP20

BLEIAP10309

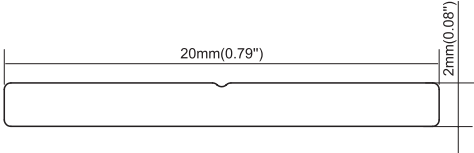

Aluminum board for heat dissipation  
20x2mm  
about 20W/M

FINISH




Anod. aluminum



IP20

BLEIAP10310

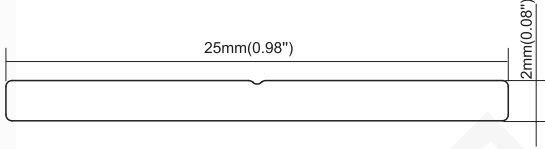

Aluminum board for heat dissipation  
25x2mm  
about 30W/M

FINISH



Anod. aluminum




IP20

Types of installation:



Material: Extruded aluminum  
Dimension: 50x50.3mm  
Length: MAX 6m

BLEIAP10311

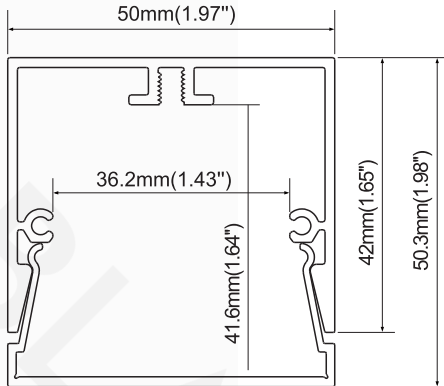

IP20

FINISH



Anod. aluminum



white




Black


END CAPS




End Caps




Step 01



Step 02



Step 03



Step 04




Step 05




### BLEIAP10312

Round driver box for circles

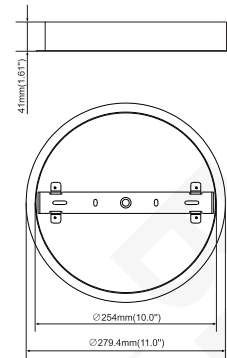


### BLEIAP10313

Round driver box for circles




### BLEIAP10314

Round driver box for circles



### BLEIAP10315



### Wieland COHESIVE PLUG SYSTEM

•For distribution and luminaire connection

## APPLICATIONS

The electrical connection of luminaires usually calls for the time-consuming method of opening the luminaire, dismantling and stripping the power supply and control cable, and, if applicable, inserting the illuminants on site. With pluggable pre-assembled luminaires, the effort required for on-site assembly can be reduced quite considerably.


## SOLUTIONS

- Industrially pre-assembled components.
- Easy to plug together on site.
- For mains application (3-pole) and DALI application (5-pole).
- Flexibility to the point in time of luminaire assembly: conventional connection or pluggable


## ADVANTAGES

- Fast, easy, and safe installation.
- Standardized interfaces for fast replacement.
- High functional reliability through prevention of mismatching.
- Simple adjustment of the installation to local conditions


LED Module For BLEIAP10036 SERIES


|                                                                                   | 600                                                                               | 900                                                                               | 1270                                                                               | 1800                                                                                |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Connection type                                                                   | 1/4 circle joining together                                                       | 1/8 circle joining together                                                       | 1/8 circle joining together                                                        | 1/8 circle joining together                                                         |
| Power(W)                                                                          | 7.2W                                                                              | 5.4W                                                                              | 7.2W                                                                               | 10.8W                                                                               |
| Input Voltage(V)                                                                  | 36V                                                                               | 36V                                                                               | 36V                                                                                | 36V                                                                                 |
| Input Current(mA)                                                                 | 200mA                                                                             | 150mA                                                                             | 200mA                                                                              | 300mA                                                                               |
| Light Output                                                                      | 1008lm                                                                            | 756lm                                                                             | 1008lm                                                                             | 1512lm                                                                              |
| Color Temperature                                                                 | 2700k/3000k/4000k/5700k                                                           | 2700k/3000k/4000k/5700k                                                           | 2700k/3000k/4000k/5700k                                                            | 2700k/3000k/4000k/5700k                                                             |
| CRI                                                                               | 80+/90+                                                                           | 80+/90+                                                                           | 80+/90+                                                                            | 80+/90+                                                                             |
| LED Type                                                                          | 2835 SMD LED                                                                      | 2835 SMD LED                                                                      | 2835 SMD LED                                                                       | 2835 SMD LED                                                                        |
| LED Brand                                                                         | Samsung/Osram                                                                     | Samsung/Osram                                                                     | Samsung/Osram                                                                      | Samsung/Osram                                                                       |

LED Module For BLEIAP10304 SERIES


|                                                                                     | 600                                                                                 | 900                                                                                 | 1200                                                                                | 1800                                                                                |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Connection type                                                                     | 1/4 circle joining together                                                         | 1/8 circle joining together                                                         | 1/8 circle joining together                                                         | 1/8 circle joining together                                                         |
| Power(W)                                                                            | 7.2W                                                                                | 5.4W                                                                                | 7.2W                                                                                | 10.8W                                                                               |
| Input Voltage(V)                                                                    | 36V                                                                                 | 36V                                                                                 | 36V                                                                                 | 36V                                                                                 |
| Input Current(mA)                                                                   | 200mA                                                                               | 150mA                                                                               | 200mA                                                                               | 300mA                                                                               |
| Light Output                                                                        | 1008lm                                                                              | 756lm                                                                               | 1008lm                                                                              | 1512lm                                                                              |
| Color Temperature                                                                   | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                             |
| CRI                                                                                 | 80+/90+                                                                             | 80+/90+                                                                             | 80+/90+                                                                             | 80+/90+                                                                             |
| LED Type                                                                            | 2835 SMD LED                                                                        | 2835 SMD LED                                                                        | 2835 SMD LED                                                                        | 2835 SMD LED                                                                        |
| LED Brand                                                                           | Samsung/Osram                                                                       | Samsung/Osram                                                                       | Samsung/Osram                                                                       | Samsung/Osram                                                                       |

LED Module For BLEIAP10305 SERIES

|                                                                                     | 900                                                                                 | 1270                                                                                 | 1800                                                                                  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Connection type                                                                     | 1/8 circle joining together                                                         | 1/8 circle joining together                                                          | 1/8 circle joining together                                                           |
| Power(W)                                                                            | 5.4W                                                                                | 8.1W                                                                                 | 10.8W                                                                                 |
| Input Voltage(V)                                                                    | 36V                                                                                 | 36V                                                                                  | 36V                                                                                   |
| Input Current(mA)                                                                   | 150mA                                                                               | 225mA                                                                                | 300mA                                                                                 |
| Light Output                                                                        | 756lm                                                                               | 1134lm                                                                               | 1512lm                                                                                |
| Color Temperature                                                                   | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                              | 2700k/3000k/4000k/5700k                                                               |
| CRI                                                                                 | 80+/90+                                                                             | 80+/90+                                                                              | 80+/90+                                                                               |
| LED Type                                                                            | 2835 SMD LED                                                                        | 2835 SMD LED                                                                         | 2835 SMD LED                                                                          |
| LED Brand                                                                           | Samsung/Osram                                                                       | Samsung/Osram                                                                        | Samsung/Osram                                                                         |

|                                                                                       | BLEILS10316                                                                           | BLEILS10317                                                                           | BLEILS10318                                                                           |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Size(mm)                                                                              | 1000×12×5                                                                             | 995×24×6                                                                              | 1185×24×6                                                                             |
| Power(W)                                                                              | 30W                                                                                   | 30W                                                                                   | 40W                                                                                   |
| Input Voltage(V)                                                                      | 30V                                                                                   | 30V                                                                                   | 27V                                                                                   |
| Input Current(mA)                                                                     | 1.0A                                                                                  | 1.0A                                                                                  | 1.5A                                                                                  |
| Light Output                                                                          | 4200lm                                                                                | 4200lm                                                                                | 5600lm                                                                                |
| Color Temperature                                                                     | 2700k/3000k/4000k/5700k                                                               | 2700k/3000k/4000k/5700k                                                               | 2700k/3000k/4000k/5700k                                                               |
| CRI                                                                                   | 80+/90+                                                                               | 80+/90+                                                                               | 80+/90+                                                                               |
| LED Type                                                                              | 2835 SMD LED                                                                          | 2835 SMD LED                                                                          | 5630 SMD LED                                                                          |
| LED Brand                                                                             | Samsung/Osram                                                                         | Samsung/Osram                                                                         | Samsung/Osram                                                                         |



|                   | FOR BLEIAP10250                                                                   | FOR BLEIAP10251                                                                   | FOR BLEIAP10256                                                                     |
|-------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                   |  |  |  |
| Size (mm)         | 132.5X20X6mm                                                                      | 190X30X6                                                                          | 285X31X6mm                                                                          |
| Power(W)          | 6W                                                                                | 9W                                                                                | 14W                                                                                 |
| Input Voltage(V)  | 15V                                                                               | 15V                                                                               | 18V                                                                                 |
| Input Current(mA) | 0.4A                                                                              | 0.6A                                                                              | 0.8A                                                                                |
| Light Output      | 660lm                                                                             | 990lm                                                                             | 1260lm                                                                              |
| Color Temperature | 3000K/4000k                                                                       | 3000K/4000k                                                                       | 3000K/4000k                                                                         |
| CRI               | 80+/90+                                                                           | 80+/90+                                                                           | 80+/90+                                                                             |
| LED Type          | 3030 SMD LED                                                                      | 3030 SMD LED                                                                      | 3030 SMD LED                                                                        |
| LED Brand         | Osram                                                                             | Osram                                                                             | Osram                                                                               |

LED Module: For BLEIAP10232, BLEIAP10233

|                   |  |  |
|-------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Size (mm)         | 280X30X6                                                                            | 1140X30X6                                                                            |
| Power(W)          | 7.2W                                                                                | 29W                                                                                  |
| Input Voltage(V)  | 42V                                                                                 | 42V                                                                                  |
| Input Current(mA) | 0.175A                                                                              | 0.7A                                                                                 |
| Light Output      | 1000lm                                                                              | 4060lm                                                                               |
| Color Temperature | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                              |
| CRI               | 80+/90+                                                                             | 80+/90+                                                                              |
| LED Type          | 2835 SMD LED                                                                        | 2835 SMD LED                                                                         |
| LED Brand         | Samsung/Osram                                                                       | Samsung/Osram                                                                        |

LED Module: Rigid Board

|                   | BLEIRB10319                                                                         | BLEIRB10320                                                                         | BLEIRB10321                                                                         |
|-------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                   |  |  |  |
| Size              | 560*24*5mm                                                                          | 560*51.5*5mm                                                                        | 560*68.5*5mm                                                                        |
| Power             | 14W                                                                                 | 21W                                                                                 | 27W                                                                                 |
| Light Output      | 1980lm                                                                              | 2950lm                                                                              | 3900lm                                                                              |
| CRI               | 80+/90+                                                                             | 80+/90+                                                                             | 80+/90+                                                                             |
| Color temperature | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                             |
| LED Brand         | Samsung/Osram                                                                       | Samsung/Osram                                                                       | Samsung/Osram                                                                       |

LED Module: Flexible PCB

|                    | BLEIFPCB10322                                                                       | BLEIFPCB10323                                                                       | BLEIFPCB10324                                                                       |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                    |  |  |  |
| Size               | 5000*12* 1.2mm                                                                      | 2500*24*1.2mm                                                                       | 2500*51.5*1.2mm                                                                     |
| Power/meter        | 14W                                                                                 | 28W                                                                                 | 34W                                                                                 |
| Light Output/meter | 1190lm                                                                              | 2380lm                                                                              | 2890lm                                                                              |
| CRI                | 80+/90+                                                                             | 80+/90+                                                                             | 80+/90+                                                                             |
| Color temperature  | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                             | 2700k/3000k/4000k/5700k                                                             |
| Voltage input      | DC24V                                                                               | DC24V                                                                               | DC24V                                                                               |
| Cutting unit       | 100mm                                                                               | 100mm                                                                               | 100mm                                                                               |
| LED Brand          | Samsung/Osram                                                                       | Samsung/Osram                                                                       | Samsung/Osram                                                                       |

Constant Voltage Driver

|                    |  |  |  |  |
|--------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Input Voltage(V)   | 220V-240V                                                                             | 220-240V                                                                              | 220-240V                                                                              | 220V-240V                                                                             |
| Output Voltage(V)  | 24V                                                                                   | 24V                                                                                   | 24V                                                                                   | 24V                                                                                   |
| Output Current(mA) | 0-1.25A                                                                               | 0-2.5A                                                                                | 0-3.3A                                                                                | 0-8.3A                                                                                |
| Power Max          | 30W                                                                                   | 60W                                                                                   | 80W                                                                                   | 200W                                                                                  |
| Efficiency         | 88%                                                                                   | 88%                                                                                   | 88%                                                                                   | 88%                                                                                   |
| Power Factor       | ≥0.95                                                                                 | ≥0.95                                                                                 | ≥0.95                                                                                 | ≥0.95                                                                                 |
| Size (mm)          | 210x30x21                                                                             | 280x30x21                                                                             | 280x30x21                                                                             | 360x37x30                                                                             |

Constant Current Driver-Osram

|             |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <div></div> |  |  |  |  |
|             | Voltage input                                                                     | 220-240VAC                                                                        | 220-240VAC                                                                         | 220-240VAC                                                                          |
|             | Voltage output                                                                    | 23-51VDC                                                                          | 23-51VDC                                                                           | 23-54VDC                                                                            |
|             | Current output                                                                    | 200mA/250mA/300mA/350mA                                                           | 500mA/600mA/700mA/800mA                                                            | 900mA/1050mA/1100mA/1200mA                                                          |
|             | Power Max                                                                         | 17.8W                                                                             | 40.8W                                                                              | 64.8W                                                                               |
|             | Efficacy                                                                          | 84%                                                                               | 85%                                                                                | 87%                                                                                 |
|             | PF                                                                                | 0.98                                                                              | 0.98                                                                               | 0.98                                                                                |
|             | Size                                                                              | 210×30×21                                                                         | 210×30×21                                                                          | 210×30×21                                                                           |

Constant Current Driver-Philips

|             |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <div></div> | <b>36W Non-dimmable</b>                                                             | <b>75W Non-dimmable</b>                                                             | <b>36W DALI</b>                                                                      | <b>75W DALI</b>                                                                       |
|             |  |  |  |  |
|             | Part Number                                                                         | Xitanium 36W/0.3-1A,54V,230V                                                        | Xitanium 75W/0.7-2A, 54V 230V                                                        | Xitanium 36W 0.3-1A,54V TD 230V                                                       |
|             | Size (mm)                                                                           | 360x30x21                                                                           | 360x30x21                                                                            | 360x30x21                                                                             |
|             | Input Voltage(V)                                                                    | 202-254V                                                                            | 202-254V                                                                             | 202-254V                                                                              |
|             | Power Factor                                                                        | ≥0.9                                                                                | ≥0.9                                                                                 | ≥0.9                                                                                  |
|             | Output Current(mA)                                                                  | 300-1000                                                                            | 700-2000                                                                             | 300-1000                                                                              |
|             | Output Voltage(V)                                                                   | 27-54V                                                                              | 27-54V                                                                               | 27-54V                                                                                |

|                       |       |       |       |       |
|-----------------------|-------|-------|-------|-------|
| Output Power Range(W) | 11-37 | 21-75 | 11-37 | 21-75 |
| Maximum Power(W)      | 36    | 75    | 36    | 75    |