OUTDOOR

LIGHT

VOL V

BLASK LIGHTING

WWW.BLASKLIGHTING.COM

Surface Mounted Light Series

Excellent thermal management

Efficient Spherolit technology

TRIAC DIMMING TRIAC dimming

Different light distributions

Protection Class

1-10V DIMMING 1-10V dimming

Different light colours

NON DIMMABLE Non dimmable

DALI DIMMING DALI dimming





Honey combcover

JHLWLO90022

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	30°/40°/50°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	950lm
Size	Ø65*H114mm

IP65 F LIFE 25000



Honey combcover

JHLWLO90024

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	16/°24°/45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	32W
Flux(lm)	3000lm
Size	Ø155*H166mm

IP65 F LIFE 25000



Honey combcover

JHLWLO90023

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	24°/36°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	1650lm
Size	Ø126*H121mm

IP65 F LIFE 25000

Honey combcover



JHLWLO90025

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	24°/33°/45°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	10W
Flux(lm)	880lm
Size	L85*W85*H130mm

IP65 F LIFE 25000

Honey combcover



JHLWLO90026

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	24°/36°/55°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	1800lm
Size	L125*W125*H150mm

IP65 F LIFE 25000

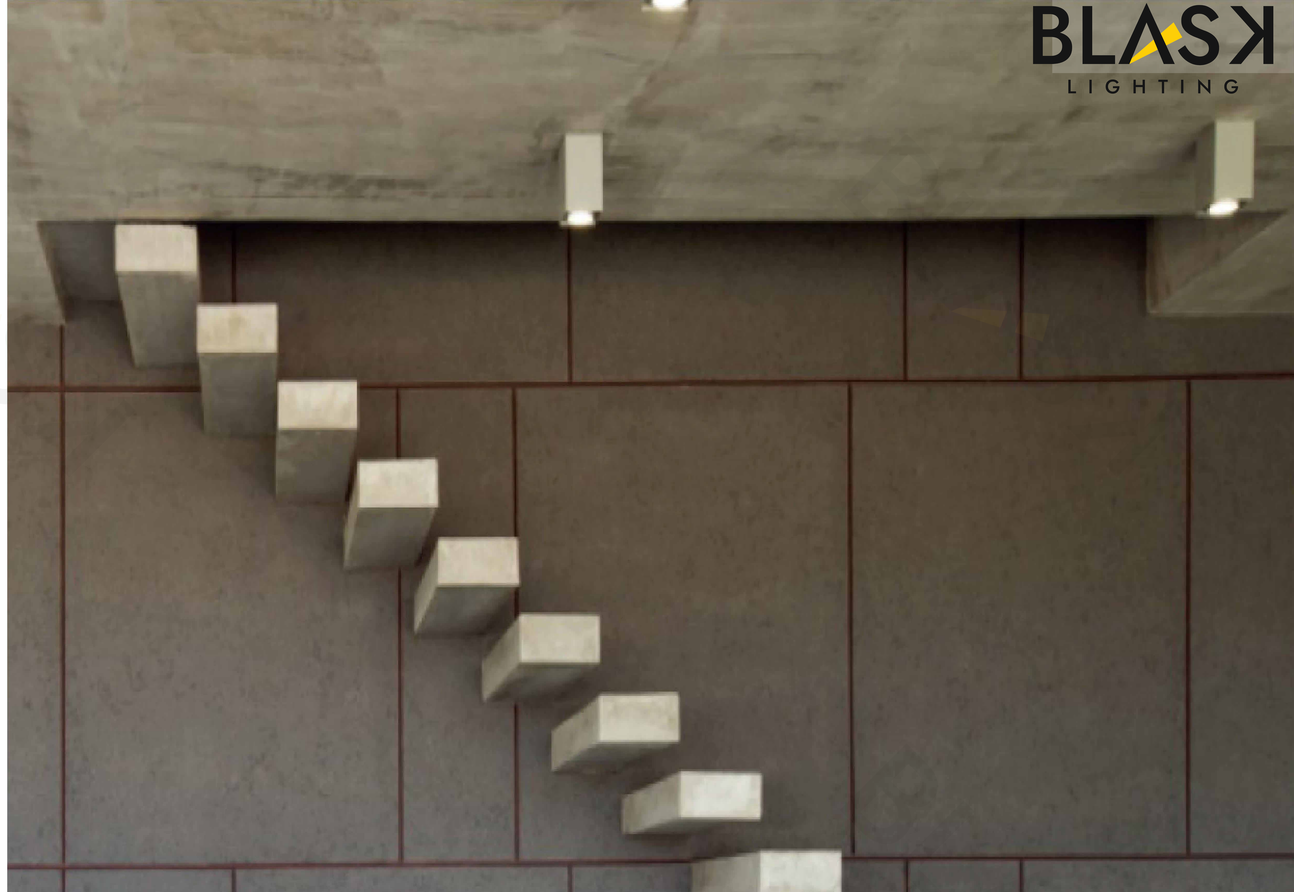



JHLCLO90018

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	24°/36°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	950lm
Size	Ø73*H108mm

IP65 F LIFE 25000



JHLCLO90019

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	25W
Flux(lm)	1877lm
Size	Ø115*H154mm

IP65 F LIFE 25000

JHLCLO90020

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	30W
Flux(lm)	2251lm
Size	Ø138*H164mm

IP65 F LIFE 25000



JHLCLO90021

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	50W
Flux(lm)	4286lm
Size	Ø170*H180mm

IP65 F LIFE 25000

Wall Light Series

Excellent thermal management

Efficient Spherolit technology

1-10V DIMMING 1-10V dimming

Different light distribu-tions

Protection Class IP65!

DALI DIMMING DALI dimming

Different light colours

NON DIMMABLE Non dimmable



JHLWLO90033

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	16°/30°/40°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	900lm
Size	L83*W65*H110mm

IP65 F LIFE 25000



JHLWLO90035

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	12°/22°/32°/45°/65°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	1900lm
Size	L115*W90*H169mm

IP65 F LIFE 25000



JHLWLO90034

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	16°/30°/40°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	2*7W
Flux(lm)	1200lm
Size	L83*W65*H165mm

IP65 F LIFE 25000



JHLWLO90036

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	12°/22°/32°/45°/65°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	2*10W
Flux(lm)	2*1000lm
Size	L115*W90*H210mm

IP65 F LIFE 25000



JHLWLO90037

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	24°/36°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	1650lm
Size	L154*W126*H121mm

IP65 F LIFE 25000



JHLWLO90038

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	16°/24°/45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	40W
Flux(lm)	3200lm
Size	L216*W155*H166mm

IP65 F LIFE 25000



JHLWLO90039

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15°/22°/32°/45°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	10W
Flux(lm)	1000lm
Size	L110*W85*H110mm

IP65 F LIFE 25000



JHLWLO90041

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	22°/38°/55°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	800lm
Size	L150*W125*H125mm

IP65 F LIFE 25000



JHLWLO90040

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15°/22°/32°/45°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	2*10W
Flux(lm)	2000lm
Size	L110*W85*H180mm

IP65 F LIFE 25000

JHLWLO90027

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	24°/36°/50°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6W
Flux(lm)	450lm
Size	L125*W46*H121mm







JHLWLO90028

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	24°/36°/50°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6W
Flux(lm)	450lm
Size	L125*W46*H341mm





JHLWLO90029

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	16°/28°/36°/50°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	800lm
Size	L147*W65*H217mm

IP65 F LIFE 25000





JHLWLO90030

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	16°/28°/36°/50°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	800lm
Size	L148*W65*H348mm

IP65 F LIFE 25000

Honeycomb
蜂巢

Flat Cap
平口遮光罩



JHLWLO90031

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	20°/24°/38°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	1600lm
Size	L178.5*W90*H267mm

IP65 F LIFE 25000

Honeycomb
蜂巢

Flat Cap
平口遮光罩





JHLWLO90032

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	20°/24°/38°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	1600lm
Size	L178.5*W90*H467mm

IP65 F LIFE 25000

Flood Light Series



JHLFLO90042

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15°/22°/32°/45°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	10W
Flux(lm)	1000lm
Size	L85*W85*H150mm

IP65 LIFE 25000





JHLFLO90043

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	12°/22°/38°/55°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	1800lm
Size	L125*W125*H212mm

IP65 LIFE 25000



JHLFLO90044

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	4*3W
Flux(lm)	1440lm
Size	L70*W66*H103mm

IP65 LIFE 25000



JHLFLO90045

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3*2W
Flux(lm)	720lm
Size	L71*W96*H103mm

IP65 LIFE 25000



JHLFLO90046

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6*2W
Flux(lm)	1440lm
Size	L98*W66*H103mm

IP65 LIFE 25000



JHLFLO90047

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6*2W
Flux(lm)	1440lm
Size	L101*W96*H103mm

IP65 LIFE 25000



JHLFLO90048

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	9*2W
Flux(lm)	2160lm
Size	L112*W73*H153mm

IP65 LIFE 25000



JHLFLO90049

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6*2W
Flux(lm)	1440lm
Size	L113*W105*H154mm

IP65 LIFE 25000



JHLFLO90050

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12*2W
Flux(lm)	2880lm
Size	L140*W73*H192mm

IP65 LIFE 25000



JHLFLO90051

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12*2W
Flux(lm)	2880lm
Size	L141*W110*H193mm

IP65 LIFE 25000



JHLFLO90052

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18*2W
Flux(lm)	4320lm
Size	L170*W76*H220mm

IP65 F LIFE 25000



JHLFLO90053

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18*2W
Flux(lm)	4320lm
Size	L172*W140*H222mm

IP65 F LIFE 25000



JHLFLO90054

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	24*2W
Flux(lm)	5760lm
Size	L200*W83*H250mm

IP65 F LIFE 25000



JHLFLO90055

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	36W
Flux(lm)	4320lm
Size	L202*W140*H252mm

IP65 F LIFE 25000



JHLFLO90056

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	54W
Flux(lm)	6480lm
Size	L238*W90*H305mm

IP65 F LIFE 25000



JHLFLO90058

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6W
Flux(lm)	720lm
Size	L135*W110*H150mm

IP65 F LIFE 25000



JHLFLO90057

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	48W
Flux(lm)	5760lm
Size	L240*W157*H307mm

IP65 F LIFE 25000



JHLFLO90059

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6W
Flux(lm)	720lm
Size	L135*W140*H150mm

IP65 F LIFE 25000



JHLFLO90060

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1440lm
Size	L160*W115*H180mm

IP65 F LIFE 25000

JHLFLO90061

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1440lm
Size	L160*W170*H180mm

IP65 F LIFE 25000



JHLFLO90062

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18*2W
Flux(lm)	4320lm
Size	L205*W130*H230mm

IP65 F LIFE 25000



JHLFLO90063

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18*2W
Flux(lm)	4320lm
Size	L205*W190*H230mm

IP65 F LIFE 25000



JHLFLO90060

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1440lm
Size	L160*W115*H180mm

IP65 F LIFE 25000

JHLFLO90061

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1440lm
Size	L160*W170*H180mm

IP65 F LIFE 25000



JHLFLO90062

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18*2W
Flux(lm)	4320lm
Size	L205*W130*H230mm

IP65 F LIFE 25000



JHLFLO90063

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18*2W
Flux(lm)	4320lm
Size	L205*W190*H230mm

IP65 F LIFE 25000



JHLFLO90064

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	24*2W
Flux(lm)	5760lm
Size	L235*W135*H260mm

IP65 F LIFE 25000

JHLFLO90065

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	24*2W
Flux(lm)	5760lm
Size	L235*W210*H260mm

IP65 F LIFE 25000



JHLFLO90066

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	36*2W
Flux(lm)	8640lm
Size	L265*W140*H290mm

IP65 F LIFE 25000



JHLFLO90067

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	36*2W
Flux(lm)	8640lm
Size	L265*W215*H290mm

IP65 F LIFE 25000



JHLFLO90068

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	54*2W
Flux(lm)	12960lm
Size	L325*W170*H330mm

IP65 F LIFE 25000

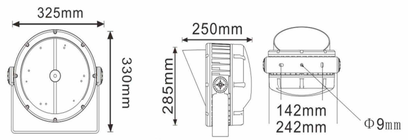

JHLFLO90069

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10*60°/5°/10°/15°/30°/45°/60°/90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	54*2W
Flux(lm)	12960lm
Size	L325*W250*H330mm

IP65 F LIFE 25000



JHLCLO90103

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	120°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	0.5W
Flux(lm)	33lm
Cutout	Ø18mm
Size	W20*H38mm

IP67 F LIFE 25000

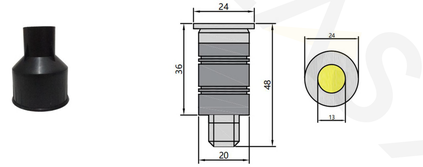

JHLCLO90104

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1W
Flux(lm)	65lm
Cutout	Ø22mm
Size	W24*H48mm

IP67 F LIFE 25000

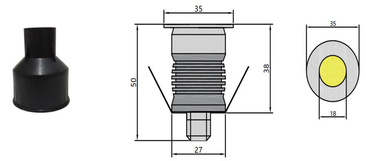

JHLCLO90105

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1W
Flux(lm)	65lm
Cutout	Ø30mm
Size	W35*H50mm

IP67 F LIFE 25000

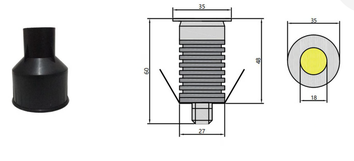

JHLCLO90106

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø30mm
Size	W35*H60mm

IP67 F LIFE 25000



JHLCLO90107

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	120°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	5W
Flux(lm)	325lm
Cutout	Ø36mm
Size	W48*H58mm



JHLCLO90108

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	15°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1W
Flux(lm)	65lm
Cutout	Ø32mm
Size	W35*H56mm



JHLCLO90109

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	15°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø36mm
Size	W48*H57mm



JHLCLO90110

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	10°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1W
Flux(lm)	65lm
Cutout	Ø32mm
Size	W35*H56mm



JHLCLO90111

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	10°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø36mm
Size	W48*H57mm

IP67 F LIFE 25000



JHLCLO90112

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1W
Flux(lm)	65lm
Cutout	Ø30mm
Size	W38*H50mm

IP67 F LIFE 25000



JHLCLO90113

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1W
Flux(lm)	65lm
Cutout	Ø30mm
Size	W35*H46mm

IP67 F LIFE 25000



JHLCLO90114

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	30°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	5W
Flux(lm)	325lm
Cutout	Ø36mm
Size	W48*H57mm

IP67 F LIFE 25000



JHLCLO90115

Material	Stainless steel+Aluminium
Input	DC24V
Beam Angle	30°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø36mm
Size	W48*H57mm

IP67 F LIFE 25000



JHLCLO90116

Material	Stainless steel
Input	DC24V
Beam Angle	15°/30°/45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3*2W
Flux(lm)	390lm
Cutout	Ø126mm
Size	Ø120*116mm

IP67 F LIFE 25000



JHLCLO90117

Material	Stainless steel
Input	DC24V
Beam Angle	15°/30°/45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	7*2W
Flux(lm)	910lm
Cutout	Ø150mm
Size	Ø150*116mm

IP67 F LIFE 25000

Underwater Light Series



JHLCLO90118

Material	Stainless steel
Input	DC24V
Beam Angle	15°/30°/45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3*2W
Flux(lm)	480lm
Cutout	Ø125mm
Size	Ø120*115mm



JHLCLO90119

Material	Stainless steel
Input	DC24V
Beam Angle	15°/30°/45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	7*2W
Flux(lm)	1120lm
Cutout	Ø150mm
Size	Ø150*115mm



JHLCLO90120

Material	Stainless steel
Input	DC24V
Beam Angle	15°/30°/45°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12*2W
Flux(lm)	1920lm
Cutout	Ø180mm
Size	Ø180*115mm



JHLCLO90121

Material	Stainless steel
Input	DC24V
Beam Angle	10°/25°/40°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6*1W
Flux(lm)	480lm
Cutout	Ø118mm
Size	Ø130*108mm



JHLCLO90122

Material	Stainless steel
Input	DC24V
Beam Angle	13°/23°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1*5W
Flux(lm)	400lm
Cutout	Ø56mm
Size	Ø62*90mm

IP68 F LIFE 25000



JHLCLO90124

Material	Stainless steel
Input	DC24V
Beam Angle	13°/23°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1*7W
Flux(lm)	560lm
Size	Ø80*97*125mm

IP68 F LIFE 25000



JHLCLO90123

Material	Stainless steel
Input	DC24V
Beam Angle	40°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1*3W
Flux(lm)	240lm
Size	Ø49.5*70*50mm

IP68 F LIFE 25000

Step Light Series



JHLFLO90070

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø175*38*50mm
Size	L185*W40*H48mm

IP65 LIFE 25000



JHLFLO90071

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø175*38*50mm
Size	L185*W40*H48mm

IP65 LIFE 25000



JHLFLO90072

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	2.5W
Flux(lm)	165lm
Cutout	Ø80*80mm
Size	L86*W86*H30mm

IP65 LIFE 25000



JHLFLO90073

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	10°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	2.5W
Flux(lm)	165lm
Cutout	Ø80*80mm
Size	L86*W86*H30mm

IP65 LIFE 25000

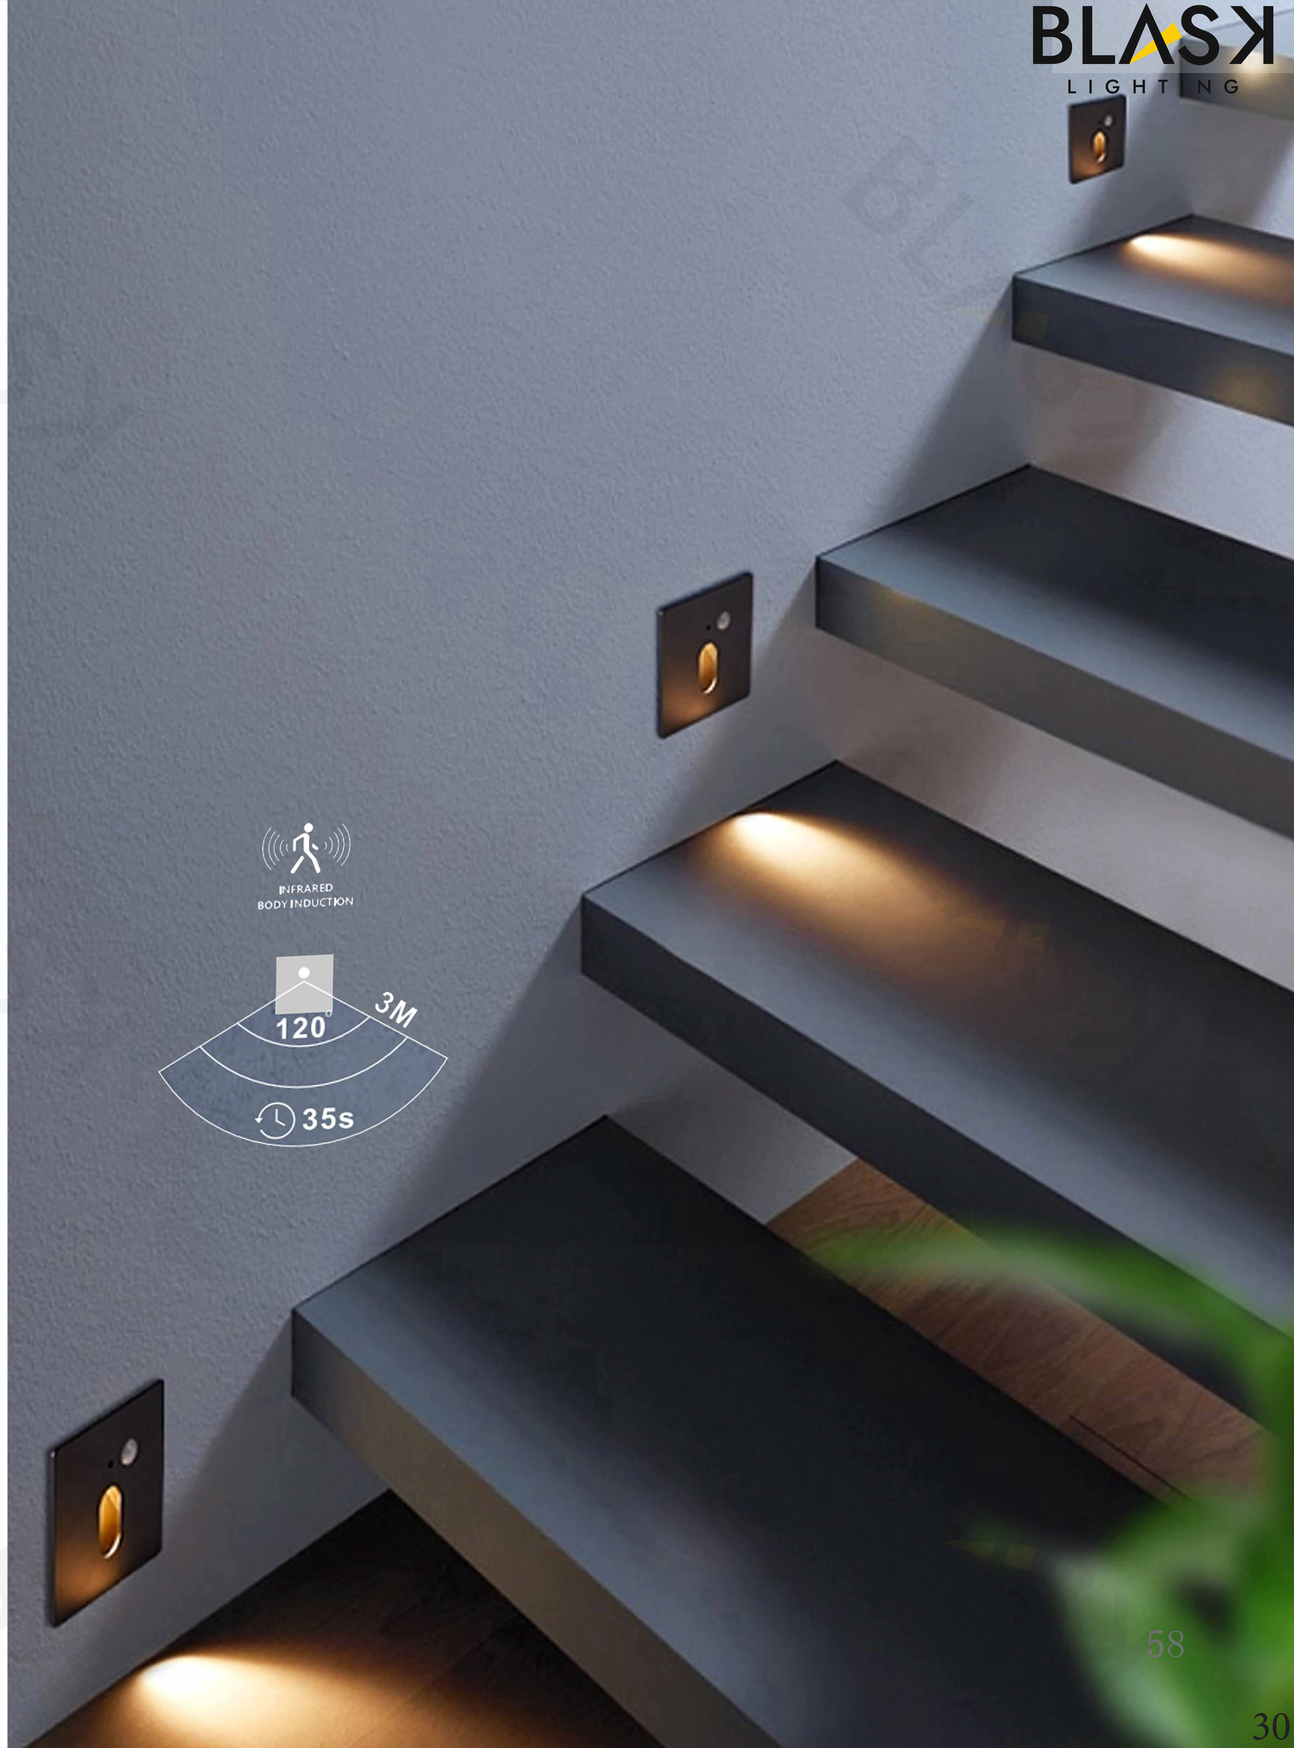





JHLFLO90074

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø140*68mm
Size	L145*W70*H50mm



JHLFLO90076

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø100*159mm
Size	L100*W162*H65mm



JHLFLO90075

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø160*100mm
Size	L165*W105*H65mm



JHLFLO90080

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	2W
Flux(lm)	130lm
Cutout	Ø80*80mm
Size	L85*W85*H50mm



JHLFLO90081

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	2W
Flux(lm)	130lm
Cutout	Ø80*80mm
Size	L85*W85*H50mm



JHLFLO90086

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Size	W177*H33mm

IP65 F LIFE 25000



JHLFLO90087

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6W
Flux(lm)	390lm
Size	W200*H33mm

IP65 F LIFE 25000



JHLFLO90088

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Size	W117*H33mm

IP65 F LIFE 25000



JHLFLO90089

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6W
Flux(lm)	390lm
Size	W200*H33mm

IP65 F LIFE 25000



JHLFLO90079

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø75*75*35mm
Size	L85*W85*H50mm



JHLFLO90078

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø75*75*35mm
Size	L85*W85*H45mm





JHLFLO90077

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	1W
Flux(lm)	65lm
Cutout	Ø40*40mm
Size	L58*W58*H50mm





JHLFLO90082

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø95*50mm
Size	L105*W60*H40mm

IP65 F LIFE 25000



JHLFLO90083

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	3W
Flux(lm)	195lm
Cutout	Ø95*50mm
Size	L105*W60*H40mm

IP65 F LIFE 25000



JHLFLO90084

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	6W
Flux(lm)	390m
Cutout	Ø200*55mm
Size	L210*W65*H40mm

IP65 F LIFE 25000



JHLFLO90085

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	90°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	2W
Flux(lm)	130lm
Cutout	Ø200*55mm
Size	L210*W65*H40mm

IP65 F LIFE 25000

BLASK LIGHTING



JHLFLO90092

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	10W
Flux(lm)	850lm
Size	W160*L54*H300mm

IP65 F LIFE 25000



JHLFLO90093

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	10W
Flux(lm)	850lm
Size	W160*L54*H600mm

IP65 F LIFE 25000



JHLFLO90094

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1020lm
Size	Ø150*13*H300mm

IP65 LIFE 25000



JHLFLO90095

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1020lm
Size	Ø150*13*H600mm

IP65 LIFE 25000



JHLFLO90096

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	7W
Flux(lm)	595lm
Size	Ø90*H300mm

IP65 LIFE 25000



JHLFLO90097

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	7W
Flux(lm)	595lm
Size	Ø90*H600mm

IP65 LIFE 25000



JHLFLO90090

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1020lm
Size	W120*L120*H300mm

IP65 LIFE 25000



JHLFLO90100

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	7W
Flux(lm)	595lm
Size	Ø605*440*H640mm

IP65 LIFE 25000



JHLFLO90091

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1020lm
Size	W120*L120*H600mm

IP65 LIFE 25000



JHLFLO90101

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1020lm
Size	Ø165*H600mm

IP65 LIFE 25000



JHLFLO90098

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	7W
Flux(lm)	595lm
Size	Ø95*H600mm

IP65 LIFE 25000



JHLFLO90102

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	10W
Flux(lm)	850lm
Size	W160*L55*H600mm

IP65 LIFE 25000



JHLFLO90099

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	/°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	7W
Flux(lm)	595lm
Size	115*72*H600mm

IP65 LIFE 25000

Ceiling Light Series

Excellent thermal management

Installation of embedded arc port

NON DIMMABLE Non dimmable

DALI DIMMING DALI dimming

Different light distributions

Efficient Spherolit technology

TRIAC DIMMING TRIAC dimming

Different light colours

Protection Class IP54

1-10V DIMMING 1-10V dimming



JHLCLO90001

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	50°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	10W
Flux(lm)	850lm
Cutout	Ø95mm
Size	Ø110*H61mm



JHLCLO90002

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	50°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	14W
Flux(lm)	1050lm
Cutout	Ø120mm
Size	Ø135*H70mm

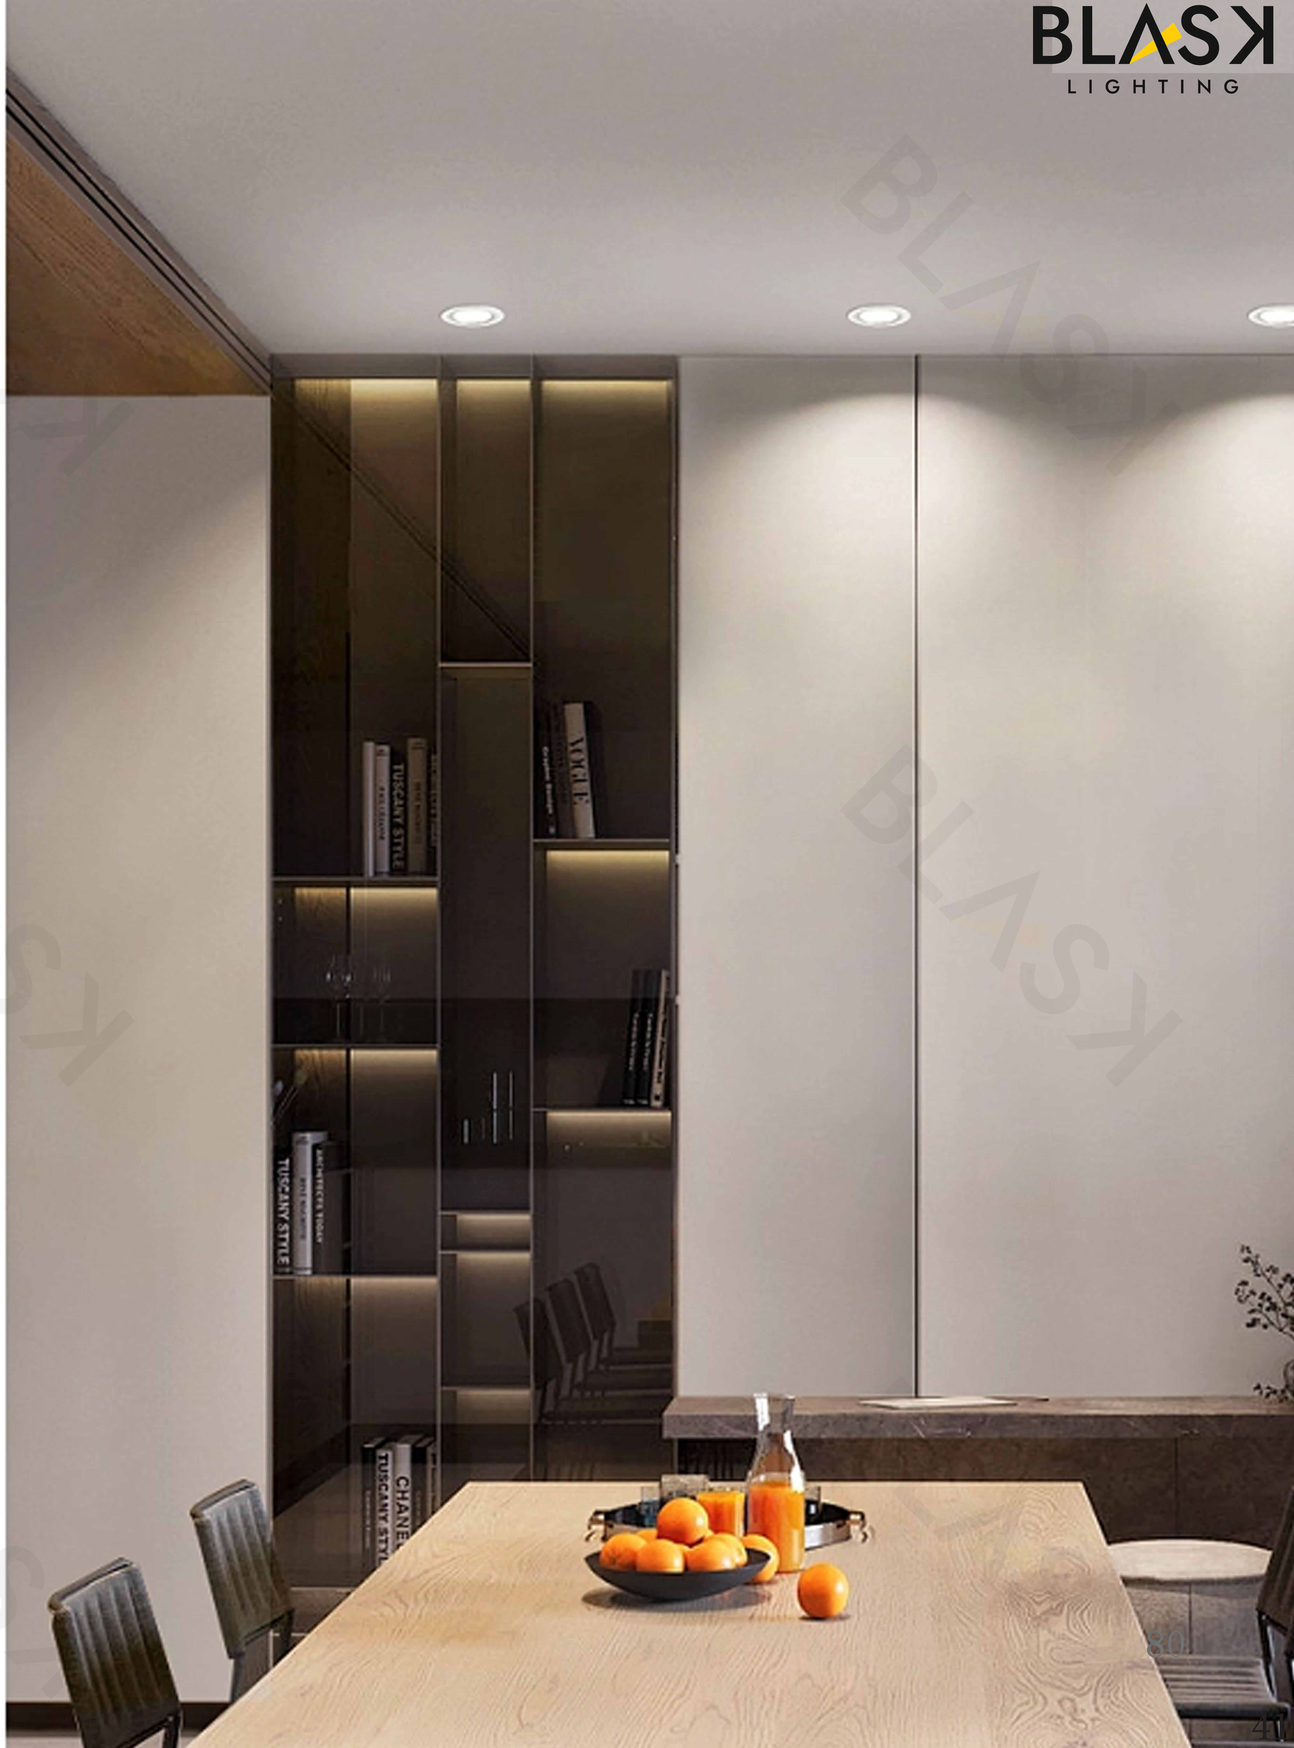



JHLCLO90003

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	55°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18W
Flux(lm)	1800lm
Cutout	Ø140mm
Size	Ø160*H75mm

IP54 LIFE 25000



JHLCLO90005

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	55°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	44W
Flux(lm)	3850lm
Cutout	Ø205mm
Size	Ø240*H116mm

IP54 LIFE 25000



JHLCLO90004

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	55°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	28W
Flux(lm)	2500lm
Cutout	Ø165mm
Size	Ø186*H100mm

IP54 LIFE 25000



JHLCLO90006

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	26° 36°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	900lm
Cutout	Ø85mm
Size	Ø90*H80mm



JHLCLO90007

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	24° 40°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	20W
Flux(lm)	1600lm
Cutout	Ø100mm
Size	Ø115*H98mm



JHLCLO90008

Material	Die-casting Aluminum
Input	AC220-240V, 50-60Hz
Beam Angle	24° 40°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	32W
Flux(lm)	2500lm
Cutout	Ø125mm
Size	Ø140*H126mm

IP65 LIFE 25000

Convenient for dismantling the surface ring

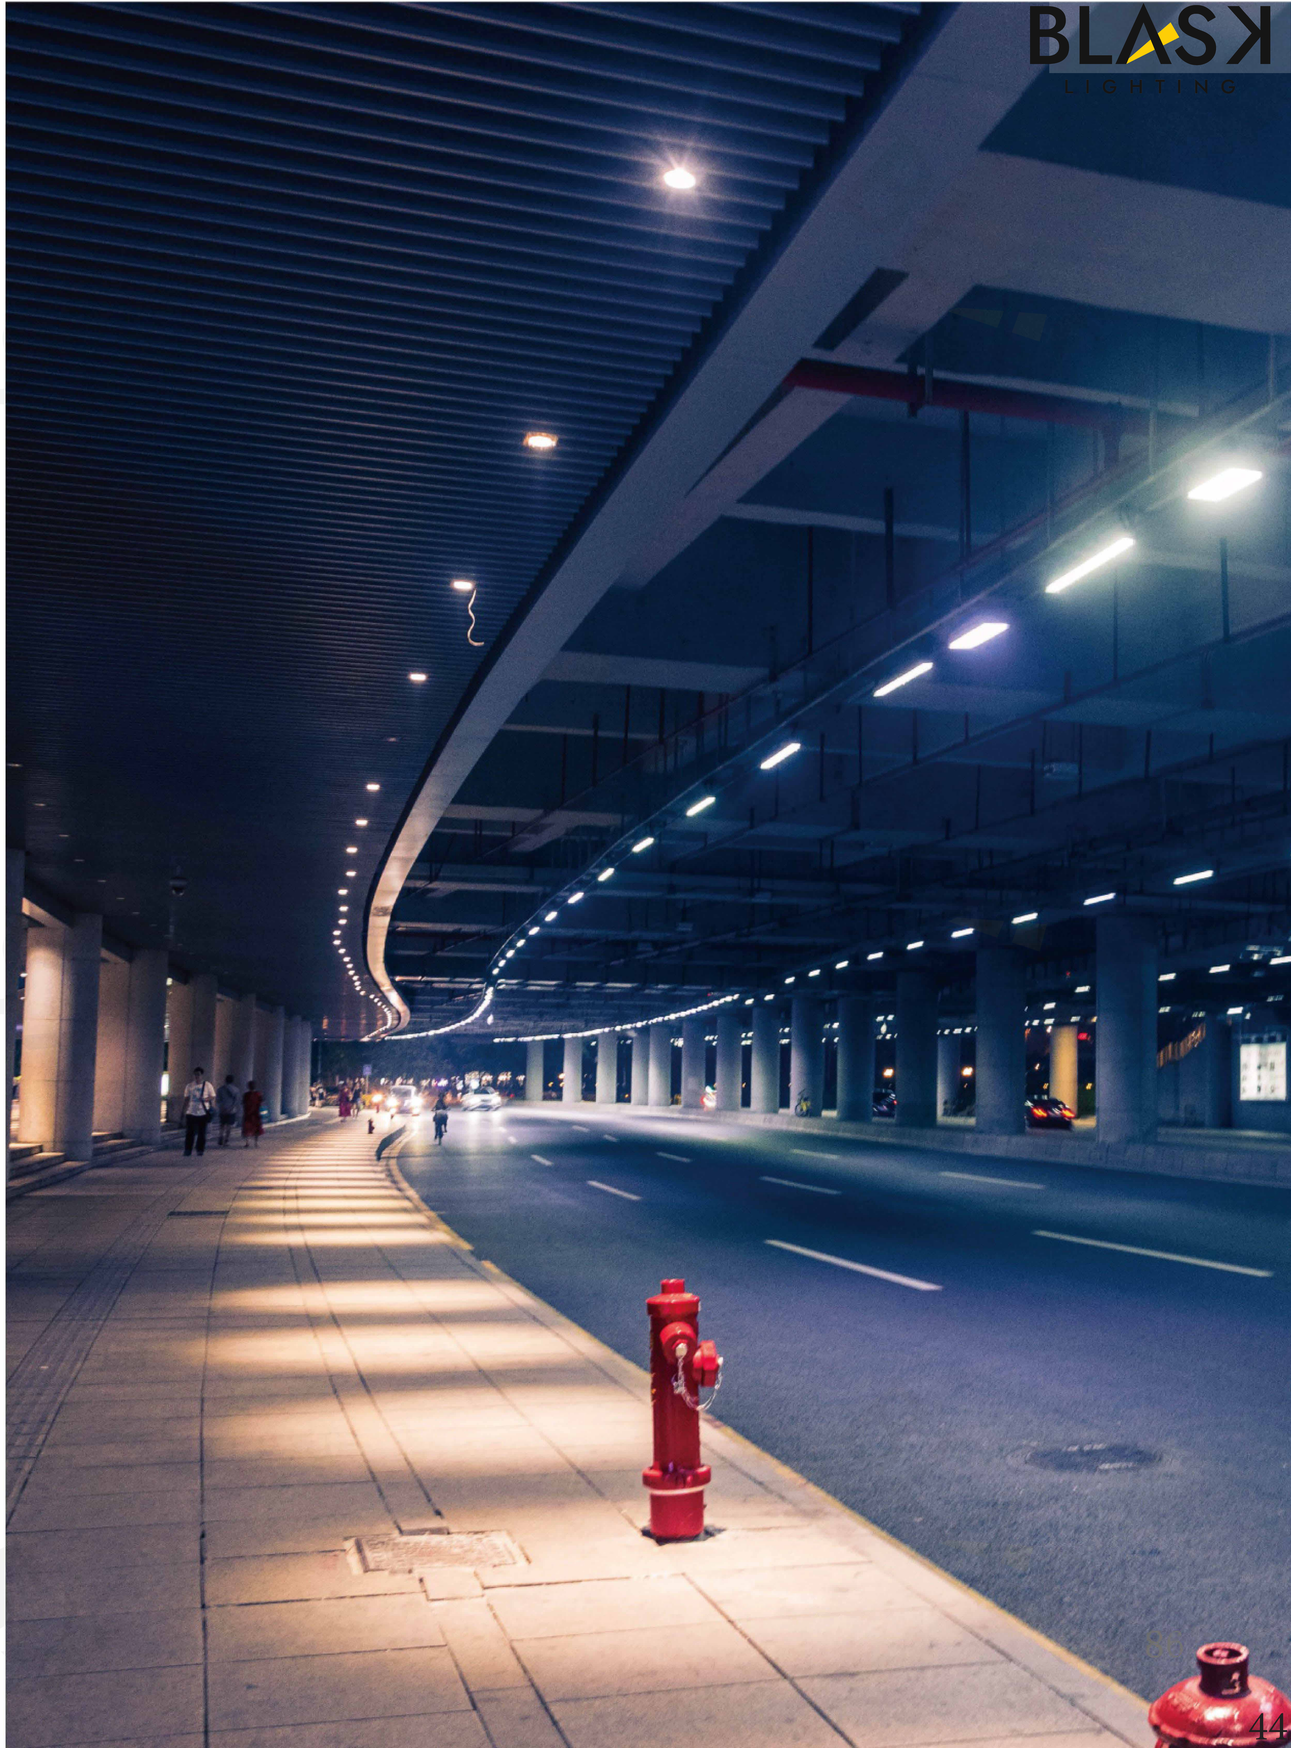



JHLCLO90009

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	15W
Flux(lm)	1321lm
Cutout	Ø75mm
Size	Ø85*H58mm

IP65 F LIFE 25000





JHLCLO90011

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	25W
Flux(lm)	2230lm
Cutout	Ø125mm
Size	Ø136*H83mm

IP65 F LIFE 25000



JHLCLO90010

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18W
Flux(lm)	1582lm
Cutout	Ø90mm
Size	Ø100*H64mm

IP65 F LIFE 25000



JHLCLO90012

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	35W
Flux(lm)	3265lm
Cutout	Ø145mm
Size	Ø158*H96mm

IP65 F LIFE 25000



JHLCLO90013

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	45W
Flux(lm)	4120lm
Cutout	Ø165mm
Size	Ø180*H109mm



JHLCLO90014

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18W
Flux(lm)	1637lm
Cutout	Ø90*90mm
Size	L100*W100*H64mm

IP65 F LIFE 25000





JHLCLO90016

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	35W
Flux(lm)	3242lm
Cutout	Ø145*145mm
Size	L158*W158*H96mm

IP65 F LIFE 25000



JHLCLO90015

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	25W
Flux(lm)	2232lm
Cutout	Ø125*125mm
Size	L136*W136*H83mm

IP65 F LIFE 25000





JHLCLO90017

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15/°24°/36°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	45W
Flux(lm)	4171lm
Cutout	Ø165*165mm
Size	L180*W180*H109mm

IP65 F LIFE 25000

Washer Light Series

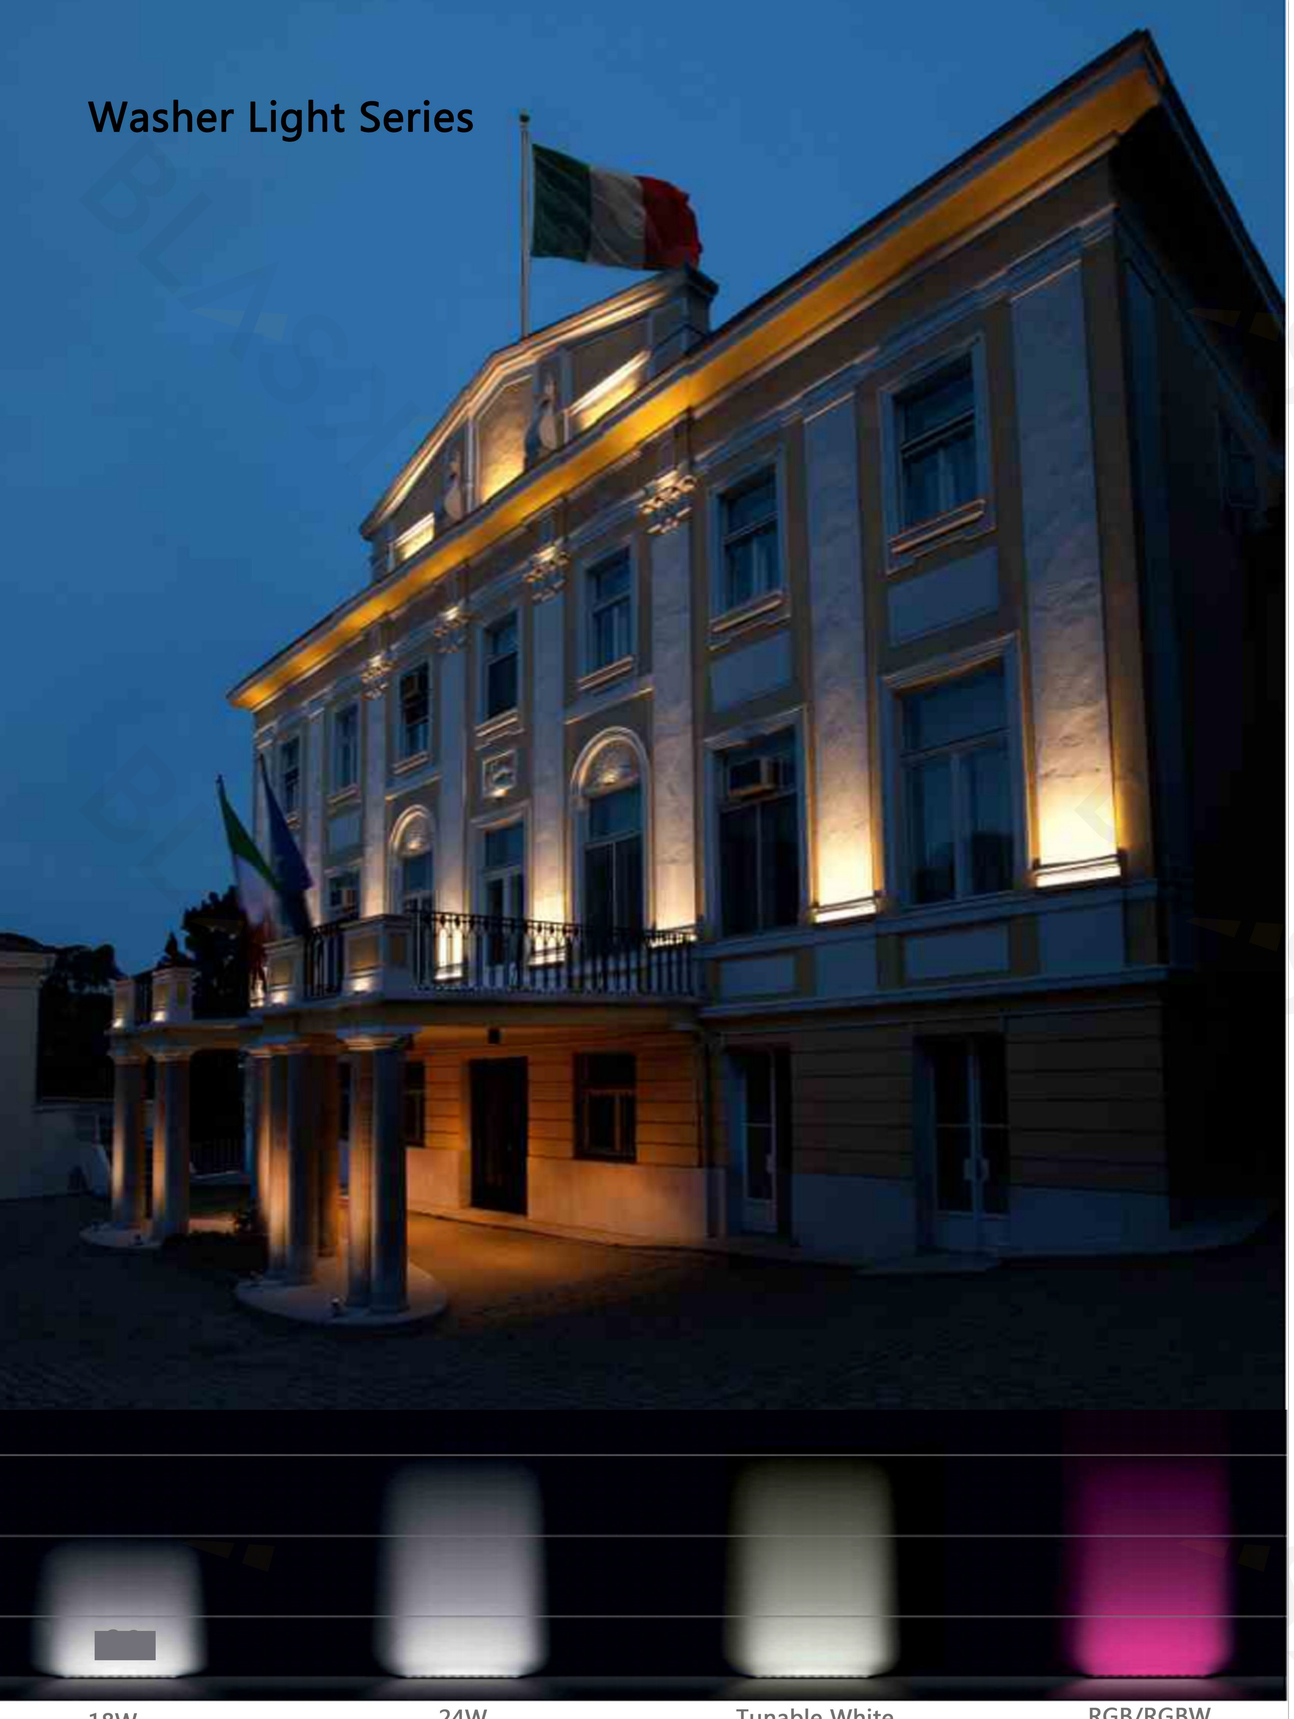

18W 24W Tunable White RGB/RGBW

BLASK LIGHTING

JHLCLO90125

Material	Die-casting Aluminum
Input	DC24V
Beam Angle	15*45°/10°/30°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18W/24W
Flux(lm)	2070lm/2760lm
Size	W36*H30*L1000MM

IP65 LIFE 25000



JHLCLO90126

Material	Die-casting Aluminum
Input	DC24V
Beam Angle	15*45°/10°/30°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	18W/24W
Flux(lm)	2070lm/2760lm
Size	W40*H90*L1000mm

IP65 LIFE 25000



JHLCLO90127

Material	Die-casting Aluminum
Input	AC220-240V，50-60Hz
Beam Angle	15*45°/10°/30°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	48W
Flux(lm)	5520lm
Size	W50*H120*L1000mm

IP65 F LIFE 25000



JHLCLO90129

Material	Die-casting Aluminum
Input	DC24V
Beam Angle	15*45°/10°/30°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W
Flux(lm)	1380lm
Size	W30*H48*L985mm

IP65 F LIFE 25000



JHLCLO90128

Material	Die-casting Aluminum
Input	DC24V
Beam Angle	15*45°/10°/30°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	72W
Flux(lm)	8280lm
Size	W65*H30*L990mm

IP65 F LIFE 25000

JHLCLO90130

Material	Die-casting Aluminum
Input	DC24V
Beam Angle	15*45°/10°/30°/60°
CCT	2700K/3000K/4000K/5000K/6500K
CRI	≥80
Chip	PHILIPS LUMINUS CITIZEN CREE
Power	12W/15W
Flux(lm)	1380lm/1725lm
Size	W30*H27*L979mm

IP65 F LIFE 25000