ARCH.

LIGHT

VOL VI

BLASK LIGHTING

WWW.BLASKLIGHTING.COM

Track view:

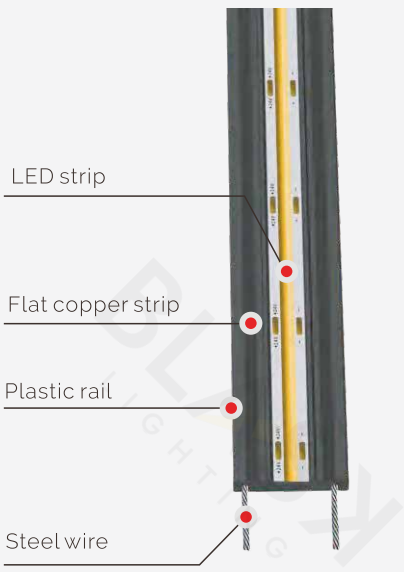

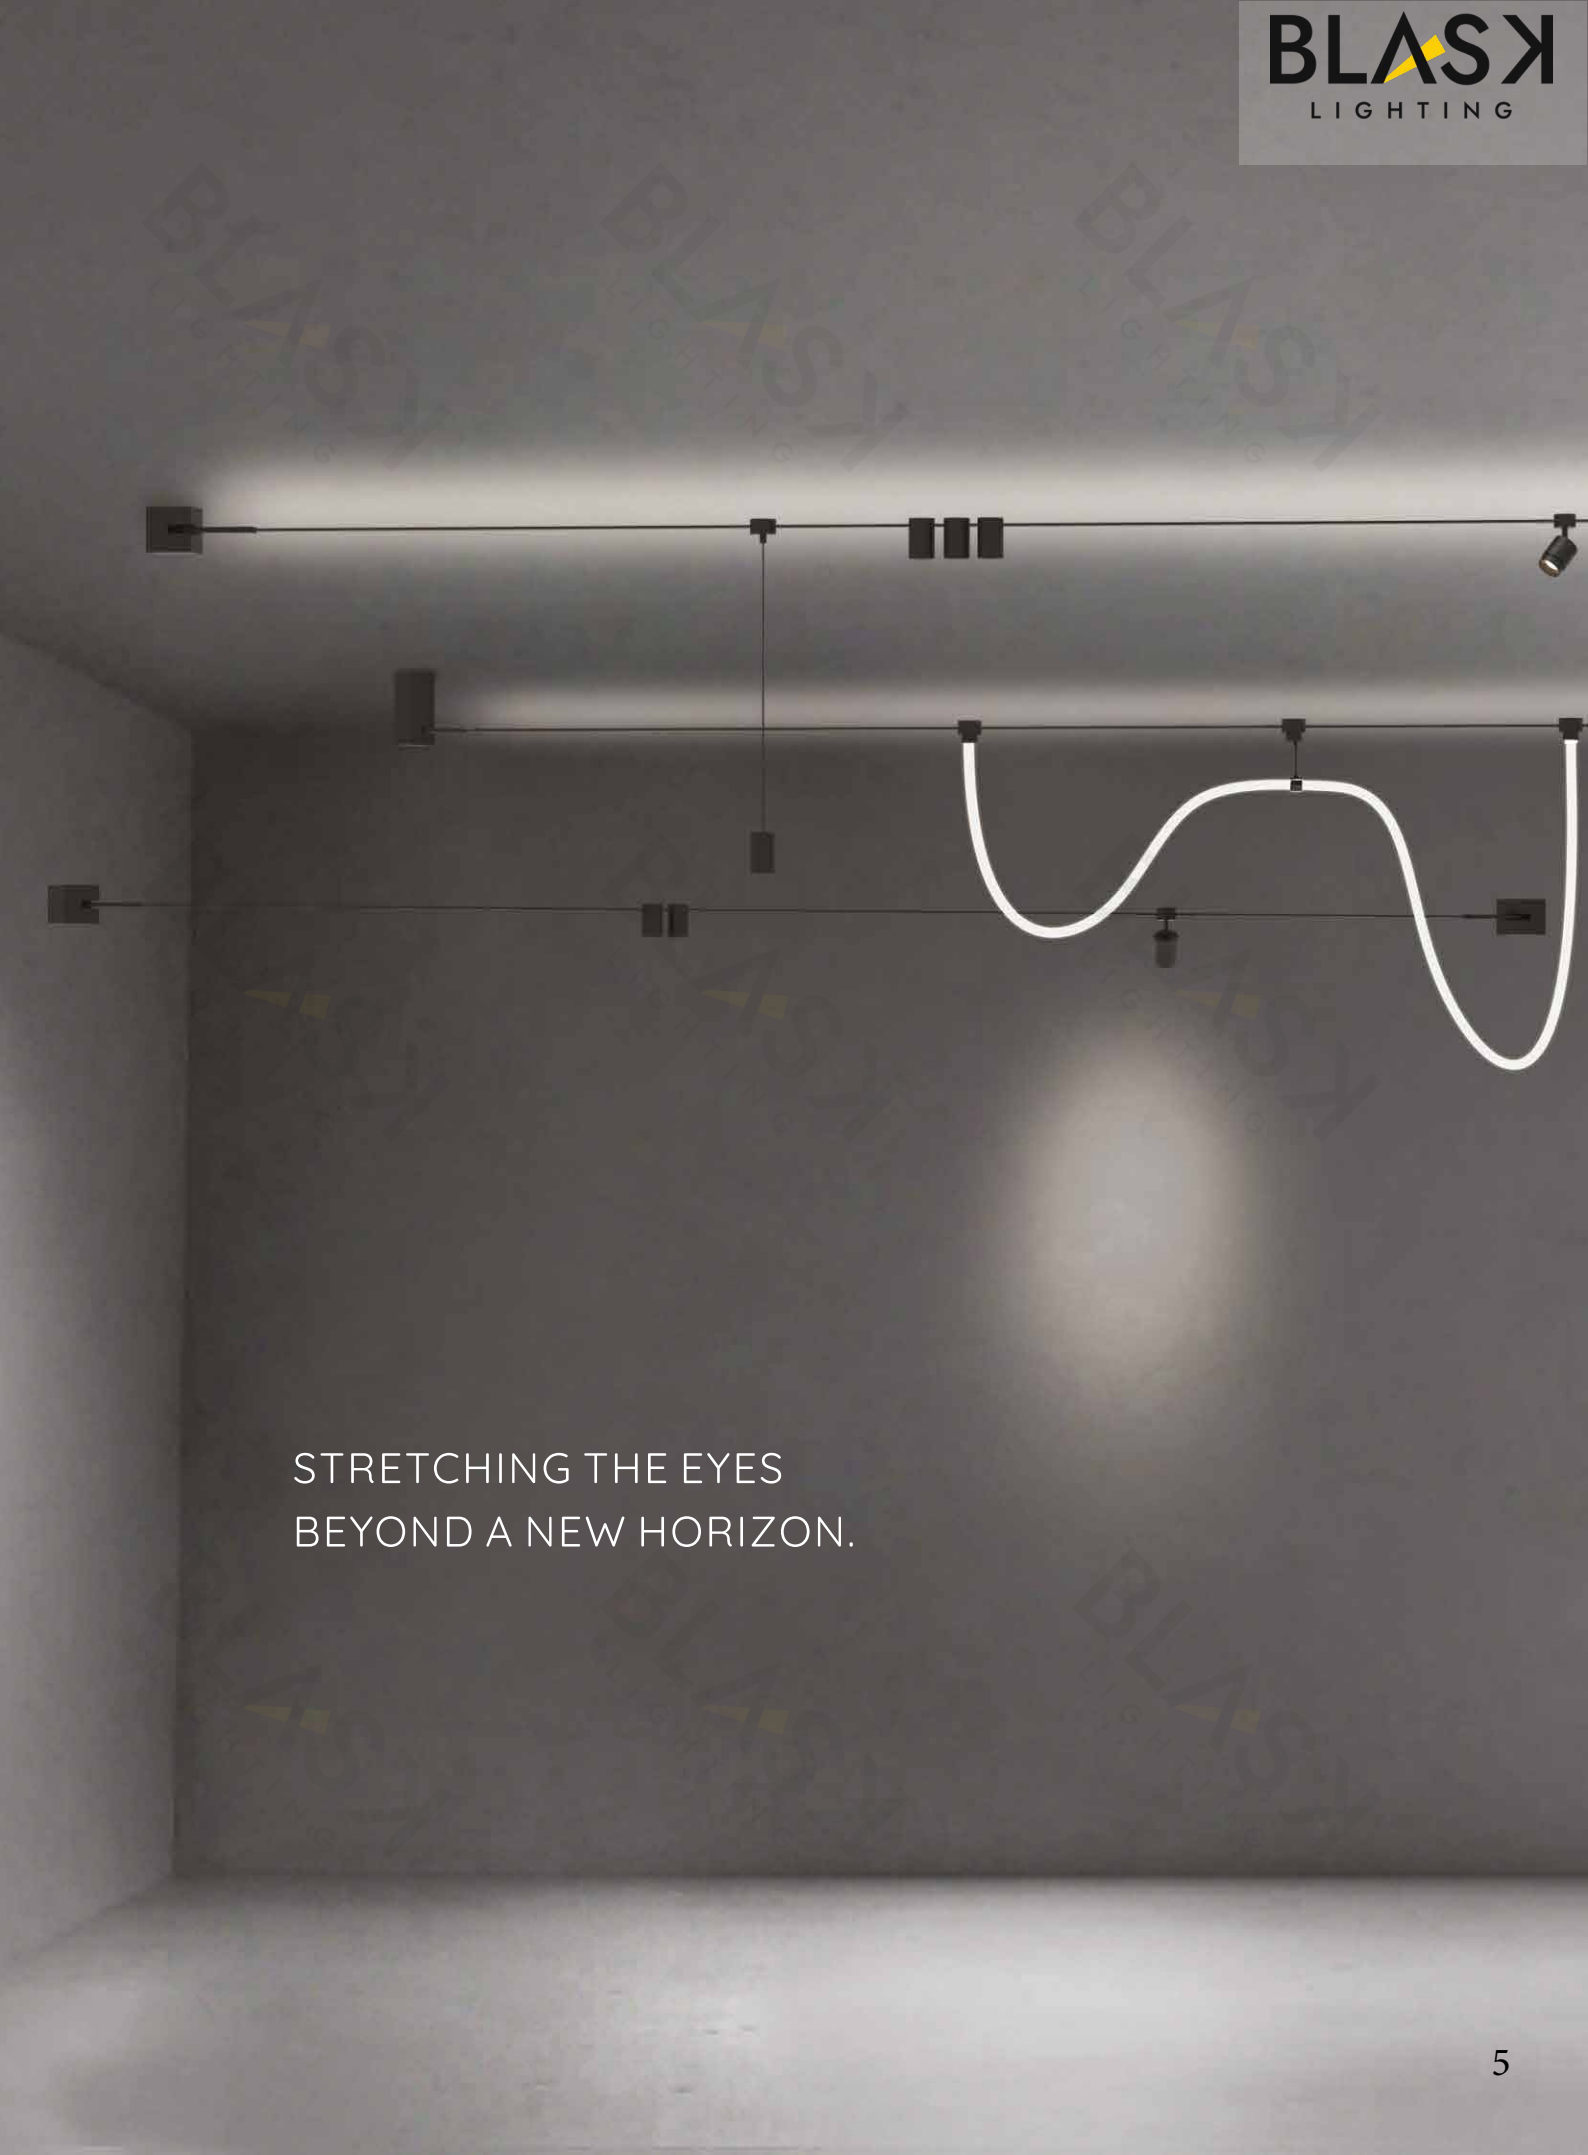
STRETCHING THE EYES
BEYOND A NEW HORIZON.

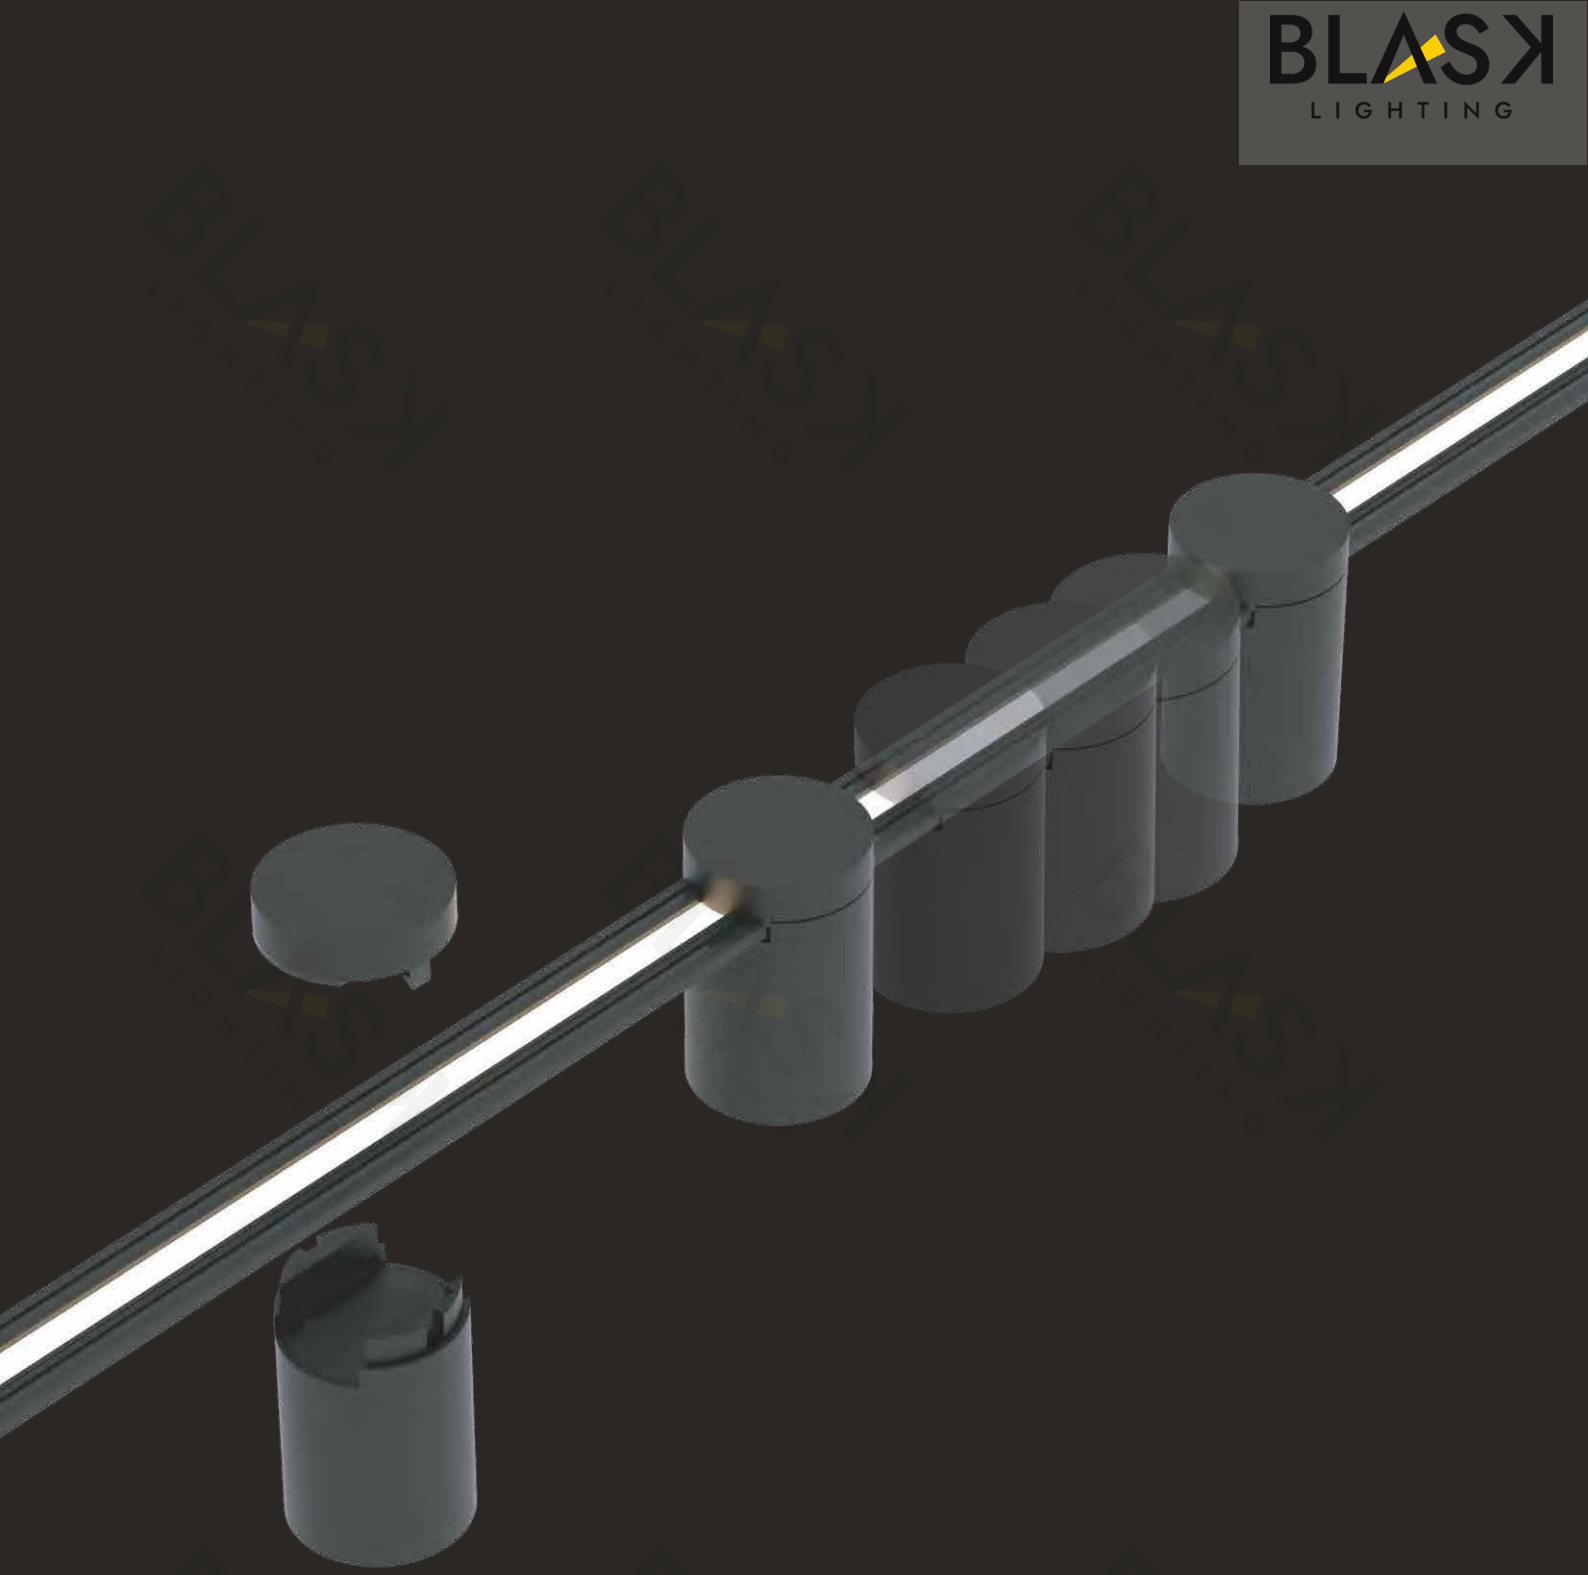

FAST INSTALLATION

The quick coupling device, combined with the exposed conductors, allows easy installation and repositioning of the source without the need for tools.

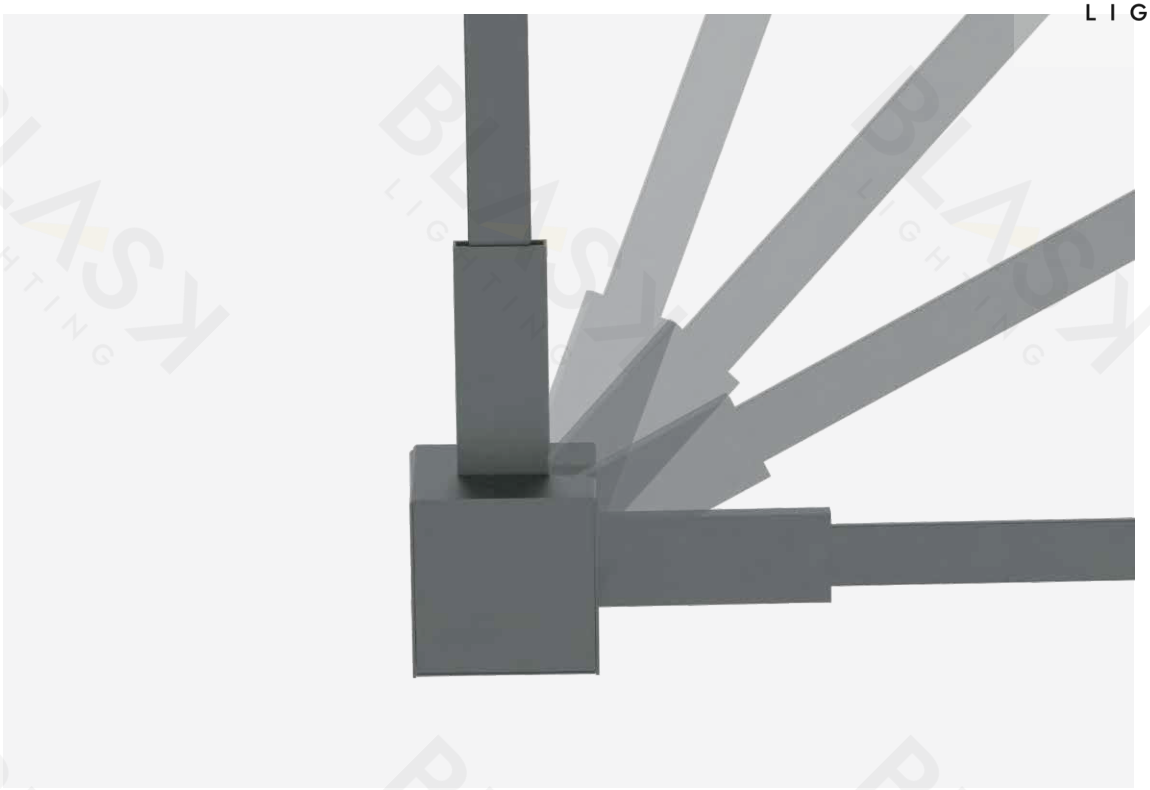

installed with wall or ceiling attachment. The ceiling spacer allows you to make the most of the indirect light of the optional LED strip. The tensioning system rotates 180° allowing multiple installation possibilities.

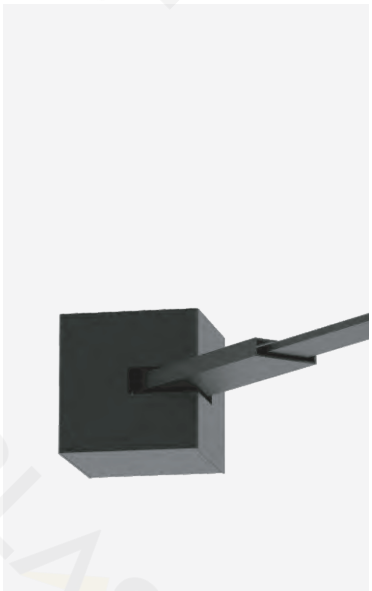

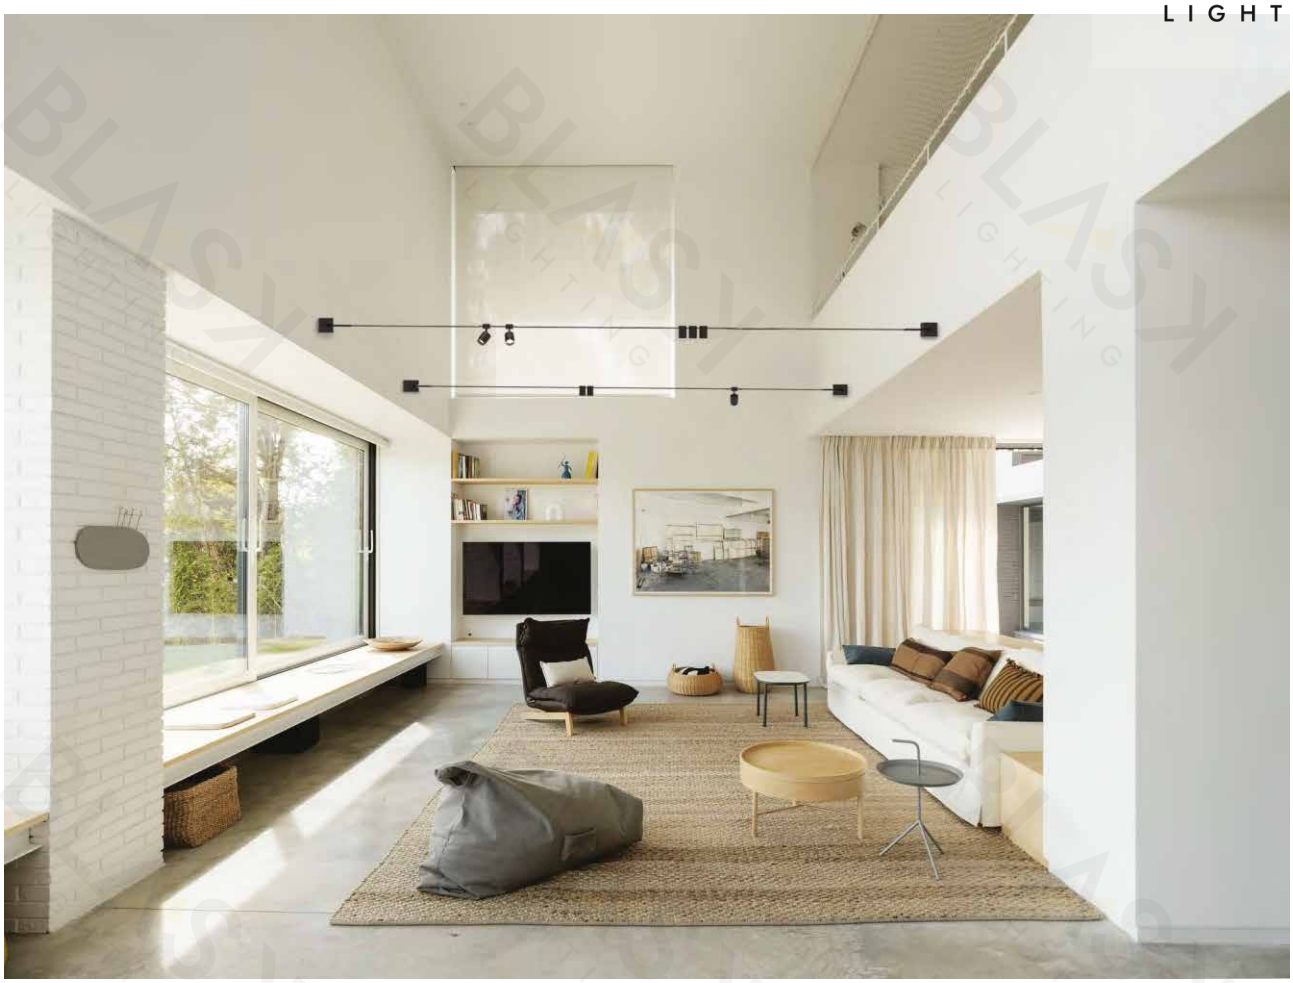

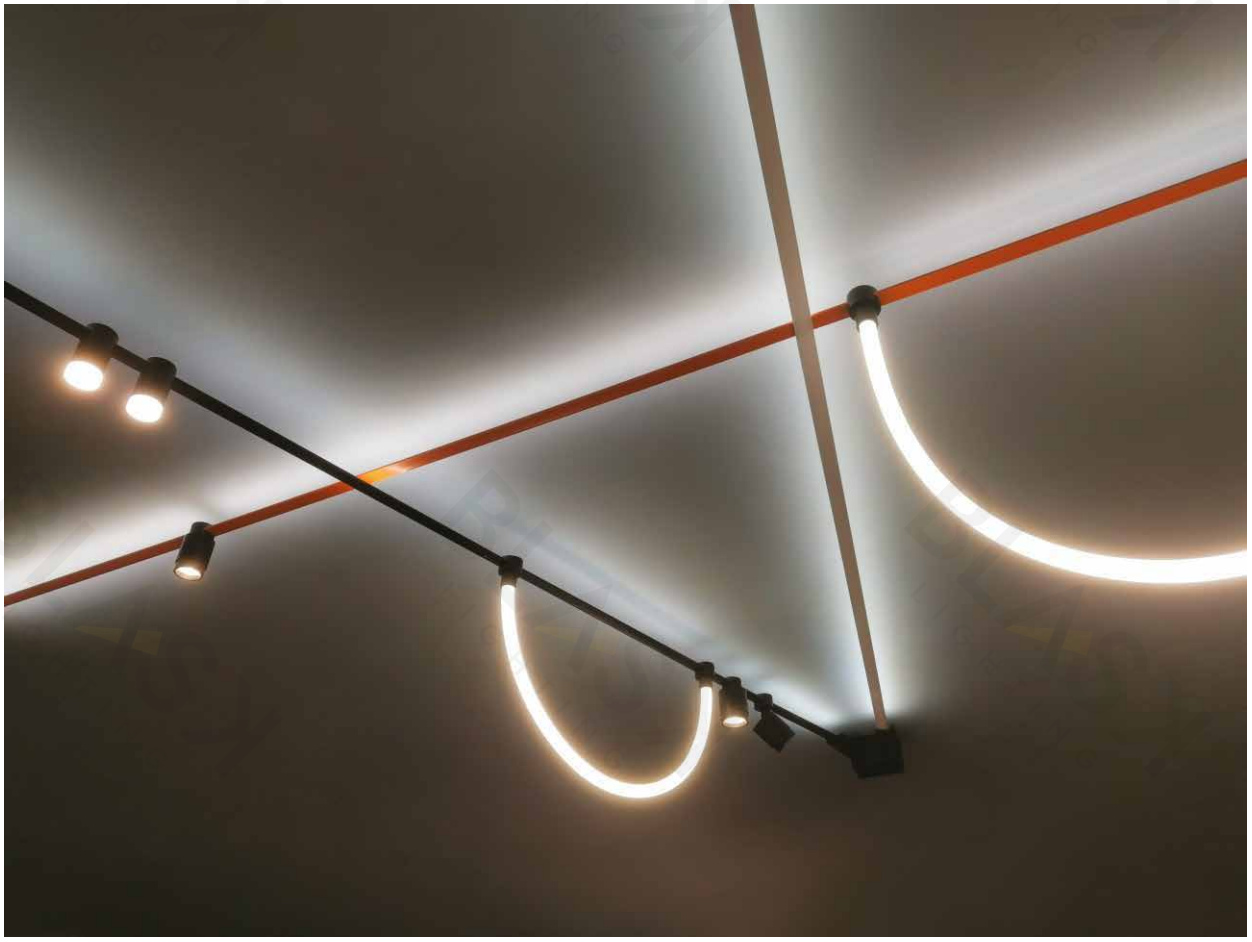

ARCHITECTURAL MAGNETIC TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30001	7W	560 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚

ARCHITECTURAL MAGNETIC TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30002	7W	560 lm	Black	3000K / 4000K/6500K	120°

FLEXIBLE TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



INAMTI30003



INAMTI30004

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30003	7W	560 lm	Black	3000K / 4000K/6500K	15˚-36˚
INAMTI30004	12W	960 lm	Black	3000K / 4000K/6500K	15˚-36˚

FLEXIBLE TRACKLIGHT

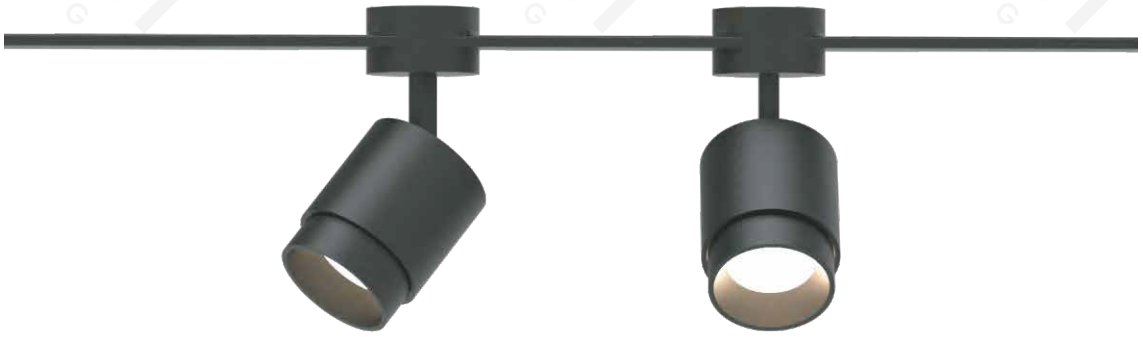

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

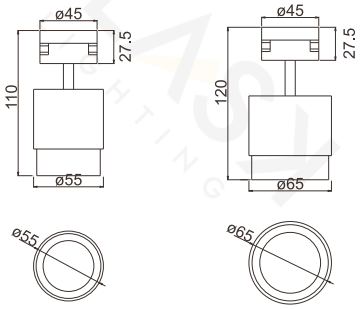

INAMTI30005 INAMTI30006

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30005	7W	560 lm	Black	3000K / 4000K/6500K	15˚-36˚
INAMTI30006	12W	960 lm	Black	3000K / 4000K/6500K	15˚-36˚

FLEXIBLE TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30007	7W	560 lm	Black	3000K / 4000K/6500K	15°/24°/36°

FLEXIBLE TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

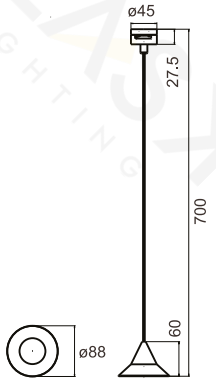

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30008	5W	400 lm	Black	3000K / 4000K/6500K	17°/24°/36°

FLEXIBLE TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30009	5W	400 lm	Black	3000K / 4000K/6500K	17°/24°/36°

FLEXIBLE TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
DC24V
50 000 hours life
5 years warranty

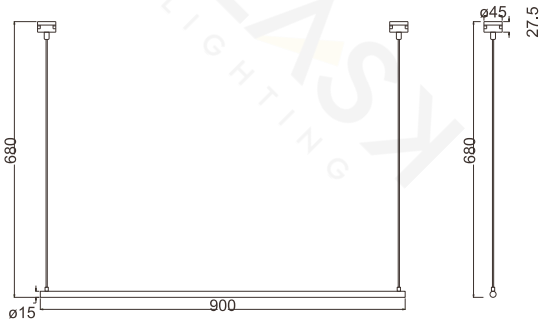

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30010	15W	1200 lm	Black	3000K / 4000K/6500K	120°

FLEXIBLE TRACKLIGHT

FEATURE

Silicone body
IP20
CRI>90
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30011	15W	1200 lm	Black	3000K / 4000K/6500K	360°

FLEXIBLE TRACKLIGHT

FEATURE

Silicone body
IP20
CRI>90
DC24V
50 000 hours life
5 years warranty

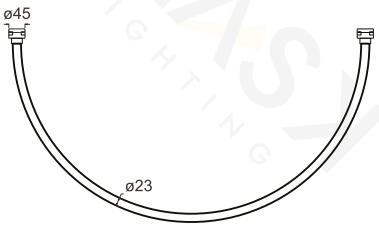

L:1000 / L:2000

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30012	15W	1200 lm	Black	3000K / 4000K/6500K	360°
INAMTI30013	30W	3200 lm	Black	3000K / 4000K/6500K	360°

FLEXIBLE TRACKLIGHT

FEATURE

Silicone body
IP20
CRI>90
DC24V
50 000 hours life
5 years warranty

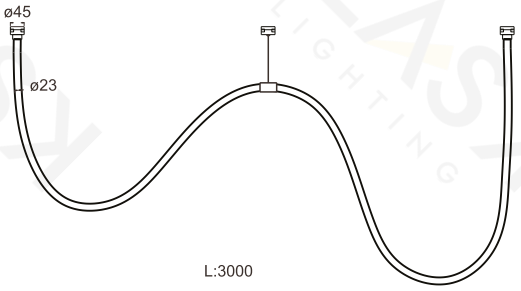

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30014	45W	3600 lm	Black	3000K / 4000K/6500K	360°

FLEXIBLE TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

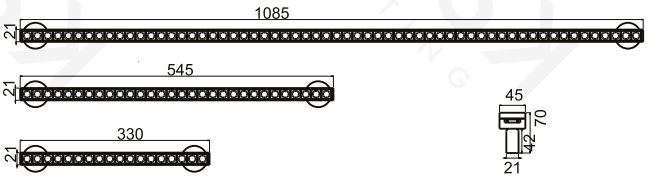

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30015	10W	800 lm	Black	3000K / 4000K/6500K	24°
INAMTI30016	15W	1200 lm	Black	3000K / 4000K/6500K	24°
INAMTI30017	30W	2400 lm	Black	3000K / 4000K/6500K	24°

FLEXIBLE TRACKLIGHT

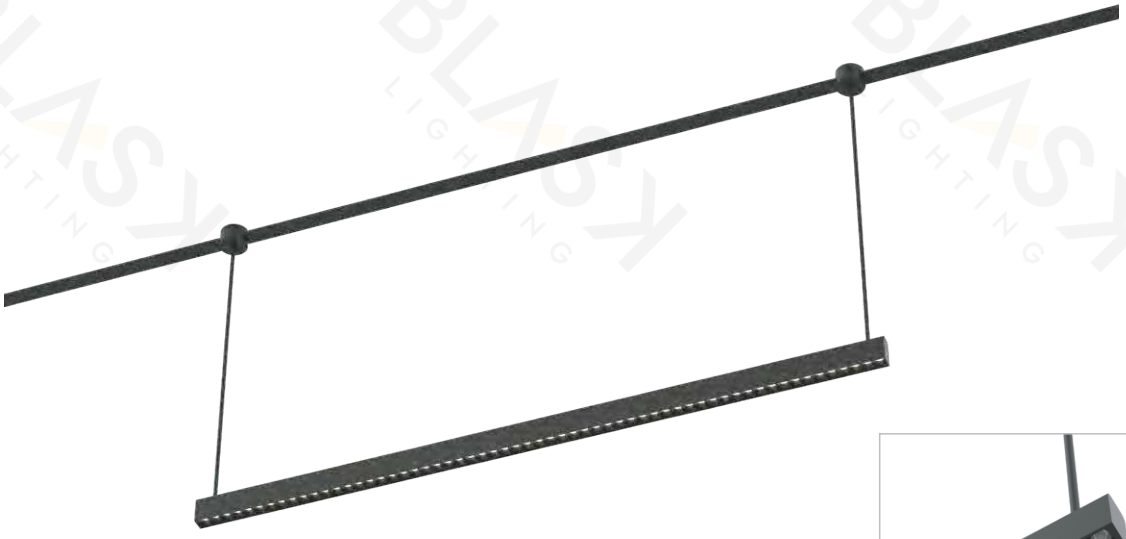

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

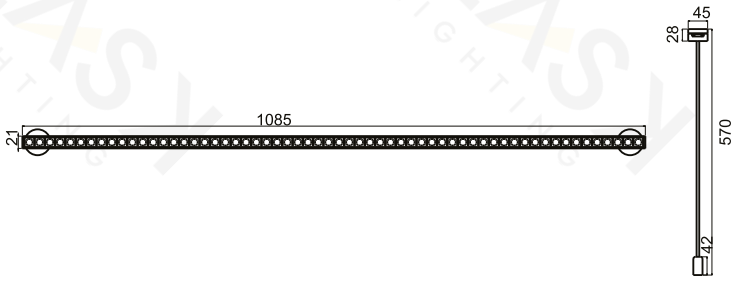

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30018	30W	2400 lm	Black	3000K / 4000K/6500K	24°

FLEXIBLE TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
Honeycomb
DC24V
50 000 hours life
5 years warranty

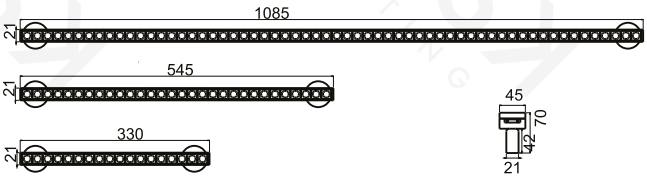

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30019	10W	800 lm	Black	3000K / 4000K/6500K	24°
INAMTI30020	15W	1200 lm	Black	3000K / 4000K/6500K	24°
INAMTI30021	30W	2400 lm	Black	3000K / 4000K/6500K	24°

FLEXIBLE TRACKLIGHT

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
Honeycomb
DC24V
50 000 hours life
5 years warranty

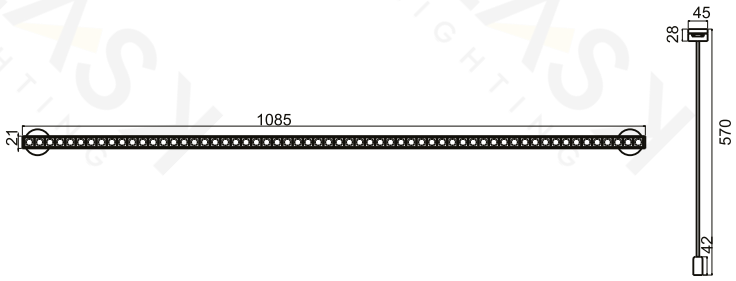

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30022	30W	2400 lm	Black	3000K / 4000K/6500K	24°

FLEXIBLE TRACKLIGHT



FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

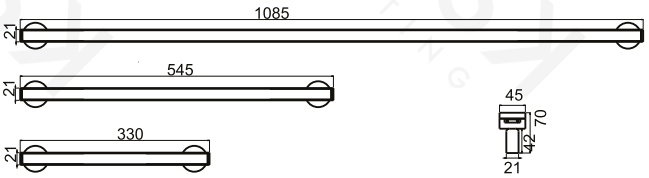

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30023	8W	640 lm	Black	3000K / 4000K/6500K	120°
INAMTI30024	12W	960 lm	Black	3000K / 4000K/6500K	120°
INAMTI30025	24W	1920 lm	Black	3000K / 4000K/6500K	120°

FLEXIBLE TRACKLIGHT

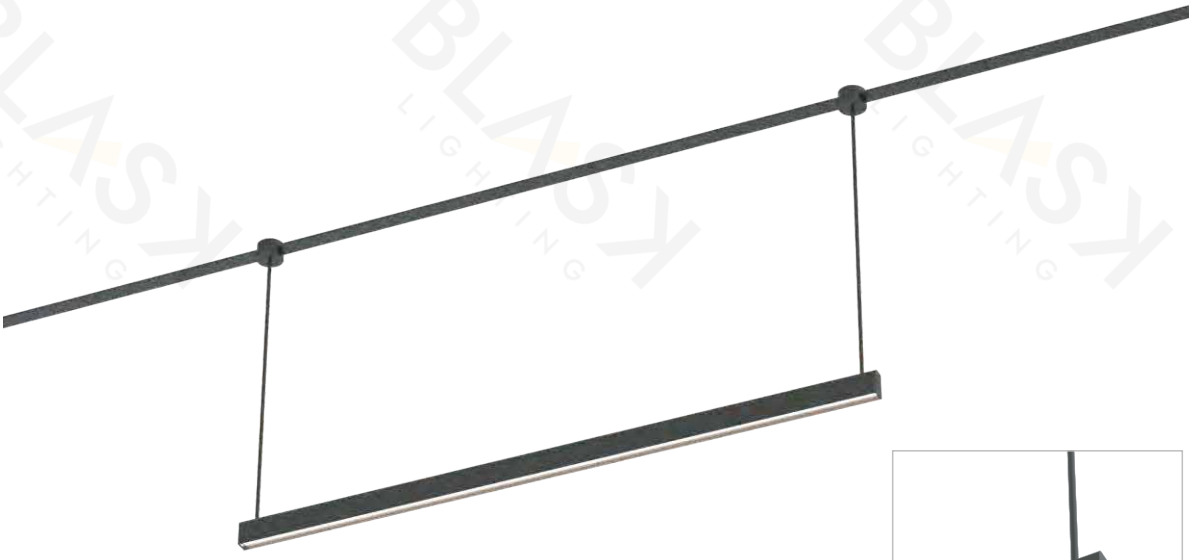

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

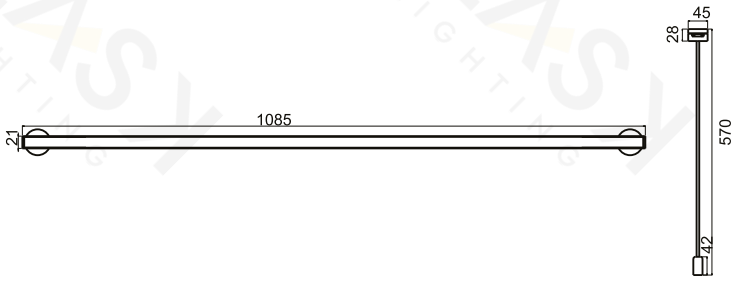

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30026	24W	1920 lm	Black	3000K / 4000K/6500K	120°

FLEXIBLE TRACKLIGHT



INAMTI30027

Material	PC
Color	Black
Length	Max.10m

INAMTI30030

Power	10W/m
Beam angle	120°
CCT	3000K / 4000K / 6500K
Color	White



INAMTI30028

Material	Iron
Color	Black



INAMTI30031

Material	Iron
Color	Black





INAMTI30029

Material	Iron
Color	Black



INAMTI30032

Material	Iron
Color	Black



INAMTI30033

Material	Aluminum
Color	Black

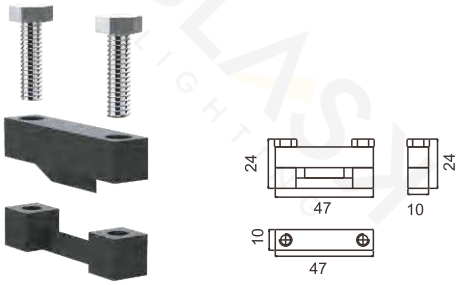

INAMTI30035

Material	Iron
Color	Black

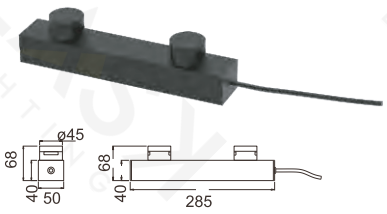

INAMTI30034

Power	180W
Color	Black

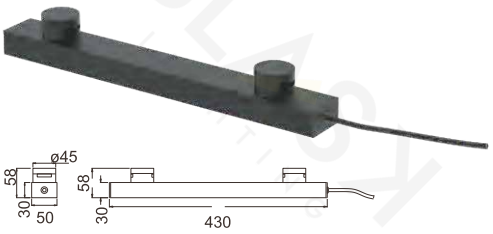

INAMTI30036

Power	250W
Color	Black

FLEXIBLE TRACK LIGHT

The most anticipated flexible track system on the market.

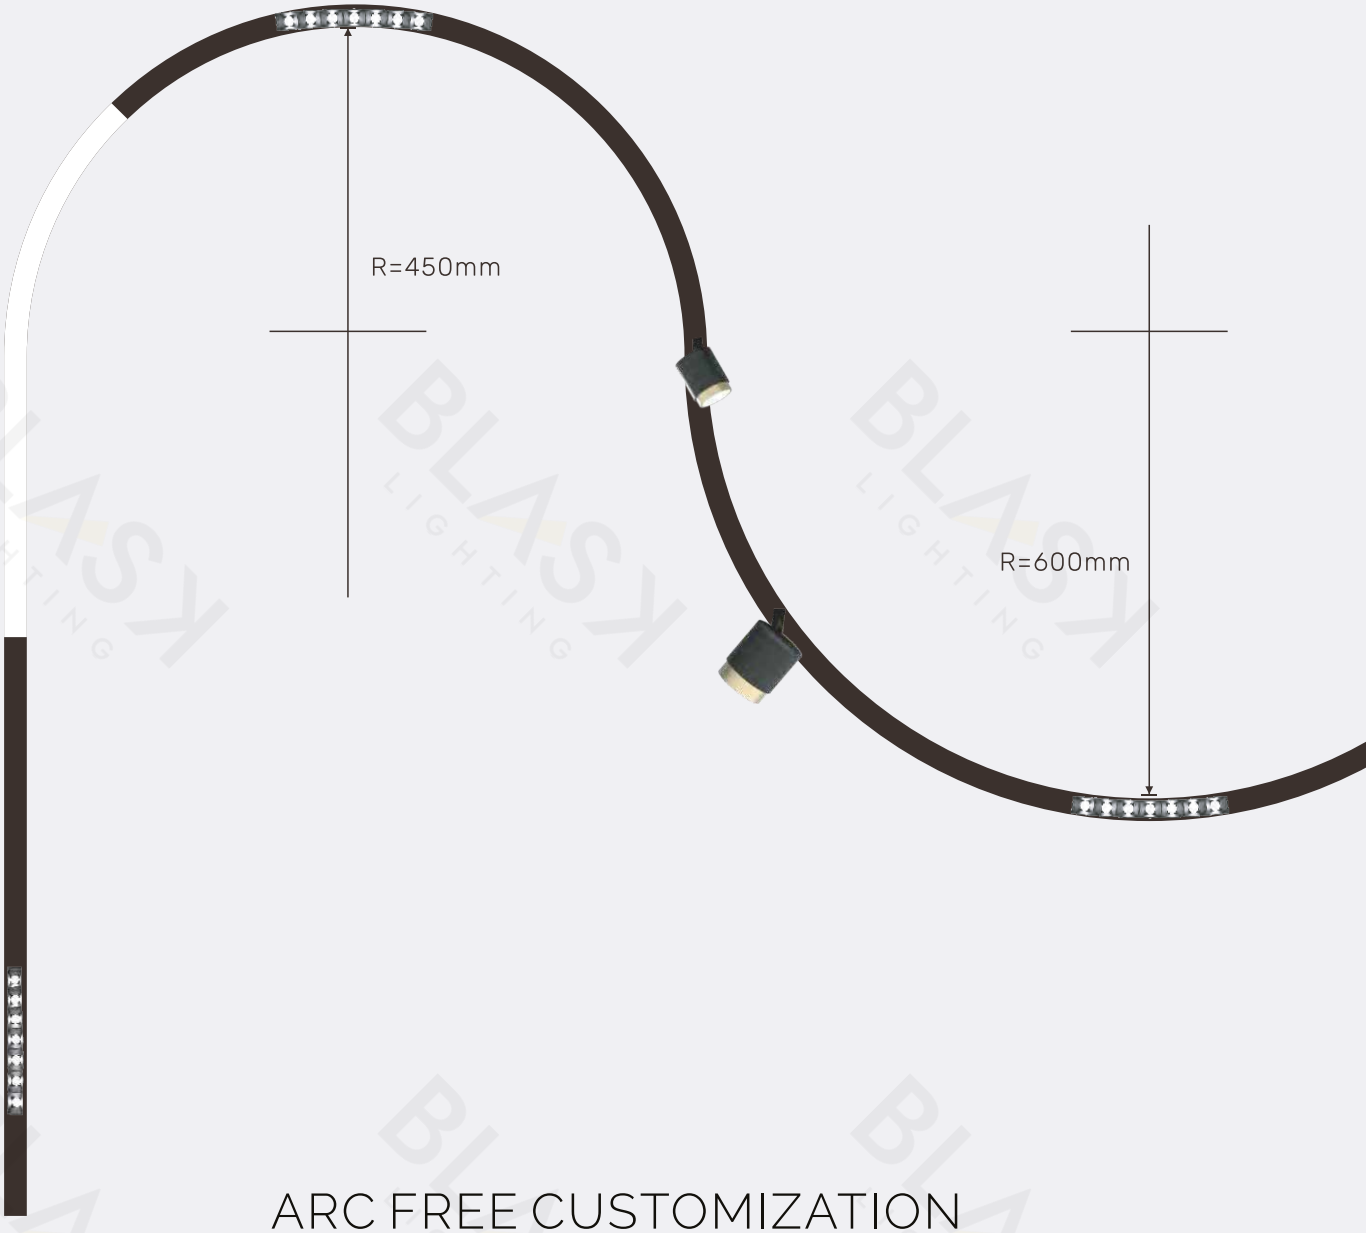

ARC FREE CUSTOMIZATION

free customization of the arc size,
the diameter of the arc is at least 900mm.

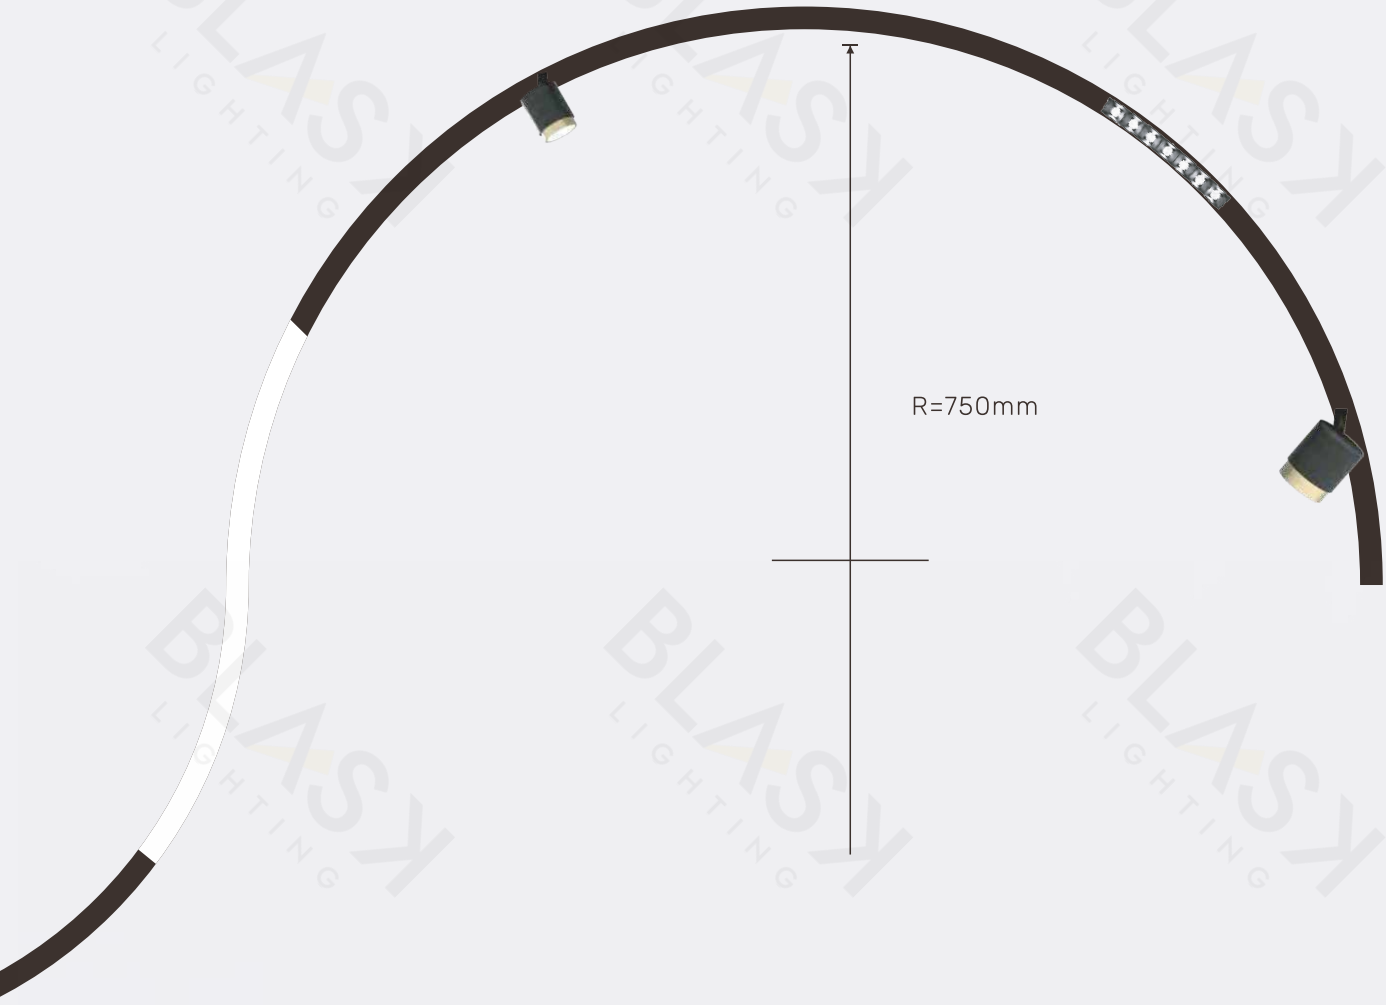

FLEXIBLE MODULE

suitable for installation on an arc with a diameter of 900mm or more.

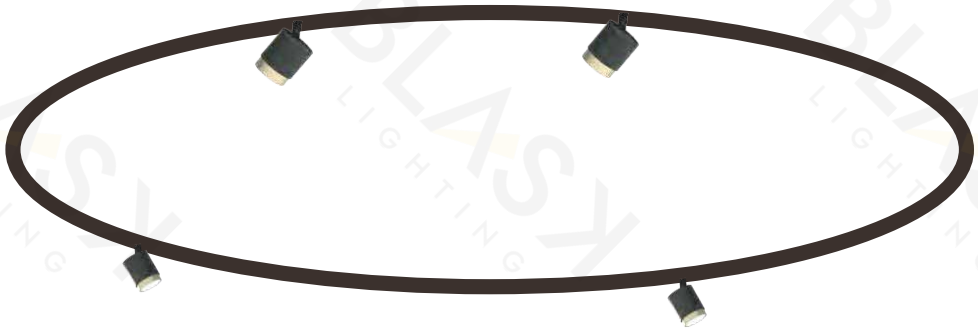



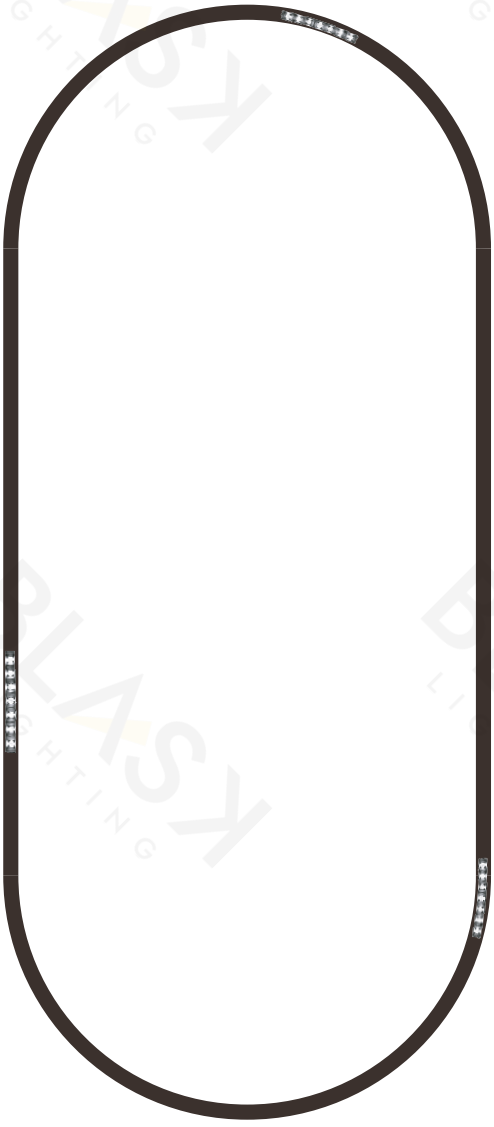

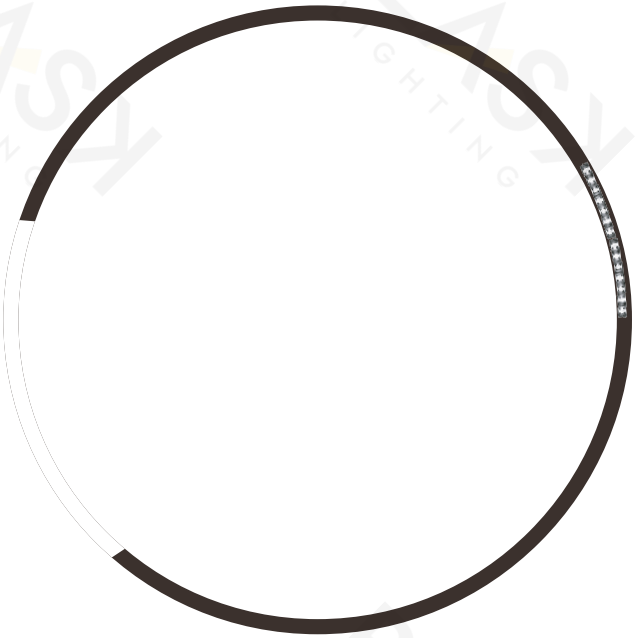

VARIETY OF TRACKS,
FREE CREATION

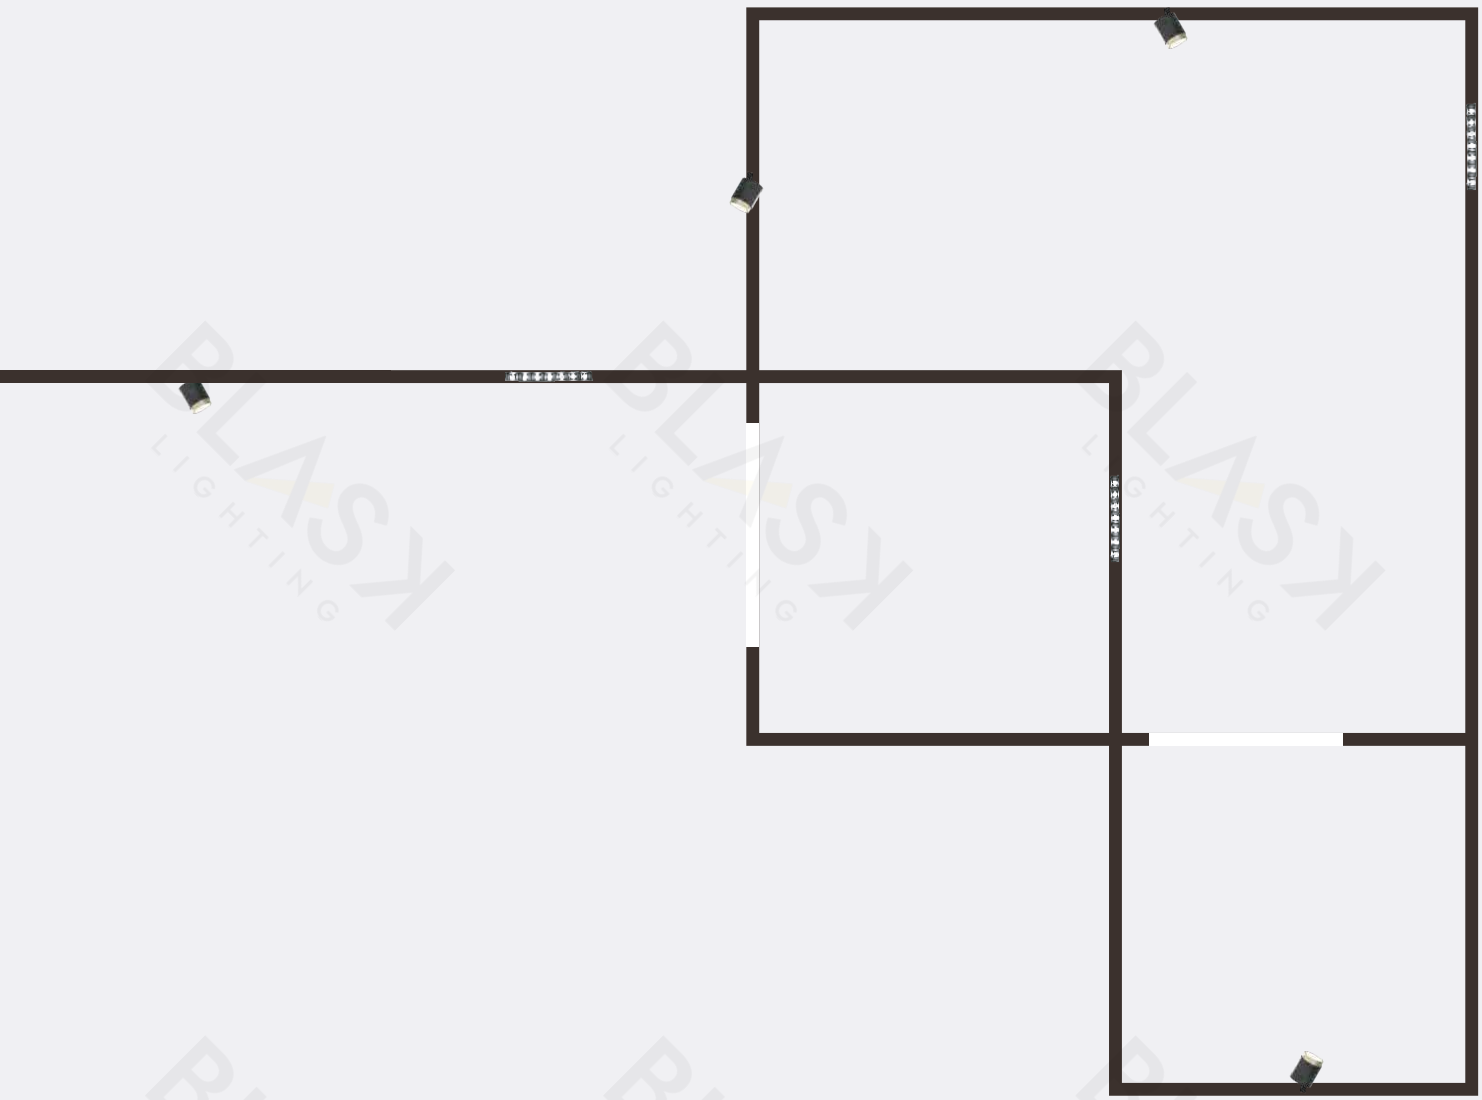

Dimmable

Optional:

DALI | 0-10V | TRIAC

- Adjustable brightness
- Single light single control
- Can be connected to DALI system

Optional (Customer Customized):

DALI 2.0 0168ME series

- Adjustable CCT

Wiring Diagram

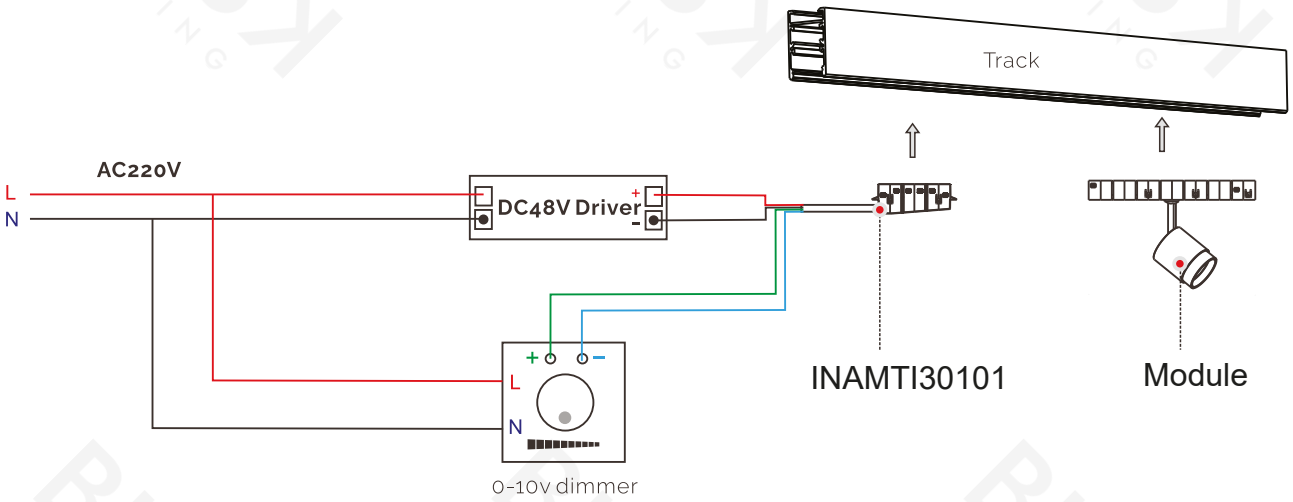

Wiring Diagram

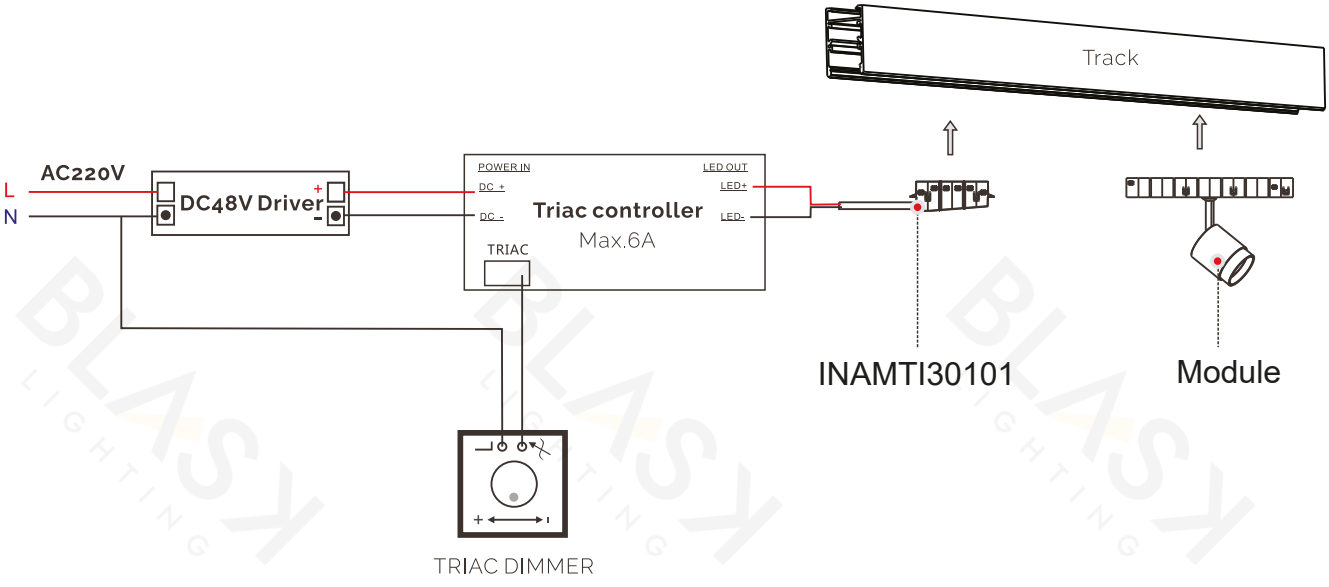

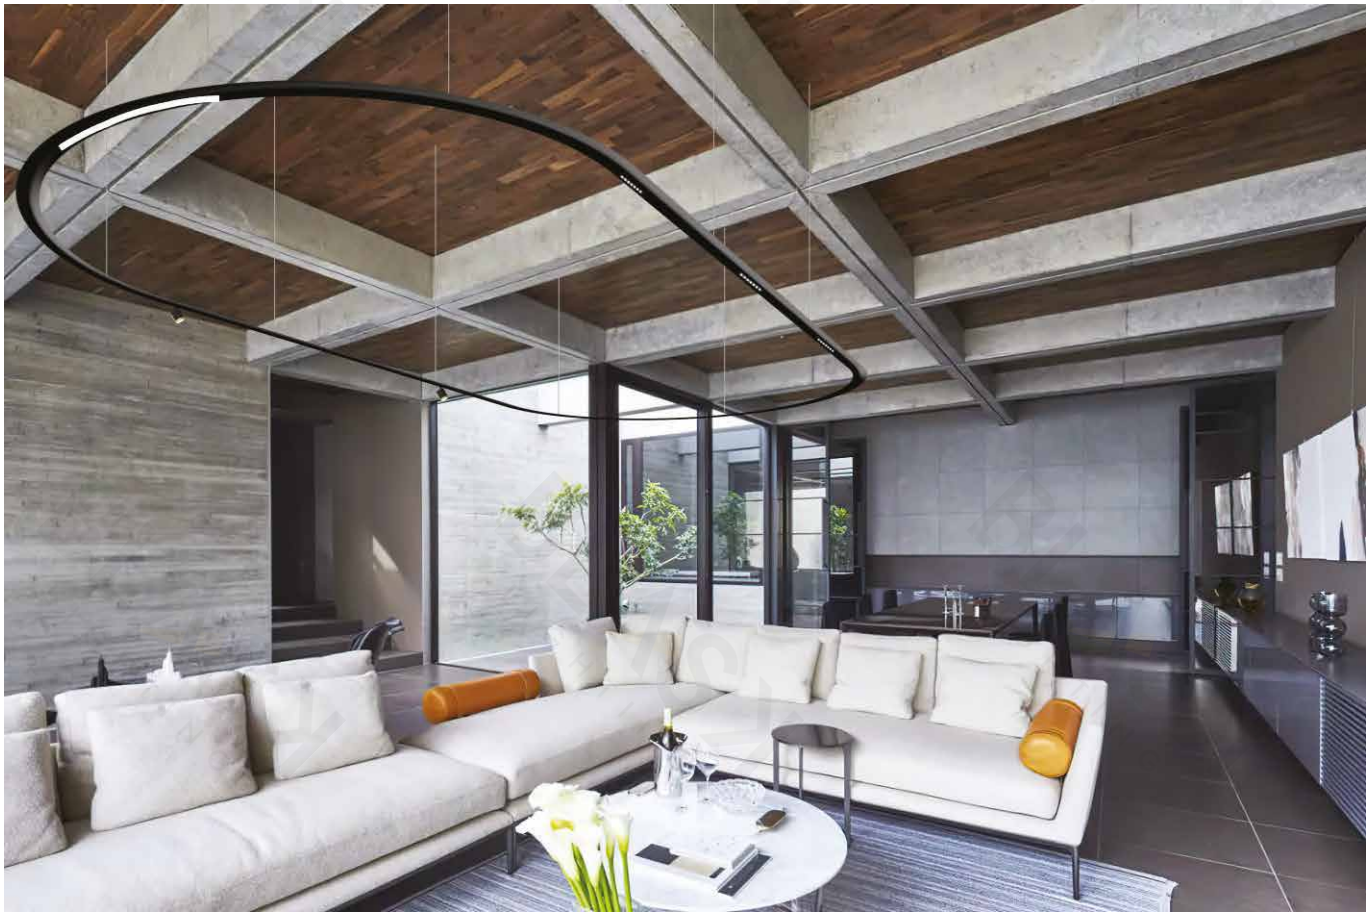

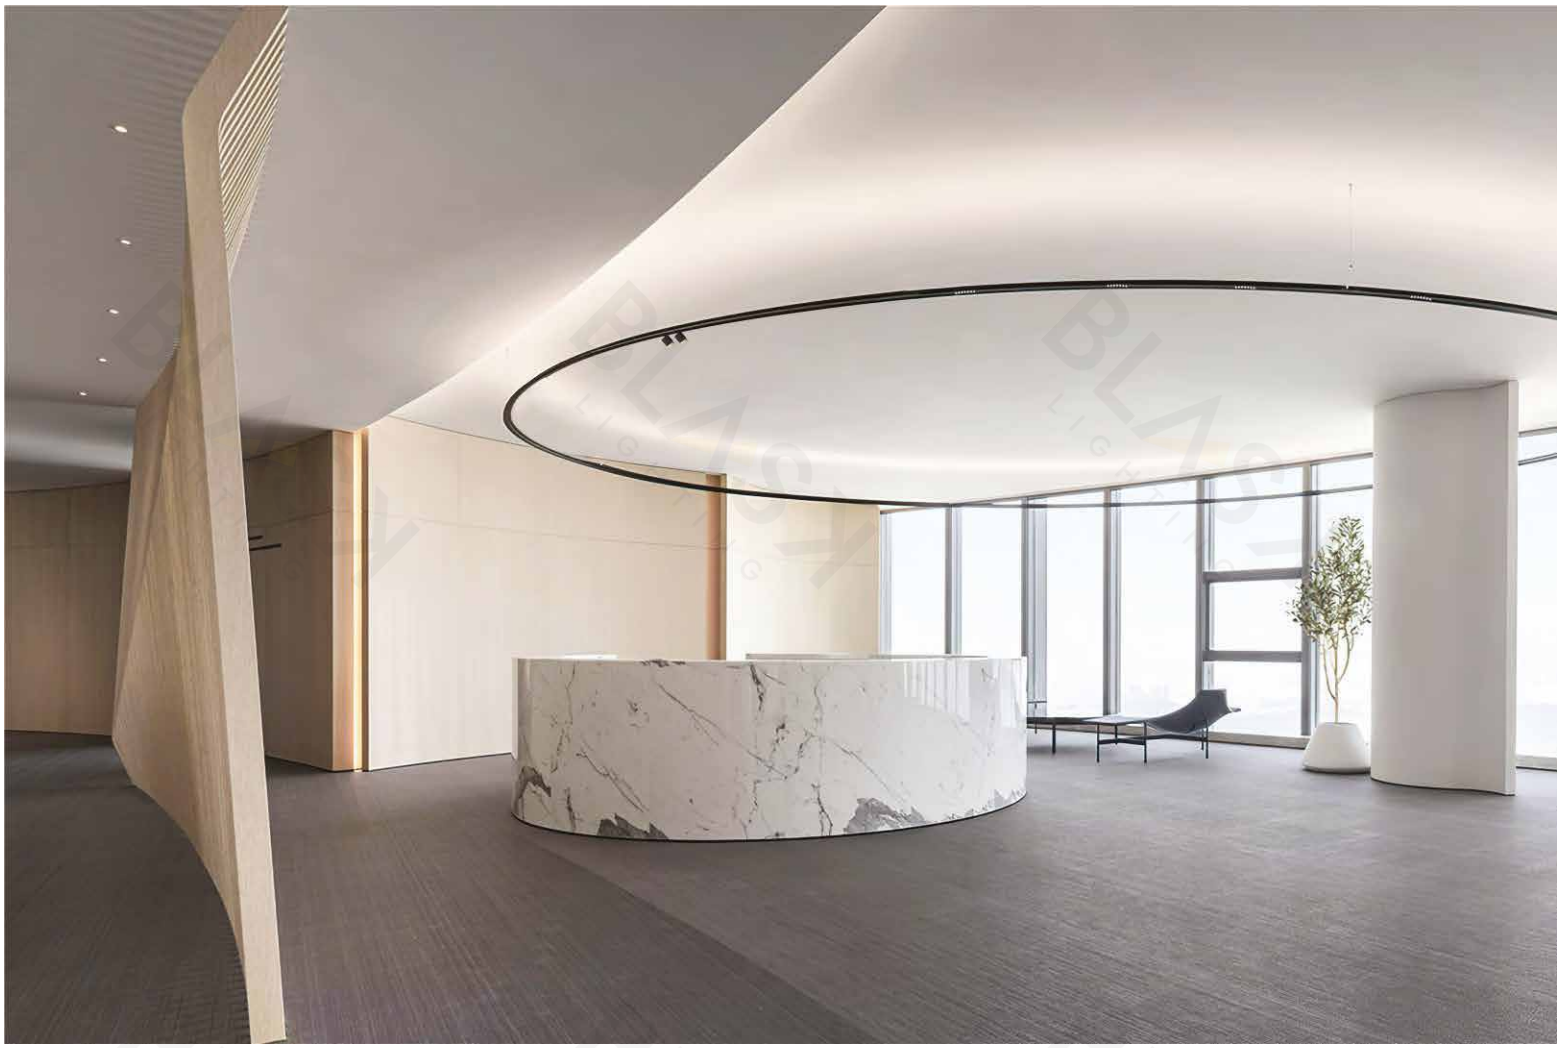

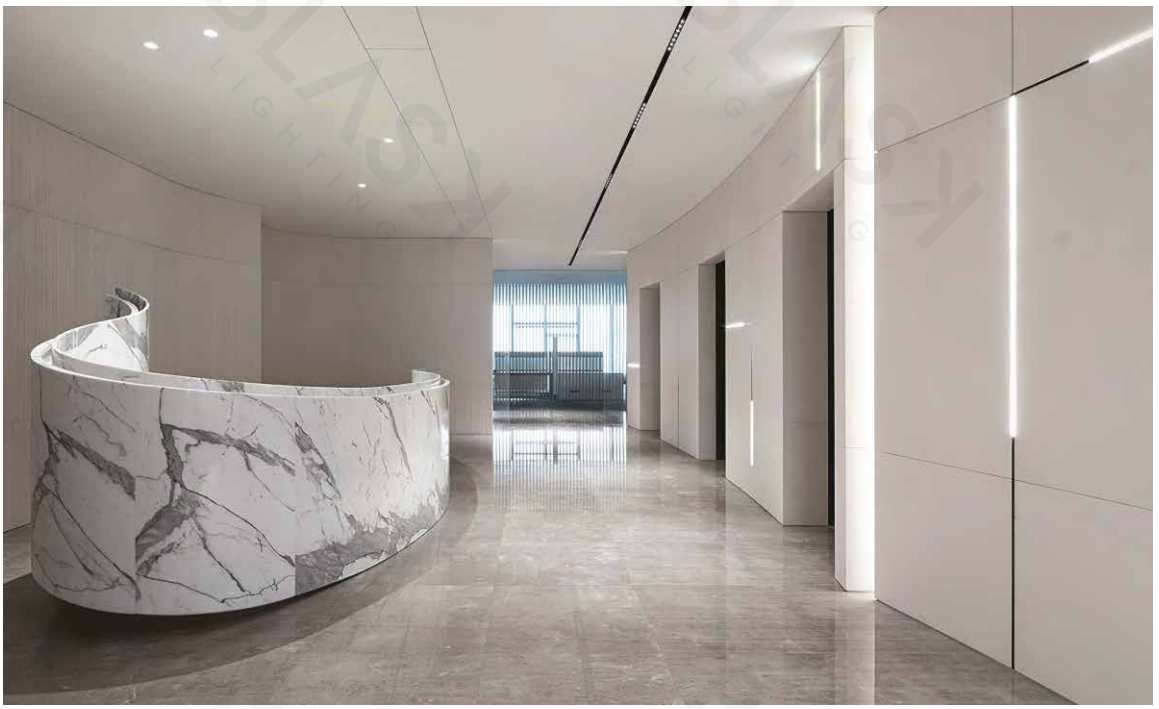

Multiple installation methods

Recessed
3mm
Recessed
15mm
27 mm

Card buckle fixing of the luminaries. The lighting bodies can be moved when they are still on, achieving enormous flexibility and adaptability in the configuration at any time.

BALL

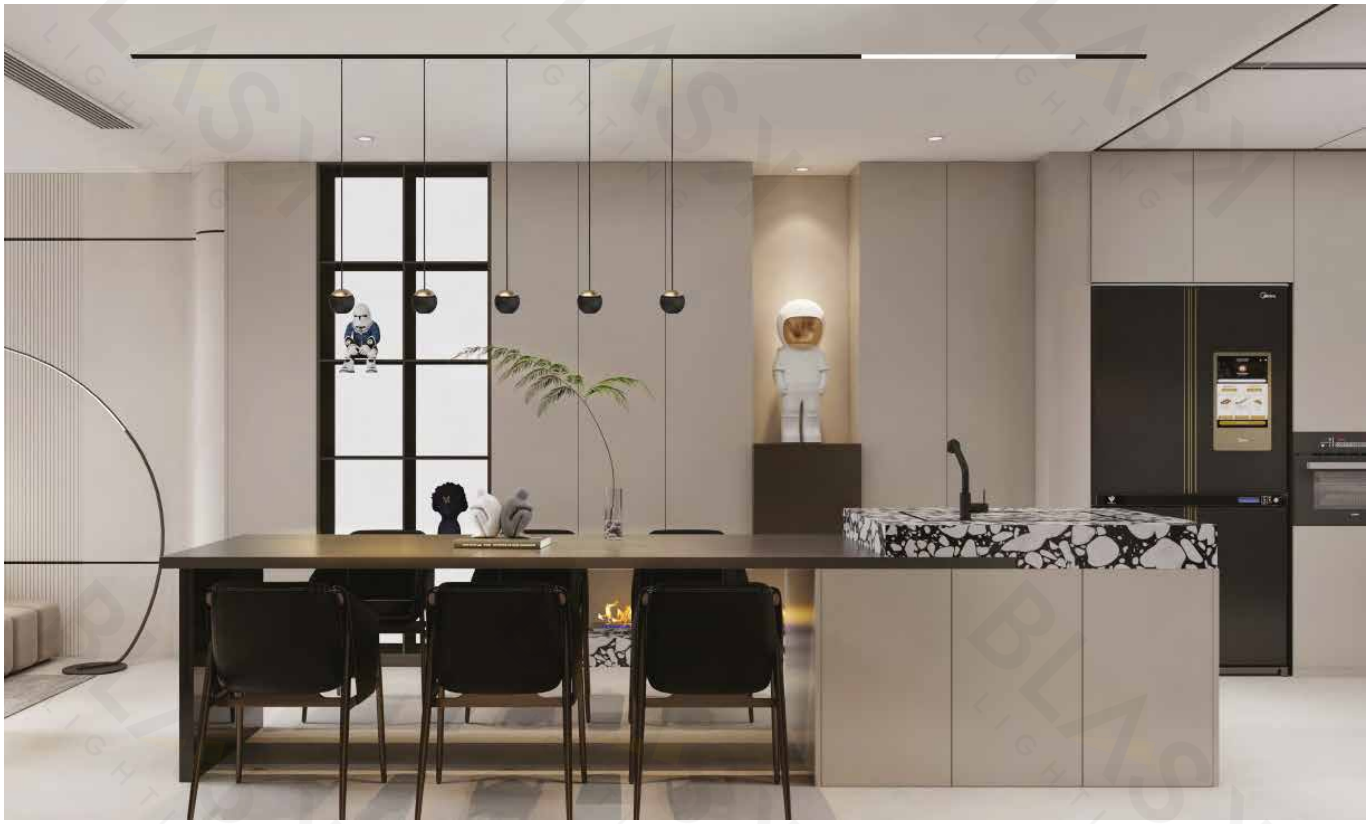

CONE

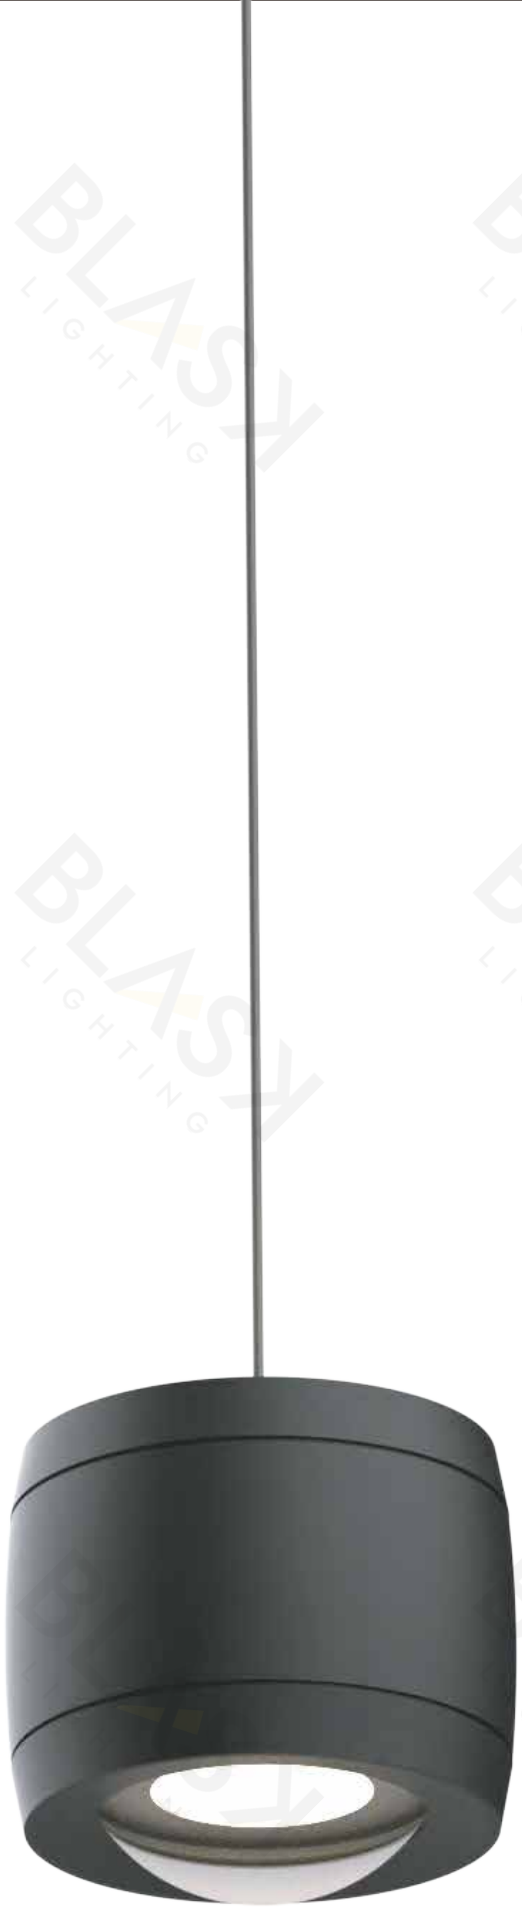

UP & DOWN

SLIM

FLEXIBLE

SWING

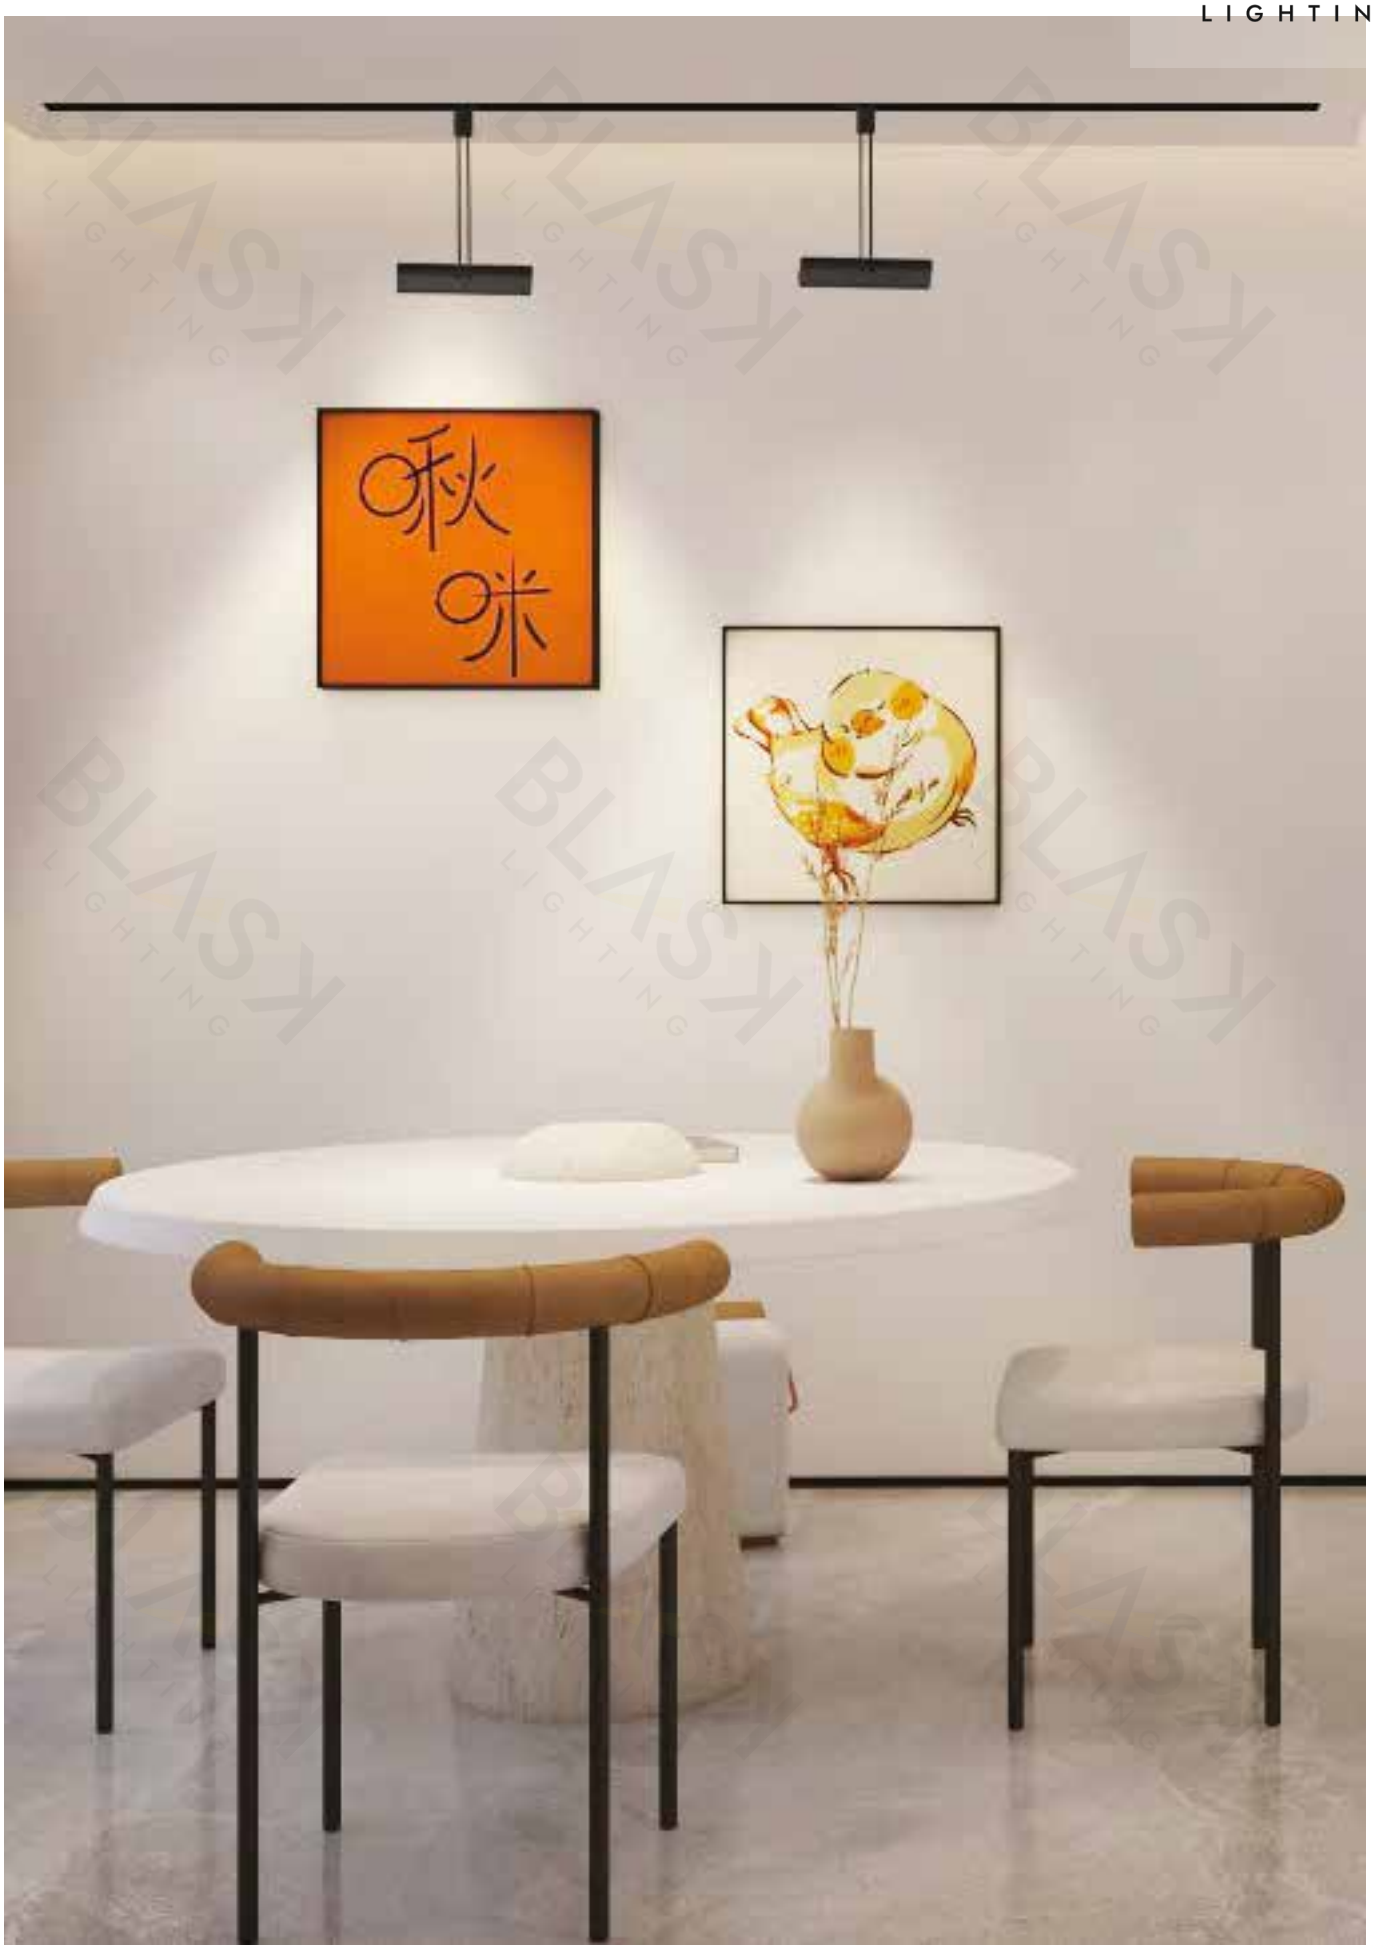
咻
咪

LINEAR

Oscar Nieme
Hexagons

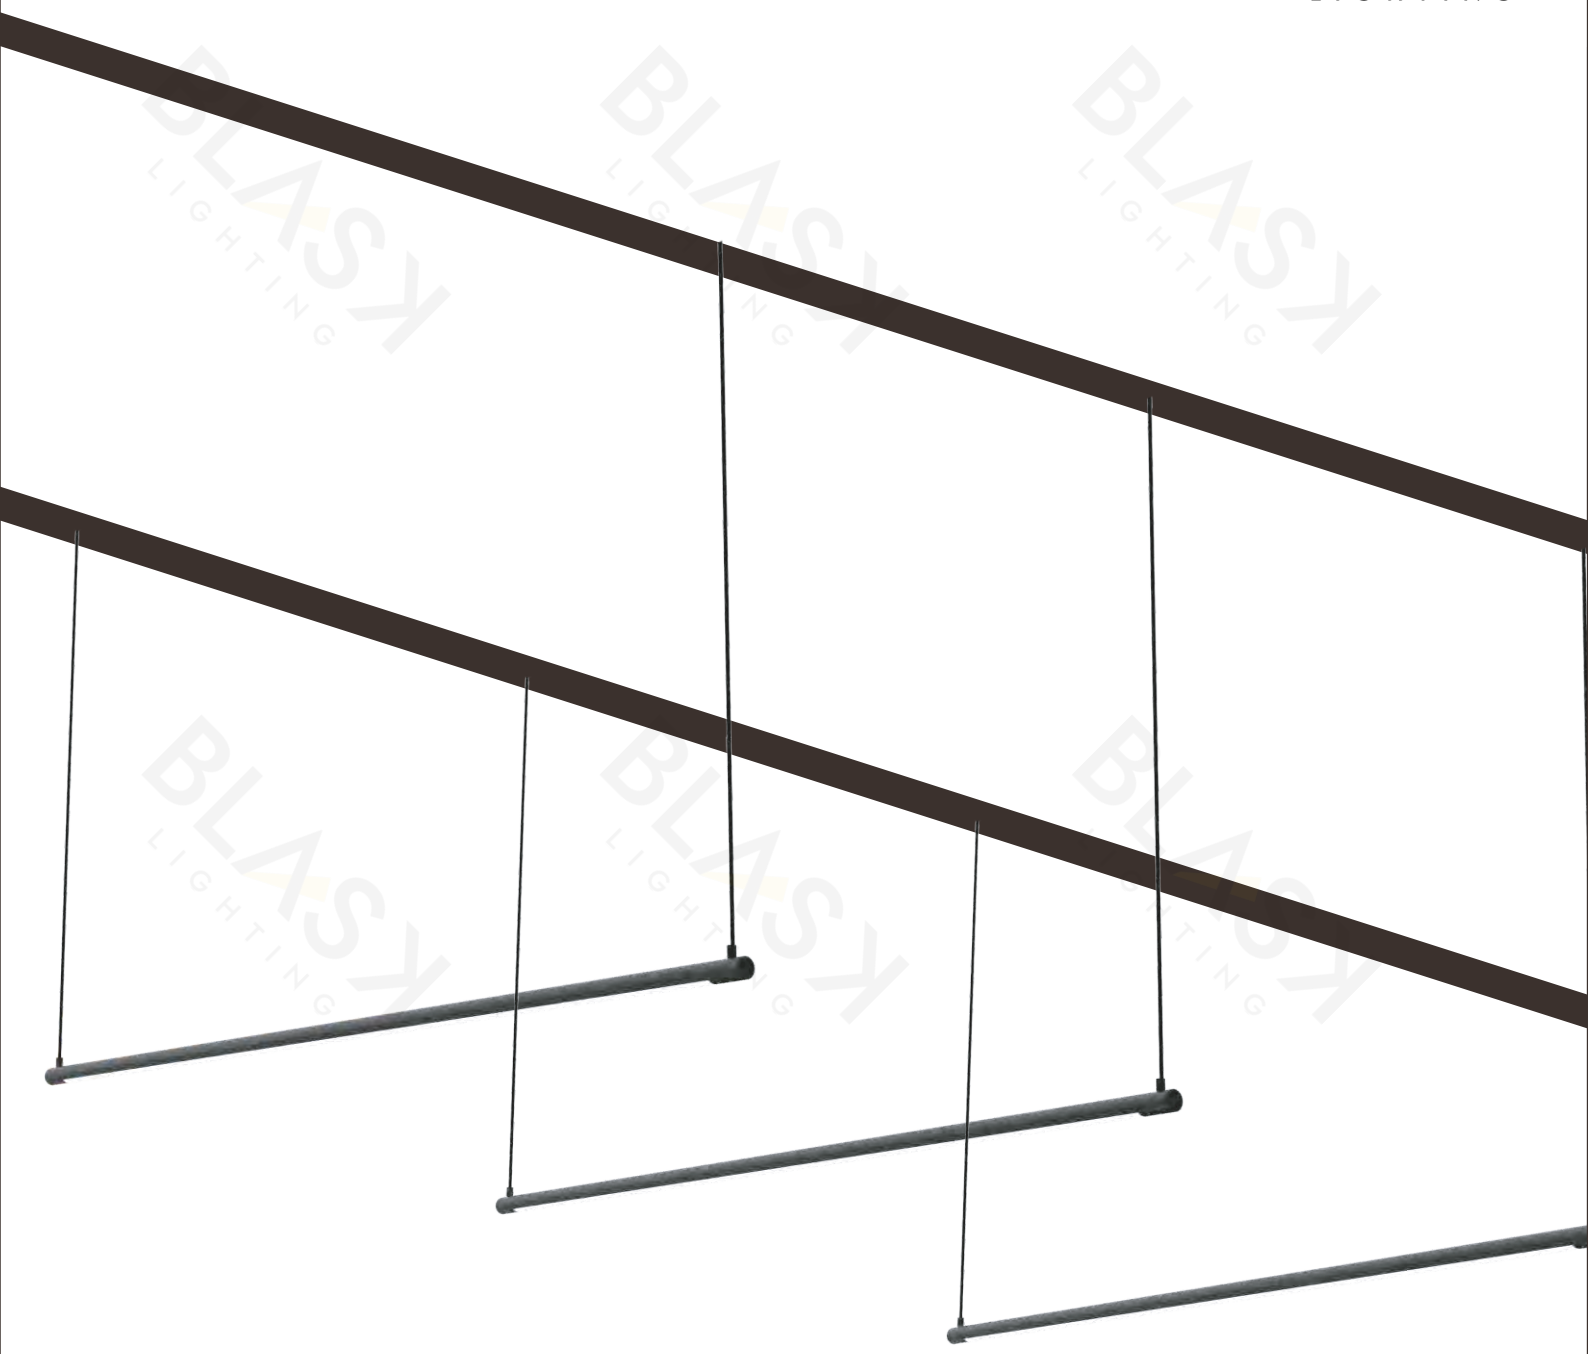

SIMPLE

This projector incorporates an innovative adjustable system with double bifocal lenses, which allows the light beam opening angle to be controlled from 15 degrees to 36 degrees, while maintaining high levels of efficiency.

15° - 36°

- No light loss luminous angle change
- The light output efficiency of the adjustable luminous angle optical device is maintained above 95%.

15°
36°

Surface
Special case of cement
ceiling surface installation

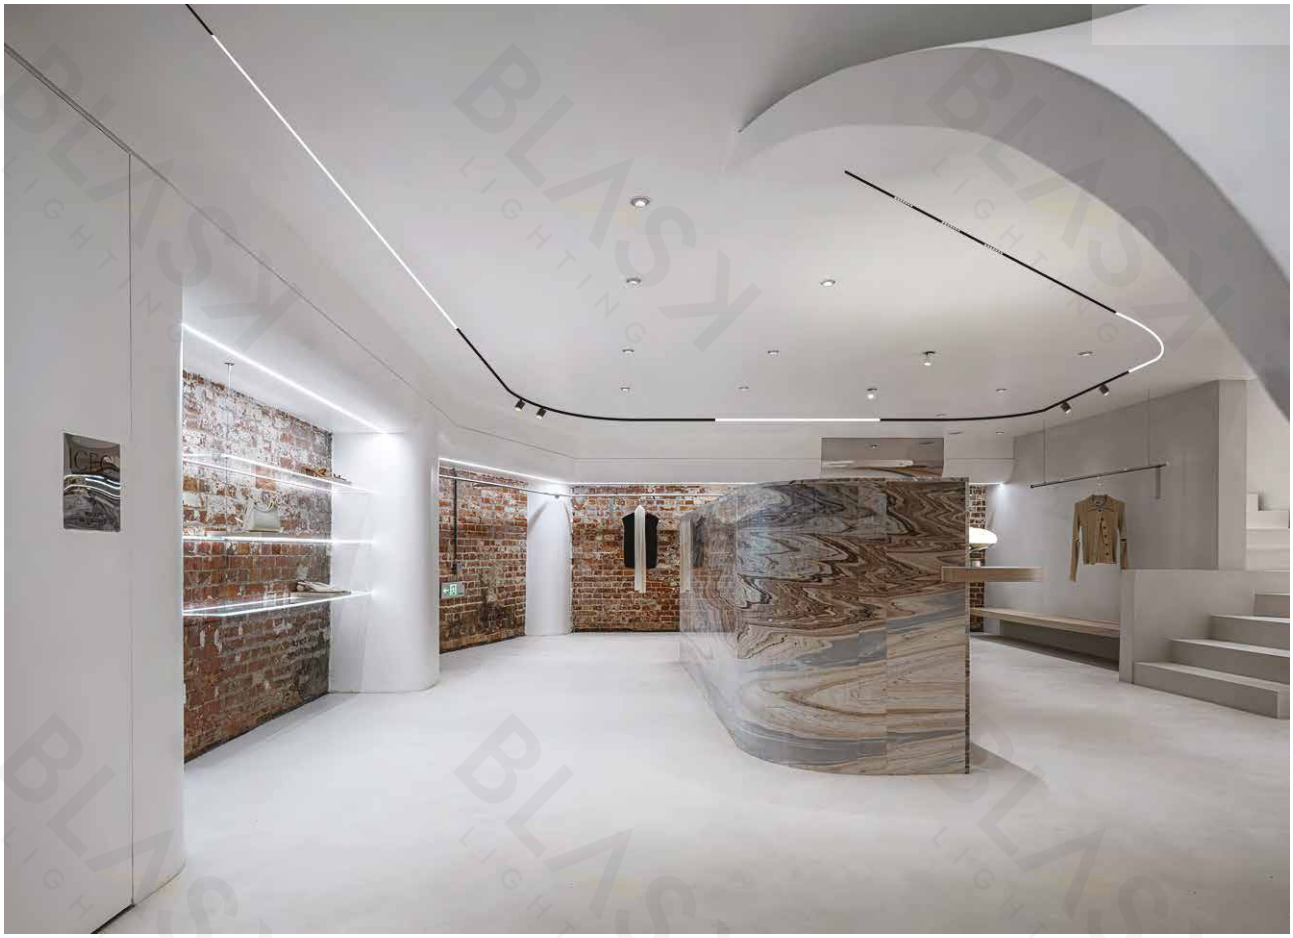

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

IP20
CRI>90
UGR<12
DC48V
5-year warranty

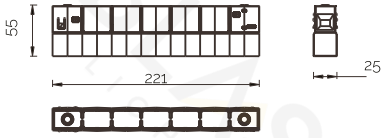

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30037	10W	1000 lm	10.5W	750 lm	3000K/4000K/6500K	24° / 38°

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

IP20
CRI>90
DC48V
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30038	10W	1000 lm	10.5W	700 lm	3000K/4000K/6500K	120°

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

IP20
CRI>90
DC48V
5-year warranty

INAMTI30039

INAMTI30040



INAMTI30041



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30039	10W	1000 lm	10.5W	700 lm	3000K/4000K/6500K	120°
INAMTI30040	20W	2000 lm	22.3W	1400 lm	3000K/4000K/6500K	120°
INAMTI30041	40W	4000 lm	43.5W	2800 lm	3000K/4000K/6500K	120°

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

IP20
CRI>90
UGR<12
DC48V
5-year warranty



INAMTI30042



INAMTI30043

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30042	5W	500 lm	5.9W	365 lm	3000K/4000K/6500K	15˚ -36˚
INAMTI30043	10W	1000 lm	10.8W	750 lm	3000K/4000K/6500K	15˚ -36˚

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

IP20
CRI>90
UGR<12
DC48V
5-year warranty



INAMTI30044



INAMTI30045



INAMTI30046

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30044	5W	500 lm	5.9W	365 lm	3000K/4000K/6500K	30°
INAMTI30045	10W	1000 lm	10.8W	750 lm	3000K/4000K/6500K	30°
INAMTI30046	15W	1500 lm	15.7W	1125 lm	3000K/4000K/6500K	30°

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

IP20
CRI>90
UGR<12
DC48V
5-year warranty
Length customization:1000mm,2000mm,3000mm

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30047	15W/m	1500 lm	15.9W	900 lm	3000K/4000K/6500K	360°

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

Non-flexible module, used with linear track
IP20
CRI>90
DC48V
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30048	10W	1000 lm	10.5W	750 lm	3000K/4000K/6500K	12° / 30° / 45° / 60°

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

Non-flexible module, used with linear track
IP20
CRI>90
DC48V
5-year warranty

INAMTI30049



INAMTI30050



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30049	6W	600 lm	6.4W	420 lm	3000K/4000K/6500K	120°
INAMTI30050	15W	1500 lm	15.5W	1050 lm	3000K/4000K/6500K	120°

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

Non-flexible module, used with linear track
IP20
CRI>90
DC48V
5-year warranty

INAMTI30051



INAMTI30052



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30051	6W	600 lm	6.4W	420 lm	3000K/4000K/6500K	120°
INAMTI30052	15W	1500 lm	15.5W	1050 lm	3000K/4000K/6500K	120°

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

Non-flexible module, used with linear track
IP20
CRI>90
DC48V
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30053	15W	1500 lm	15.5W	1050 lm	3000K/4000K/6500K	30°

FLEXIBLE TRACK LIGHT

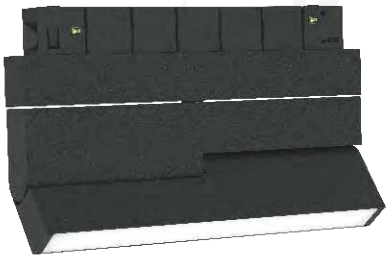

PRODUCT FEATURES

Non-flexible module, used with linear track
IP20
CRI>90
DC48V
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30054	15W	1500 lm	15.5W	1050 lm	3000K/4000K/6500K	120°

FLEXIBLE TRACK LIGHT

INAMTI30055 INAMTI30056 INAMTI30057 INAMTI30058 INAMTI30059

PRODUCT FEATURES

IP20
CRI>90
DC48V
5-year warranty

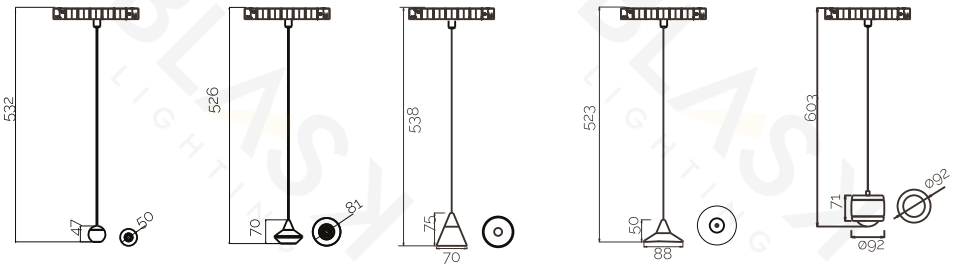

INAMTI30055 INAMTI30056 INAMTI30057 INAMTI30058 INAMTI30059

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30055	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	15˚ / 24˚ / 36˚ / 50˚
INAMTI30056	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	15˚ / 24˚ / 36˚ / 50˚
INAMTI30057	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	17˚ / 24˚ / 36˚
INAMTI30058	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	17˚ / 24˚ / 36˚
INAMTI30059	UP:1.5W+DOWN:4.5W	600 lm	6.5W	420 lm	3000K/4000K/6500K	20˚ / 40˚ / 60˚

FLEXIBLE TRACK LIGHT

PRODUCT FEATURES

IP20
CRI>90
DC48V
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30060	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	15° / 24° / 36°

FLEXIBLE TRACK LIGHT

INAMTI30061

INAMTI30062

PRODUCT FEATURES

IP20
CRI>90
DC48V
5-year warranty



INAMTI30061



INAMTI30062

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30061	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	27°
INAMTI30062	15W	1500 lm	15.6W	1050 lm	3000K/4000K/6500K	120°

FLEXIBLE TRACK LIGHT

INAMTI30063 INAMTI30064

PRODUCT FEATURES

IP20
CRI>90
DC48V
5-year warranty





INAMTI30063 INAMTI30064

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30063	6W	600 lm	6.4W	420 lm	3000K/4000K/6500K	30°
INAMTI30064	12W	1200 lm	12.6W	840 lm	3000K/4000K/6500K	30°

FLEXIBLE TRACK LIGHT

INAMTI30065

INAMTI30066

PRODUCT FEATURES

IP20
CRI>90
DC48V
5-year warranty



INAMTI30065



INAMTI30066

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30065	6W	600 lm	6.4W	420 lm	3000K/4000K/6500K	120°
INAMTI30066	12W	1200 lm	12.6W	840 lm	3000K/4000K/6500K	120°

FLEXIBLE TRACK LIGHT

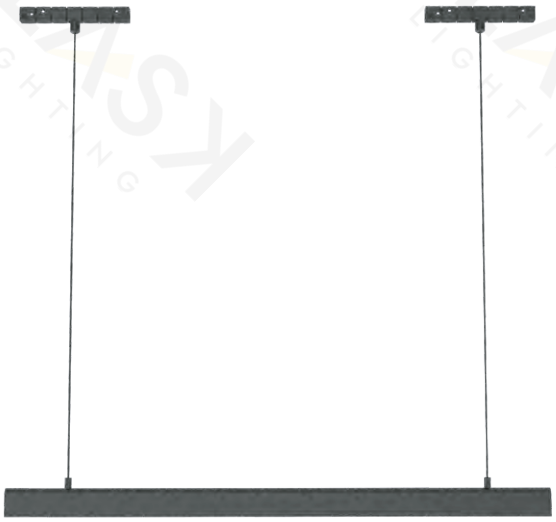

INAMTI30067

INAMTI30068

PRODUCT FEATURES

IP20
CRI>90
DC48V
5-year warranty



INAMTI30067



INAMTI30068

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30067	24W	2400 lm	25.2W	1680 lm	3000K/4000K/6500K	30°
INAMTI30068	24W	2400 lm	25.4W	1680 lm	3000K/4000K/6500K	120°

FLEXIBLE TRACK LIGHT

INAMTI30069



INAMTI30070

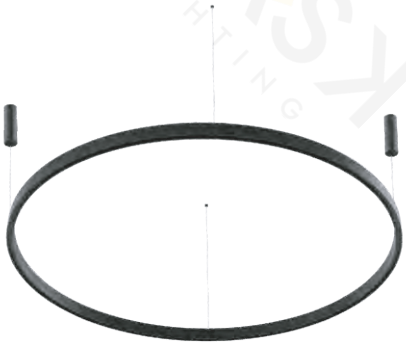

INAMTI30071

PRODUCT FEATURES

Up+down light
IP20
CRI>90
DC48V
5-year warranty

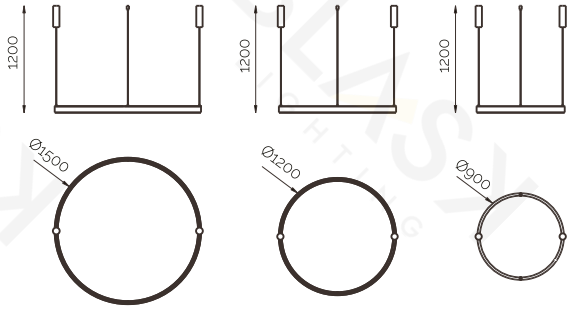

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INAMTI30069	Up:40W+Down:Max.100W	Up:2800 lm	3000K/4000K/6500K	Up:120°
INAMTI30070	Up:55W+Down:Max.150W	Up:3850 lm	3000K/4000K/6500K	Up:120°
INAMTI30071	Up:65W+Down:Max.150W	Up:4550 lm	3000K/4000K/6500K	Up:120°



INAMTI30072

Power	12W/M
Material	Aluminum
Color	Black
Remark	Track for suspend . Size for 1000/2000/3000mm optional.



INAMTI30075

Material	Aluminum
Color	Black
Remark	Track for surface mounted. Size for 1000/2000/3000mm optional.



INAMTI30073

Material	Aluminum
Color	Black
Remark	Track for trimless recessed only. Size for 1000/2000/3000mm optional.



INAMTI30076

Material	Aluminum
Color	Black
Remark	Track for trimless recessed only. Size for 1000/2000/3000mm optional.



INAMTI30074

Material	Aluminum
Color	Black
Remark	Track for trimless recessed only. Size for 1000/2000/3000mm optional.



INAMTI30077

Material	Aluminum
Color	Black
Remark	Track for surface mounted. r 1000/2000/3000mm optional.

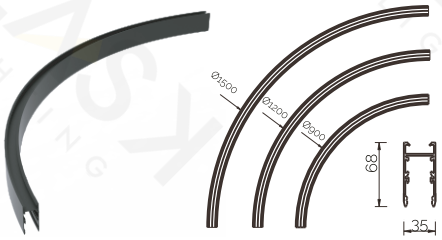

INAMTI30078

Material	Aluminum
Color	Black
Remark	Surface mounted 0168ME track 1/4 of a circle. Size for Ø900/Ø1200/Ø1500mm optional or custom made.

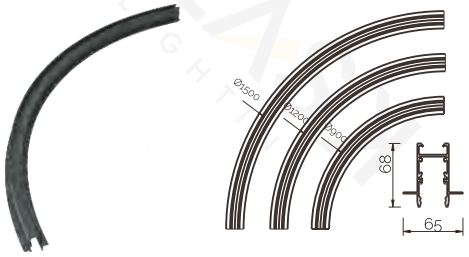

INAMTI30081

Material	Aluminum
Color	Black
Remark	Ceiling recessed 0168MEC track 1/4 of a circle. Size for Ø900/Ø1200/Ø1500mm optional or custom made.

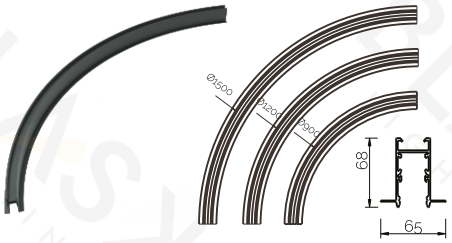

INAMTI30079

Material	Aluminum
Color	Black
Remark	Ceiling recessed 0168MEC track 1/4 of a circle. Size for Ø900/Ø1200/Ø1500mm optional or custom made.

INAMTI30082

Material	Aluminum
Color	Black
Remark	Surface mounted. Size for Ø900/Ø1200/Ø1500mm optional or custom made.

INAMTI30080

Material	Aluminum
Color	Black
Remark	Ceiling recessed. Size for Ø900/Ø1200/Ø1500mm optional or custom made.

INAMTI30083

Material	Aluminum
Color	Black
Remark	Ceiling recessed. Size for Ø900/Ø1200/Ø1500mm optional or custom made.



INAMTI30084

Material	Aluminum
Color	Black
Remark	Track for suspend and surface mounting the plane 90° Corner



INAMTI30087

Material	Aluminum
Color	Black
Remark	Track for suspend and surface mounting the erect 90° Corner



INAMTI30085

Material	Aluminum
Color	Black
Remark	Track for recessed the plane 90° Corner



INAMTI30088

Material	Aluminum
Color	Black
Remark	Track for recessed the erect 90° Corner



INAMTI30086

Material	Aluminum
Color	Black
Remark	Track for recessed the plane 90° Corner



INAMTI30089

Material	Aluminum
Color	Black
Remark	Track for recessed the erect 90° Corner



INAMTI30090

Material	Aluminum
Color	Black
Remark	Track for suspend and surface mounting the corner +



INAMTI30093

Material	Aluminum
Color	Black
Remark	Track for suspend and surface mounting the corner T





INAMTI30091

Material	Aluminum
Color	Black
Remark	Track for recessed the corner +



INAMTI30094

Material	Aluminum
Color	Black
Remark	Track for recessed the corner T



INAMTI30092

Material	Aluminum
Color	Black
Remark	Track for recessed the corner +



INAMTI30095

Material	Aluminum
Color	Black
Remark	Track for recessed the corner T

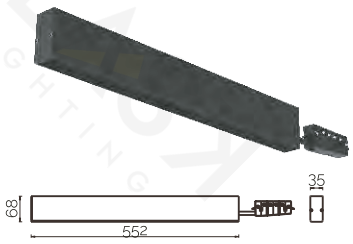

INAMTI30096

Power	144W
Material	Aluminum
Color	Black
Remark	Driver box for 0168ME TRACK SURFACE

INAMTI30099

Power	150W
Material	Aluminum
Color	Black
Remark	Driver box for 0168ME CIRCLE



INAMTI30097

Material	Aluminum
Color	Black
Remark	0168ME TRACK End cap





INAMTI30100

Material	Aluminum
Color	Black
Remark	For track surface mounting accessories

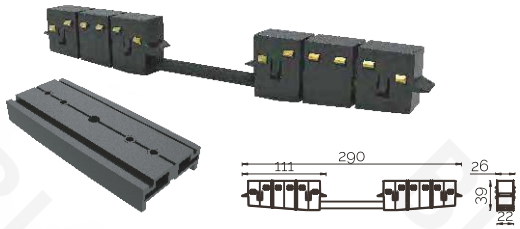

INAMTI30098

Material	Aluminum+Silica gel
Color	Black
Remark	For electrically conductive connections between two tracks .

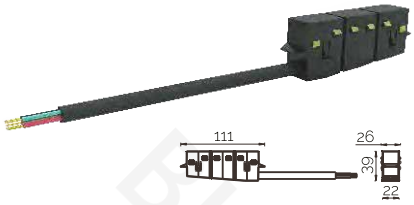

INAMTI30101

Material	Silica gel
Color	Black
Remark	Used for conductive connection between power supply and track.

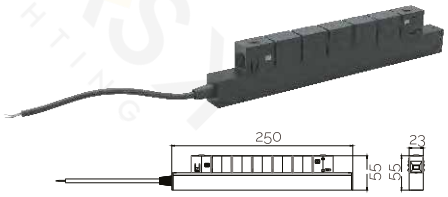

INAMTI30102

Power	Max. 100W
Material	Plastic
Color	Black
Remark	Driver for magnetic track

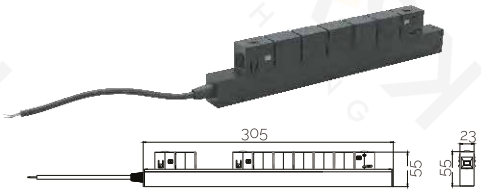

INAMTI30104

Power	Max. 200W
Material	Plastic
Color	Black
Remark	Driver for magnetic track

INAMTI30103

Material	Stainless steel
Color	Black
Remark	For track suspend accessories

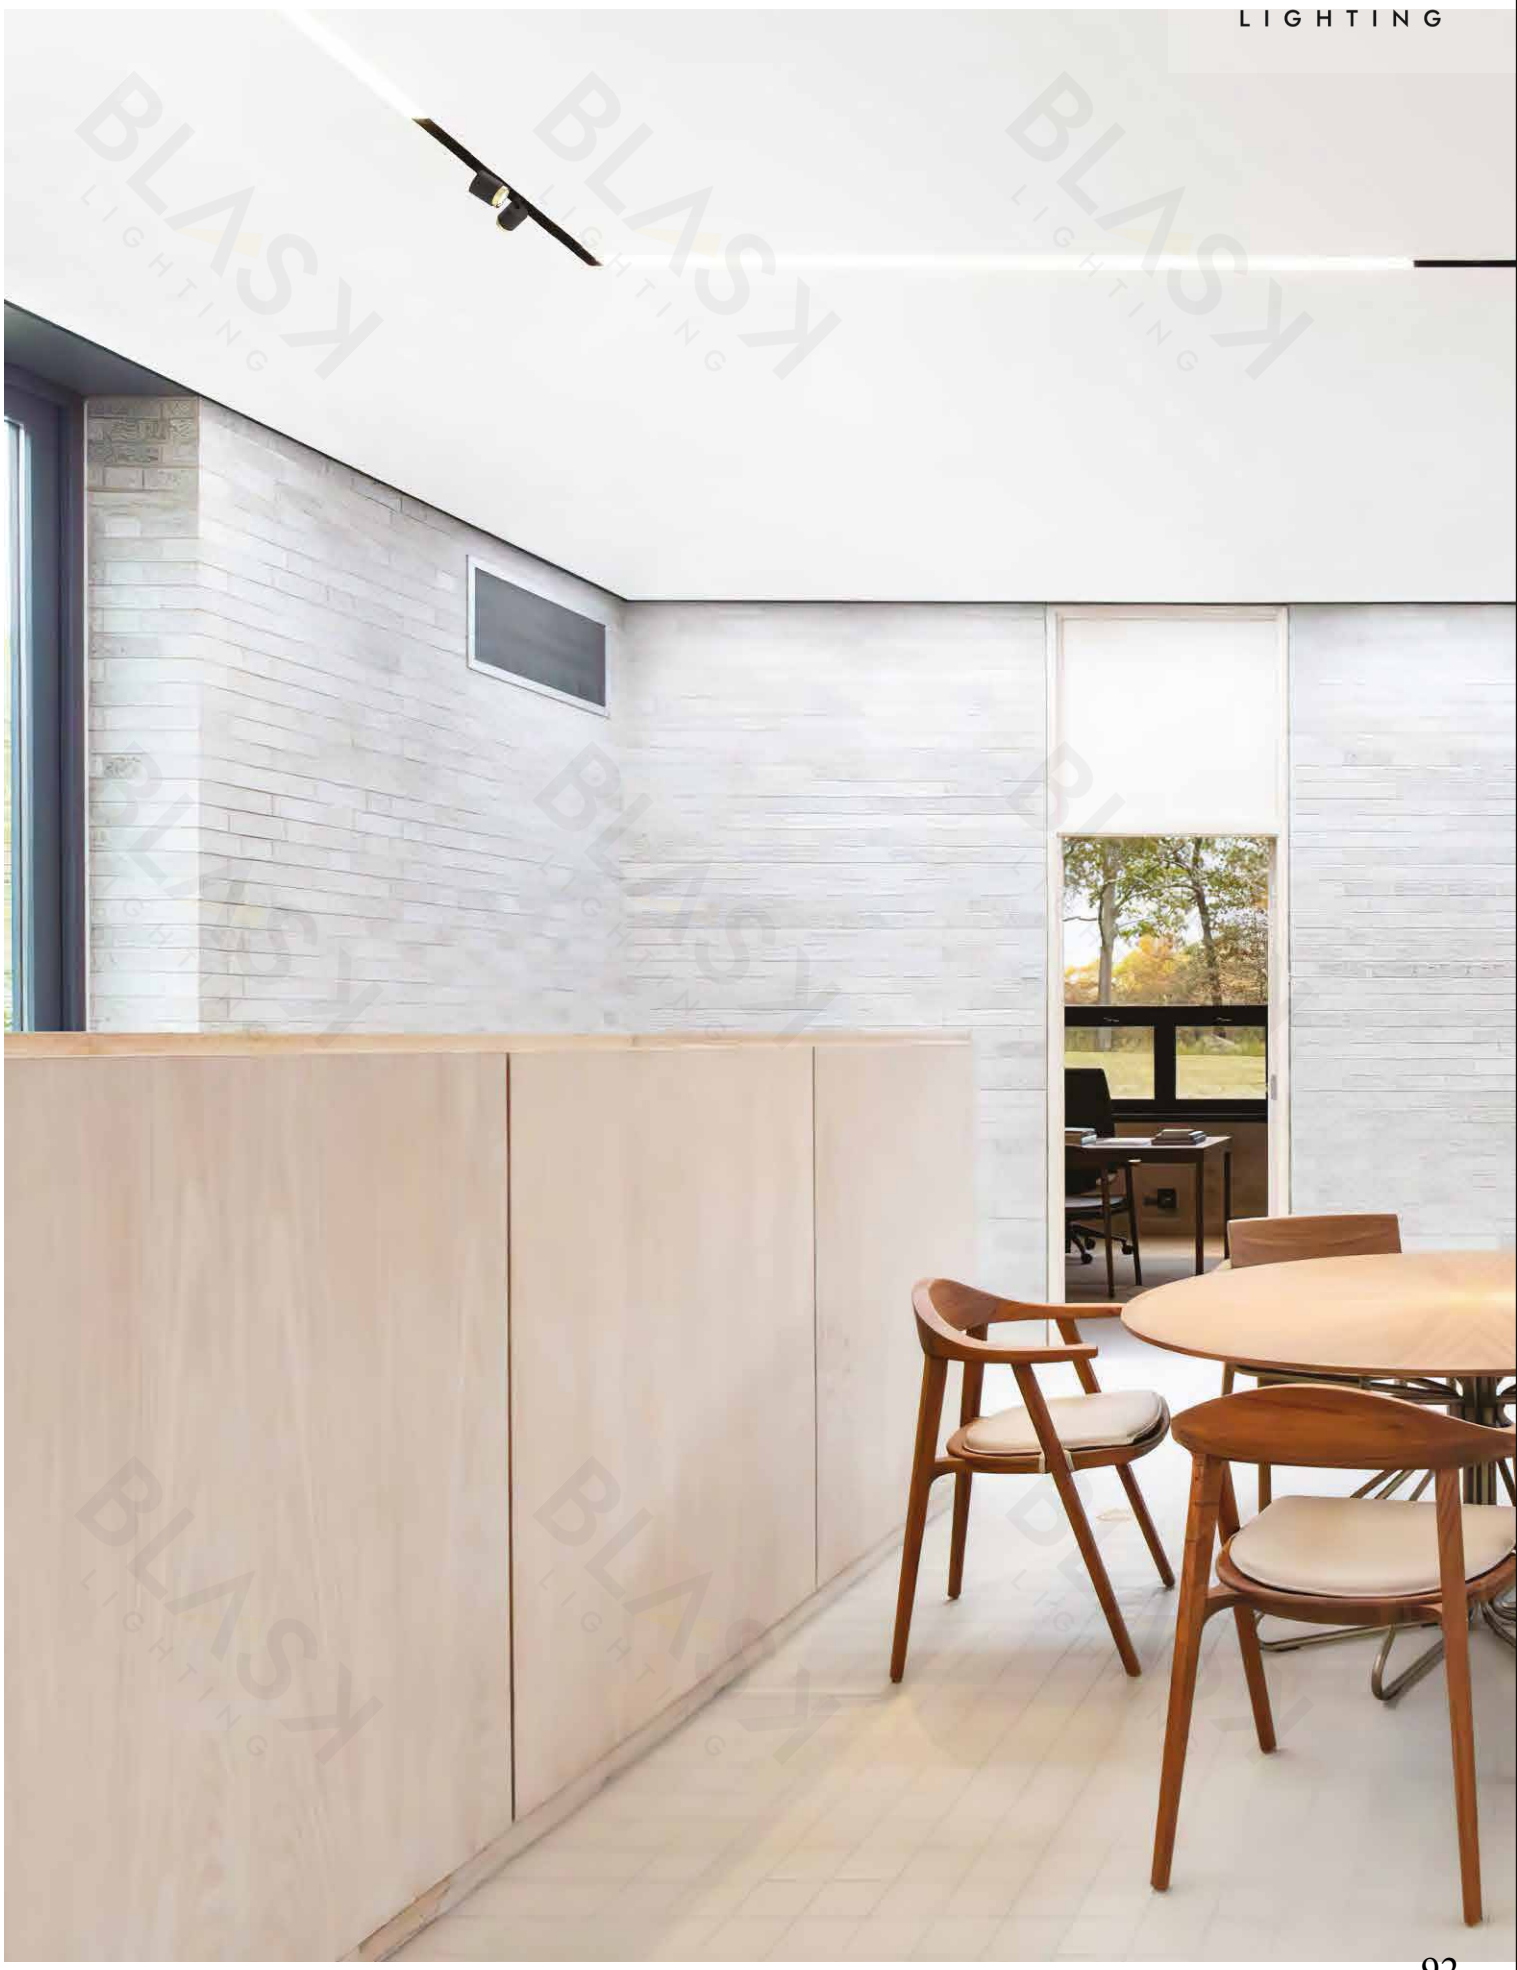

ULTRA-NARROW MAGNETIC LIGHT

The system consists of magnetic profiles powered at 48V where the LED lighting modules are placed. The profiles are suitable recessed,surface and suspend installations in walls or plasterboard ceilings. The Tracking Magnet is completed by ambient and accent lighting modules with different optics, as well as by a special module for spot lighting on walls.

A minimal line only 10 mm wide, achieved trough the extreme miniaturization of the electronics and the optical bodies. The Tracking Magnet offers a complete collection of lighting tools for any need. Its magnetic installation gives total freedom to be configured in space.

Dimmable

Optional:

DALI | 0-10V | TRIAC

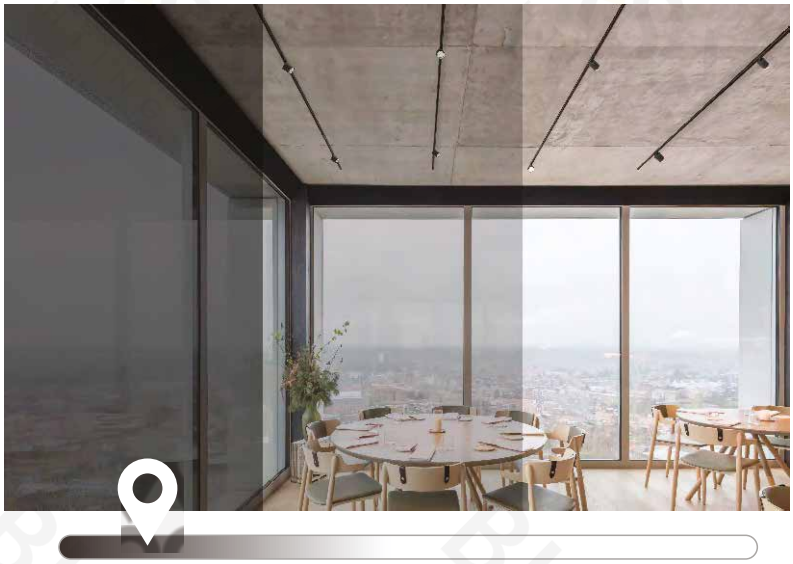

Wiring Diagram

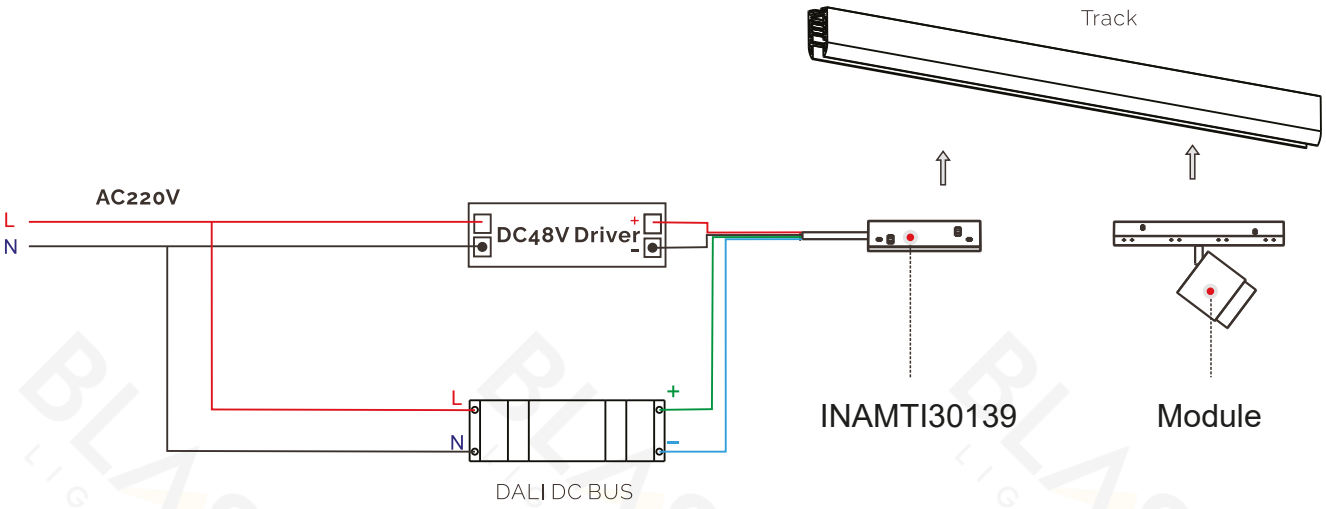

Wiring Diagram

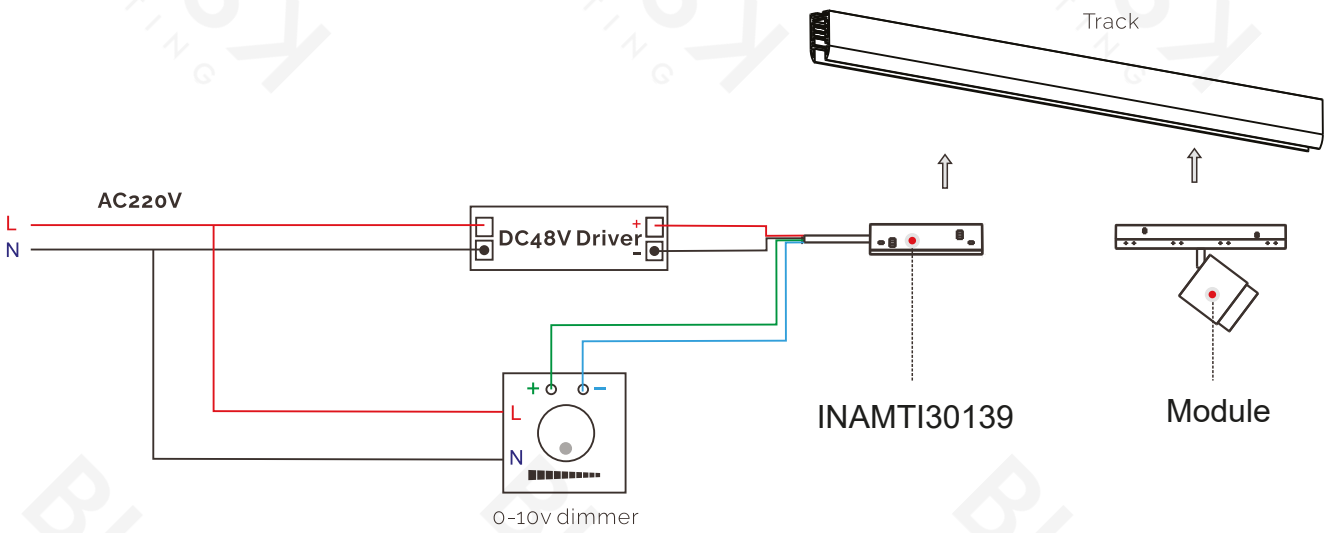

Wiring Diagram

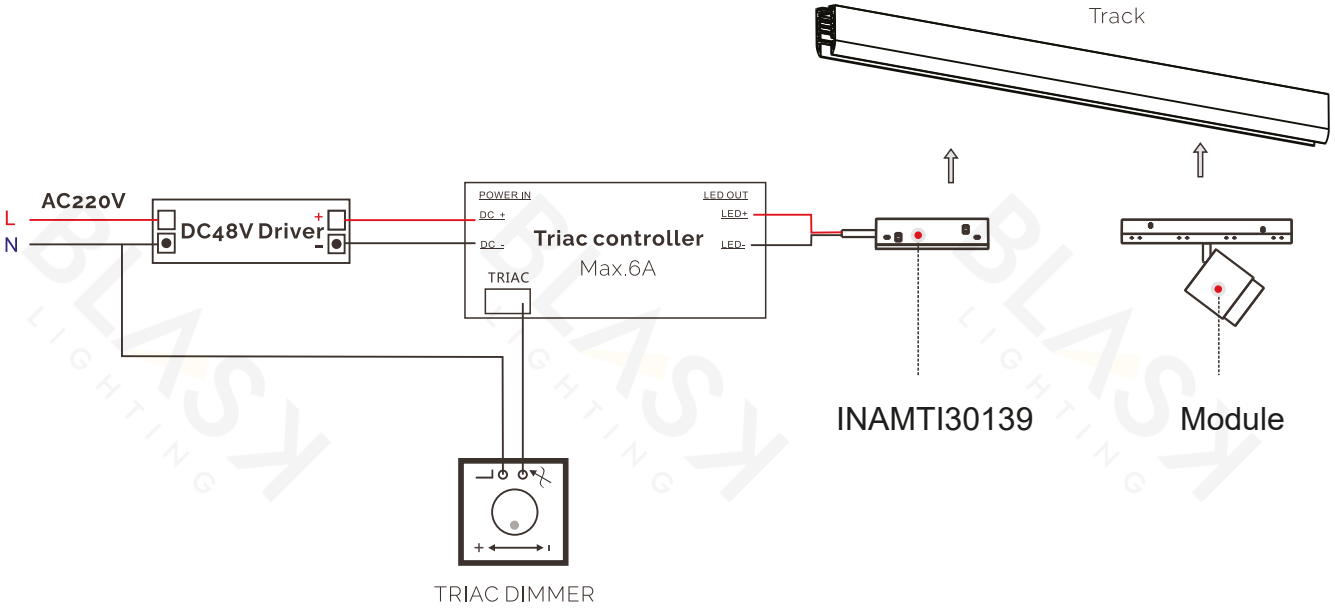

A minimal line only 10 mm wide ,
merging with any architectural structure in a perfect integration.

Surface

Suspend

Recessed

Magnetic fixing of the luminaries. The lighting bodies can be moved when they are still on, achieving enormous flexibility and adaptability in the configuration at any time.

This projector incorporates an innovative adjustable system with double bifocal lenses, which allows the light beam opening angle to be controlled from 15 degrees to 36 degrees, while maintaining high levels of efficiency.

15° - 36°

- No light loss luminous angle change
- The light output efficiency of the adjustable luminous angle optical device is maintained above 95%.

15°
36°

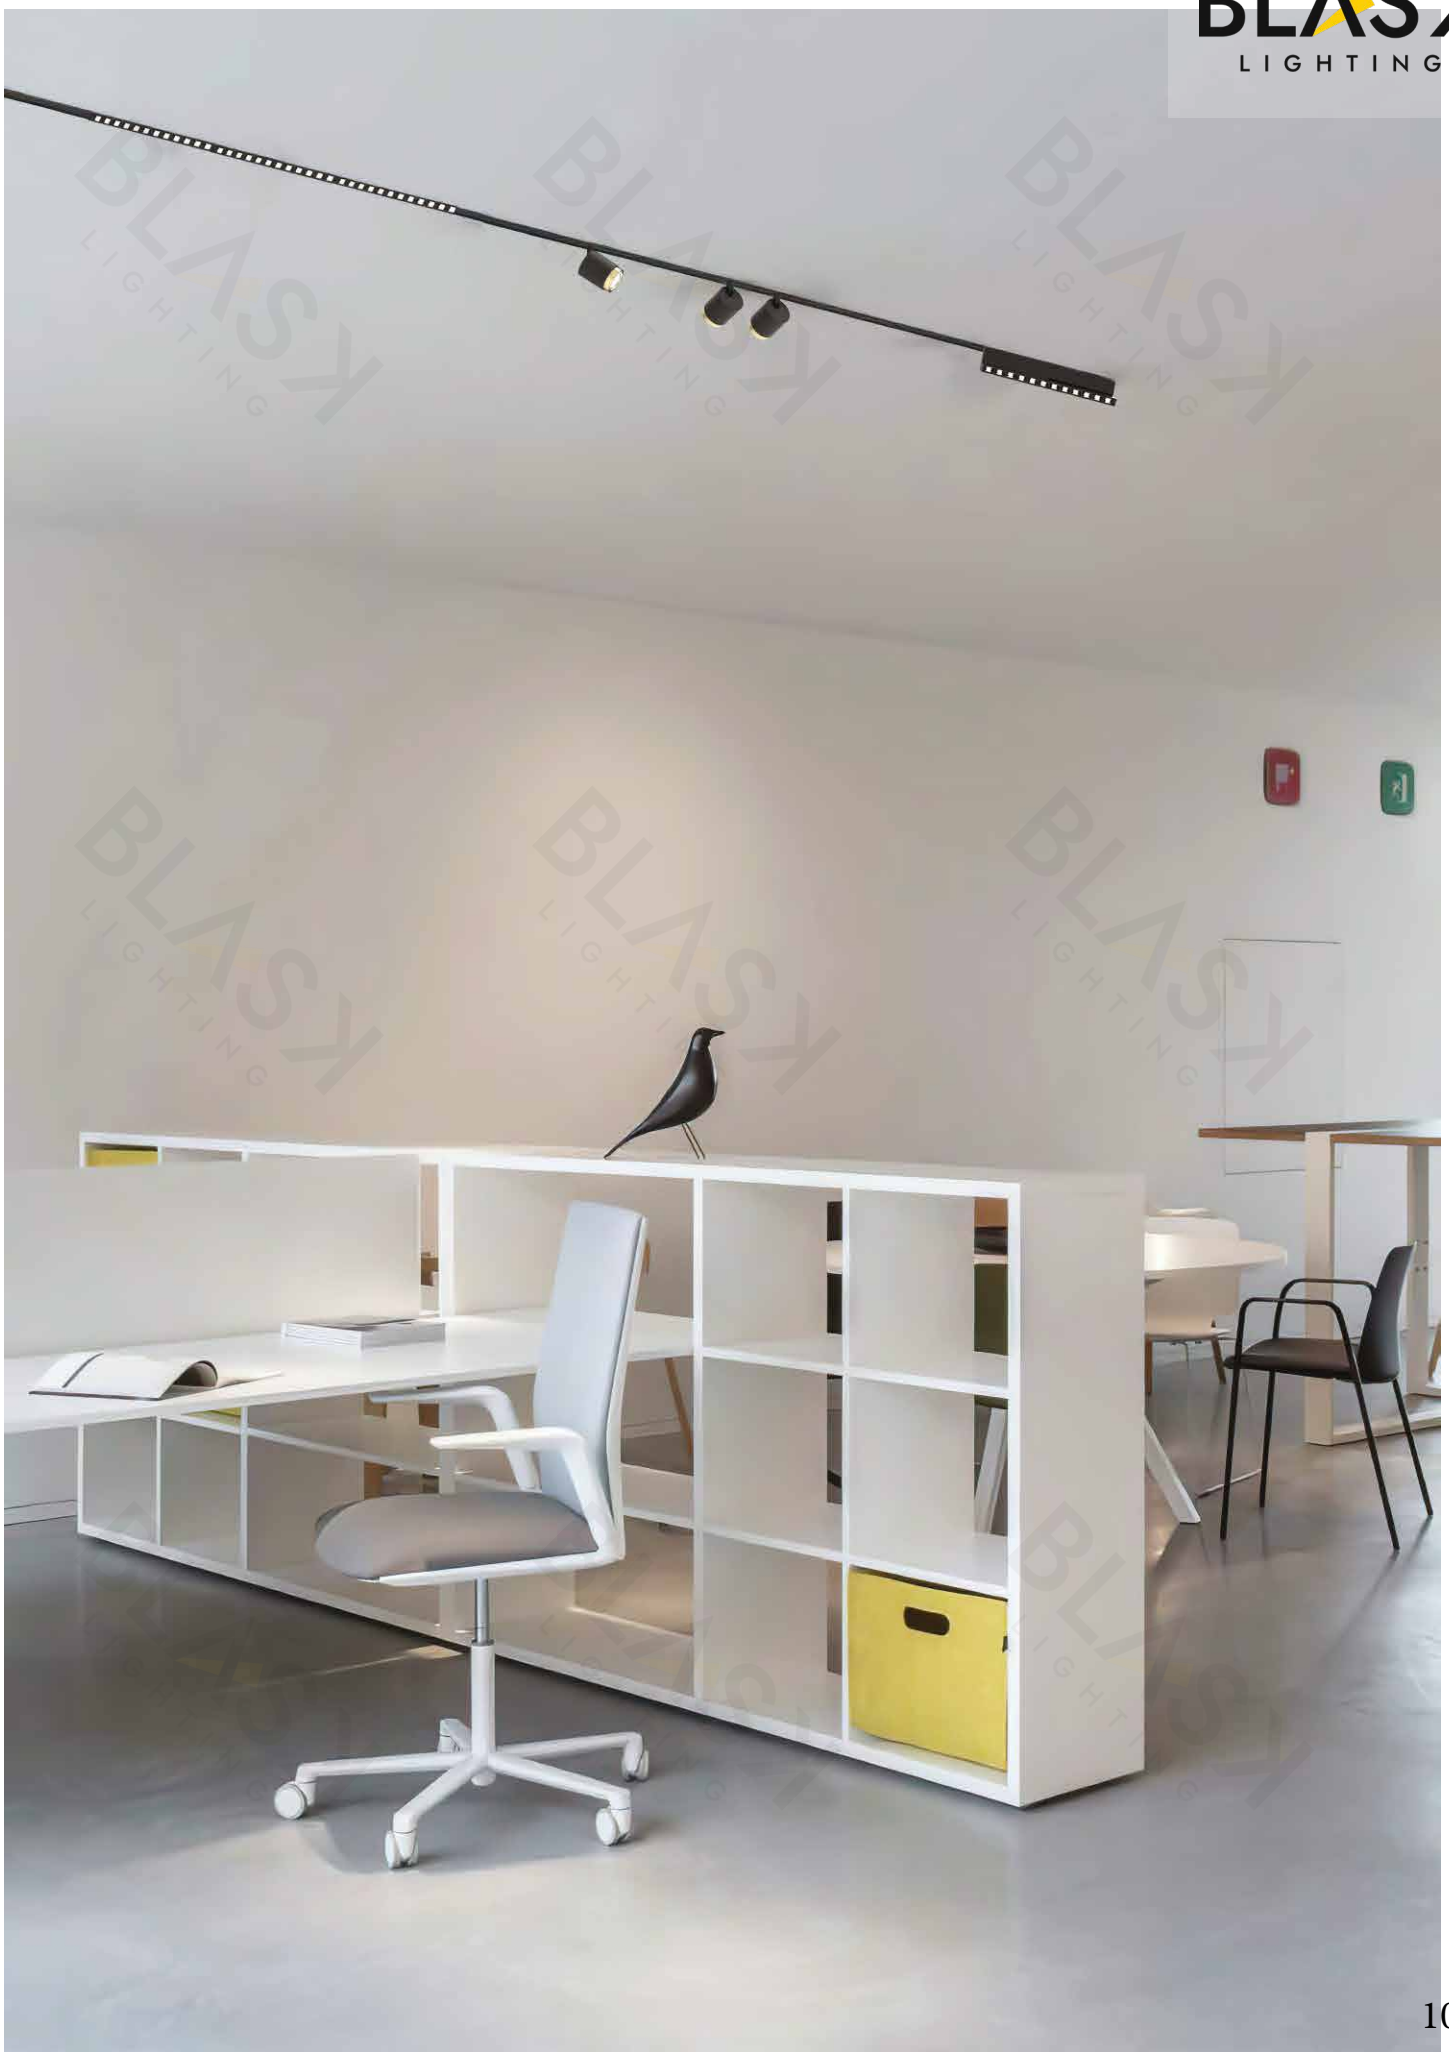

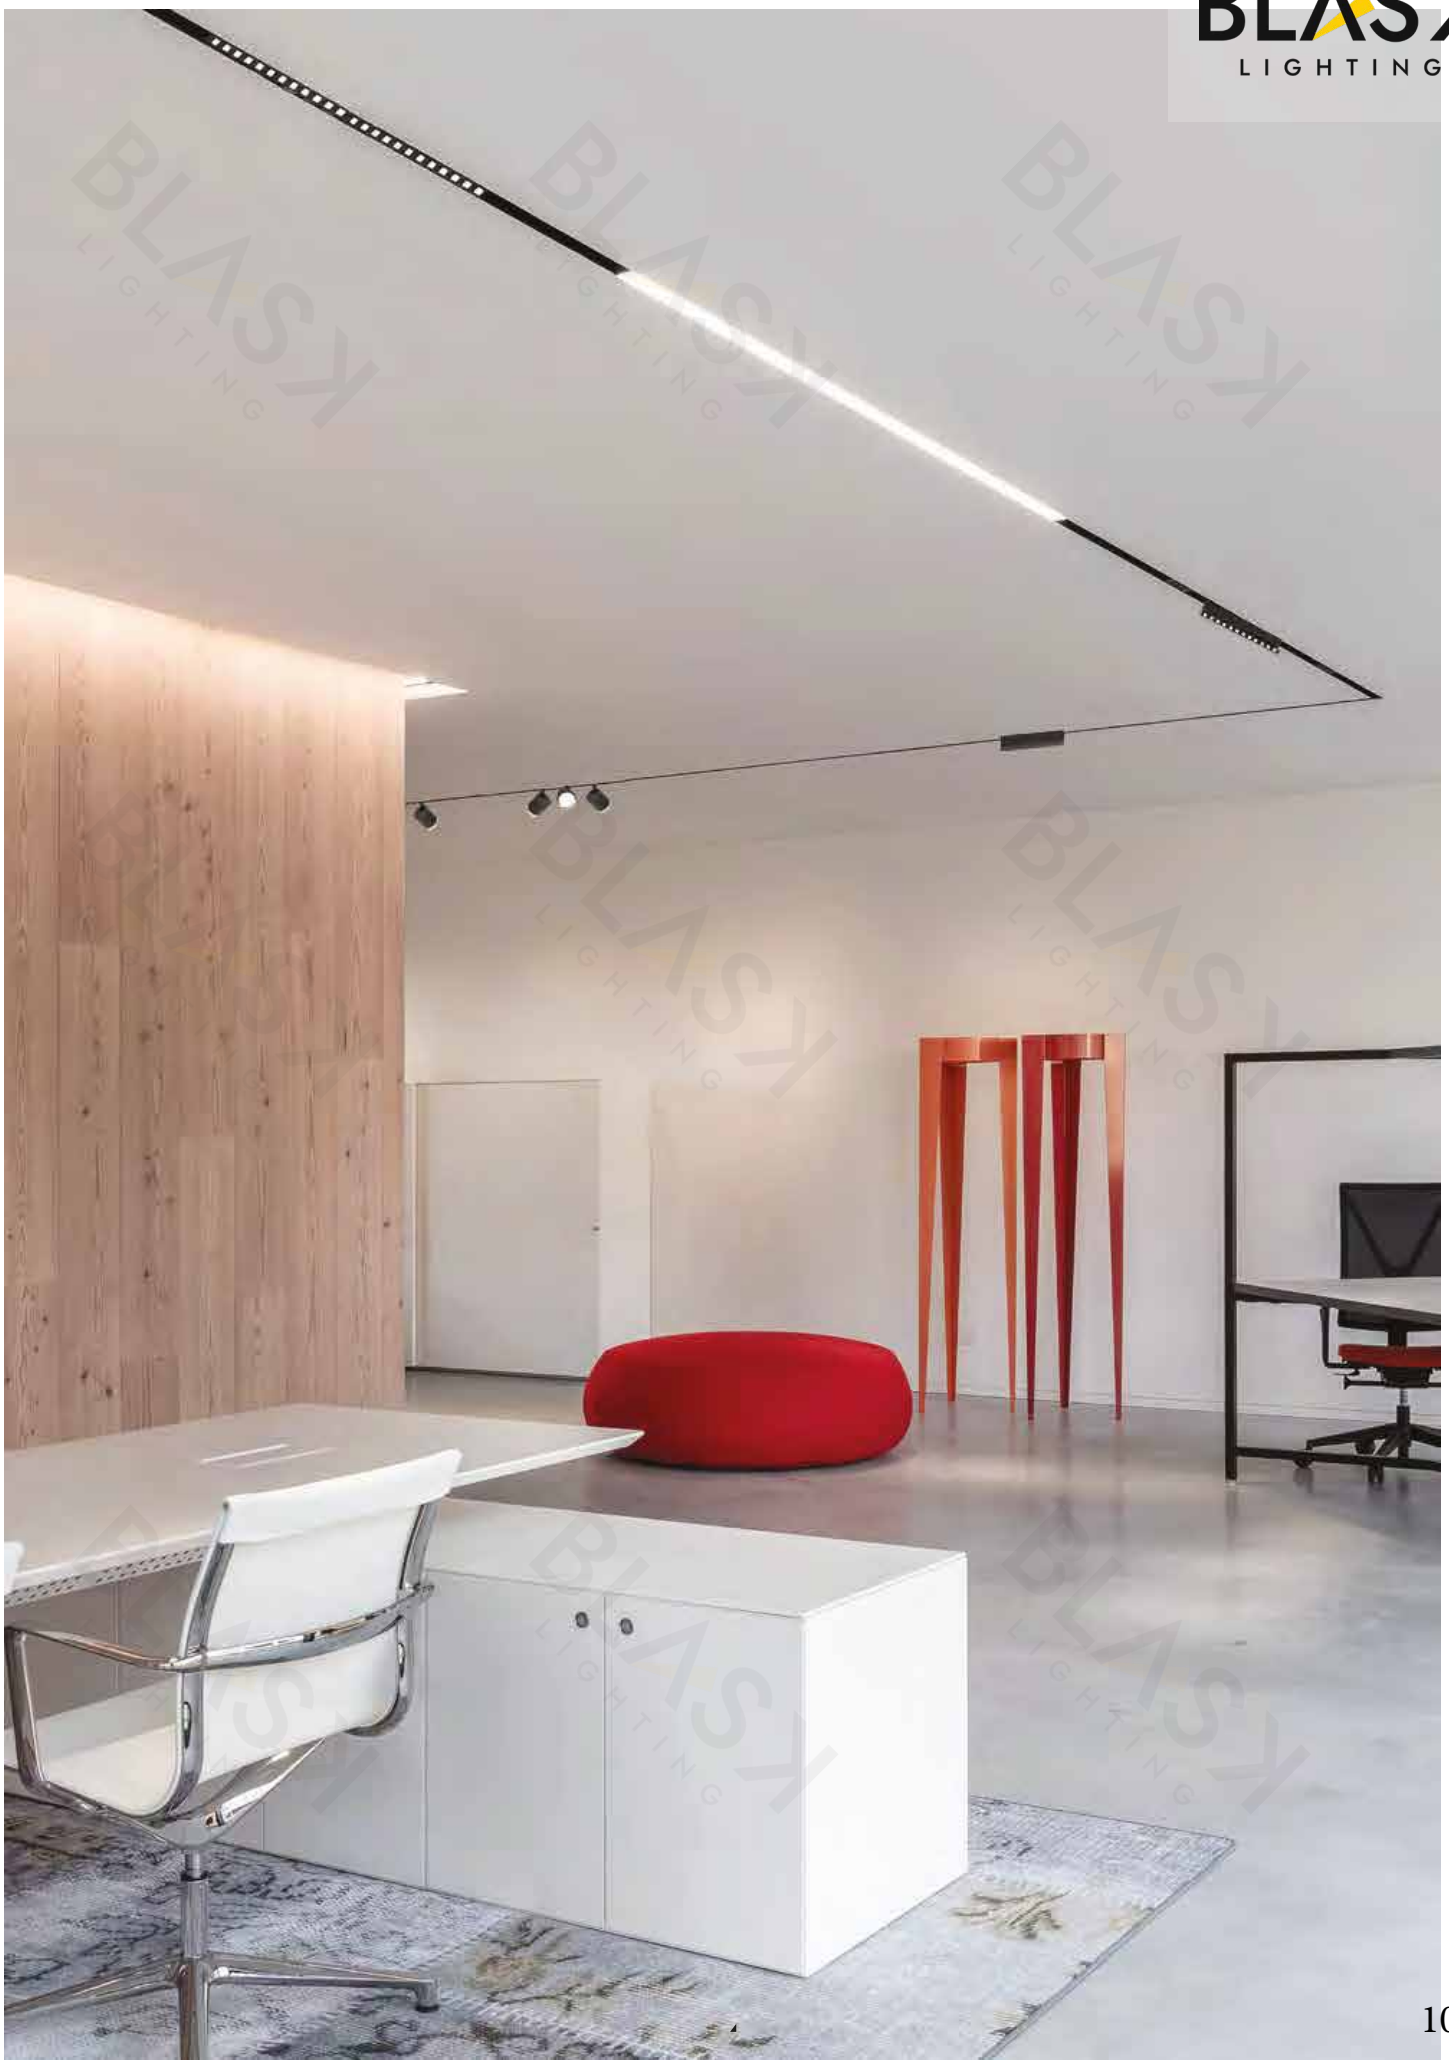

ULTRA-NARROW MAGNETIC LIGHT

INAMTI30105

INAMTI30106

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
UGR<12
DC48V
5-year warranty



INAMTI30105



INAMTI30106

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30105	6W	600 lm	6.8W	420 lm	3000K/4000K/6500K	30°
INAMTI30106	12W	1200 lm	13.2W	840 lm	3000K/4000K/6500K	30°

ULTRA-NARROW MAGNETIC LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
UGR<12
DC48V
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30107	12W	1200 lm	13.2W	840 lm	3000K/4000K/6500K	30°

ULTRA-NARROW MAGNETIC LIGHT

INAMTI30108

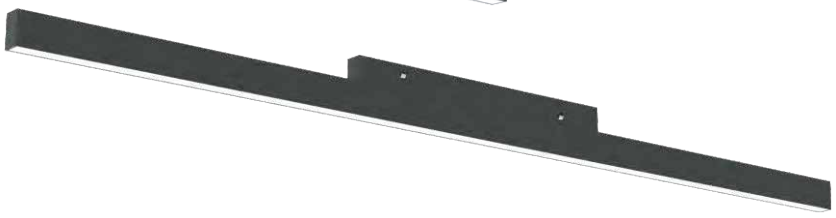

INAMTI30109

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
DC48V
5-year warranty

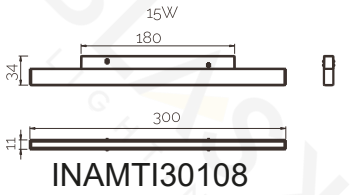

INAMTI30108

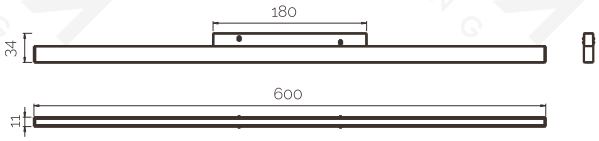

INAMTI30109

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30108	15W	1500 lm	16.1W	1050 lm	3000K/4000K/6500K	120°
INAMTI30109	30W	3000 lm	32.3W	2100 lm	3000K/4000K/6500K	120°

ULTRA-NARROW MAGNETIC LIGHT

INAMTI30110

INAMTI30111

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
UGR<12
DC48V
5-year warranty



INAMTI30110



INAMTI30111

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30110	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	15˚ -36˚
INAMTI30111	10W	100 lm	10.8W	700 lm	3000K/4000K/6500K	15˚ -36˚

ULTRA-NARROW MAGNETIC LIGHT

INAMTI30112

INAMTI30113

INAMTI30114

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
UGR<12
DC48V
5-year warranty



INAMTI30112



INAMTI30113



INAMTI30114

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30112	5W	500 lm	5.9W	365 lm	3000K/4000K/6500K	30°
INAMTI30113	10W	1000 lm	10.8W	750 lm	3000K/4000K/6500K	30°
INAMTI30114	15W	1500 lm	15.7W	1125 lm	3000K/4000K/6500K	30°

ULTRA-NARROW MAGNETIC LIGHT

INAMTI30115

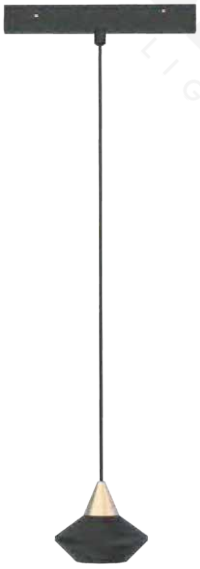

INAMTI30116

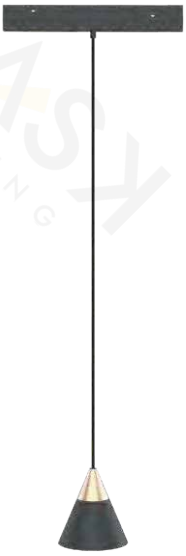

INAMTI30117

INAMTI30118

INAMTI30119

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
DC48V
5-year warranty



INAMTI30115



INAMTI30116

INAMTI30117



INAMTI30118



INAMTI30119

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30115	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	15˚ / 24˚ / 36˚ / 50˚
INAMTI30116	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	15˚ / 24˚ / 36˚ / 50˚
INAMTI30117	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	17˚ / 24˚ / 36˚
INAMTI30118	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	17˚ / 24˚ / 36˚
INAMTI30119	UP:1.5W+DOWN:4.5W	600 lm	6.5W	420 lm	3000K/4000K/6500K	20˚ / 40˚ / 60˚

ULTRA-NARROW MAGNETIC LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
DC48V
5-year warranty

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30120	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	15° / 24° / 36°

ULTRA-NARROW MAGNETIC LIGHT

INAMTI30121

INAMTI30122

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
DC48V
5-year warranty



INAMTI30121

INAMTI30122

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30121	5W	500 lm	5.9W	350 lm	3000K/4000K/6500K	27°
INAMTI30122	15W	1500 lm	15.6W	1050 lm	3000K/4000K/6500K	120°

ULTRA-NARROW MAGNETIC LIGHT

INAMTI30123

INAMTI30124

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
DC48V
5-year warranty



INAMTI30123



INAMTI30124

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30123	6W	600 lm	6.4W	420 lm	3000K/4000K/6500K	30°
INAMTI30124	12W	1200 lm	12.6W	840 lm	3000K/4000K/6500K	30°

ULTRA-NARROW MAGNETIC LIGHT

INAMTI30125

INAMTI30126

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
DC48V
5-year warranty



INAMTI30125



INAMTI30126

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30125	6W	600 lm	6.4W	420 lm	3000K/4000K/6500K	120°
INAMTI30126	12W	1200 lm	12.6W	840 lm	3000K/4000K/6500K	120°

ULTRA-NARROW MAGNETIC LIGHT

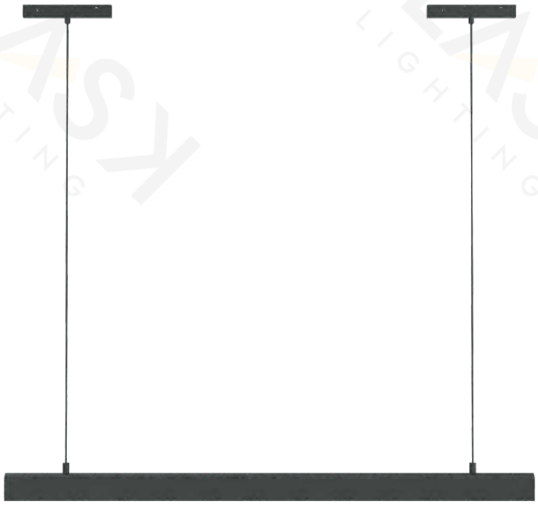

INAMTI30127

INAMTI30128

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
DC48V
5-year warranty



INAMTI30127



INAMTI30128

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INAMTI30127	24W	2400 lm	25.2W	1680 lm	3000K/4000K/6500K	30°
INAMTI30128	24W	2400 lm	25.4W	1680 lm	3000K/4000K/6500K	120°

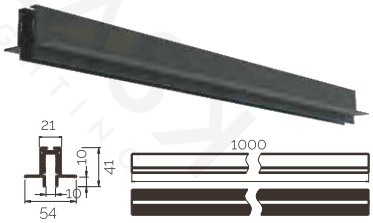

INAMTI30129

Material	Aluminum
Color	Black
Remark	Magnetic track for trimless recessed only. Size for 1000/2000/3000mm optional.



INAMTI30132

Material	Aluminum
Color	Black
Remark	Magnetic track for suspend or surface mounted. Size for 1000/2000/3000mm optional.

INAMTI30130

Material	Aluminum
Color	Black
Remark	Magnetic track for suspend andsurface mounting the plane 90° Corner

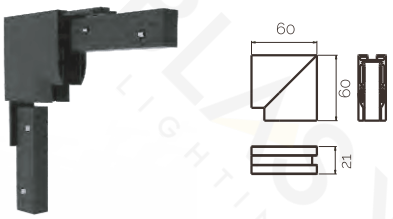

INAMTI30133

Material	Aluminum
Color	Black
Remark	Magnetic track for suspend andsurface mounting the erect 90° Corner

INAMTI30131

Material	Aluminum
Color	Black
Remark	Magnetic track for recessed the plane 90° Corner

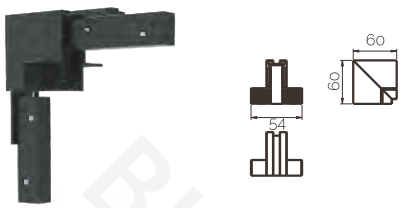

INAMTI30134

Material	Aluminum
Color	Black
Remark	Magnetic track for recessed the erect 90° Corner



INAMTI30135

Material	Aluminum
Color	Black
Remark	0166MEC TRACK End cap



INAMTI30138

Material	Aluminum
Color	Black
Remark	0166ME TRACK End cap

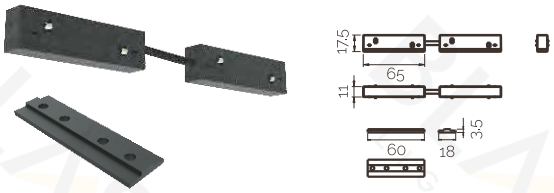

INAMTI30136

Material	Aluminum+PC
Color	Black
Remark	For electrically conductive connections between two magnetic tracks

INAMTI30139

Material	PC
Color	Black
Remark	Used for conductive connection between power supply and magnetic track

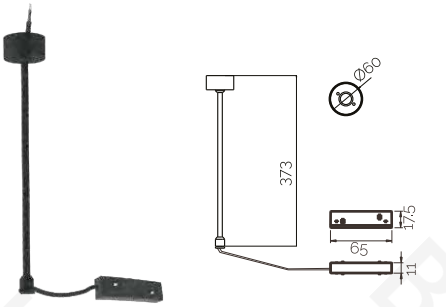

INAMTI30137

Material	Aluminum
Color	Black
Remark	For magnetic track suspend accessories (Wire input)



INAMTI30140

Material	Aluminum
Color	Black
Remark	For magnetic track suspend accessories

Applications

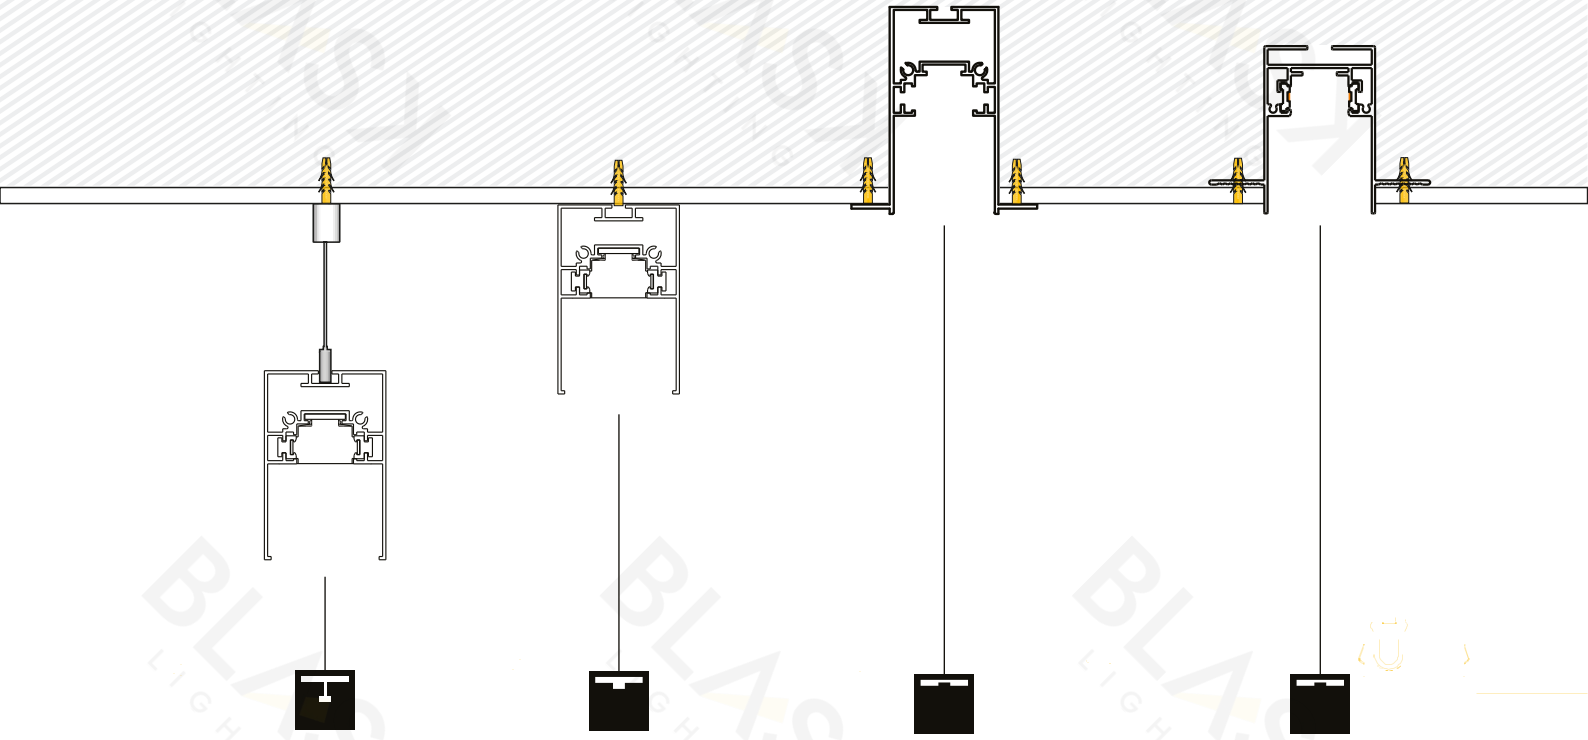

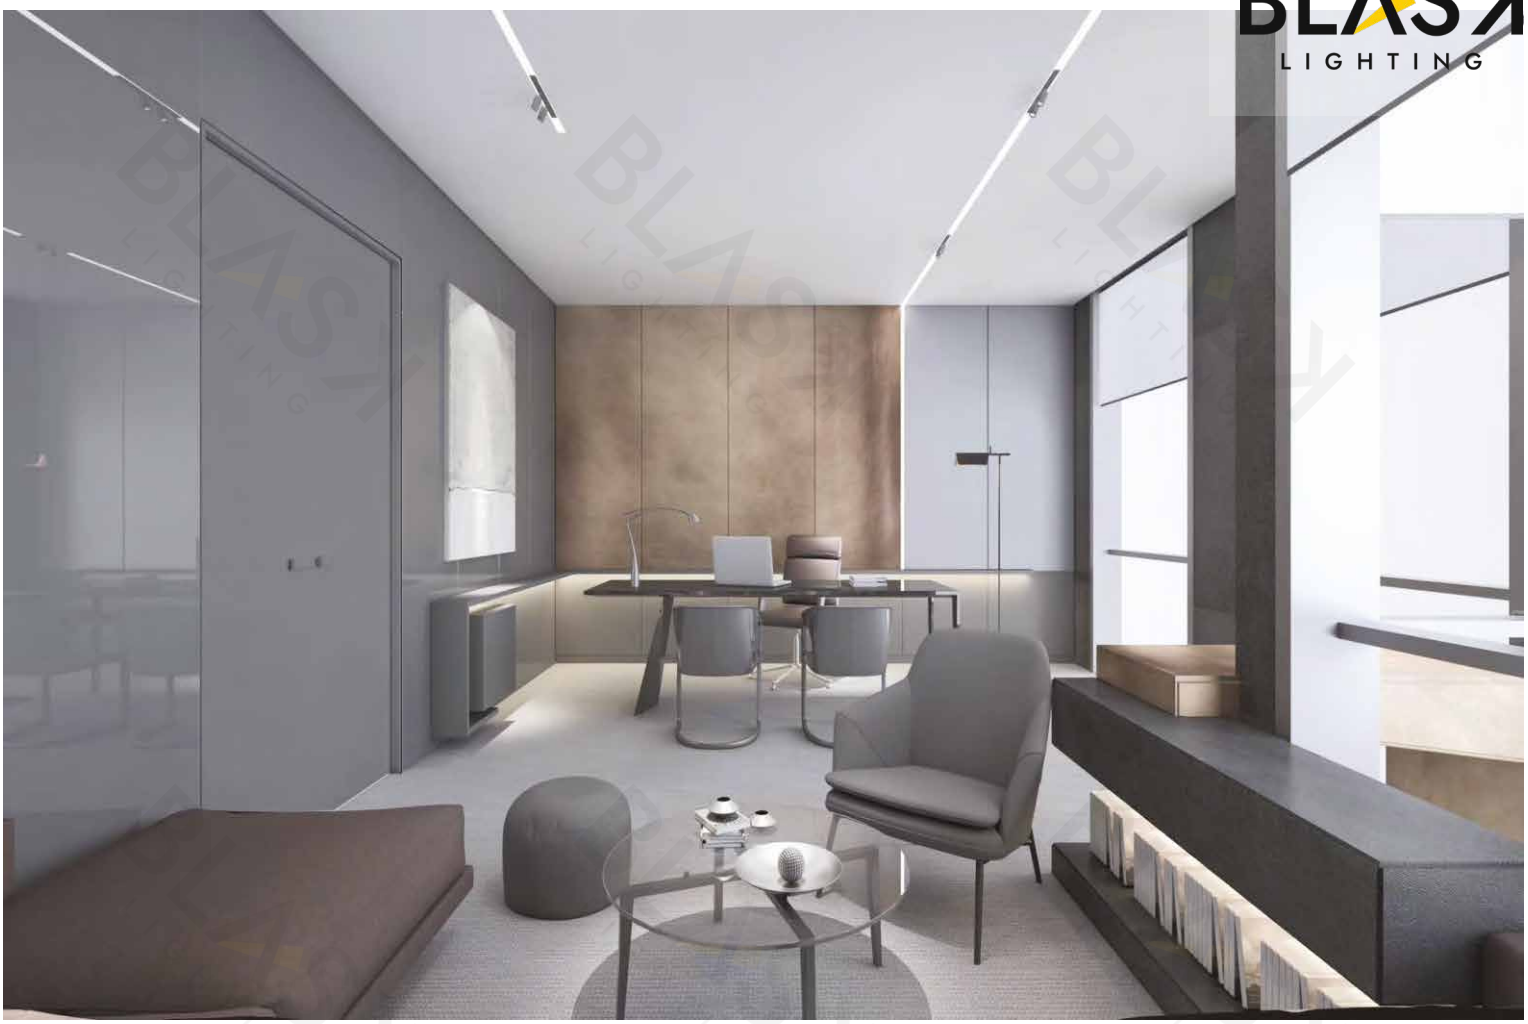

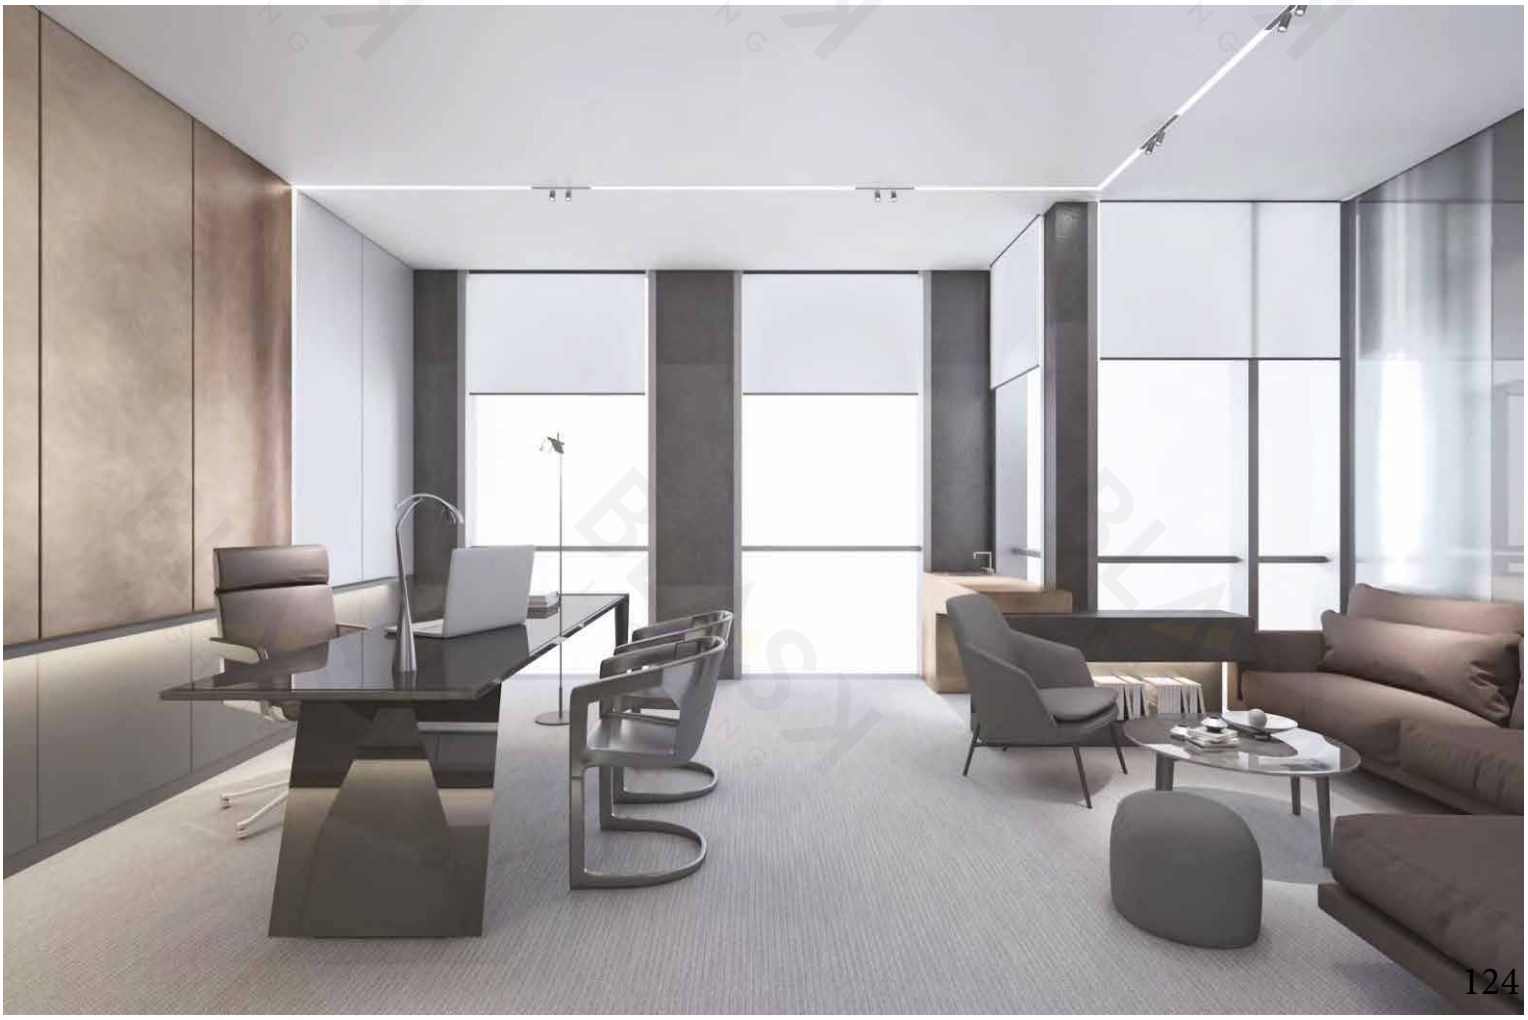

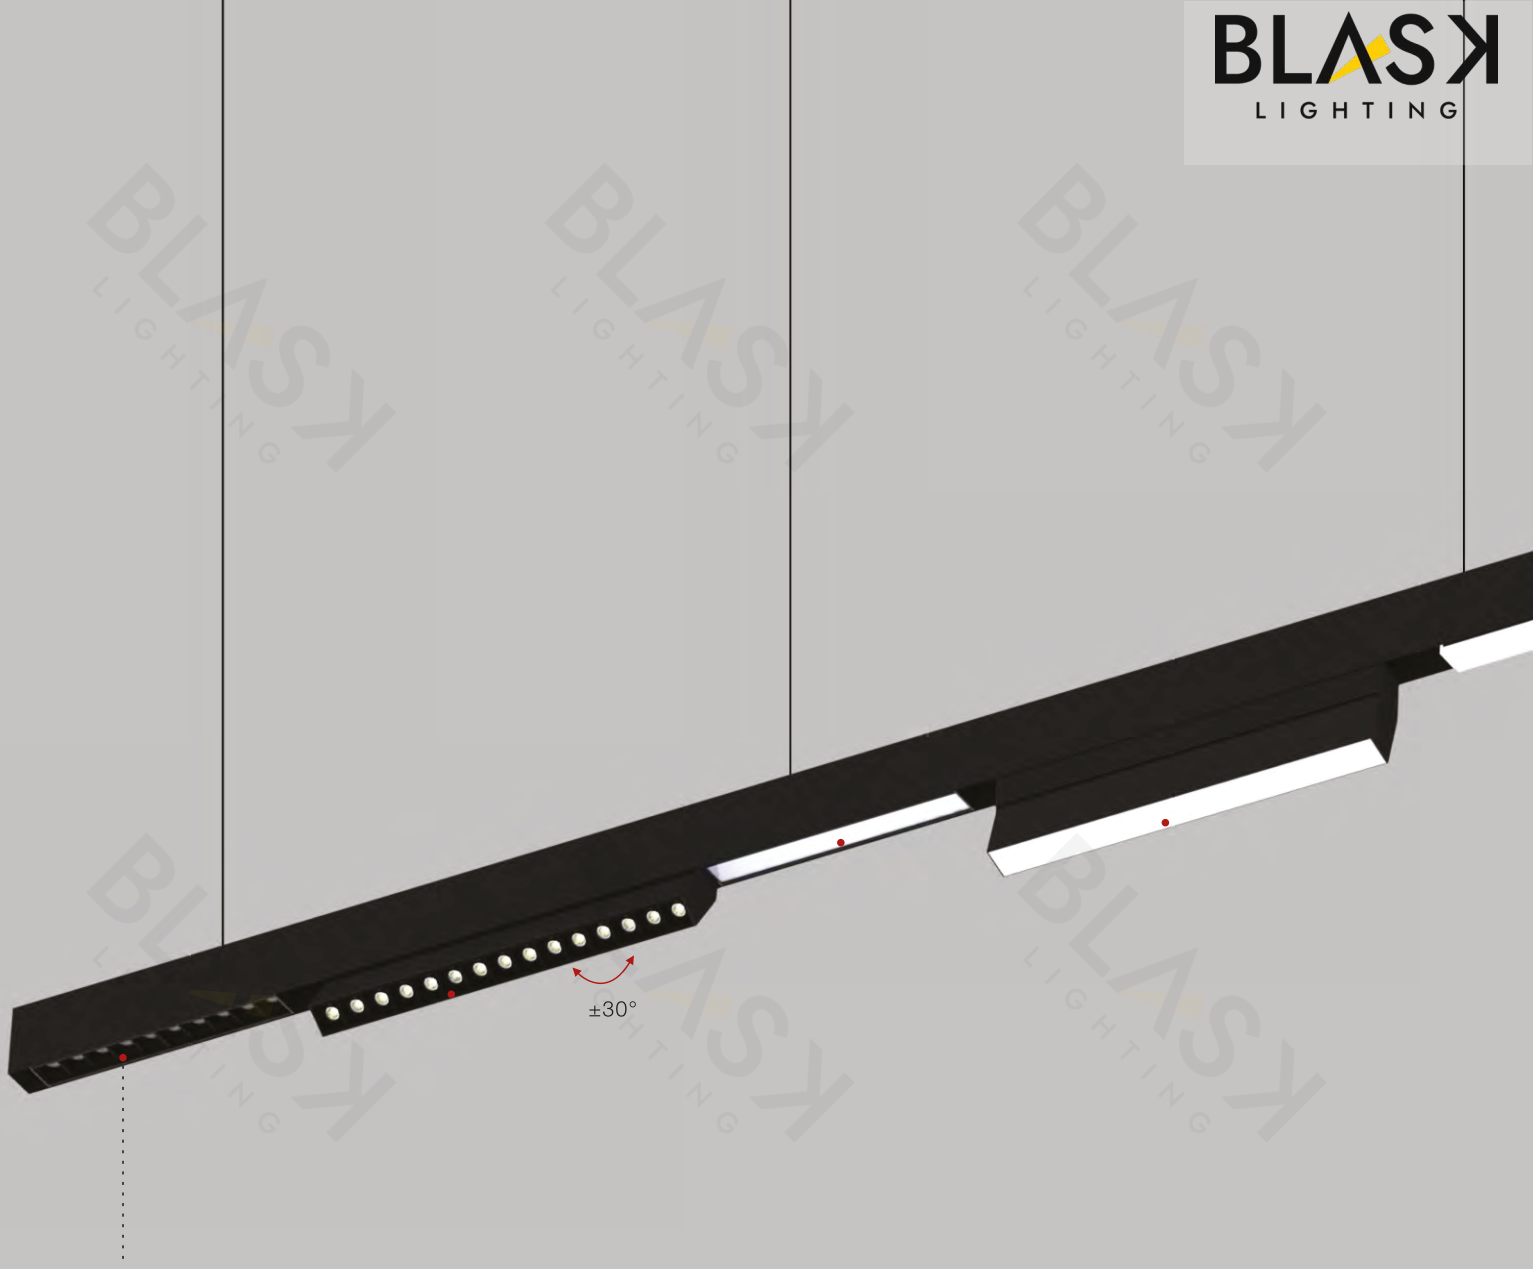

Changeable

350°
90°

SUSPENSION
(Pipe / line)

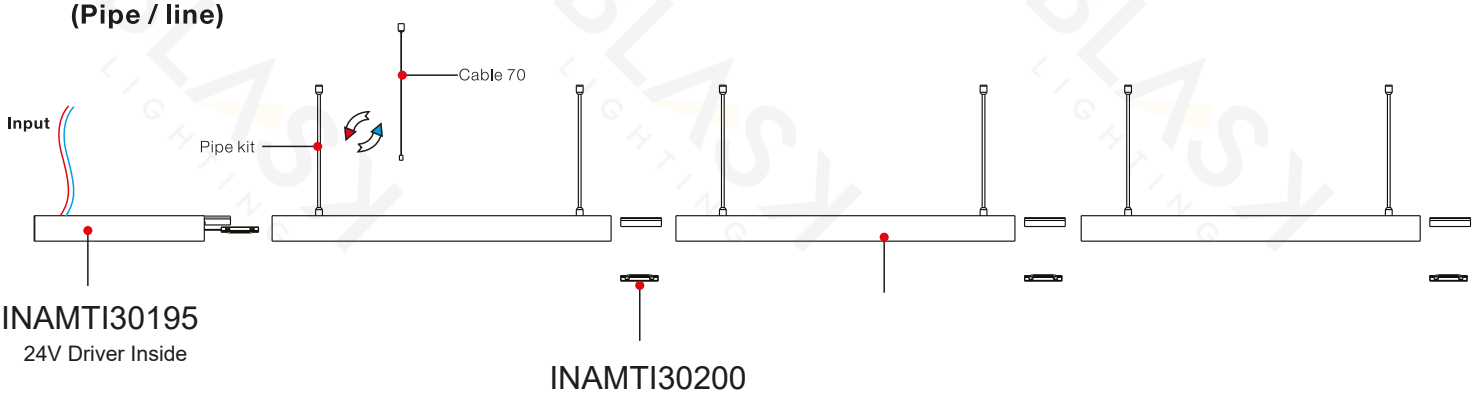

INAMTI30195
24V Driver Inside

INAMTI30200

SURFACE

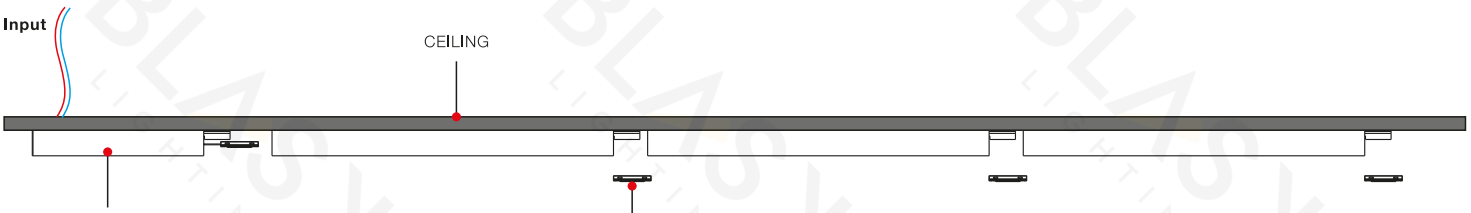

INAMTI30195
24V Driver Inside

INAMTI30200

RECESSED

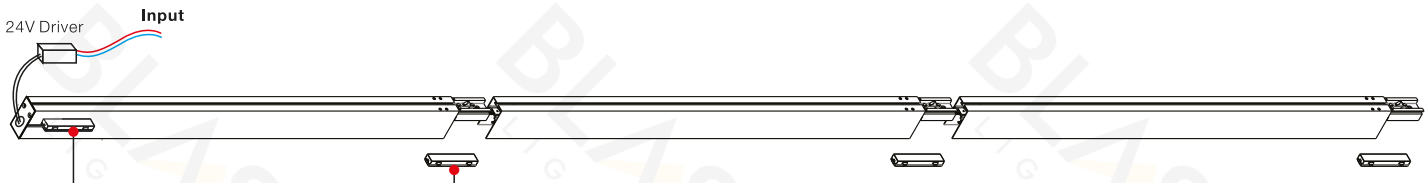

INAMTI30202

INAMTI30200

LIGHT MODULES

INAMTI30141
15W
CRI>90
Anti-glare

INAMTI30142
22W
CRI>90
Anti-glare

INAMTI30145
15W
CRI>90
Anti-glare

INAMTI30146
22W
CRI>90
Anti-glare

INAMTI30150
15W
CRI>90

INAMTI30151
22W
CRI>90

INAMTI30149
45W
CRI>90

INAMTI30147
15W
CRI>90

INAMTI30148
22W
CRI>90

INAMTI30150
15W
CRI>90

INAMTI30151
22W
CRI>90

INAMTI30152
45W
CRI>90

INAMTI30155
5W
CRI>90
Anti-glare
Adjustable beam angle

INAMTI30156
15W
CRI>90
Anti-glare
Adjustable beam angle

INAMTI30157
INAMTI30158
8W
CRI>90
Anti-glare
Ultra narrow angle

INAMTI30159
INAMTI30160
5W
CRI>90
Anti-glare

LIGHT MODULES

INAMTI30161

INAMTI30162

10W
CRI>90
Anti-glare

INAMTI30164

15W
CRI>90
Anti-glare

INAMTI30170

5W
CRI>90

INAMTI30171

5W
CRI>90

INAMTI30172
5W
CRI>90

INAMTI30165
10W
CRI>90

INAMTI30166
10W
CRI>90

INAMTI30167
10W
CRI>90
Anti-glare

INAMTI30168
15W
CRI>90

INAMTI30173
5W
CRI>90

INAMTI30174
5W
CRI>90

Example of suspended installation

Appliance suitable for suspended, ceiling or semi-recessed installation; shown here in the single suspension version with sliding cables.

Kit for suspension
with sliding cables.
Variable distancing
between anchor points.

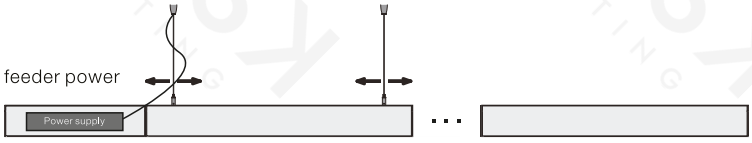

Example of the connection between linear

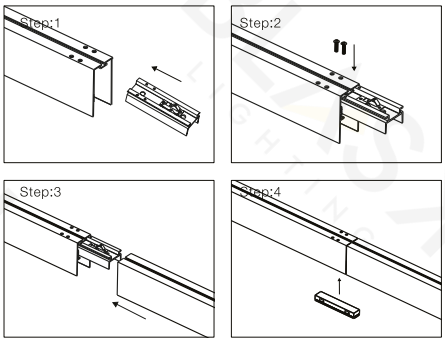

Installation













Dimmable

Optional:

0-10V

TRIAC

0-10V/Triac
2 functions in
one

Thanks to the advancement of technology, we have
opened up the development and research of intelligent lighting systems.
The application of luminaires has reached a new level of technology.
This smart dimming app can be easily opened or
Turning off the lighting fixtures and adjusting the brightness
and other intelligent features greatly facilitates the application of lighting
requirements.

Installation diagram

wiring diagram

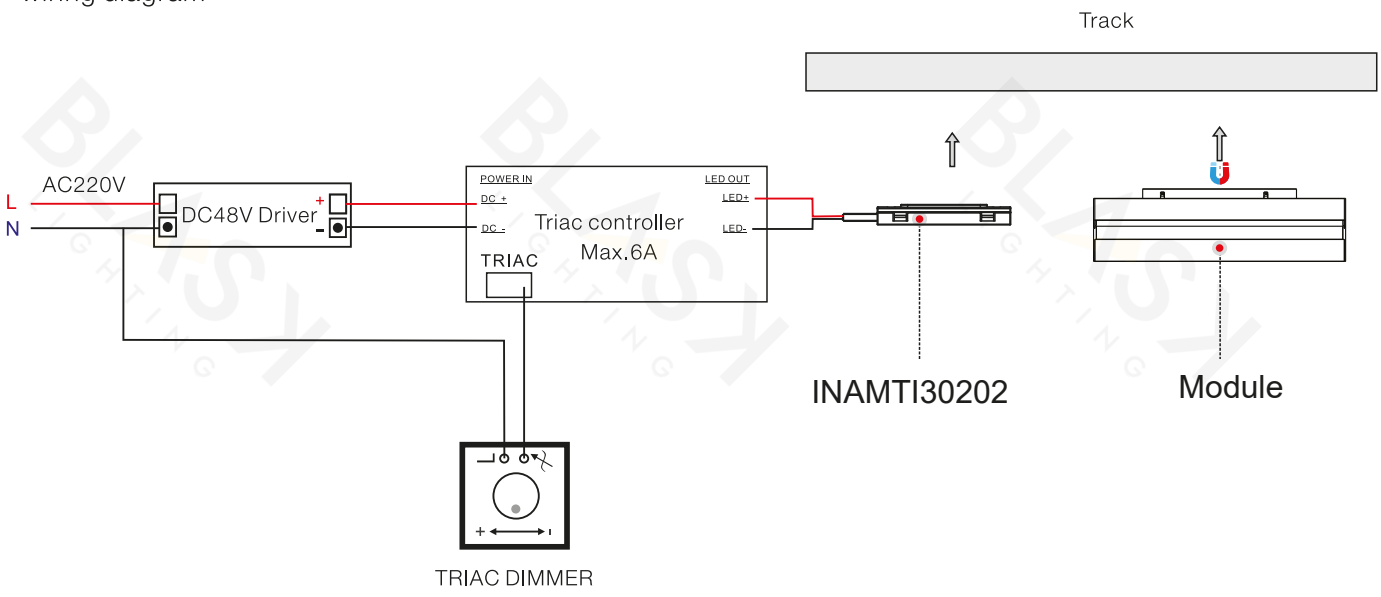

wiring diagram

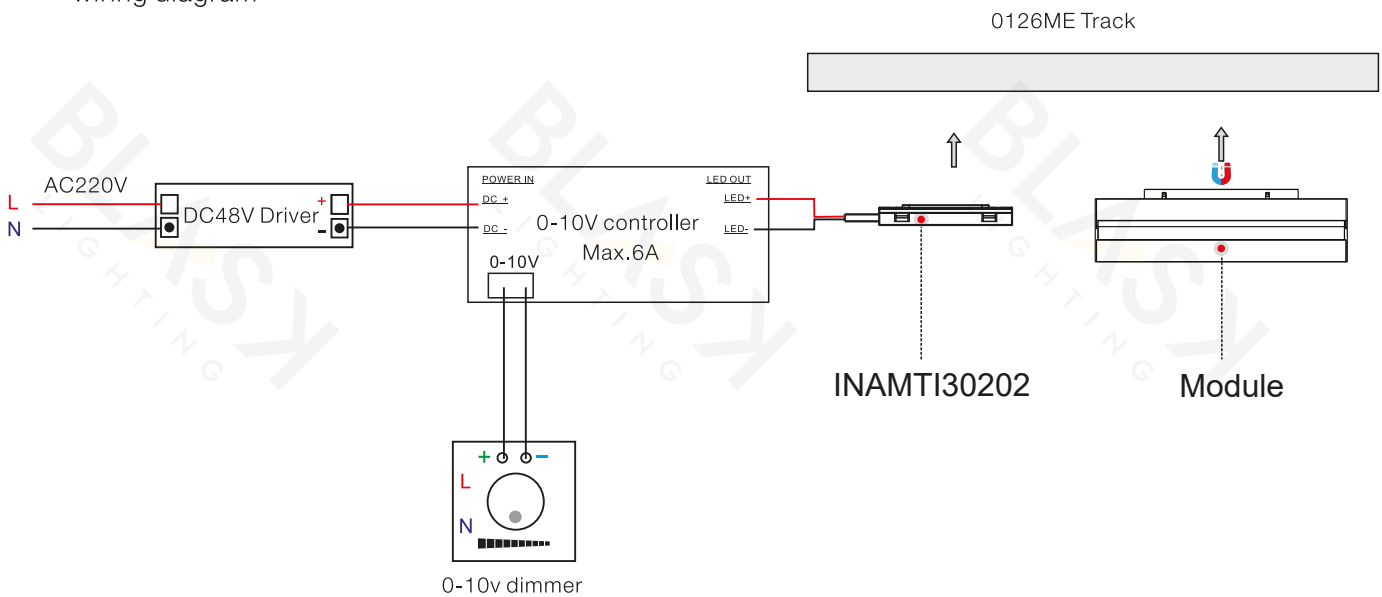

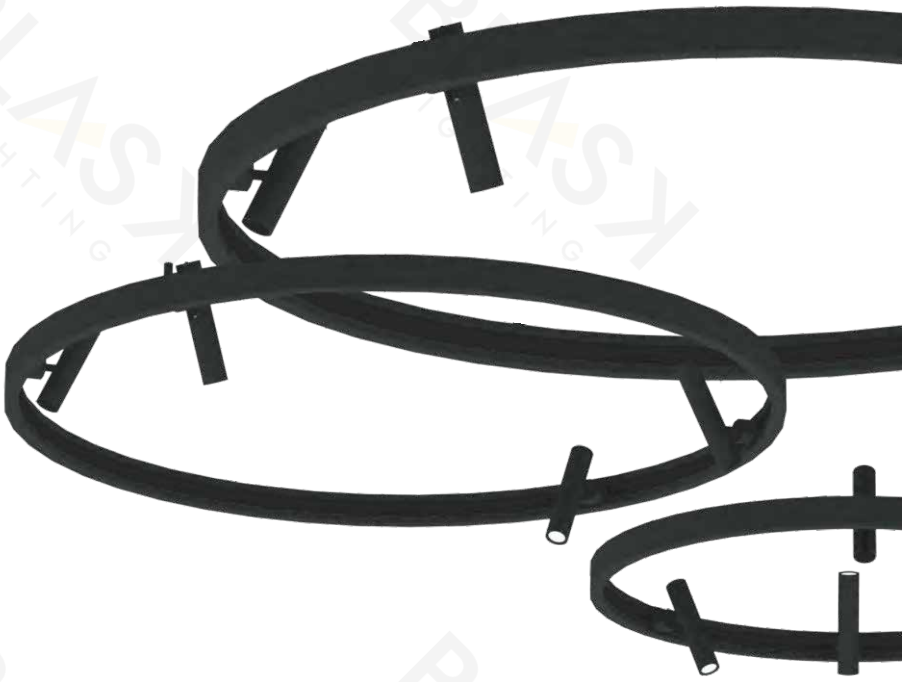

Ø900mm

Ø1200mm

Ø1700mm

Power supply

This model can only do suspend.

BLASK
LIGHTING

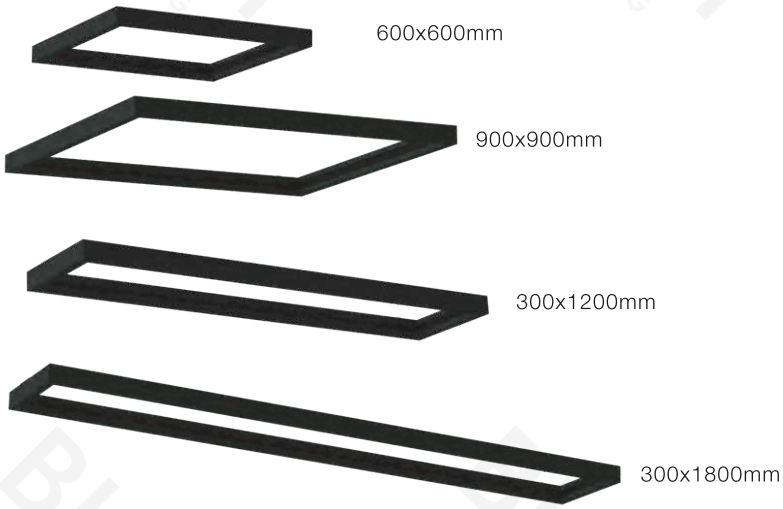

Power supply

This model can only do suspend.

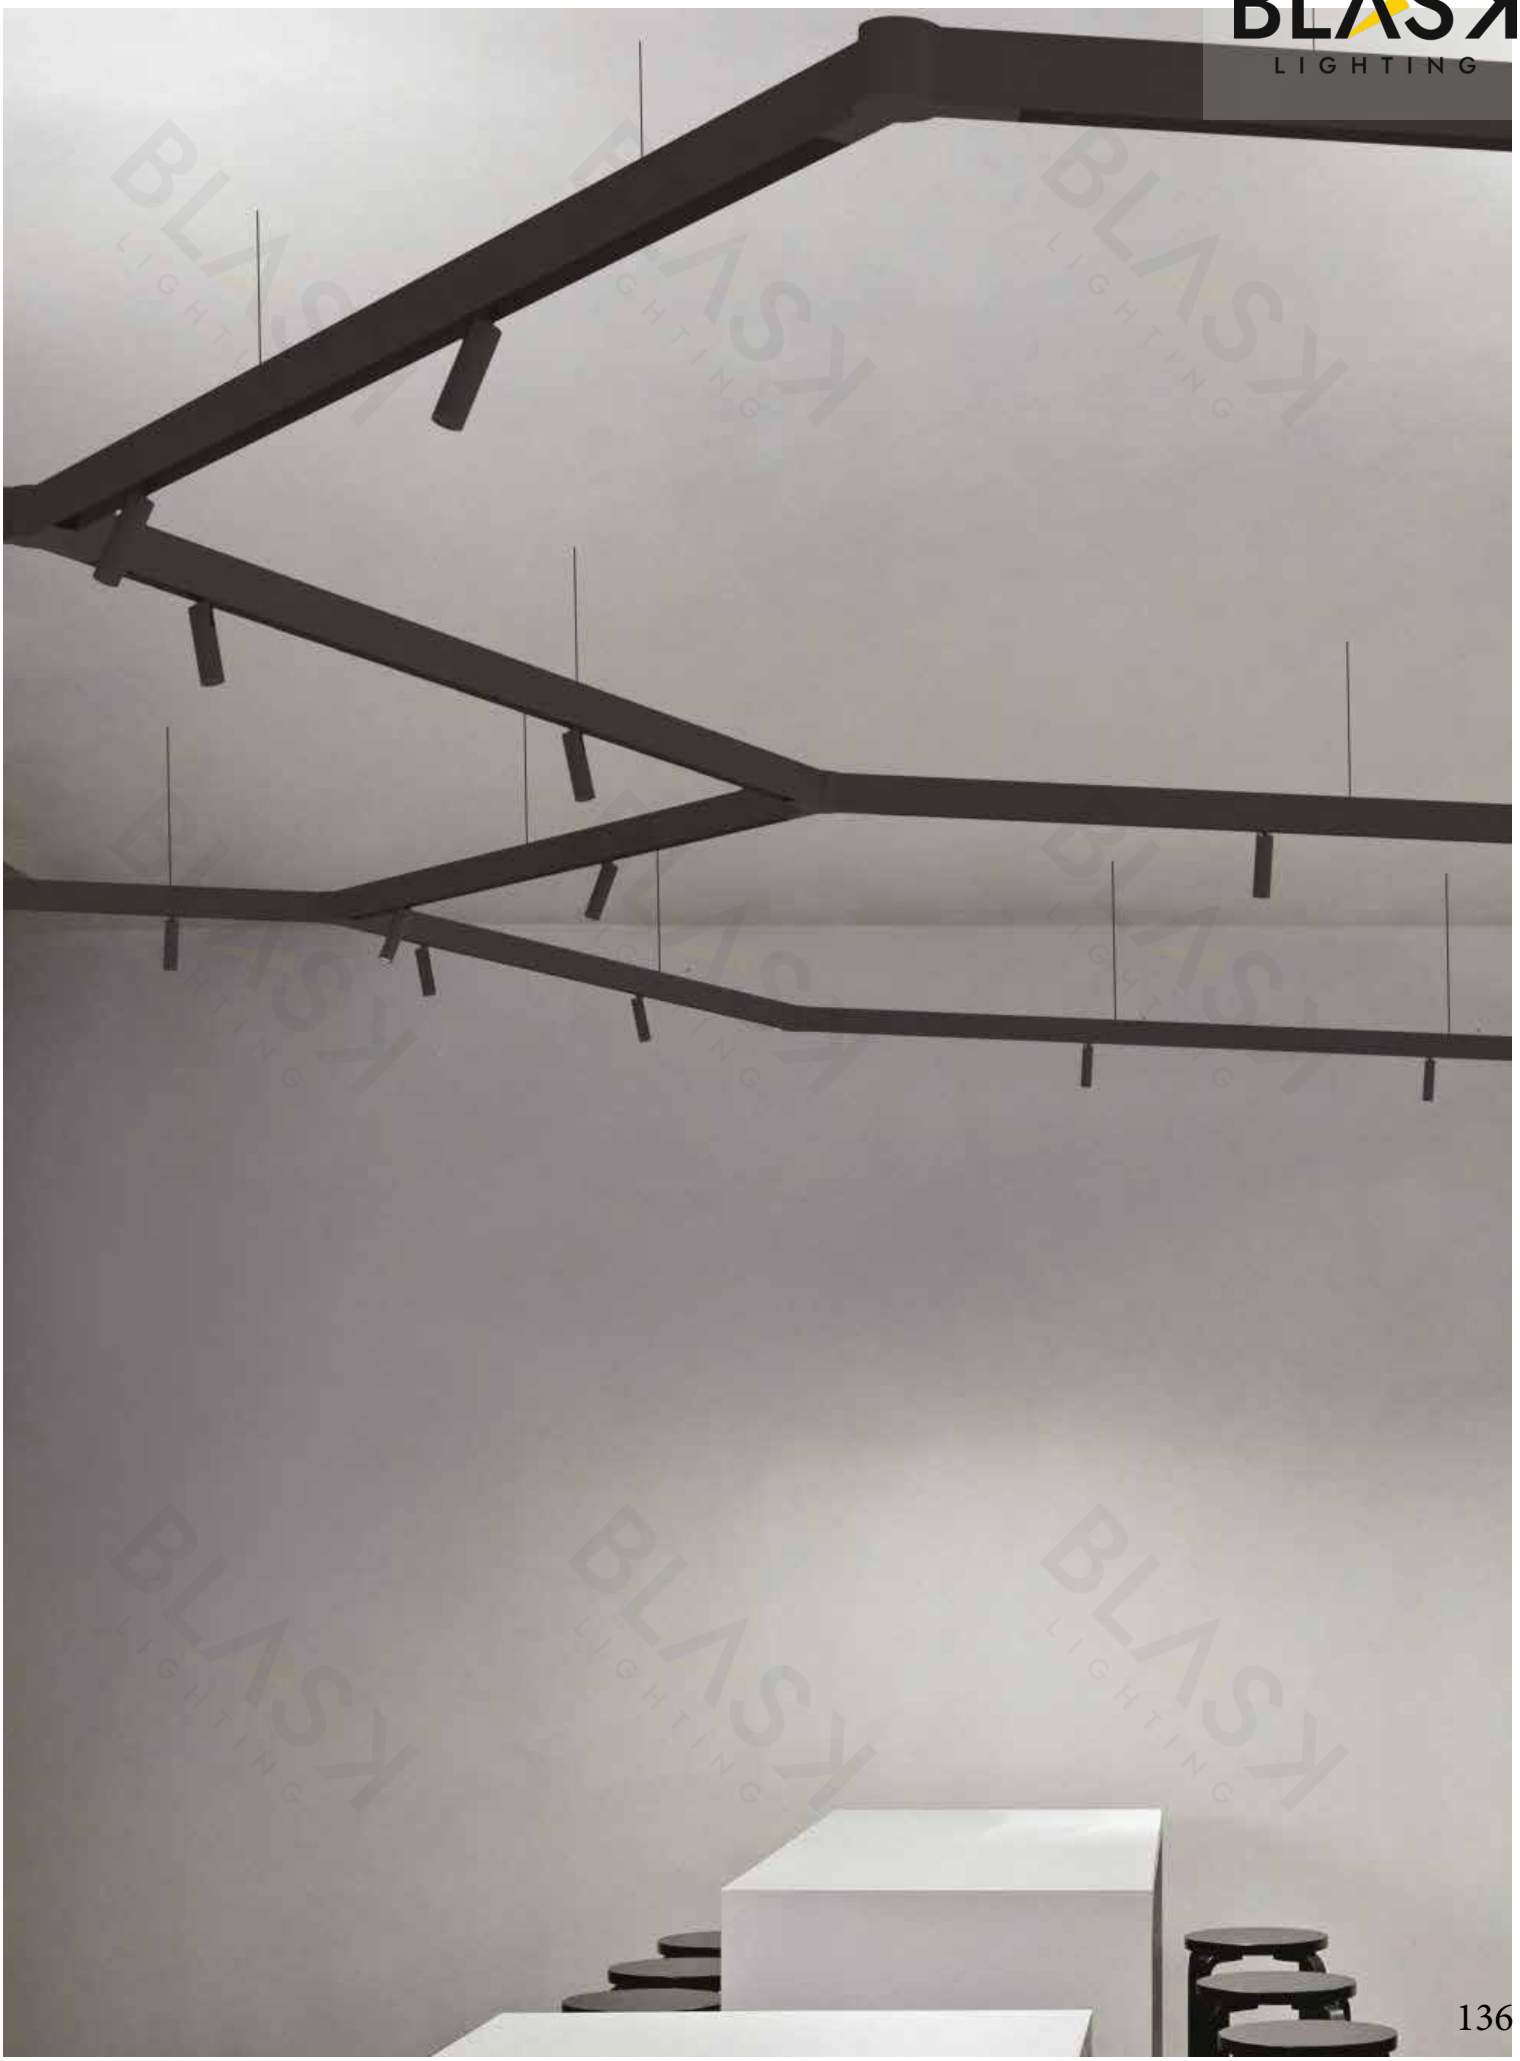

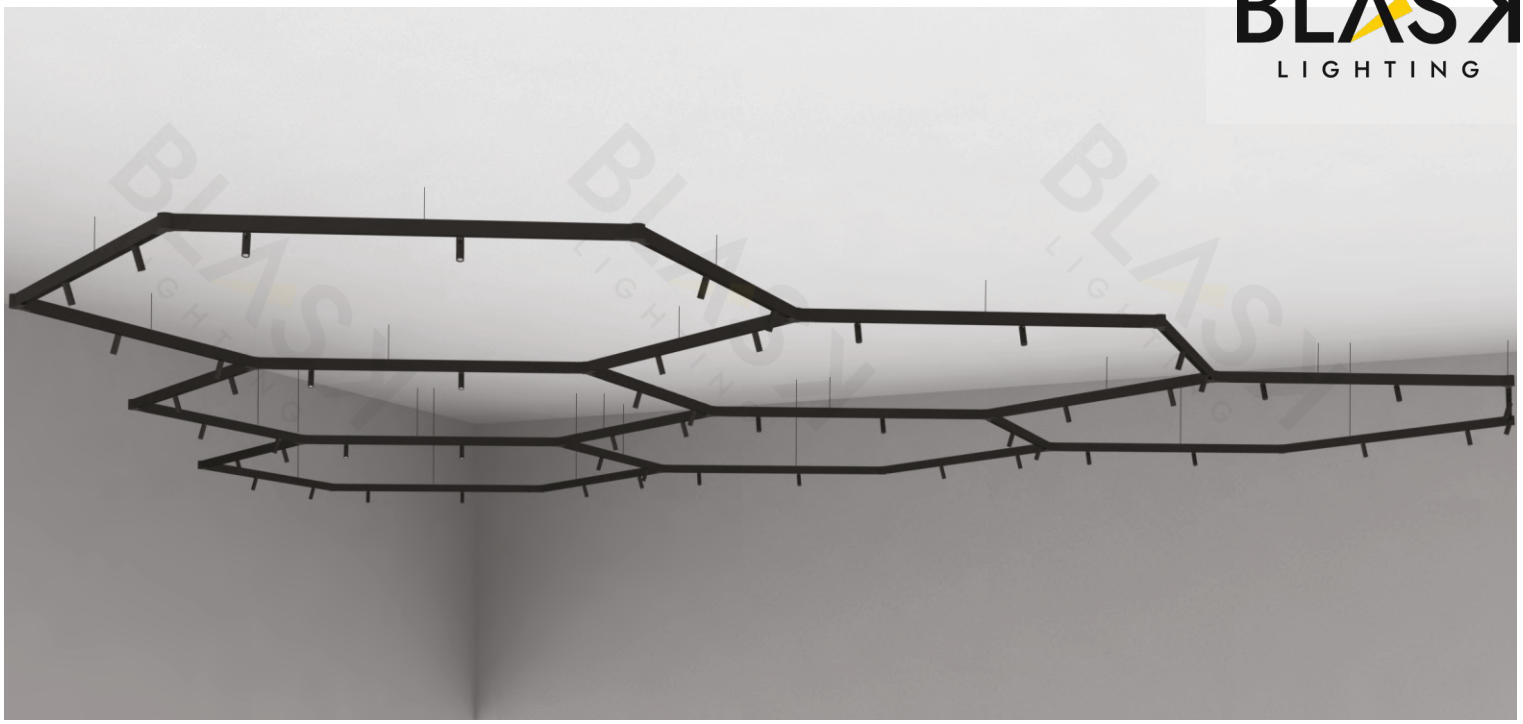

This model can only do suspend or surface mounted

Installation exploded view

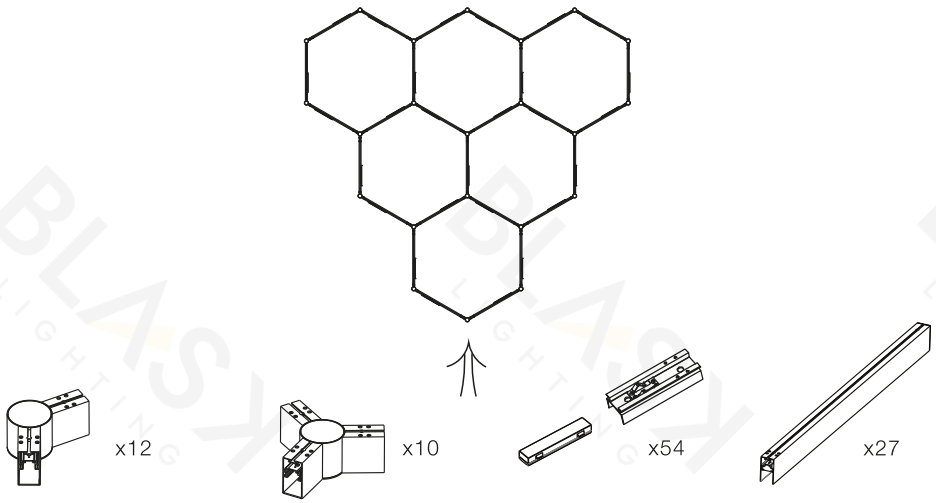

This model can only do suspend or surface mounted

Installation exploded view

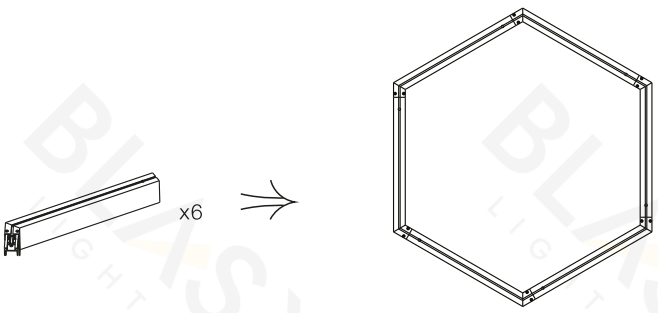

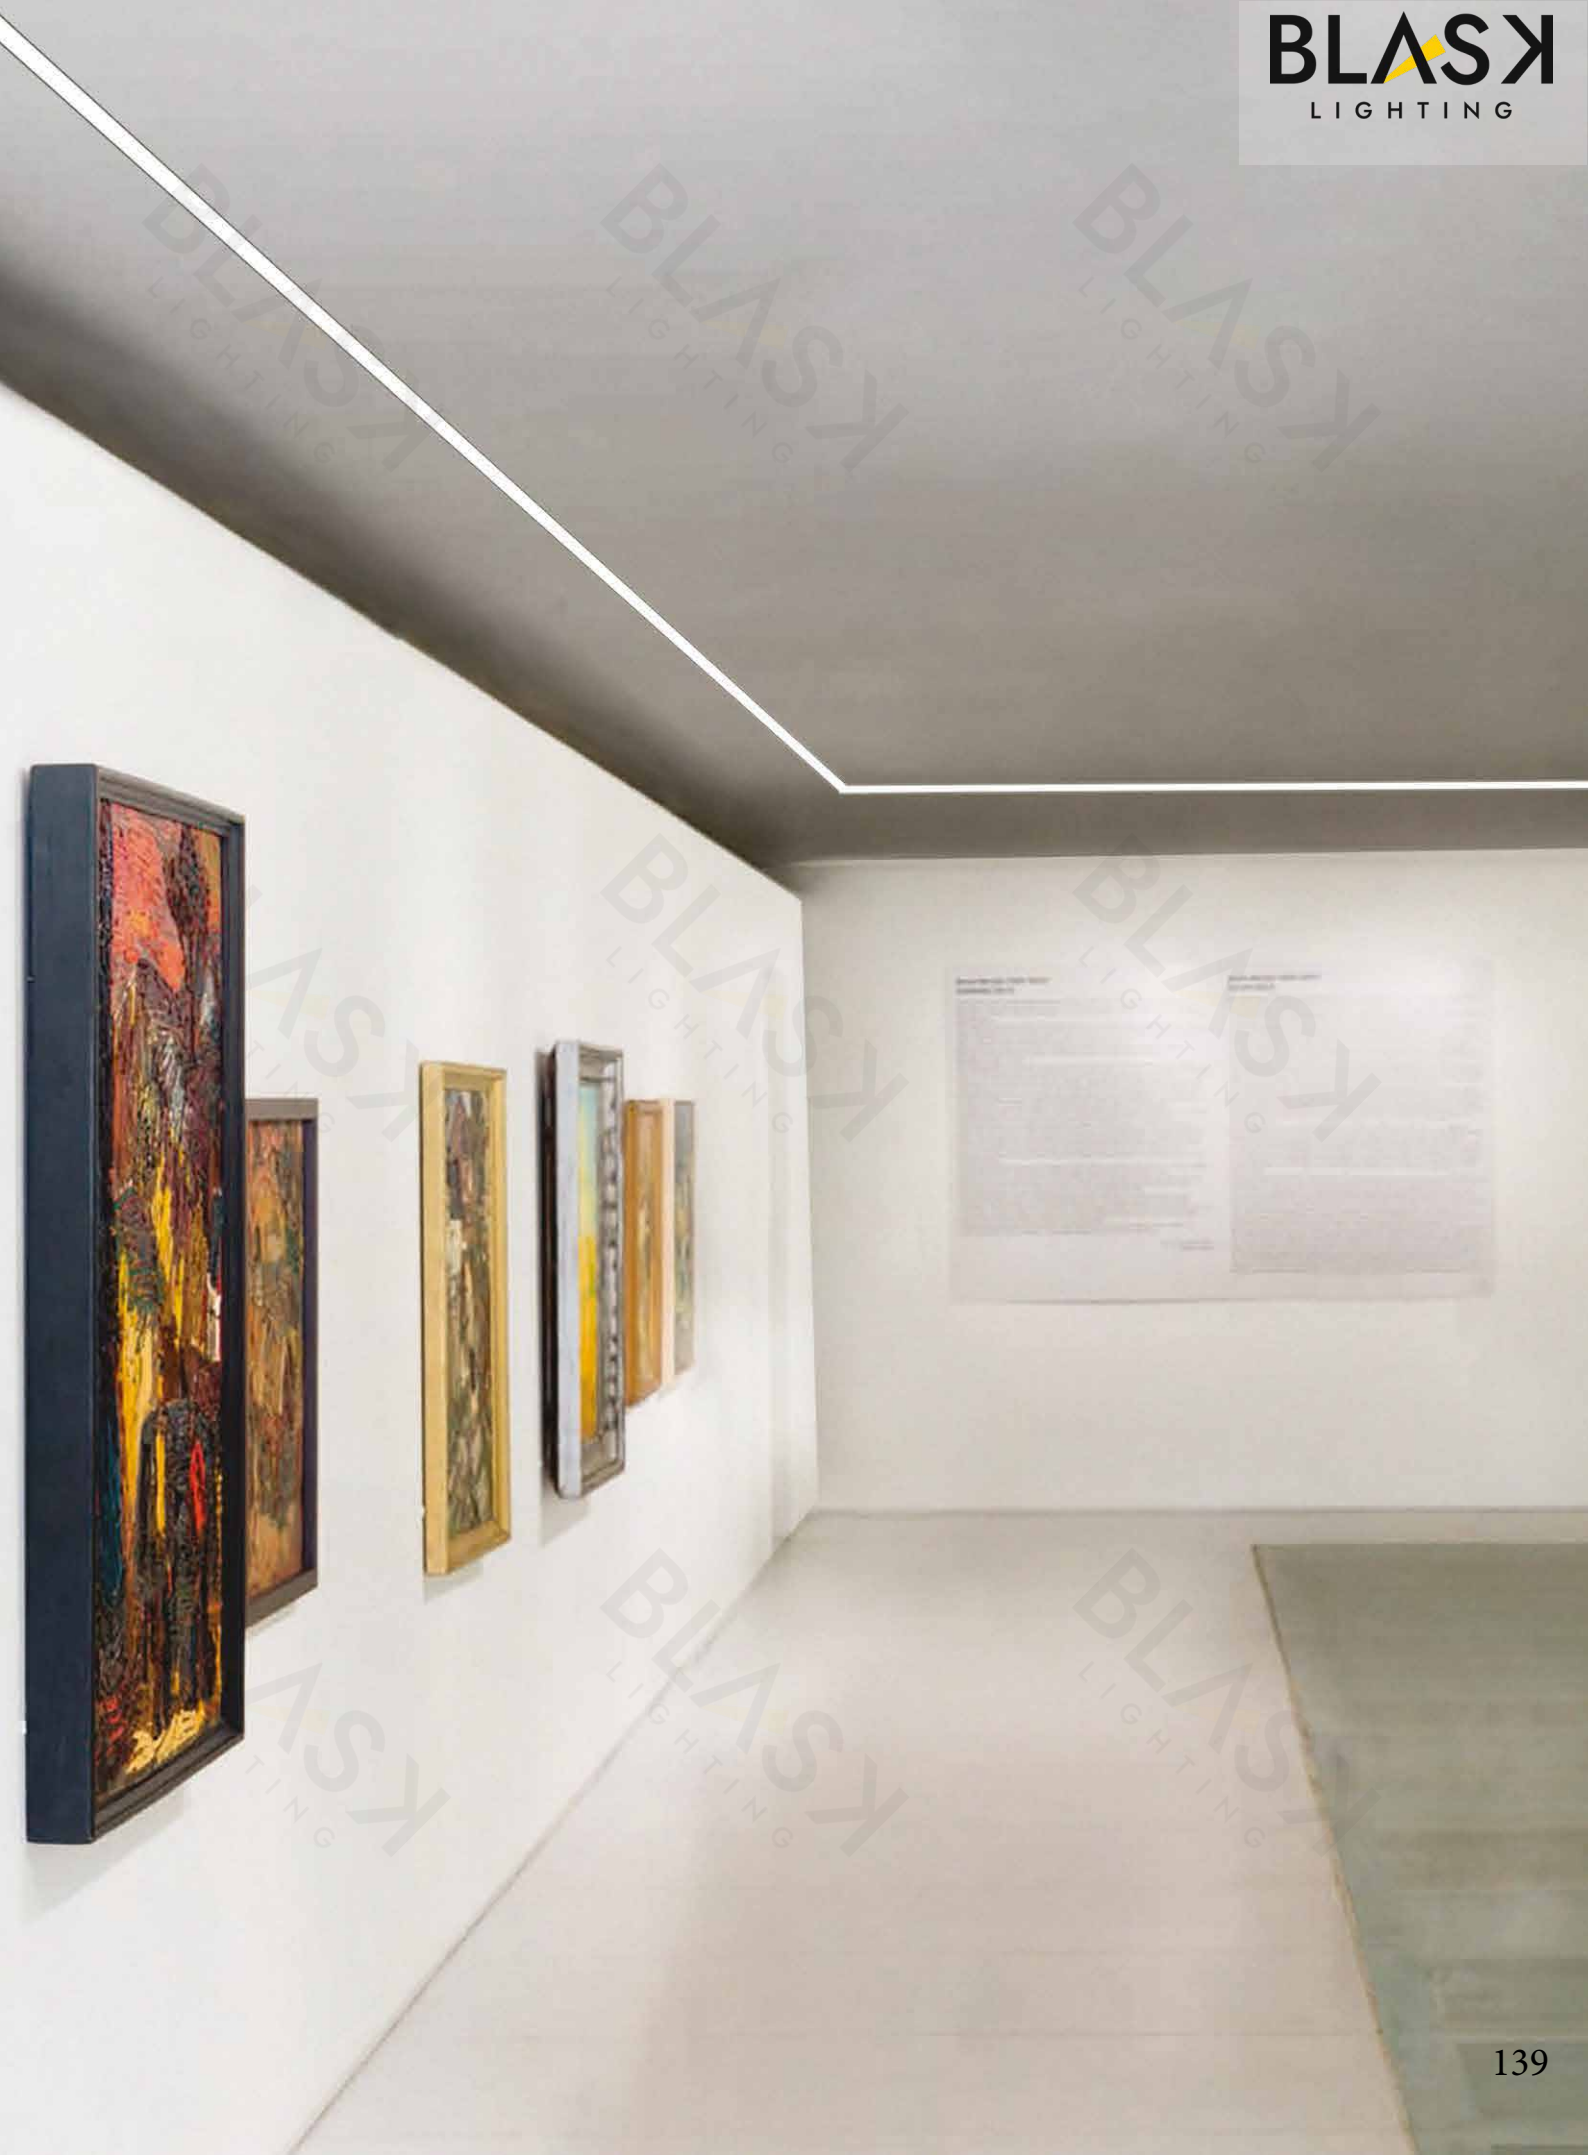

ASYMMETRICAL LIGHTING SOLUTIONS

INAMTI30153

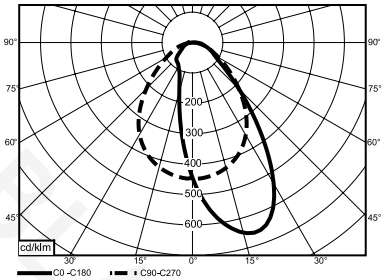

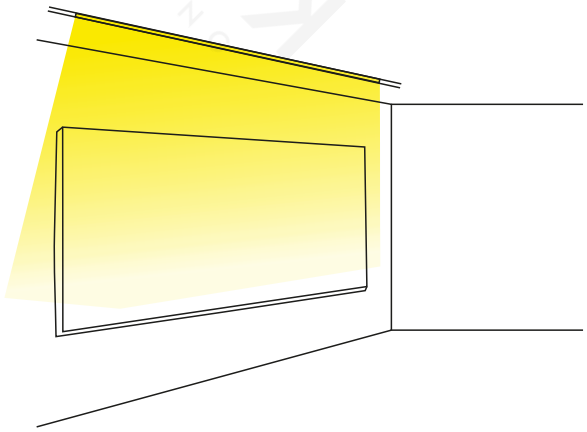

The design and application of single polarized optics in the art gallery. Continuous installation creates a perfect single-polarized wall-washing effect, making it easy for visitors to enjoy paintings in a comfortable lighting environment.

INAMTI30154

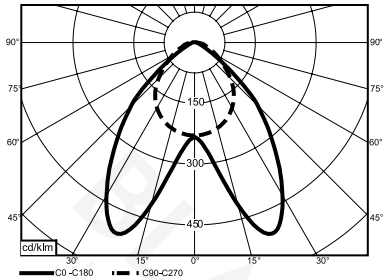

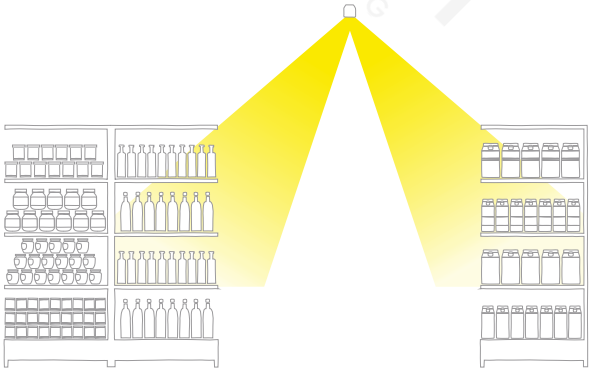

The design of dual polarized optical components in the central lane of the supermarket. Achieve the dual functions of comfortable general lighting and accent lighting during the customer purchase process.
Special lenses transmit light laterally, reducing glare in the past, so that people's attention is focused on the shelf, and the customer's eyes focus on the displayed object to enhance the shopping experience.

Correct installation

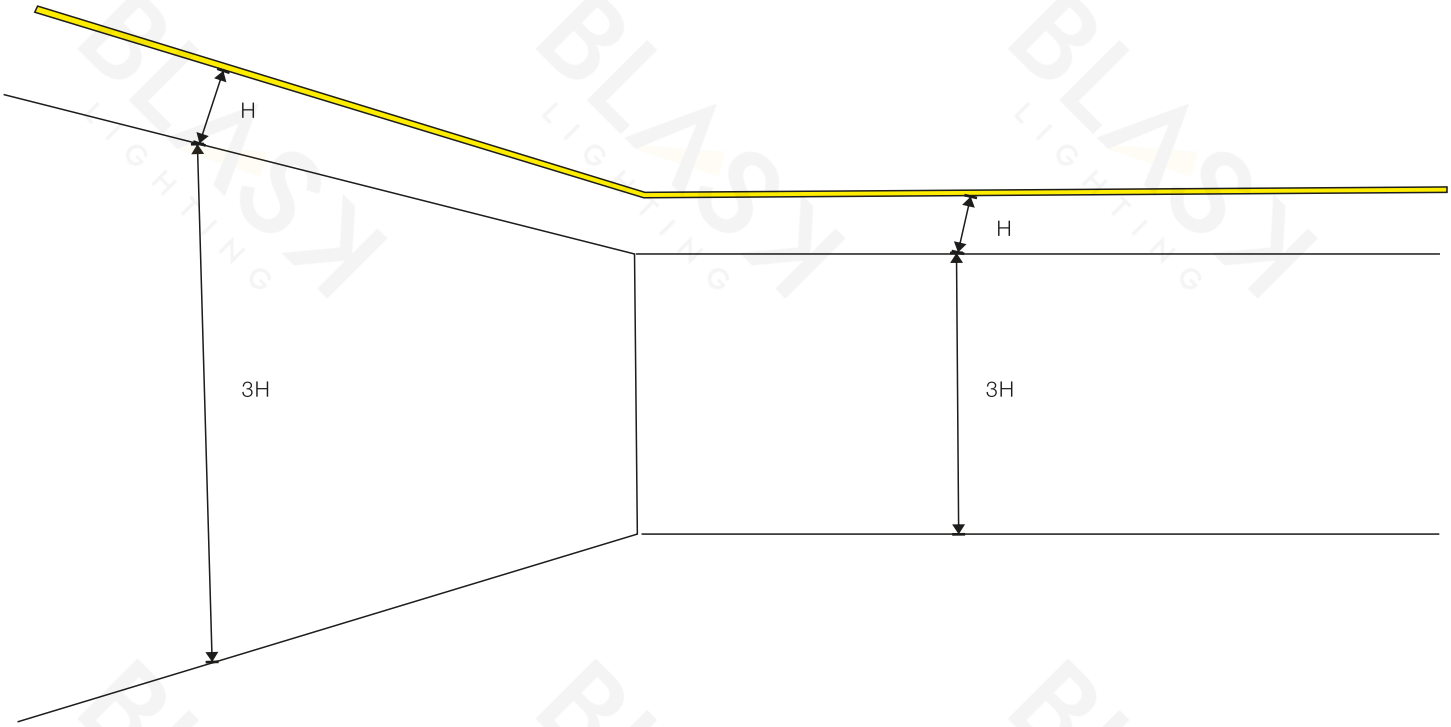

The table shows the correct installation distances for uniform lighting on the wall.



code	L (m)	h (m)
0127ASY	1. 5	4. 5

INAMTI30141

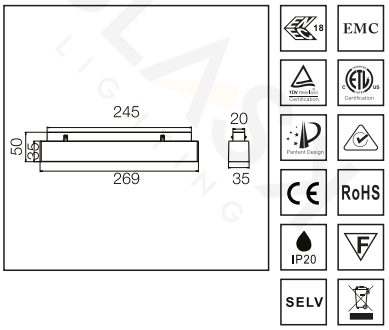

Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30142



Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30143

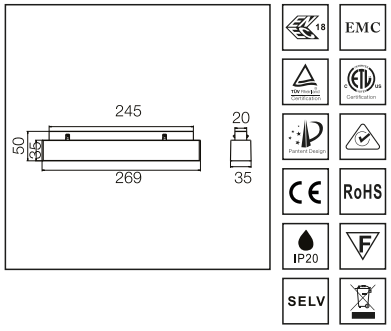

Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30144



Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30145





Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30146



Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30147



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30148



Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30149



Power	45W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	3600 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30150



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30151



Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30152



Power	45W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	3600 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30153



Power	20W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1600 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30154



Power	20W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1600 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30155

15°-30°



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30156

15°-30°



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30157



Power	8W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	640 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30158



Power	8W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	640 lm
CRI	>90
Material	Aluminum
Color	Brass
Warranty	5 Years

INAMTI30159





Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30160





Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Brass
Warranty	5 Years

INAMTI30161



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30162





Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Brass
Warranty	5 Years

INAMTI30163





Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30164





Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Brass
Warranty	5 Years

INAMTI30165



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30166



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30167



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30168



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30169



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30170



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30171





Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30172



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30173





Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Brass
Warranty	5 Years

INAMTI30174





Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Brass
Warranty	5 Years

INAMTI30175



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend

INAMTI30176



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend

INAMTI30177



Material	Aluminum
Color	Black
Remark	Magnetic track for recessed

INAMTI30178





Material	Aluminum
Color	Black
Remark	Magnetic track for recessed

INAMTI30179



Material	Aluminum
Color	Black
Remark	For electrically conductive connections between two magnetic tracks

INAMTI30180



Material	Aluminum
Color	Black
Remark	For the connection between two magnetic tracks 0126MECN G2

INAMTI30181





Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend the plane T Corner

INAMTI30182





Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend the erect + Corner

INAMTI30183



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend the plane 90° Corner

INAMTI30184



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend the erect 90° Corner

INAMTI30185



Material	Aluminum
Color	Black
Remark	Magnetic track for recessed the plane 90° Corner

INAMTI30186



Material	Aluminum
Color	Black
Remark	Magnetic track for recessed the erect 90° Corner

INAMTI30187



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend the plane 90° Corner

INAMTI30188



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend the erect 90° Corner

INAMTI30189

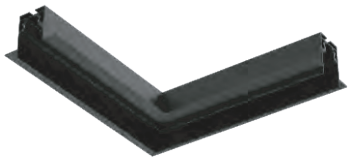



Material	Aluminum
Color	Black
Remark	Magnetic track for recessed the plane 90° Corner

INAMTI30190



Material	Aluminum
Color	Black
Remark	Magnetic track for recessed the erect 90° Corner

INAMTI30191



Material	Aluminum
Color	Black
Remark	Magnetic track L for surface mounting and suspend

INAMTI30192



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend the plane 120° Corner

INAMTI30193



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting and suspend the plane 3x120° Corner

INAMTI30194



Material	Aluminum
Color	Black
Remark	Driver box without driver for magnetic track surface mounting and suspend

INAMTI30195



Power	Max. 180W
Material	Aluminum
Color	Black
Remark	Driver box with driver for magnetic track surface mounting and suspend

INAMTI30196



Material	Iron
Color	Chrome
Remark	For magnetic track surface mounting accessories

INAMTI30197



Material	Aluminum
Color	Black
Remark	For magnetic track suspend accessories

INAMTI30198



Material	Aluminum
Color	Black
Remark	For magnetic track suspend accessories

INAMTI30199



Material	PVC
Color	Blac
Remark	Used to cover the blank space of the track and to protect the interior when the track is concealedk

INAMTI30200



Material	Aluminum
Color	Black
Remark	Used for connection and conduction between two tracks

INAMTI30201



Material	Aluminum
Color	Black
Remark	For the end of the magnetic track

INAMTI30202



Material	Aluminum
Color	Black
Remark	Used for magnetic track start and conduction

INAMTI30203



Material	Aluminum
Color	Black
Remark	For the end of 0126ME TRACK C G2

INAMTI30204



Power	Max.75W
Material	Aluminum
Color	Black

INAMTI30205





Power	Max.100W
Material	Aluminum
Color	Black

INAMTI30206



Power	Max.150W
Material	Aluminum
Color	Black

INAMTI30207



Power	Max.75W
Material	Aluminum
Color	Black

INAMTI30208



Power	Max.100W
Material	Aluminum
Color	Black

INAMTI30209





Power	Max.100W
Material	Aluminum
Color	Black

INAMTI30210





Power	Max.100W
Material	Aluminum
Color	Black

INAMTI30211



Power	Max. 100W
Material	Plastic
Color	Black
Remark	Driver for magnetic track

INAMTI30212

Power	Max. 200W
Material	Plastic
Color	Black
Remark	Driver for magnetic track

INAMTI30213



Input voltage	DC48V
Output voltage	DC48V
Output current	MAX.6A

INAMTI30214



Input voltage	DC48V
Output voltage	DC48V
Output current	MAX.6A

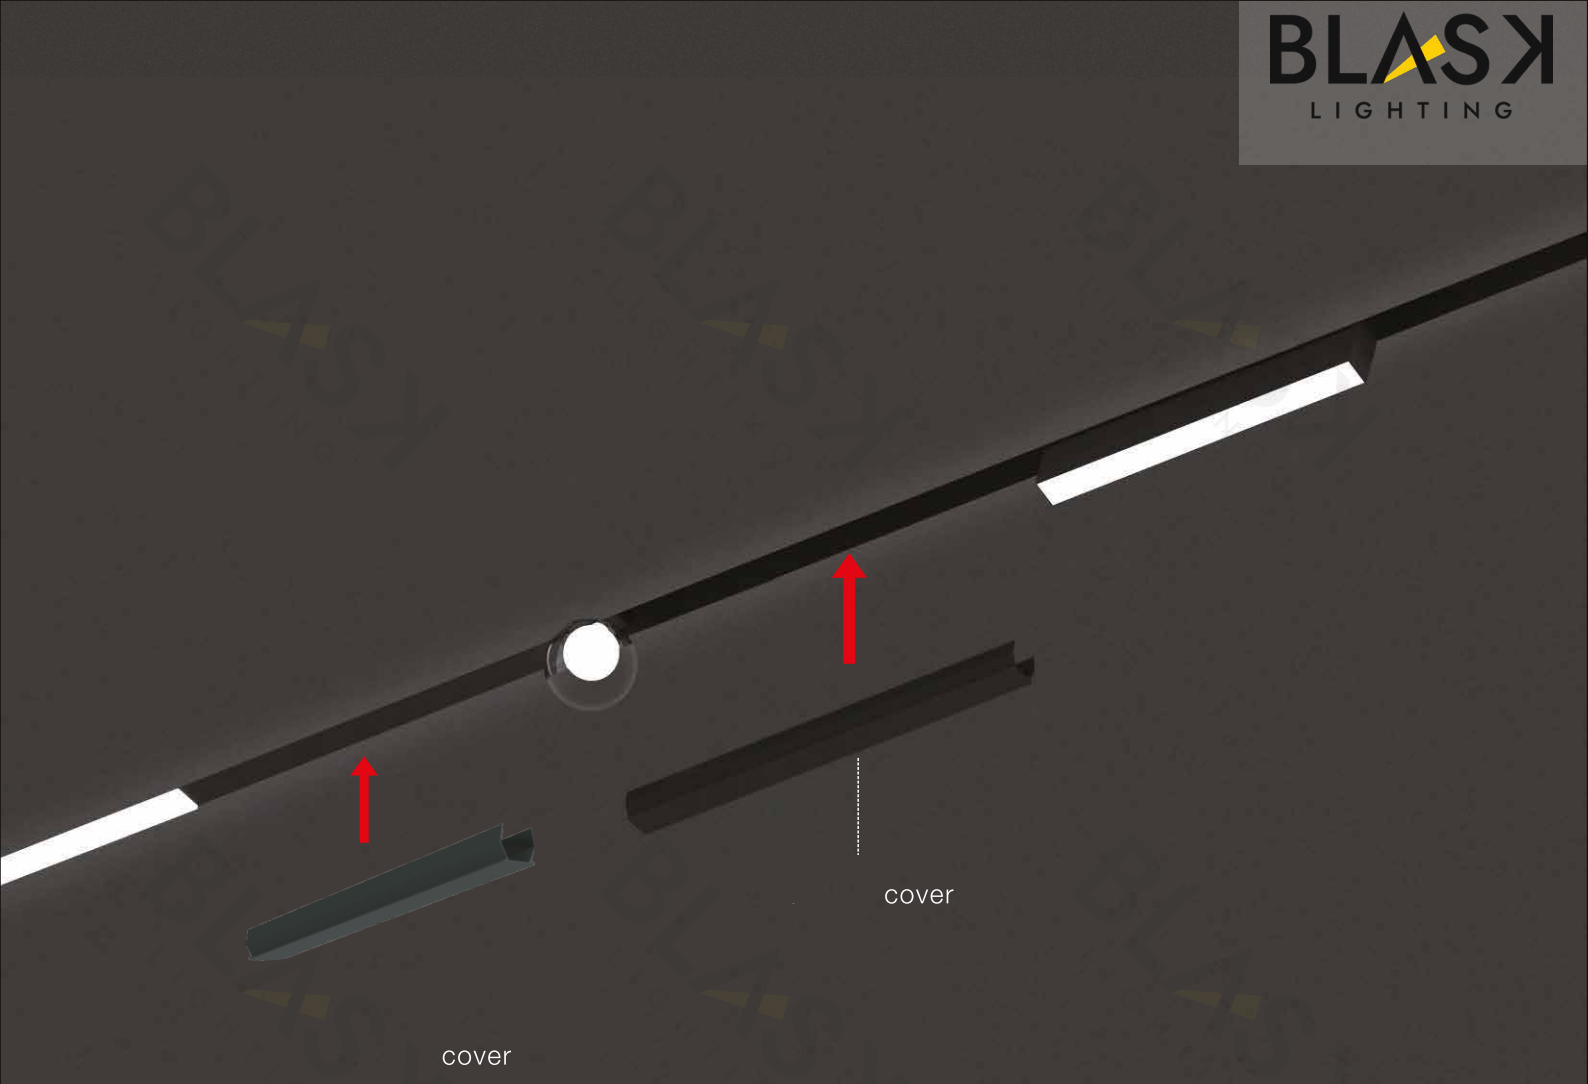
cover
cover

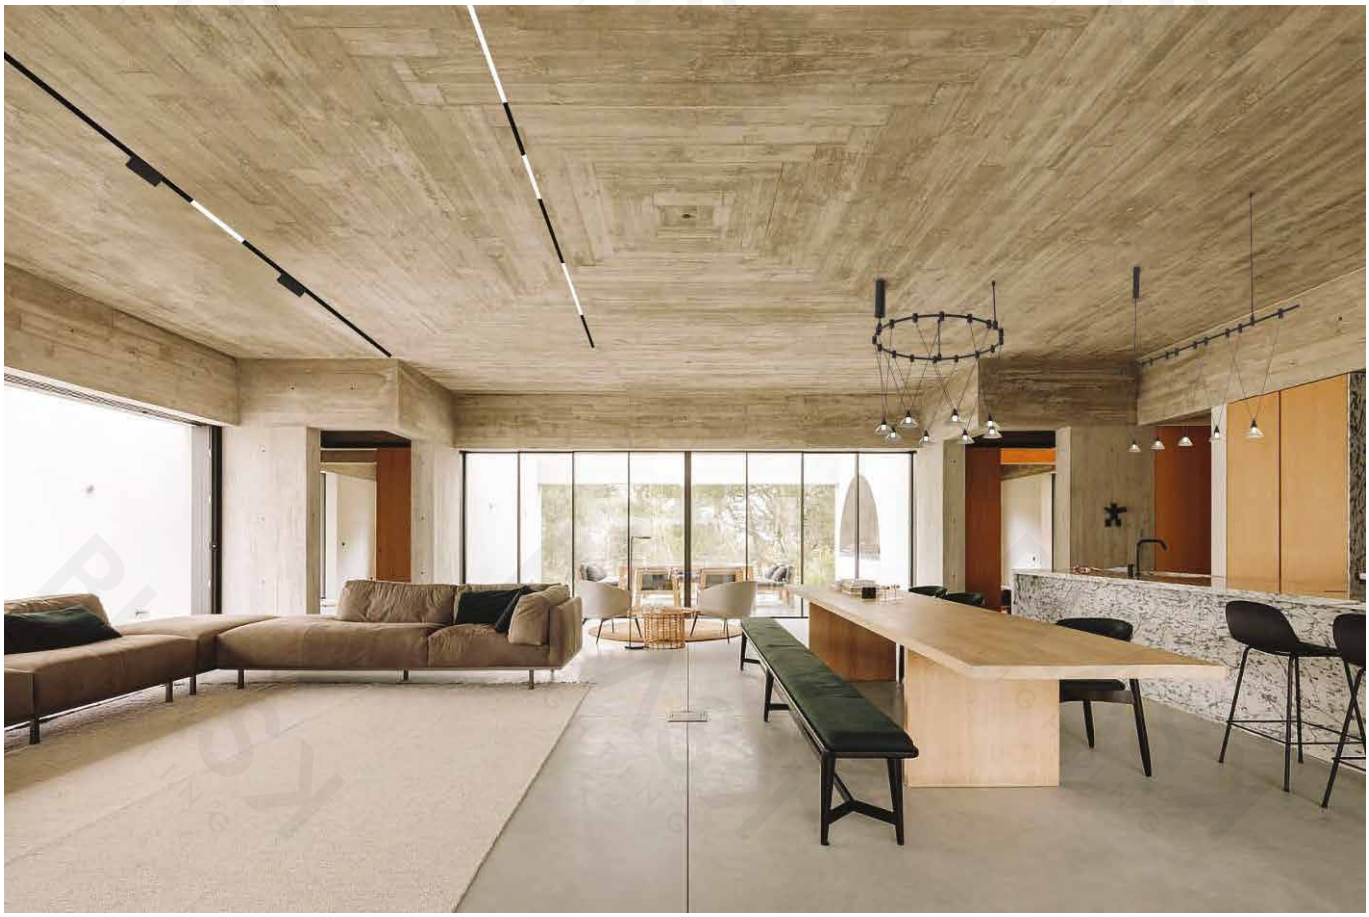

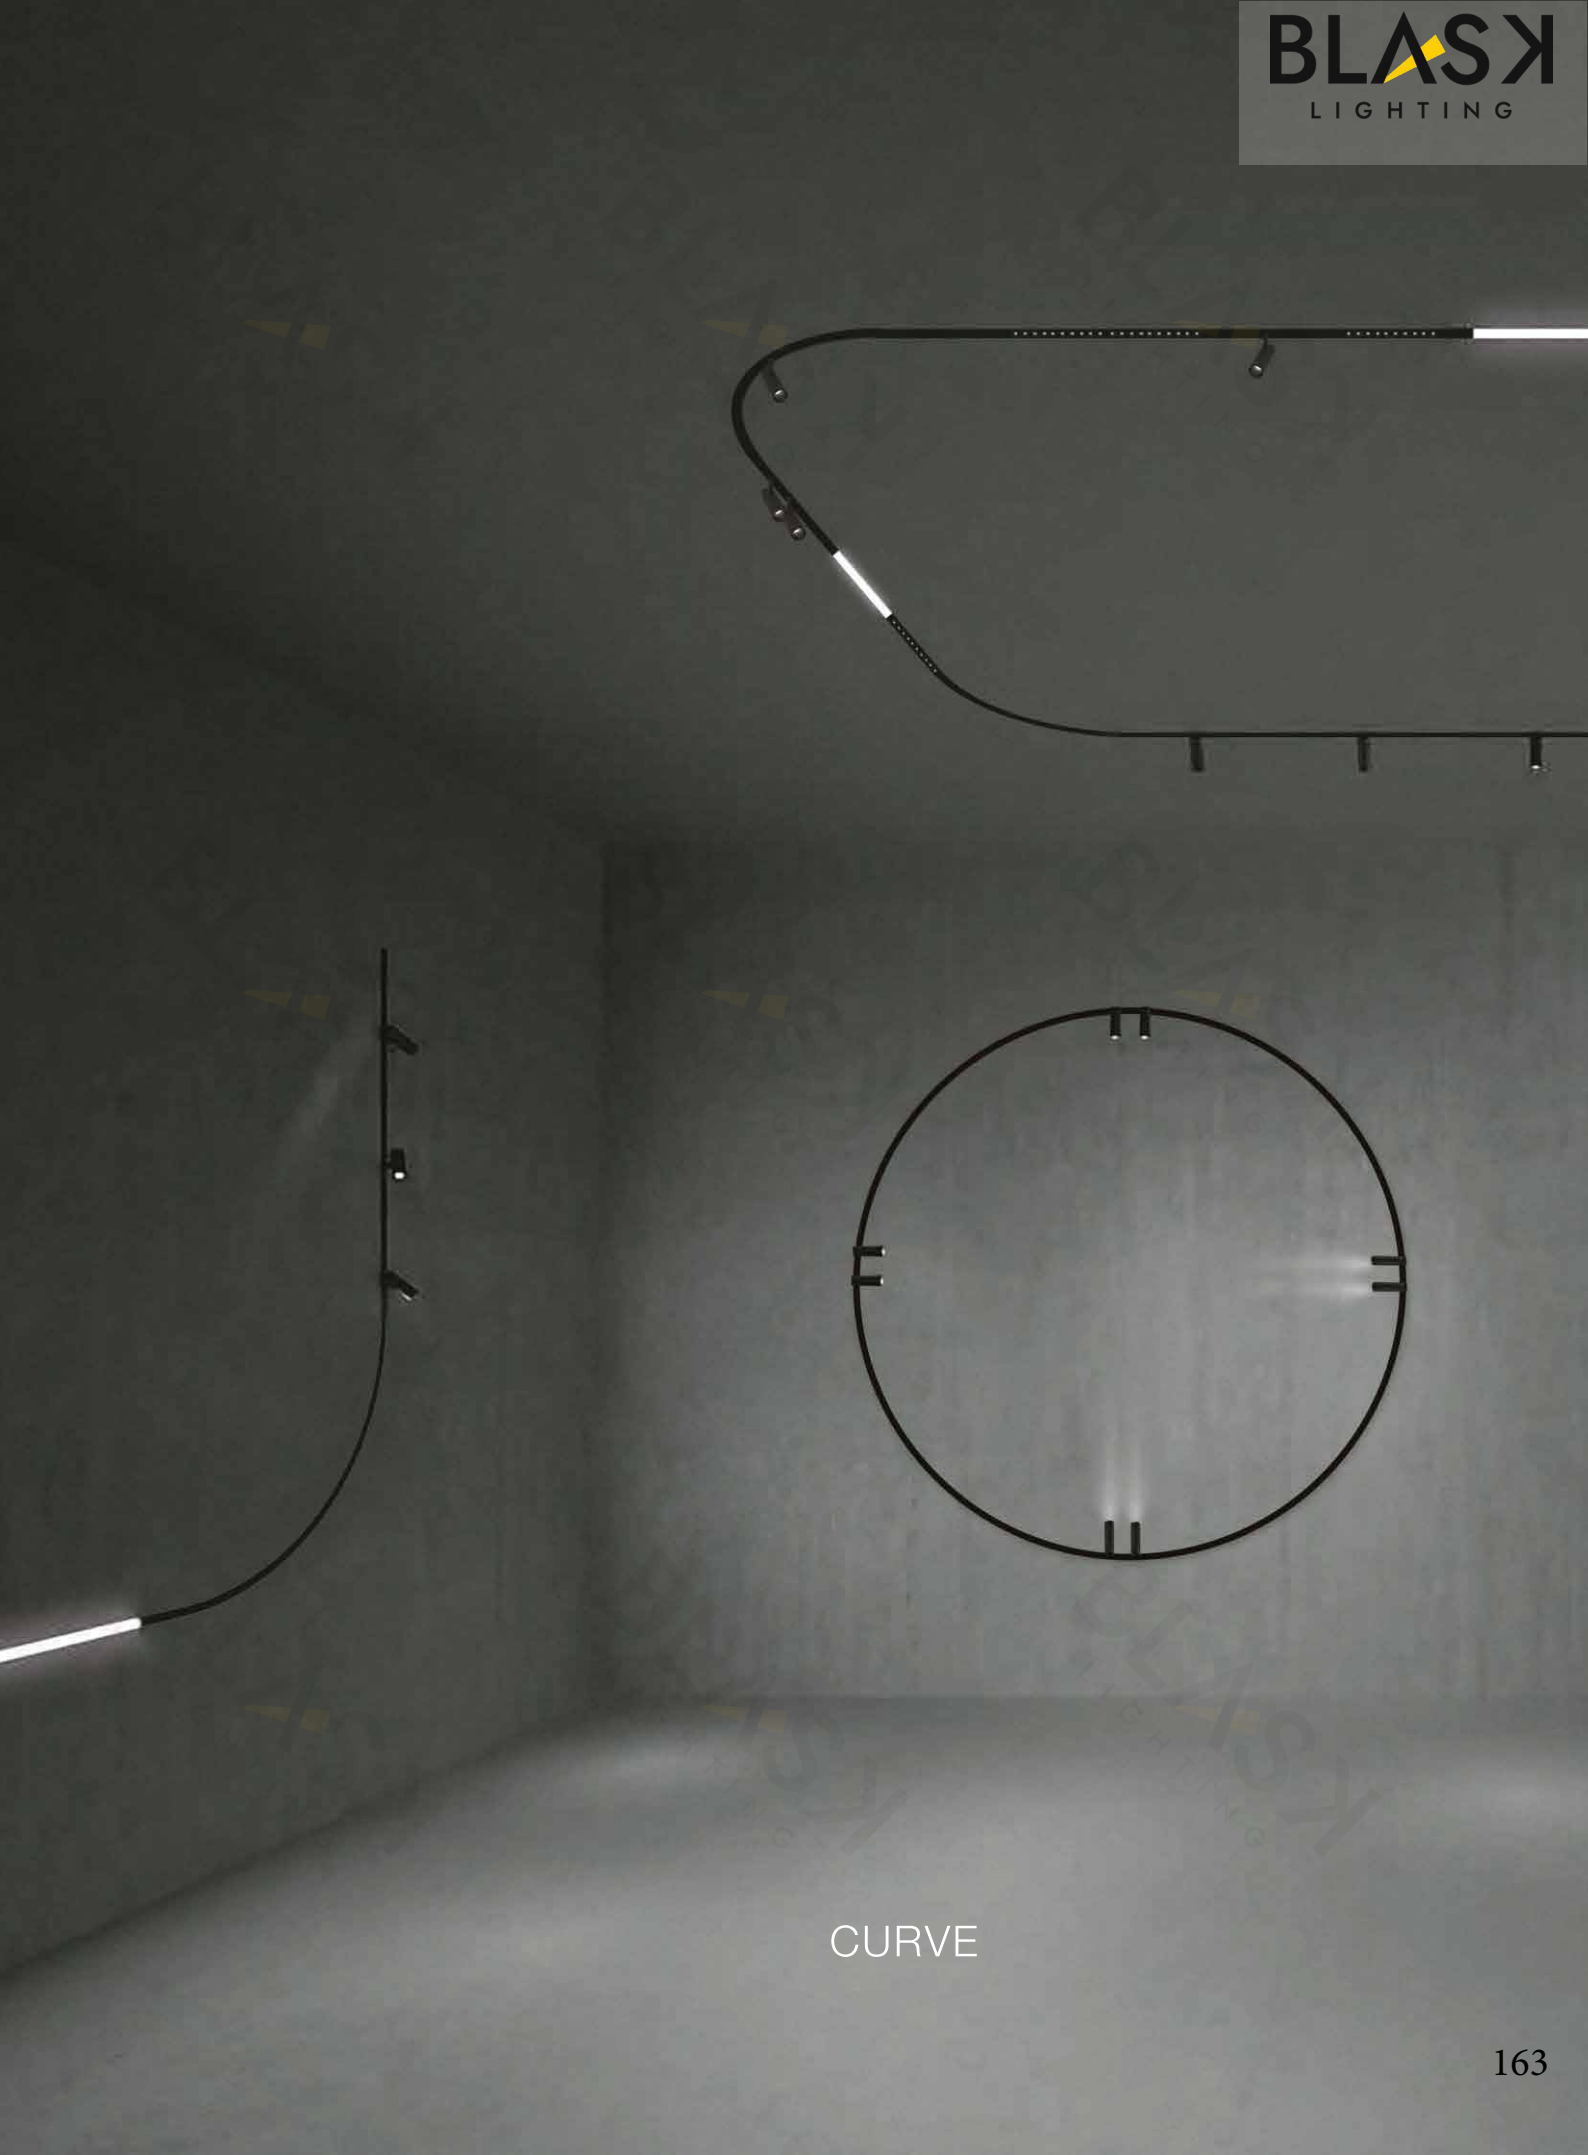

CURVE

LIFE AT THE EDGE

Combination diagram

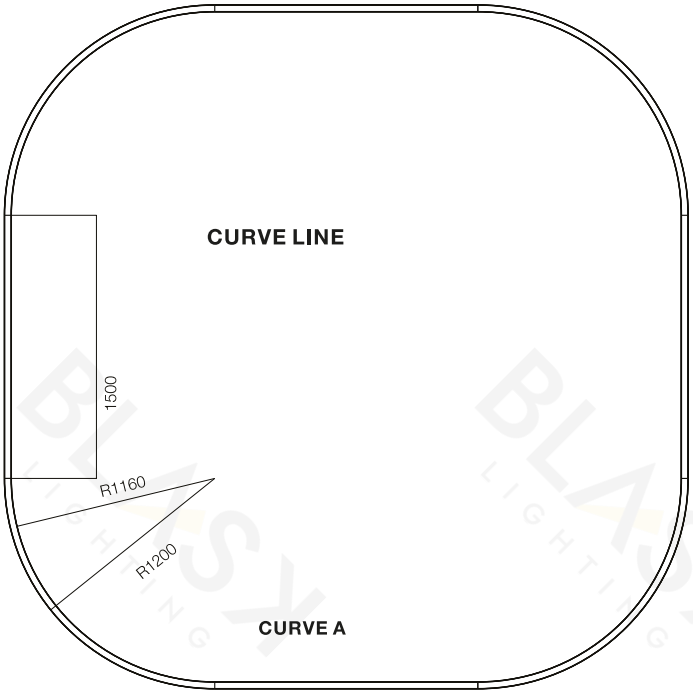

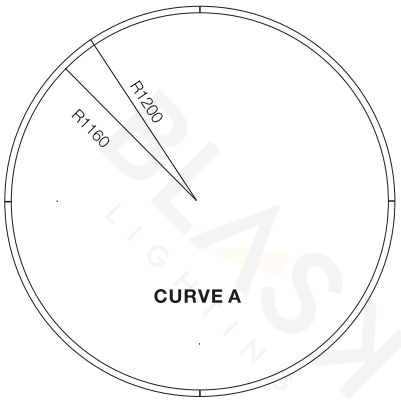

INAMTI30215



Material	Aluminum
Color	Black
Remark	Use for suspend or surface mounted

INAMTI30216



Material	Aluminum
Color	Black
Remark	Use for suspend or surface mounted

INAMTI30217



Material	Iron
Color	Black
Remark	Use for ceiling recessed

INAMTI30218



Material	Iron
Color	Black
Remark	Use for ceiling recessed

INAMTI30219



Material	Aluminum
Color	Black
Remark	Use for suspend or surface mounted

INAMTI30220



Material	Aluminum
Color	Black
Remark	Use for ceiling recessed

INAMTI30221



Material	Aluminum
Color	Black
Remark	Used to connect two magnetic tracks

INAMTI30222



Material	Aluminum
Color	Black
Remark	Used to block the beginning or end of a magnetic track

INAMTI30223



Material	Iron
Color	Black
Remark	Used to connect two magnetic tracks

INAMTI30224



Material	Iron
Color	Black
Remark	Used to block the beginning or end of a magnetic track

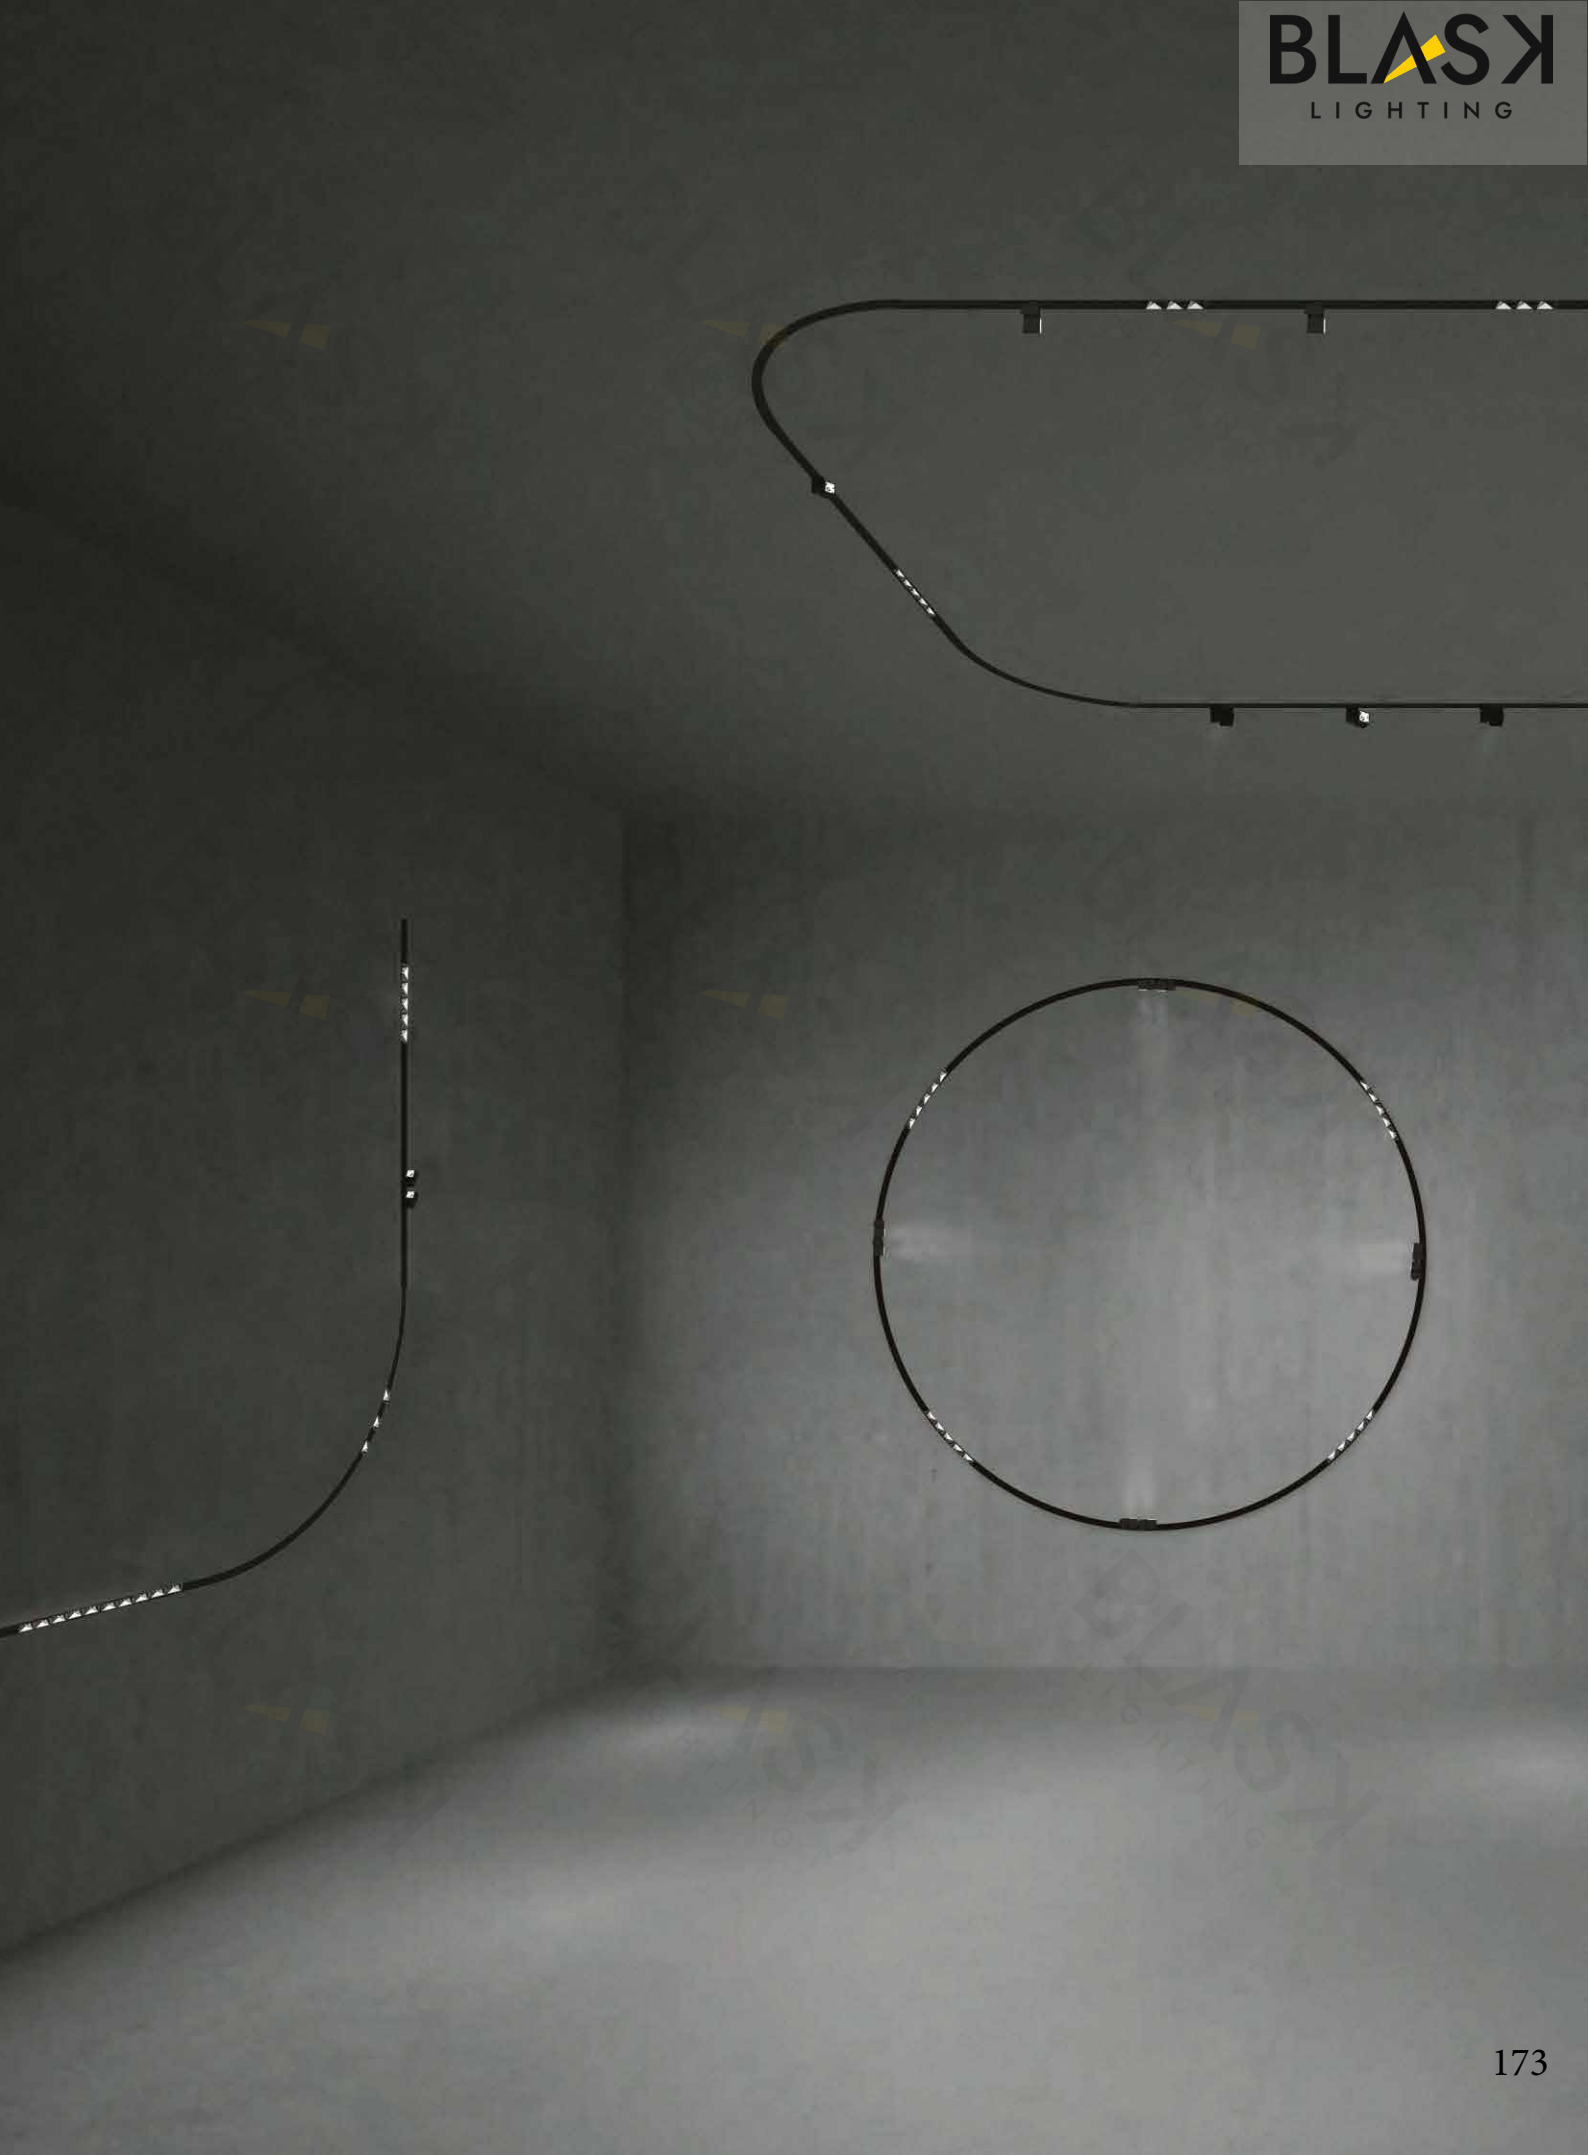

MAGNETIC MINI SPOTLIGHT

Patent pending

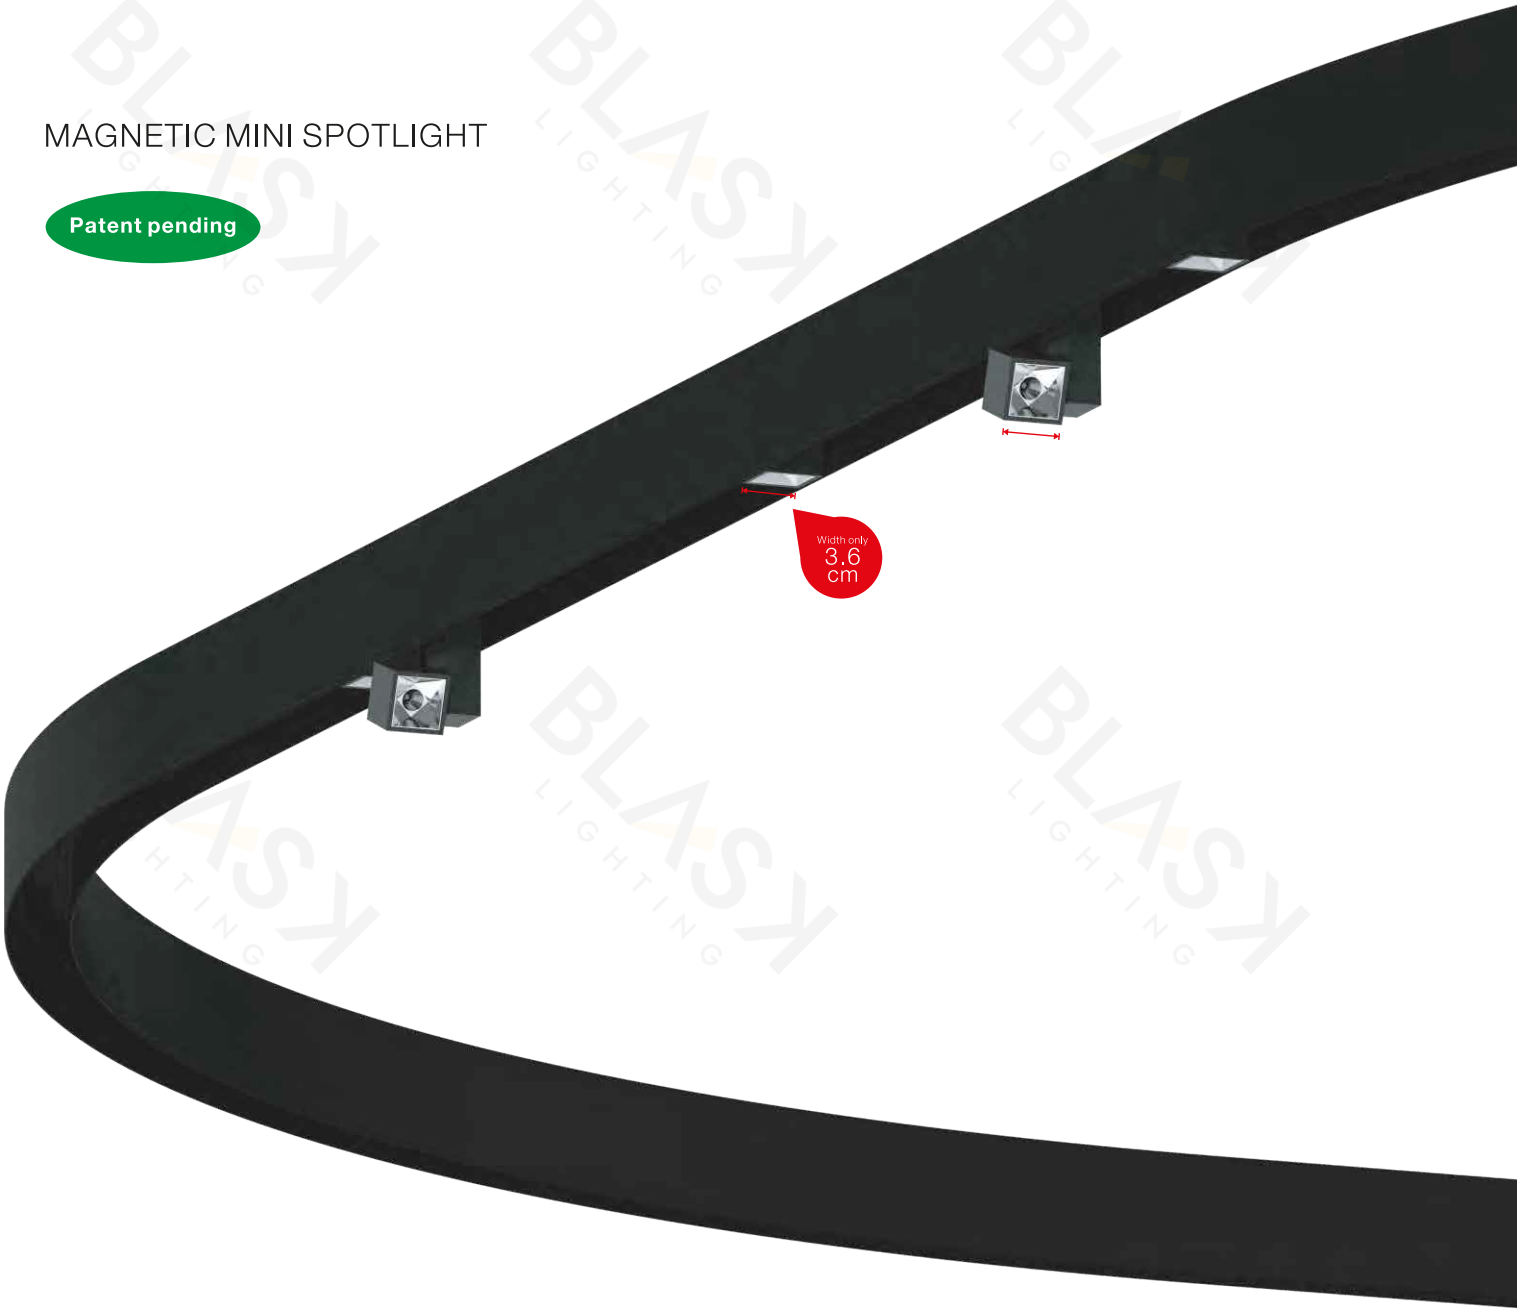



DIAL CODE TO ADJUST CCT

FREE COMBINATION OF DIFFERENT POWER

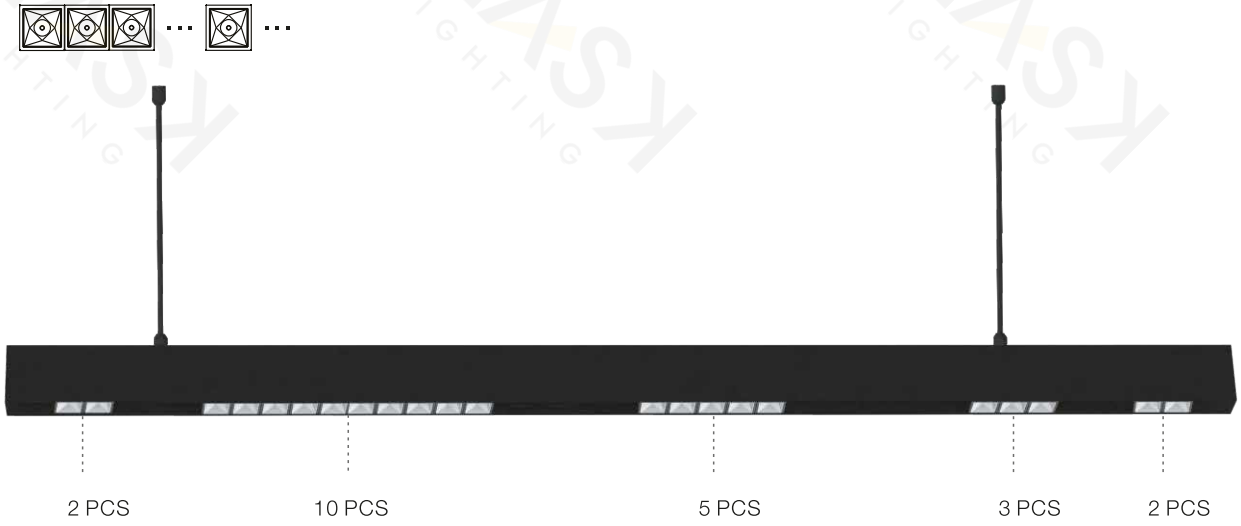

Perfect optical design

Architecture is often made up of modular spaces having varible geometries and specific requirements.Light adapts to every height and every distance to illuminate objects free of any restriction.We develop solutions-from one to one hundred thousand-each with a multiplicity of optics,including adjustable versions,with technologies and powers that turn flexibility into effectiveness,providing the best possible light based on the application in question.Modulation of light,from super-spot cones,to spot,medium,flood,wide flood,wall washer,square and framer systems.Interchangeable refractors allow the cone to be changed in relation to changing requirements without having to changed in relation to changing requirements without having to change the product.Framers have outer fins that can rotate geometric shapes without opening the device in order to adjust the final effect definitively and eliminate unwanted light.Moreover,we have also developed additional accessories that,combined with availabel optics,can be used to exactly design the desired light.Colour quality and visual well-being are constant features.The improvement in quality of indoor or outdoor spotllight is measured in terms fo the flexibility offered-and we have thought of everything:from optics to accessories,from design to fine tuning,we design exact,made-to-measure light.

12° / 20° / 34° / 48° | Wide Flood 60° | Square 55°*55° | Rectangle 40°*65° | Wall Washer

Lighting effects



Spot 12°



Medium 20°



Flood 34°



Wide Flood48°



Wide Flood 60°



Square 55°*55°

Rectangle 40°*65°





Wall Washer

INAMTI30225



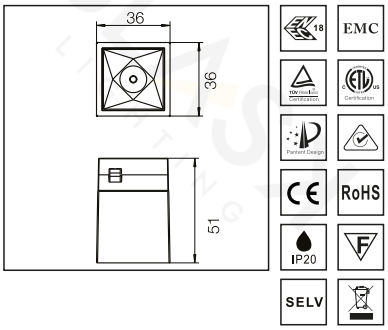

Power	2W
CCT	3000K/4000K/6500K
Voltage	DC24V
Output Lumens	120 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30226



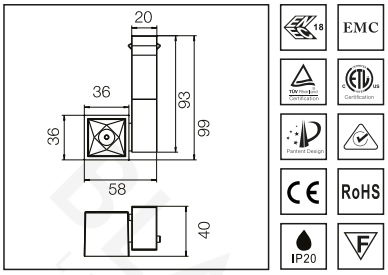

Power	2W
CCT	3000K/4000K/6500K
Voltage	DC24V
Output Lumens	120 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30227



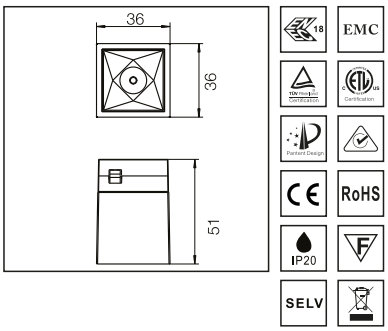

Power	3W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	210 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

INAMTI30228



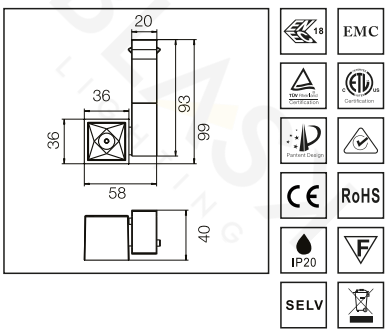

Power	3W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	210 lm
CRI	>90
Material	Aluminum
Color	Black
Warranty	5 Years

H2962
BBB

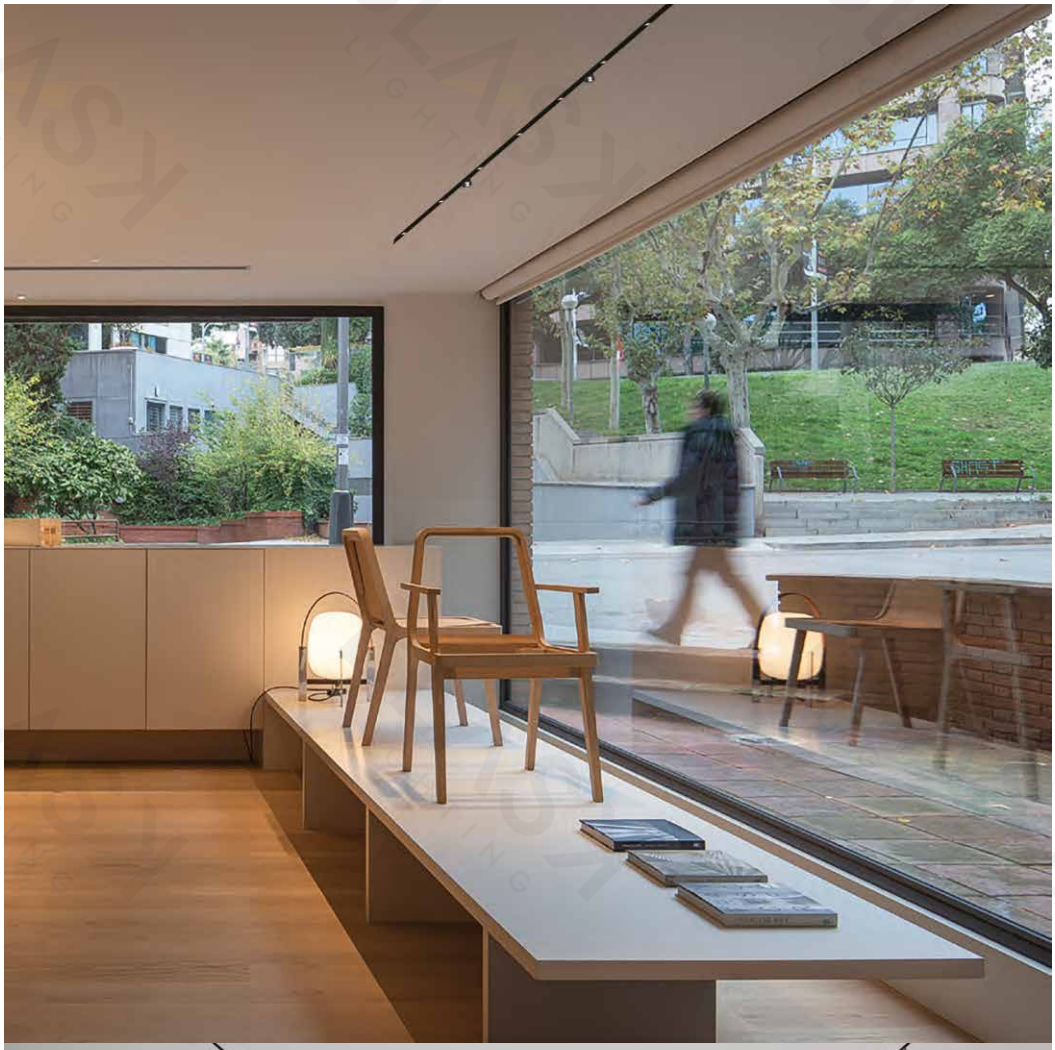

Magnetic linear lighting system

Suspend
Surface

Suspend
Surface

Recessed

Magnetice & Click
100% Safety

Flexible magnetic attachment

Different insets are held in place by magnetic force along the entire track. No tools are needed to install them. Rotate, slide into any position, and adjust at any time – all it takes is one hand movement to highlight objects according to requirements.

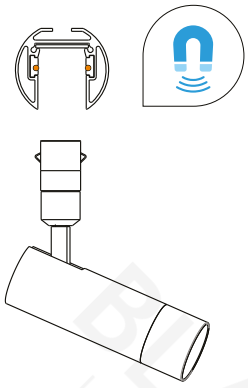

- **Safe low voltage**
  DC24V

- **Unlimited free movement**
  Randomly adjust the position angle of the free push to illuminate each space.

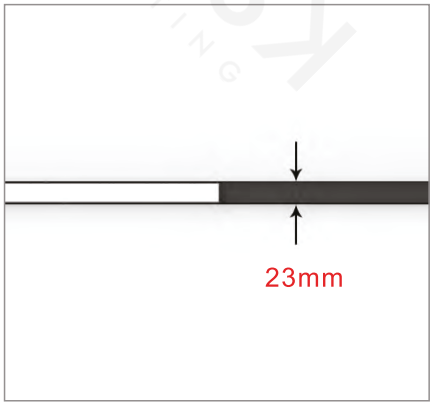

- **Slim shape exquisite and beautiful**
  Streamlined aesthetics, line -shaped light and shadow,Create high -quality space.

- **Free cut length**
  Magnetic track can freely cut the length you want to meet the needs of different spaces.

- **Internal built -in switch power supply**
  Simple and convenient, convenient for maintenance.

- **3 orbit 3 installation methods**
  Recessed / surface / suspend

Dimmable

Optional:

0-10V TRIAC

0-10V/Triac
2 functions in one

Thanks to the advancement of technology, we have
opened up the development and research of intelligent lighting systems.
The application of luminaires has reached a new level of technology.
This smart dimming app can be easily opened or
Turning off the lighting fixtures and adjusting the brightness
and other intelligent features greatly facilitates the application of lighting requirements.

Installation diagram

wiring diagram

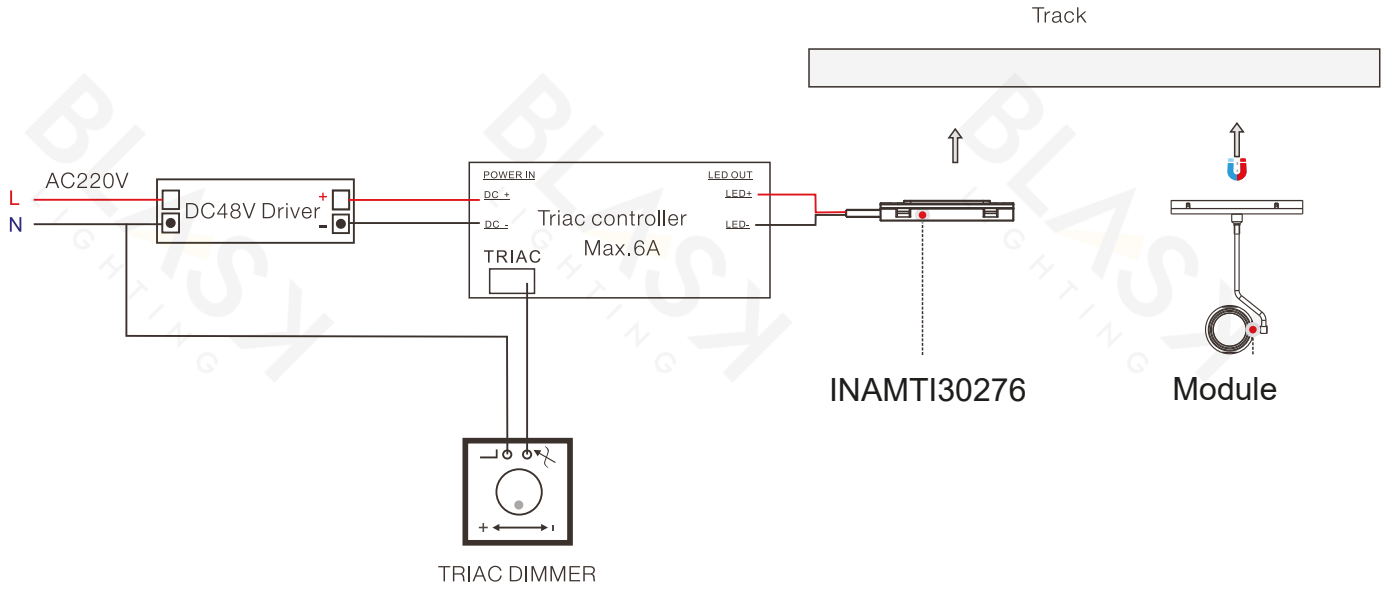

wiring diagram

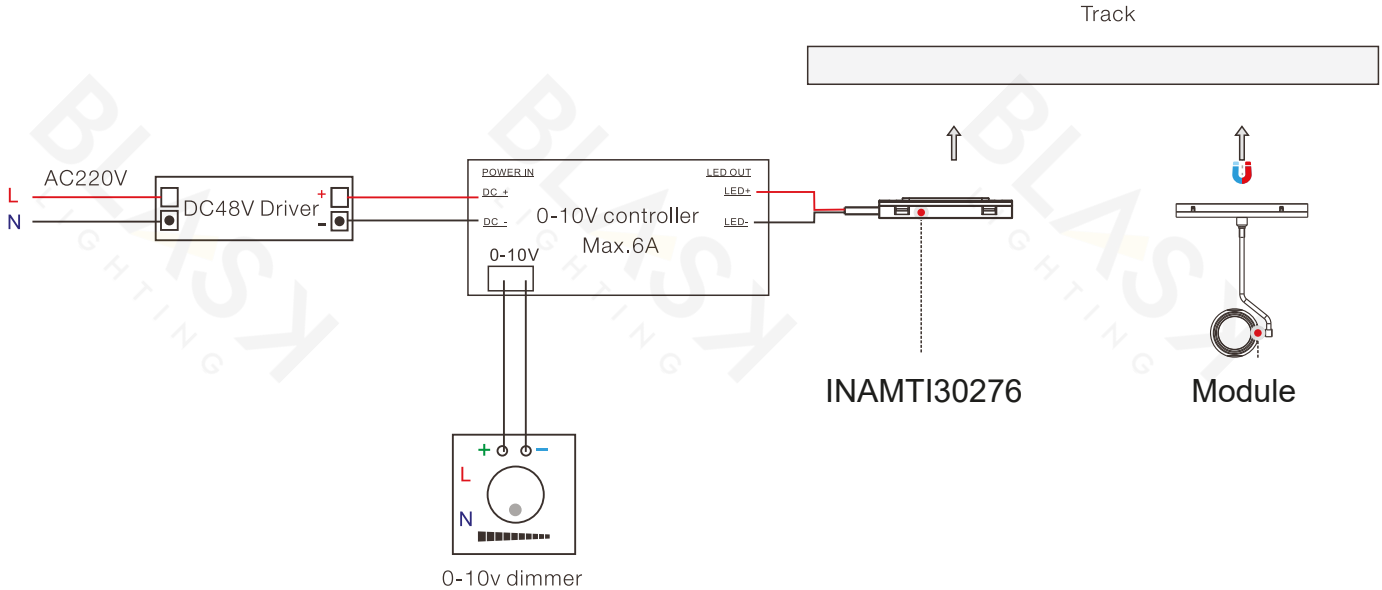

SIMPLE AND REFINED

Ultra-narrow body



Width only
23
mm

Anti-glare network

Variability

Flexible changes, you can assemble a variety of graphics.

Adjustable rotate and move

Patent design

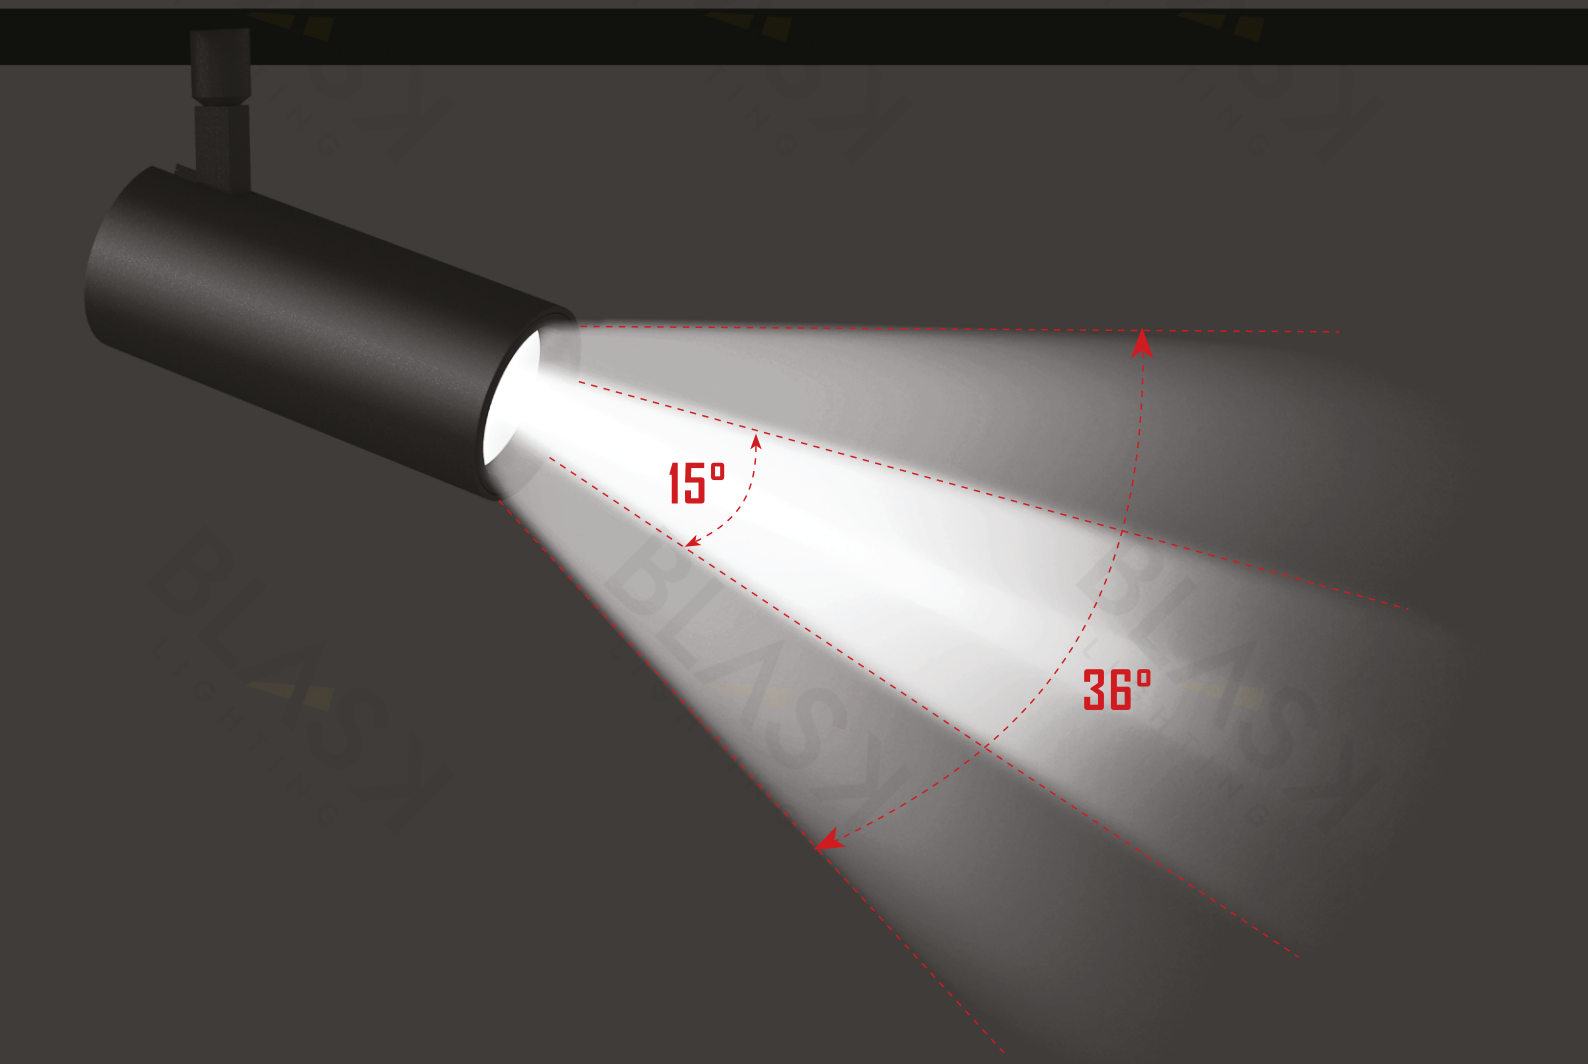

ADJUSTABLE BEAM ANGLE

Different environmental lighting design also requires different illumination angles of the lamps. For example, the office and the front desk should meet the illumination requirements for the work area. Museums and galleries need to focus on the display, and some places need to illuminate the environment or decorate. The effect of lighting. Is there a lighting product that can meet the above various lighting needs, and realize a variety of lighting scene modes to switch freely. Therefore, we specially introduce 0136MMS, its beam angle (15°-36°) can be switched freely, which can be applied to different needs.

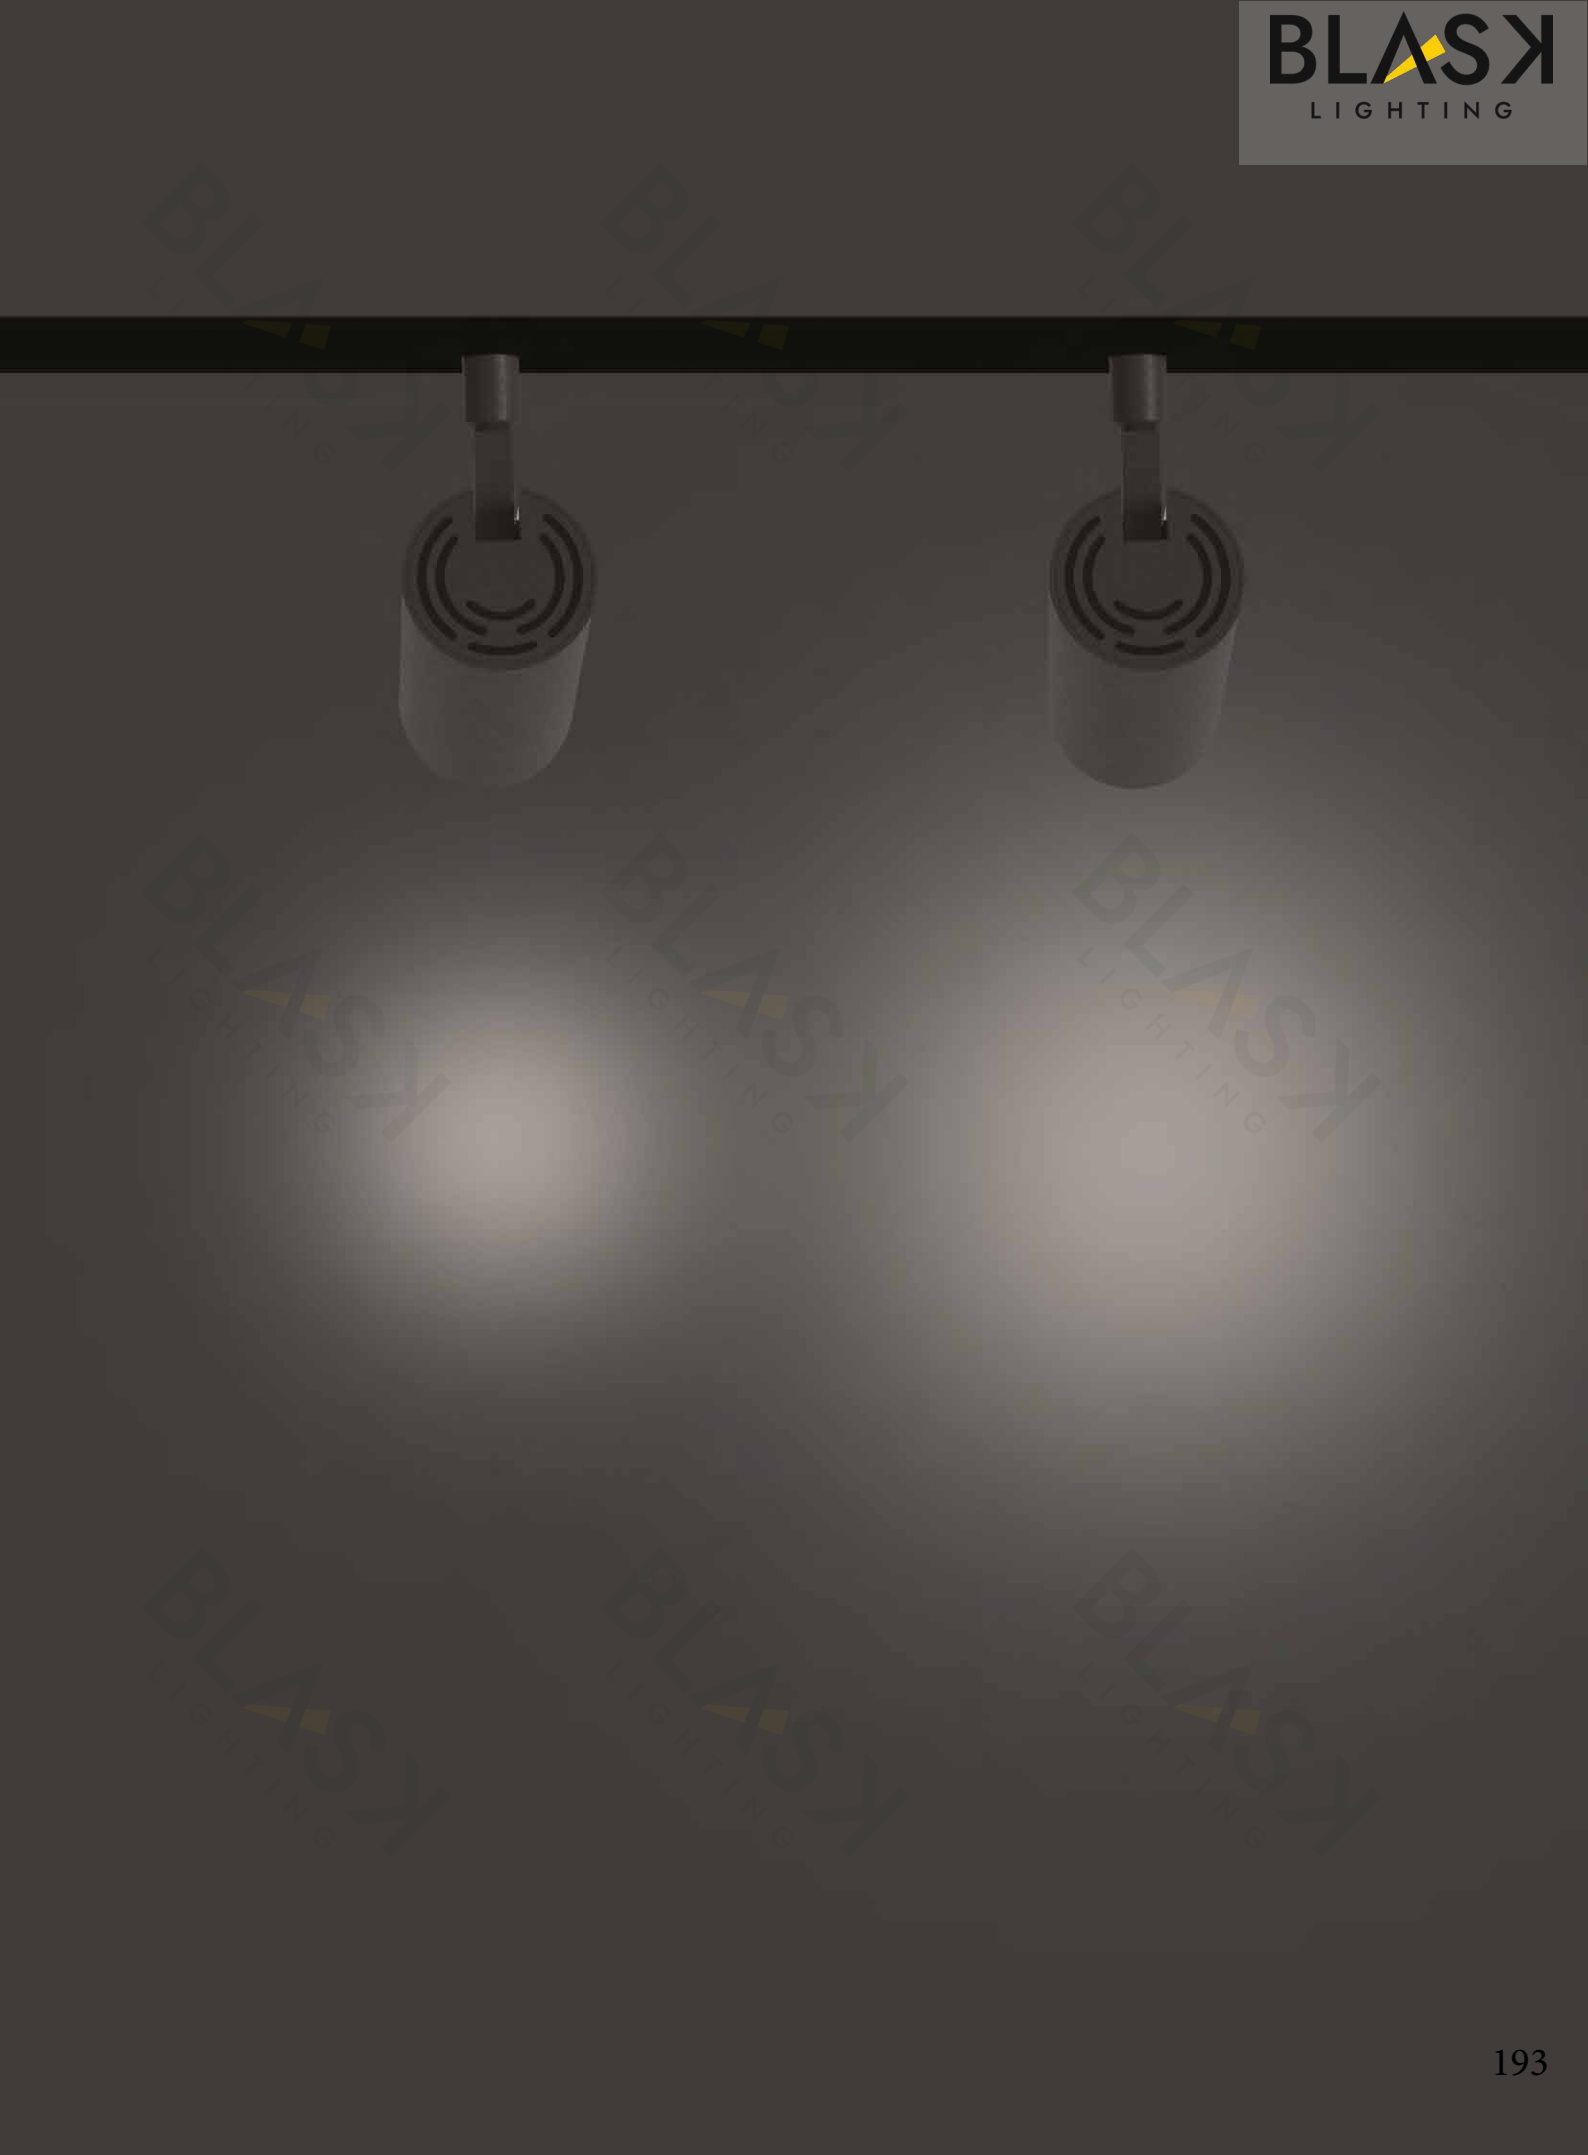

ACCESS
NYC
IN A
NEW YORK
MINUTE

fitting rooms
JOSEPH
DIANE VON
FURSTENBERG

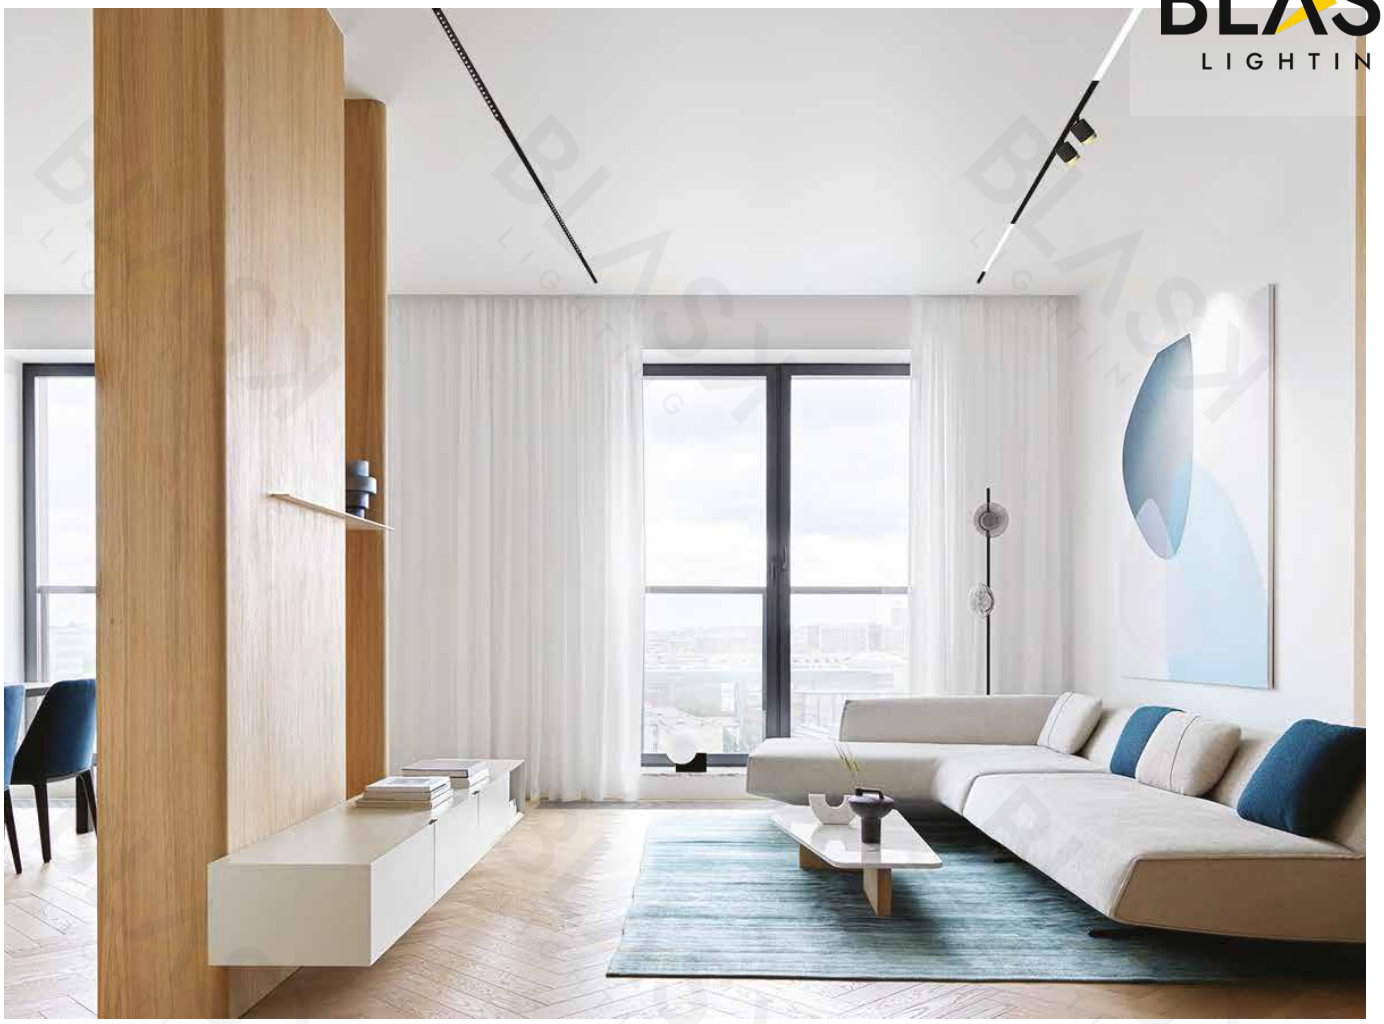

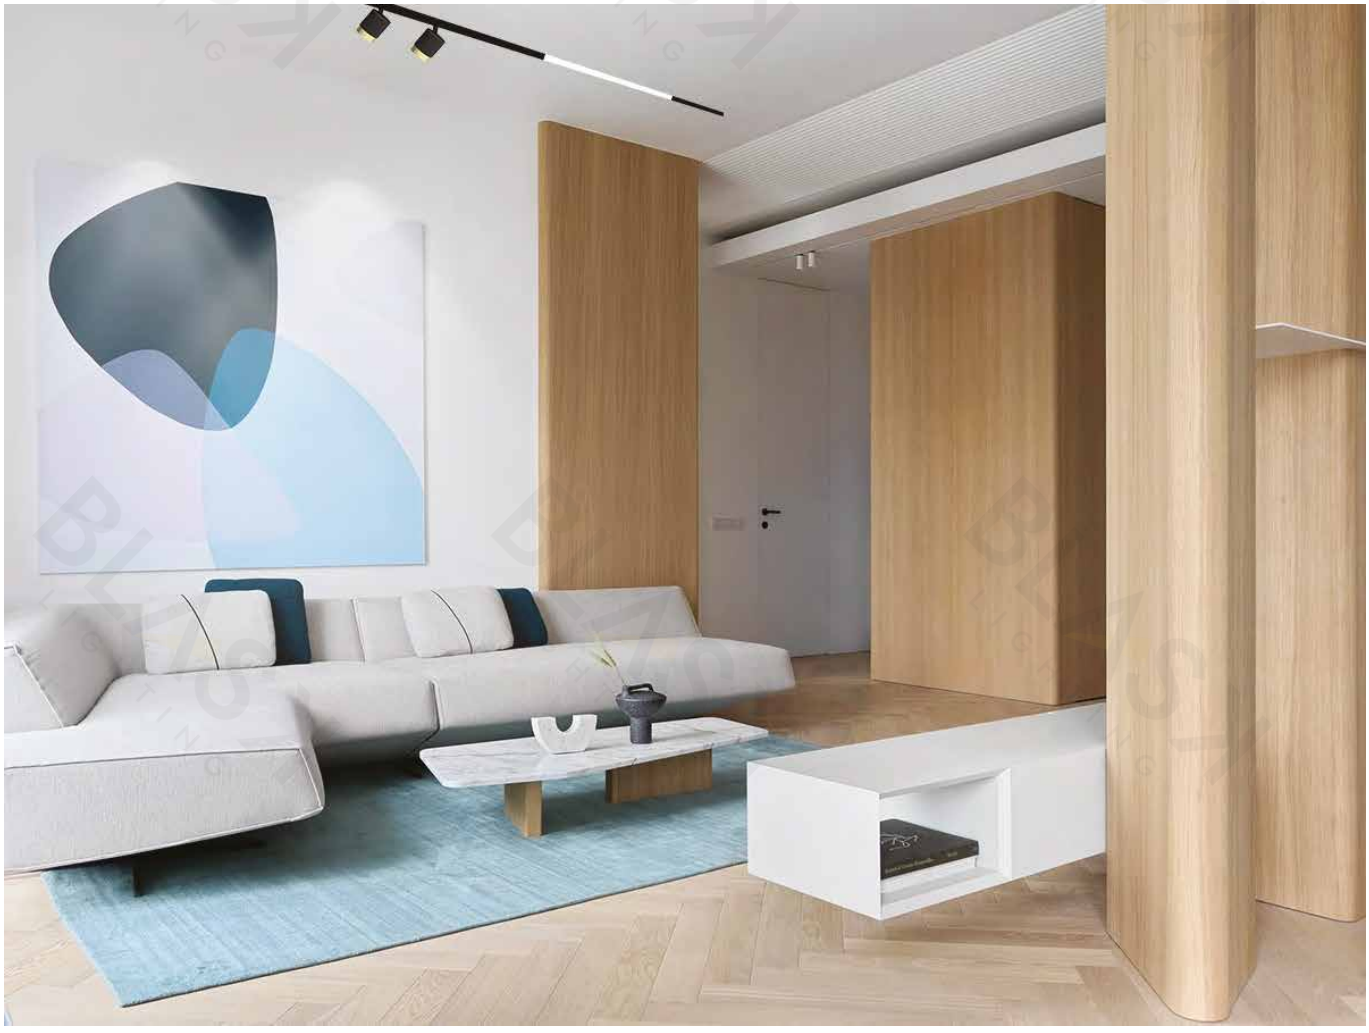

INAMTI30229



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30230





Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30231





Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30232



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30233



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30234



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30235



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30236



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30237





Power	13W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1040 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30238



Power	26W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	2080 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30239



Power	13W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1040 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30240



Power	26W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	2080 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30241



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30242



Power	38W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	3040 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30243



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30244



Power	20W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1600 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30245



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30246



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30247





Power	2W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	160 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30248



Power	20W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1600 lm
CRI	>90
Material	Aluminum
Color	Black / White
Warranty	5 Years

INAMTI30249







Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30250





Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30251



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30252



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30253



Power	UP1.5W+DOWN 4.5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	480 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30254



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30255



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30256

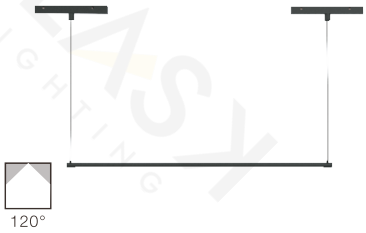



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30257



Power	6W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	480 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30258



Power	12W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	960 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30259



Power	6W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	480 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30260



Power	12W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	960 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30261

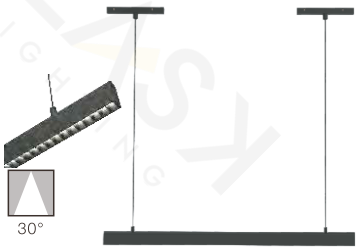



Power	24W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1920 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30262

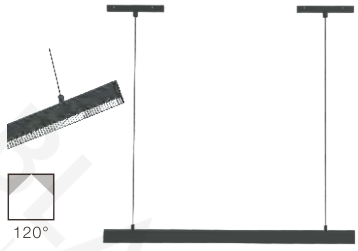



Power	24W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1920 lm
CRI	>90
Material	Aluminum
Color	Black / White /Gold
Warranty	5 Years

INAMTI30263



Material	Aluminum
Color	Black
Remark	Magnetic track for suspend orsurface mounted. Size for 1000/2000/3000mm optional.

INAMTI30264





Material	Aluminum
Color	Black
Remark	Magnetic track for trimless recessed only. Size for 1000/2000/3000mm optional.

INAMTI30265



Material	Aluminum
Color	Black
Remark	Magnetic track for trimless recessed only. Size for 1000/2000/3000mm optional. New mold, oxidation process.

INAMTI30266



Material	Aluminum
Color	Black
Remark	Magnetic track for suspend or surface mounted. Size for 1000/2000/3000mm optional.

INAMTI30267



Material	Aluminum
Color	Black
Remark	Magnetic track for suspend andsurface mounting the plane 90° Corner

INAMTI30268



Material	Aluminum
Color	Black
Remark	Magnetic track for suspend andsurface mounting the erect 90° Corner

INAMTI30269



Material	Aluminum
Color	Black
Remark	Magnetic track for recessed the plane 90° Corner

INAMTI30270



Material	Aluminum
Color	Black
Remark	Magnetic track for recessed the erect 90° Corner

INAMTI30271



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting the plane 90° Corner

INAMTI30272



Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting the erect 90° Corner

INAMTI30273



Material	Aluminum
Color	Black
Remark	For magnetic track suspend accessories (Wire input)

INAMTI30274



Material	Aluminum
Color	Black
Remark	For magnetic track suspend accessories

INAMTI30275



Material	Aluminum
Color	Black
Remark	For electrically conductive connections between two magnetic tracks

INAMTI30276



Material	Aluminum
Color	Black
Remark	Used for conductive connection between power supply and magnetic track

INAMTI30277



Material	Aluminum
Color	Black
Remark	For the connection between two magnetic tracks

INAMTI30278



Material	Iron
Color	Chrome
Remark	For magnetic track surface mounting accessories

INAMTI30279



Material	Aluminum
Color	Black
Remark	For magnetic track suspend accessories

INAMTI30280



Material	Aluminum
Color	Black
Remark	For the end of 0136ME TRACK R

INAMTI30281



Material	Aluminum
Color	Black
Remark	For the end of 0136ME TRACK C

INAMTI30282



Material	Aluminum
Color	Black
Remark	For the end of 0136ME TRACK S

INAMTI30283



Power	Max. 45W
Material	Aluminum
Color	Black
Remark	Driver box with driver for magnetic track surface mounting and suspend

INAMTI30284



Power	Max. 45W
Material	Aluminum
Color	Black
Remark	Driver box with driver for magnetic track surface mounting and suspend

INAMTI30285



Power	Max. 100W
Material	Plastic
Color	Black
Remark	Driver for magnetic track

INAMTI30286

Power	Max. 200W
Material	Plastic
Color	Black
Remark	Driver for magnetic track

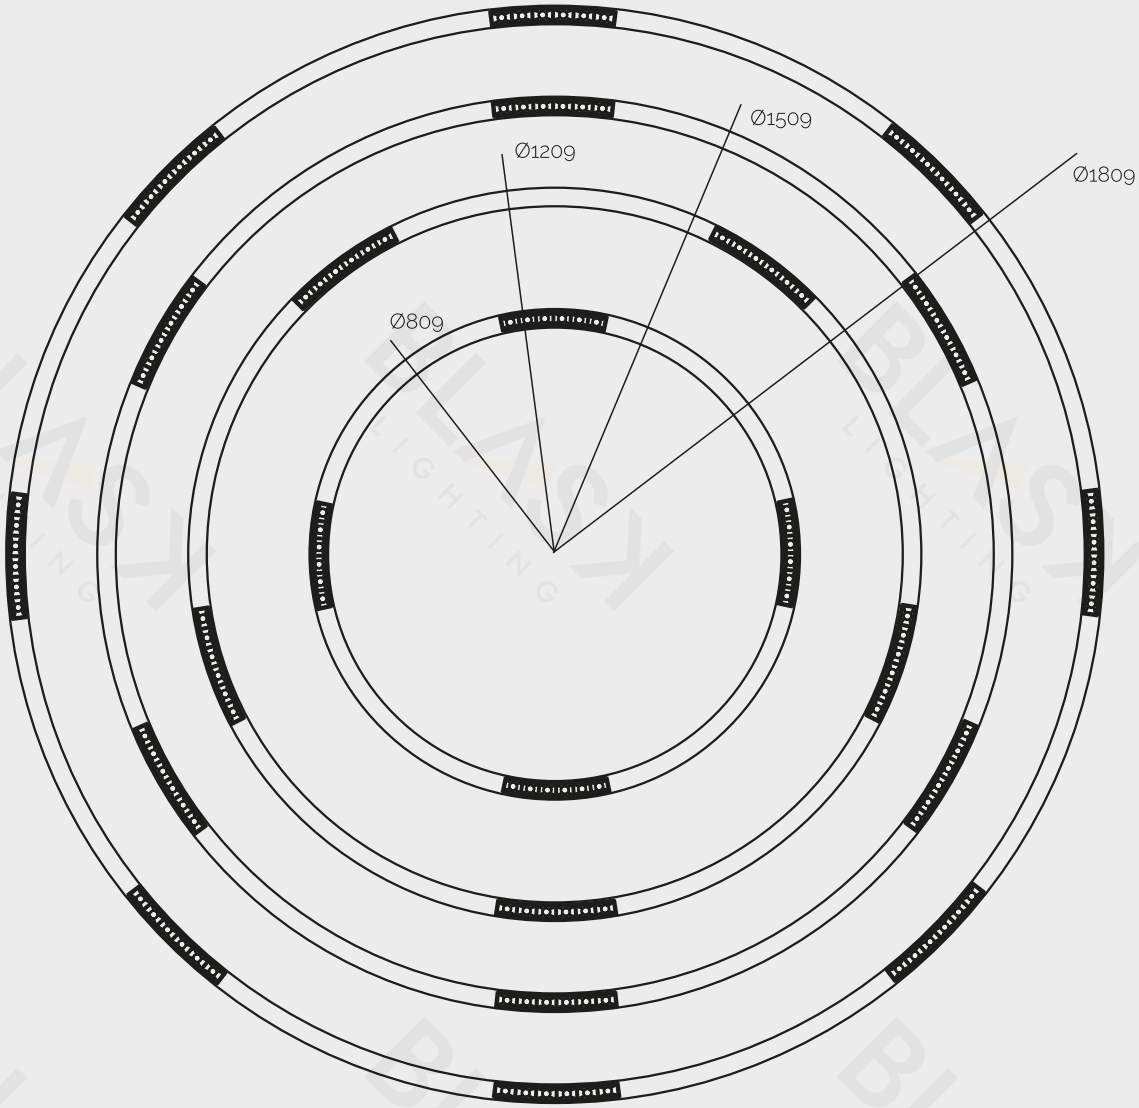
Ø809
Ø1209
Ø1509
Ø1809

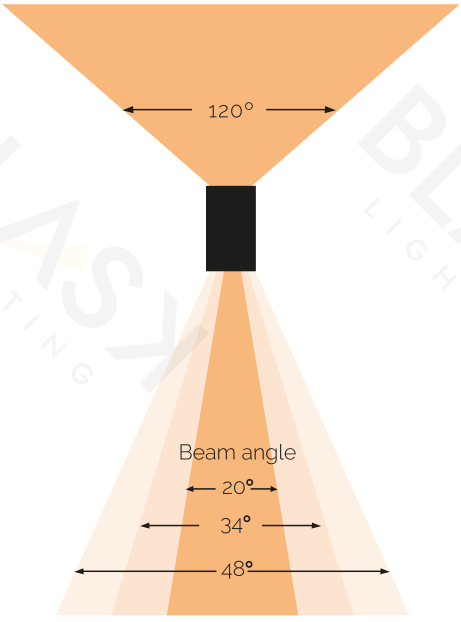
120°
Beam angle
20°
34°
48°

POLPO

MAGNETIC UP AND DOWN LIGHT SYSTEM

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
UGR<12
DC24V
5-year warranty



INAMTI30287 INAMTI30288 INAMTI30289 INAMTI30290

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30287	6W	360 lm	White / Black	3000K / 4000K	20° / 34° / 48°
INAMTI30288	6W	360 lm	White / Black	3000K / 4000K	20° / 34° / 48°
INAMTI30289	6W	360 lm	White / Black	3000K / 4000K	20° / 34° / 48°
INAMTI30290	6W	360 lm	White / Black	3000K / 4000K	20° / 34° / 48°

MAGNETIC UP AND DOWN LIGHT SYSTEM

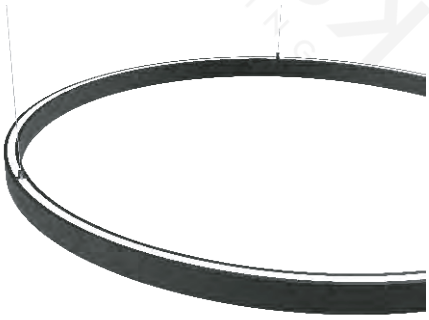

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
AC220-240V 50/60Hz
5-year warranty

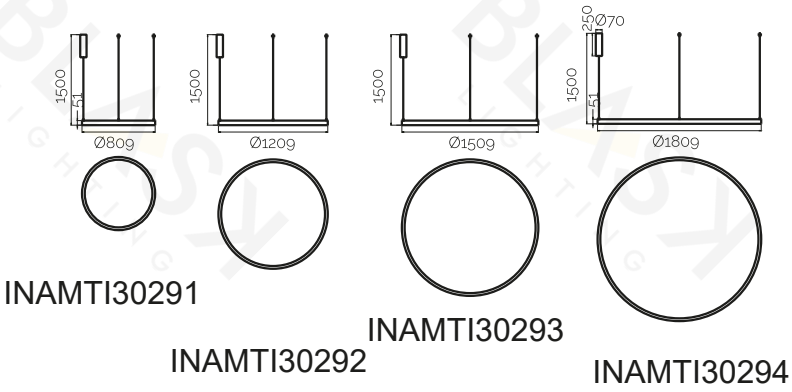

INAMTI30291

INAMTI30292

INAMTI30293

INAMTI30294

PRODUCT SPECIFICATIONS

Item No.	Power	Color	CCT	Beam Angle
INAMTI30291	UP 10W + DOWN Max.100W	White / Black	3000K / 4000K	120°
INAMTI30292	UP 15W + DOWN Max.100W	White / Black	3000K / 4000K	120°
INAMTI30293	UP 18W + DOWN Max.100W	White / Black	3000K / 4000K	120°
INAMTI30294	UP 22W + DOWN Max.100W	White / Black	3000K / 4000K	120°

WARNING:
Drivers must be installed in the ceiling

Surface

MAGNETIC UP AND DOWN LIGHT SYSTEM

PRODUCT FEATURES

Aluminum lamp body
Surface installation
IP20
CRI>90
AC220-240V 50/60Hz
5-year warranty

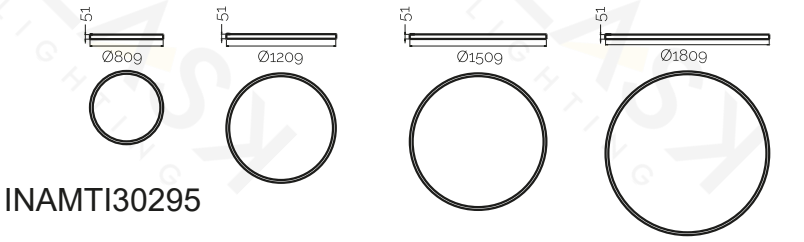

INAMTI30295

INAMTI30296

INAMTI30297 INAMTI30298

PRODUCT SPECIFICATIONS

Item No.	Power	Color	CCT	Beam Angle
INAMTI30295	Max.100W	White / Black	3000K / 4000K	20° / 34° / 48°
INAMTI30296	Max.100W	White / Black	3000K / 4000K	20° / 34° / 48°
INAMTI30297	Max.100W	White / Black	3000K / 4000K	20° / 34° / 48°
INAMTI30298	Max.100W	White / Black	3000K / 4000K	20° / 34° / 48°

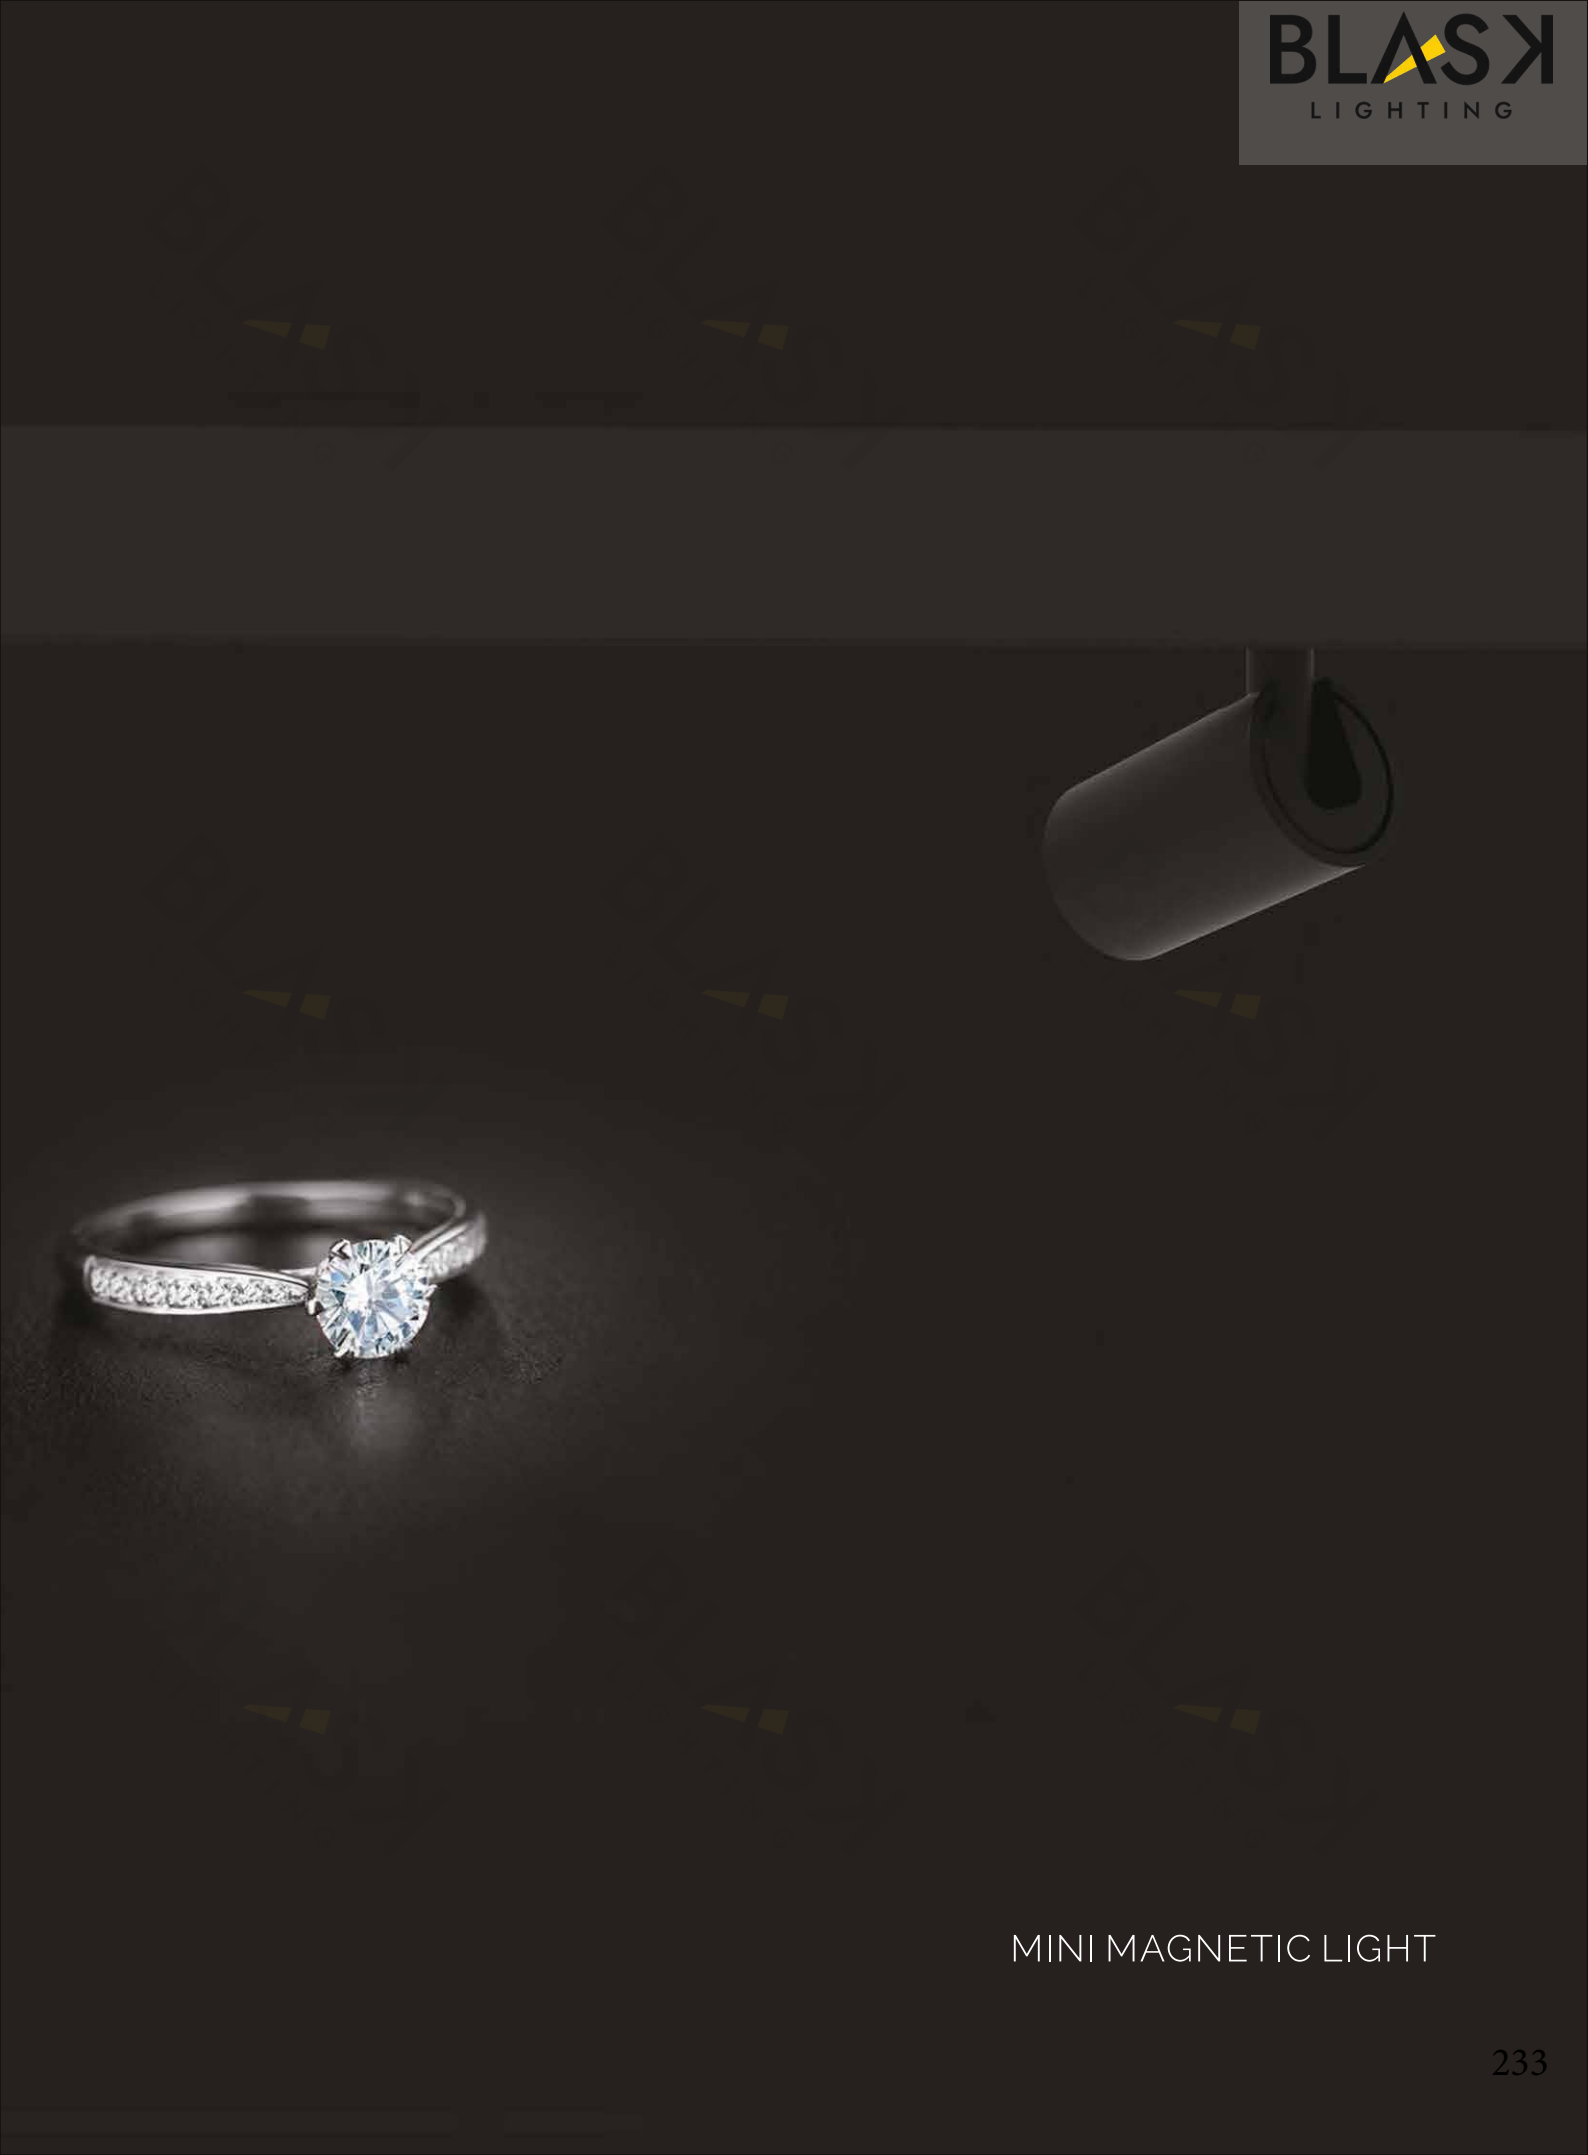

MINI MAGNETIC LIGHT

A minimal line only 15 mm wide and 17.5 mm high ,
merging with any architectural structure in a perfect integration.

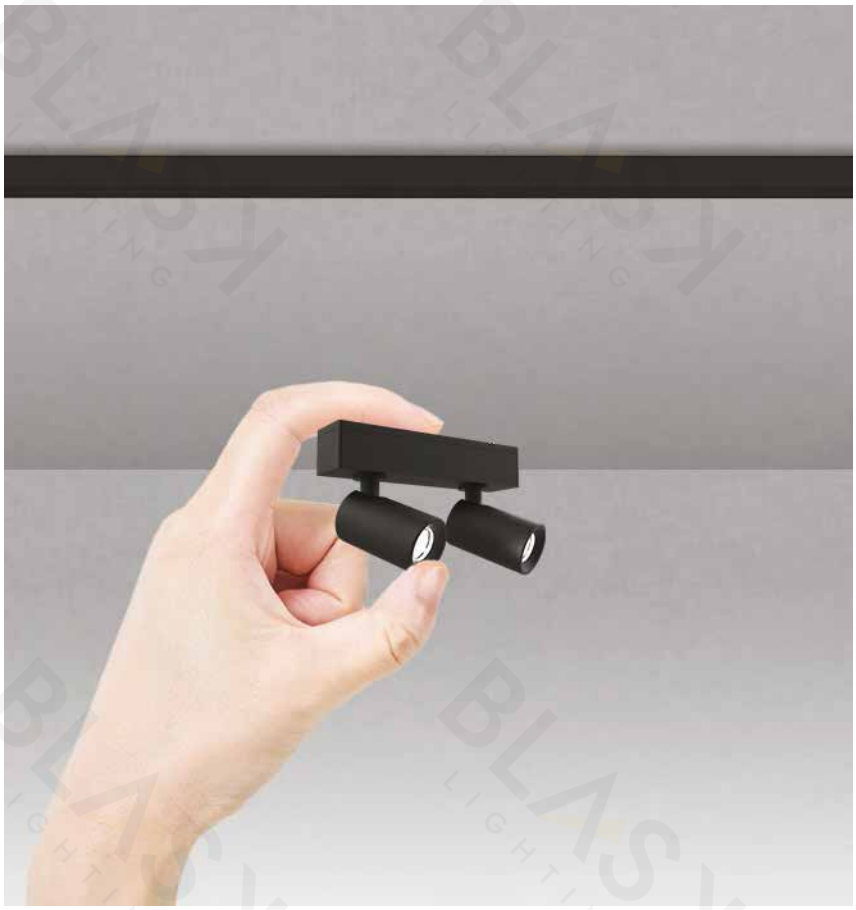

Magnetic fixing of the luminaries. The lighting bodies can be moved when they are still on, achieving enormous flexibility and adaptability in the configuration at any time.

the ultimate solution for exhibition lighting.
A complete and professional program that, in addition to its reduced dimensions, provides a balanced and attractive light to highlight each object in the best way and in 360°.

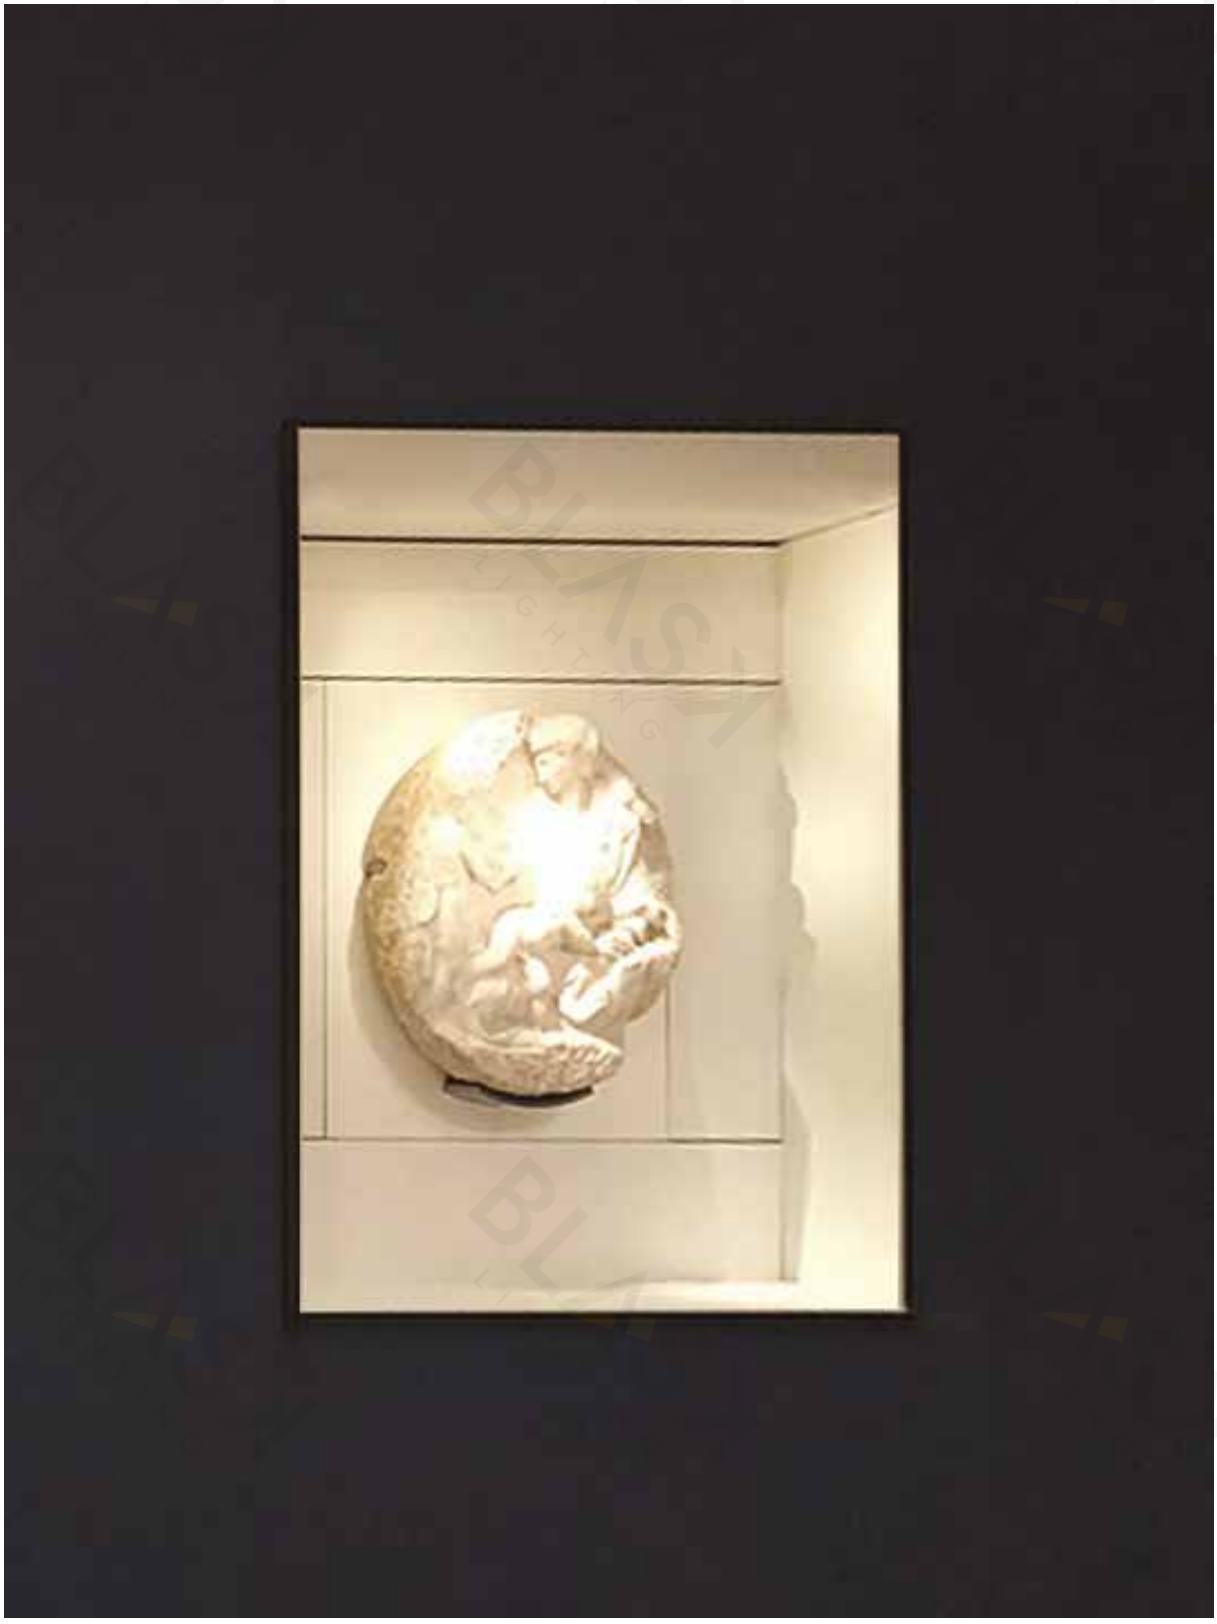

The small spotlight can be used as a key lighting function, which can highlight the objects and focus people's sight.

Mini magnetic light

Feed magnetic assembly

Different lamps can be fixed in place along the entire track by magnetic force. No tools are required to install the fixture. Place the lamp in any position and adjust it at any time. Just move it manually and let the light shine to the most suitable place according to the needs.



Free length cutting

The track can free length cutting.

Mini slim

The inner tank width is only 15mm, Various light sizes mini.

Safety extra-low voltage

DC24V

Easy and fast maintenance

Installation

Surface

Wide range of applications

Jewelry Showcase
Museum Exhibition
Supermarket sales rack
wardrobe

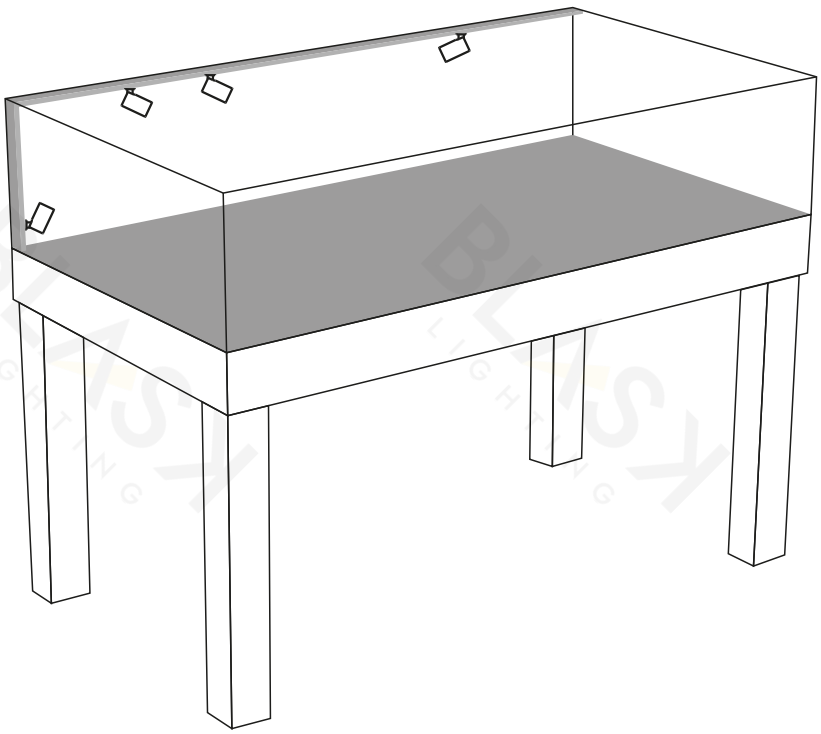

Mini magnetic light

FEATURE

Magnetic design
Using permanent magnets
Aluminum lamp body
Anti-glare design
UGR<19
IP20
CRI>90
DC24V
5 years warranty



INSTALLATION

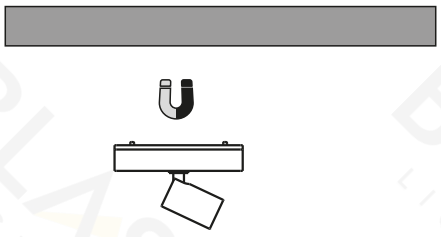

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30299	1W	70 lm	White / Black	3000K / 4000K	12° / 30° / 55°

SPECIAL CHARACTERISTICS

- Pantent Design
- ENEC Certification
- RoHS Certification
- ETL Certification
- Safety extra-low voltage
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light distributions
- Different light colors
- Class III
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors
- IP20

Mini magnetic light

FEATURE

Magnetic design
Using permanent magnets
Aluminum lamp body
Anti-glare design
UGR<19
IP20
CRI>90
DC24V
5 years warranty



INSTALLATION



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30300	2W	140 lm	White / Black	3000K / 4000K	12° / 30° / 55°

SPECIAL CHARACTERISTICS

- Pantent Design
- ENEC Certification
- RoHS Certification
- ETL Certification
- Safety extra-low voltage
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light distributions
- Different light colors
- Class III
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors
- IP20

Mini magnetic light

FEATURE

Magnetic design
Using permanent magnets
Aluminum lamp body
Anti-glare design
UGR<19
IP20
CRI>90
DC24V
5 years warranty

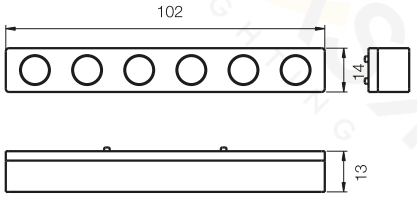

INSTALLATION

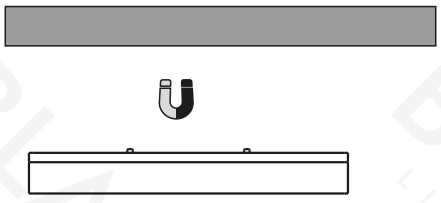

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30301	3W	210 lm	White / Black	3000K / 4000K	12° / 30° / 55°

SPECIAL CHARACTERISTICS

- Pantent Design
- ENEC Certification
- RoHS Certification
- ETL Certification
- Safety extra-low voltage
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light distributions
- Different light colors
- Class III
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors
- IP20

Mini magnetic light

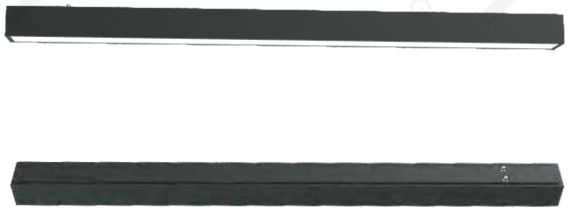

FEATURE

Magnetic design
Using permanent magnets
Aluminum lamp body
IP20
CRI>90
DC24V
5 years warranty



INSTALLATION

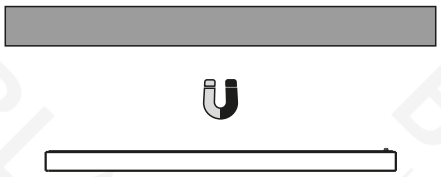

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30302	3W	210 lm	White / Black	3000K / 4000K	120°

SPECIAL CHARACTERISTICS

- Pantent Design
- ENEC Certification
- RoHS Certification
- ETL Certification
- Safety extra-low voltage
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light colors
- Class III
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors
- IP20

Surface mounted accessories usage

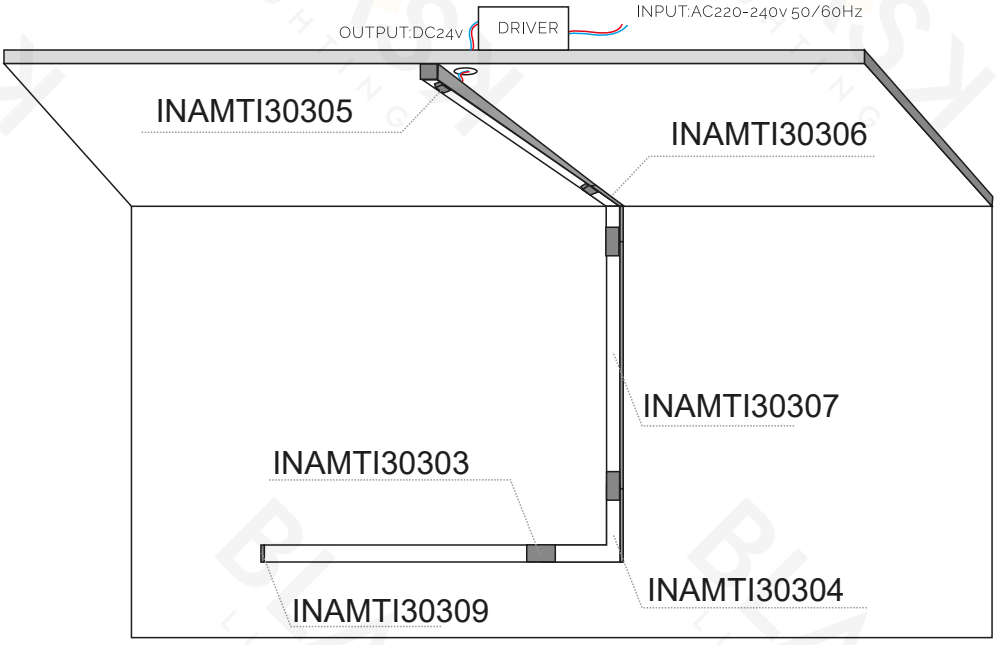



INAMTI30303

Material	Aluminum
Color	Black
Remark	For electrically conductive connections between two magnetic tracks



INAMTI30305

Material	Aluminum
Color	Black
Remark	Used for conductive connection between power supply and magnetic track



INAMTI30304

Material	Aluminum
Color	Black
Remark	Magnetic track for surface mounting the plane 90° Corner



INAMTI30306

Material	Aluminum
Color	Black
Remark	Magnetic track for surface mountin the erect 90° Corner

Surface mounted accessories usage



INAMTI30307

Material	Aluminum
Color	Black
Remark	Magnetic track





INAMTI30309

Material	Aluminum
Color	Black
Remark	End cap



INAMTI30308

Material	Iron
Color	Chrome
Remark	Screw case for surface mounted magnetic track

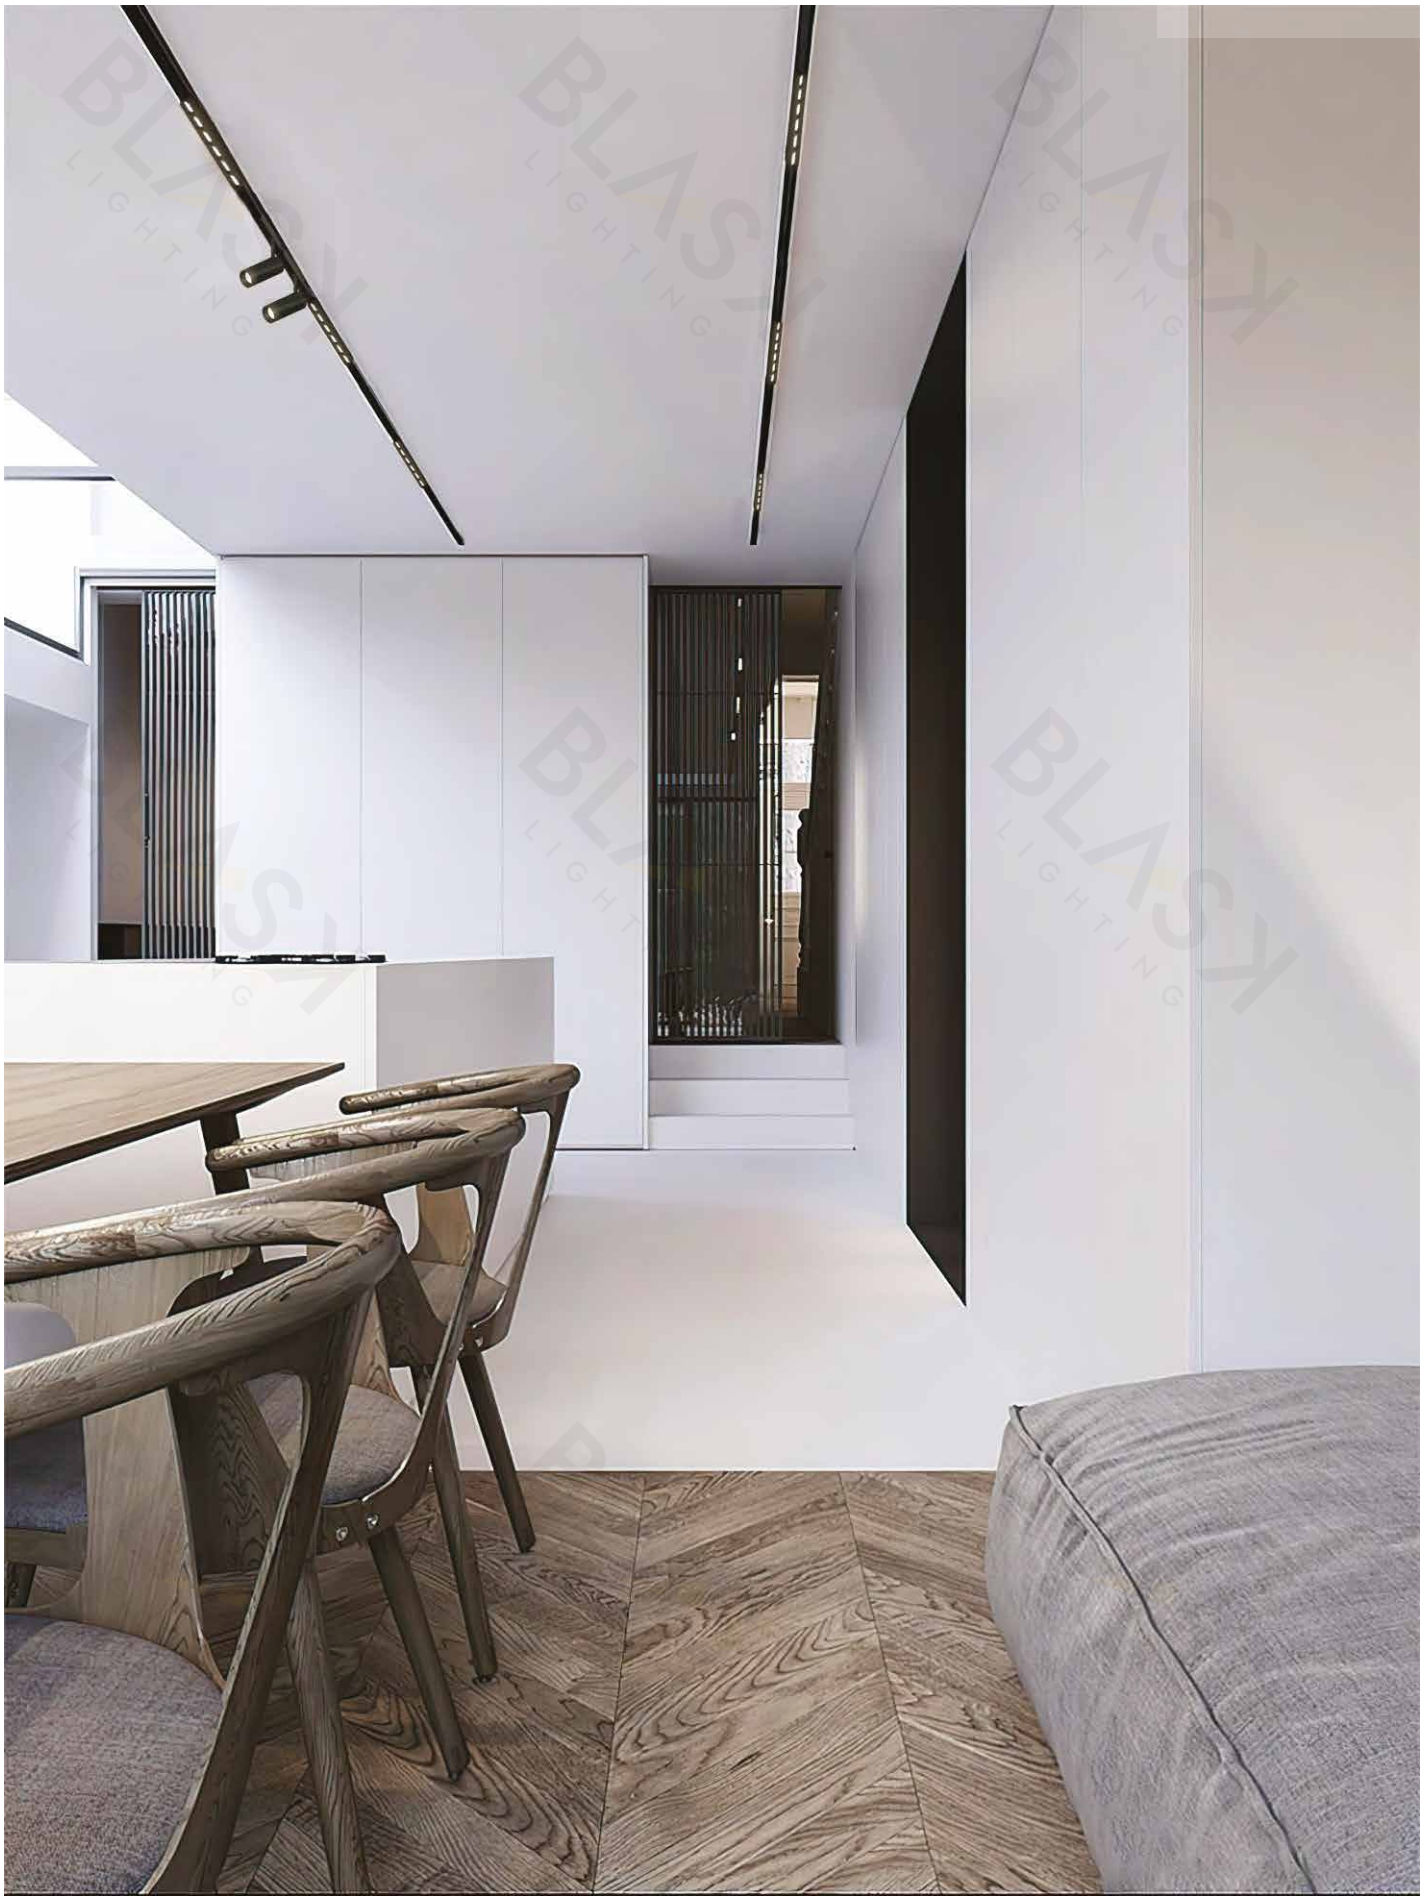

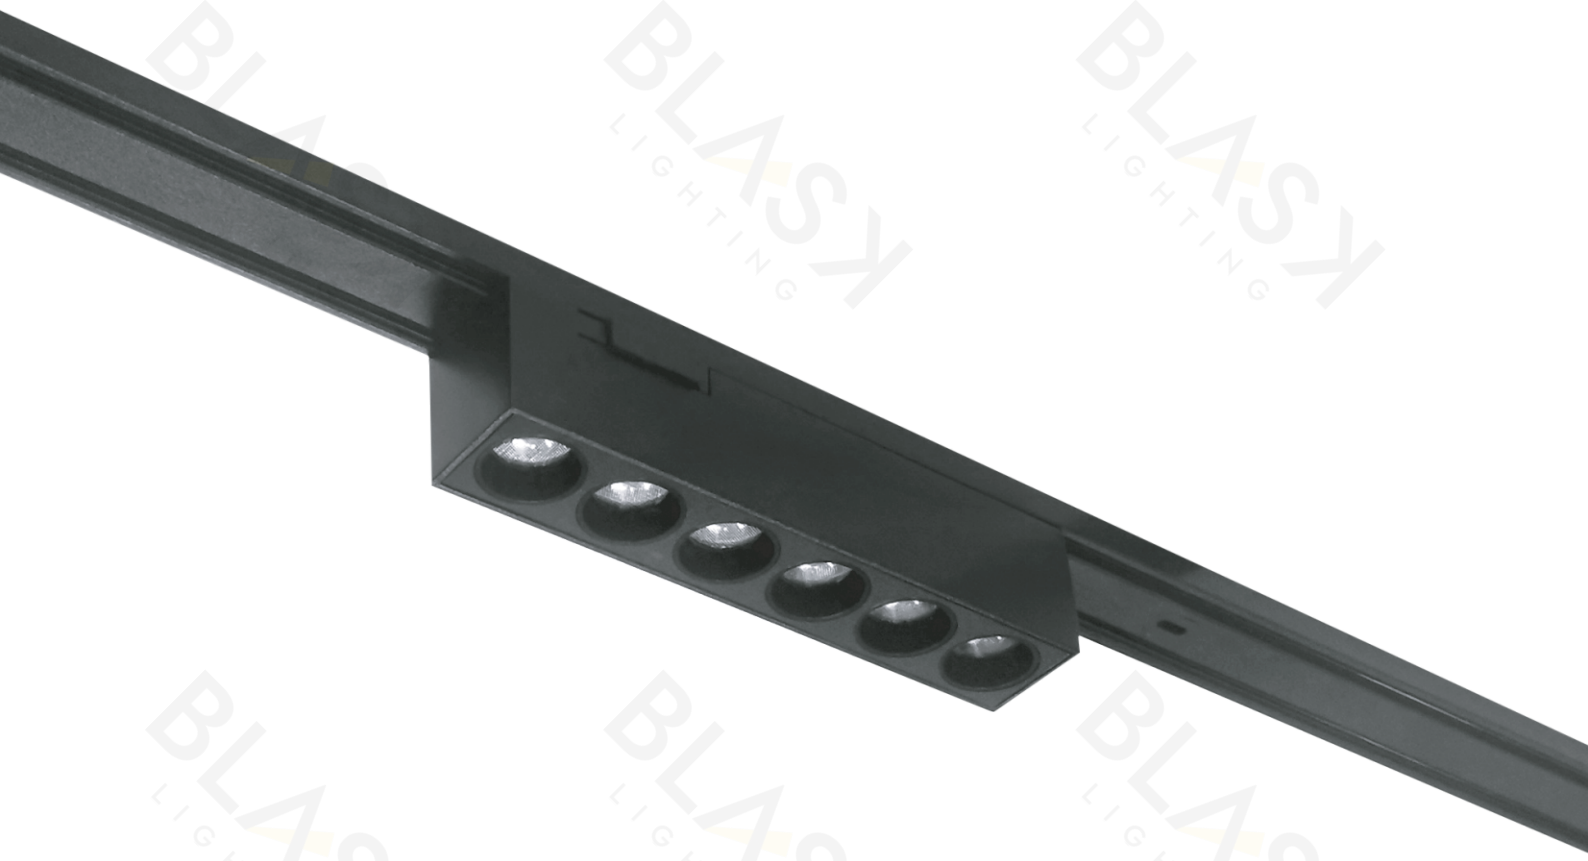

Click-on

Safety and fast installation

MULTIPLE OPTICAL DESIGN

0227 series has grille lamp design, pan -light design, folding grille light design, and shooting light design.

Dimmable

SMART LAMP VERSION

0-10V

TRIAC

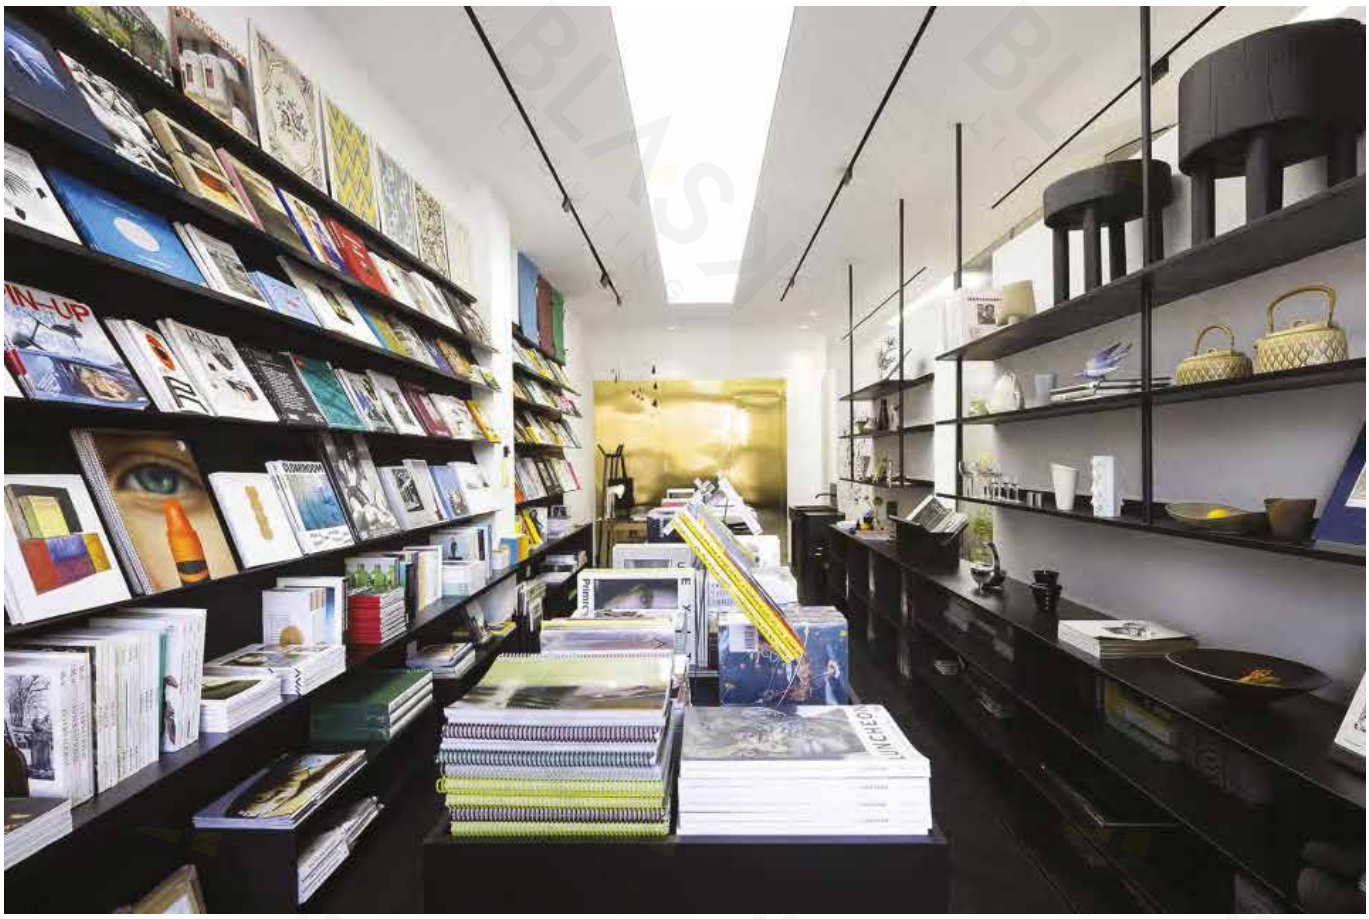
PIN-UP
JUNCHEON

VOGUE
ALEIDOSCOPE

ULTRA -THIN TRACK SYSTEM

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty





SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	Size
INAMTI30310	6W	480 lm	Black	3000K / 4000K/6500K	24˚/36˚	120x24x26
INAMTI30311	12W	960 lm	Black	3000K / 4000K/6500K	24˚/36˚	236x24x26

ULTRA -THIN TRACK SYSTEM

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty





SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	Size
INAMTI30312	6W	480 lm	Black	3000K / 4000K/6500K	24˚/36˚	120x24x26
INAMTI30313	12W	960 lm	Black	3000K / 4000K/6500K	24˚/36˚	236x24x26

ULTRA -THIN TRACK SYSTEM

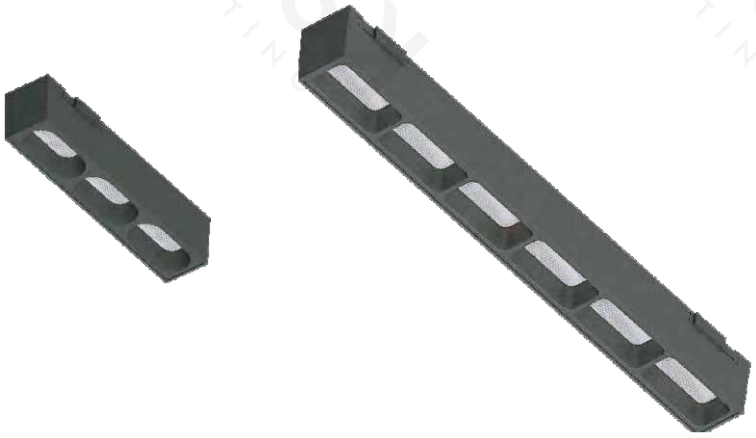

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty





SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	Size
INAMTI30314	3W	240 lm	Black	3000K / 4000K/6500K	90°	120x24x26
INAMTI30315	6W	480 lm	Black	3000K / 4000K/6500K	90°	236x24x26

ULTRA -THIN TRACK SYSTEM

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	Size
INAMTI30316	3W	240 lm	Black	3000K / 4000K/6500K	90°	120x24x26
INAMTI30317	6W	480 lm	Black	3000K / 4000K/6500K	90°	236x24x26

ULTRA -THIN TRACK SYSTEM

INAMTI30318

INAMTI30319

INAMTI30320

INAMTI30321

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	Size
INAMTI30318	7W	560 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚	Ø35x80
INAMTI30319	12W	960 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚	Ø45x103
INAMTI30320	18W	1440 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚	Ø55x114
INAMTI30321	24W	1920 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚	Ø65x133

ULTRA -THIN TRACK SYSTEM

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



INAMTI30322



INAMTI30323



INAMTI30324

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30322	5W	400 lm	Black	3000K / 4000K/6500K	30°
INAMTI30323	10W	800 lm	Black	3000K / 4000K/6500K	30°
INAMTI30324	15W	1200 lm	Black	3000K / 4000K/6500K	30°

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



INAMTI30325



INAMTI30326

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30325	5W	400 lm	Black	3000K / 4000K/6500K	15˚-36˚
INAMTI30326	10W	800 lm	Black	3000K / 4000K/6500K	15˚-36˚

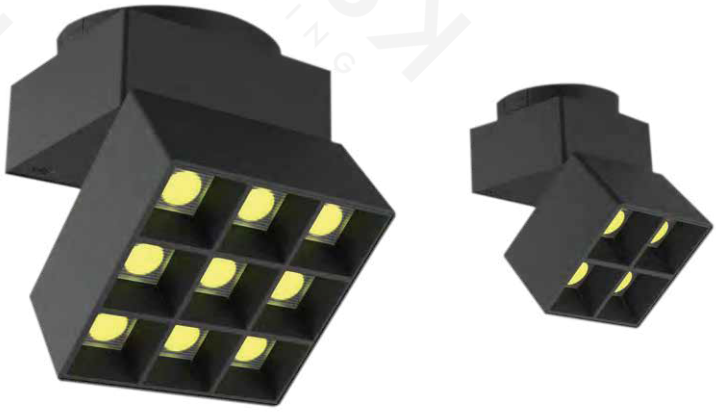

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



INAMTI30327



INAMTI30328

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30327	8W	640 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚
INAMTI30328	18W	1440 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚

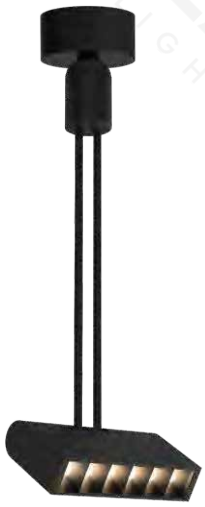

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



INAMTI30329



INAMTI30330

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30329	6W	480 lm	Black	3000K / 4000K/6500K	30°
INAMTI30330	12W	960 lm	Black	3000K / 4000K/6500K	30°

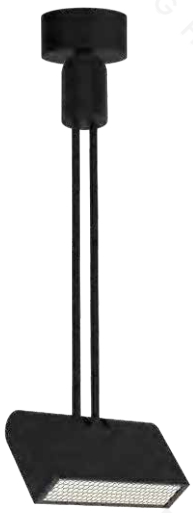

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



INAMTI30331



INAMTI30332

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30331	6W	480 lm	Black	3000K / 4000K/6500K	120°
INAMTI30332	12W	960 lm	Black	3000K / 4000K/6500K	120°

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

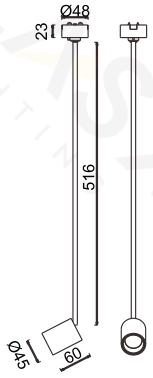

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30333	5W	400 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚

ULTRA -THIN TRACK SYSTEM

INAMTI30334 INAMTI30335 INAMTI30336 INAMTI30337 INAMTI30338

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

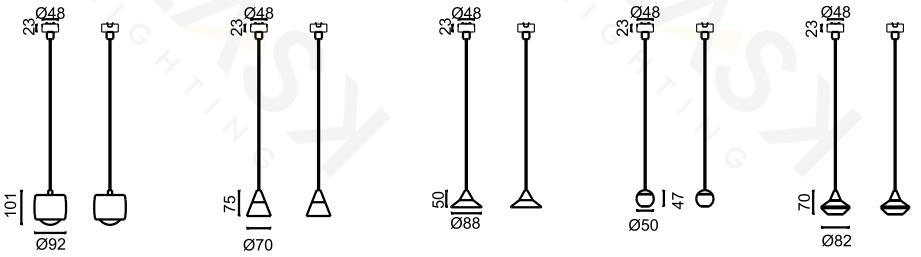

INAMTI30334 INAMTI30335 INAMTI30336 INAMTI30337 INAMTI30338

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30334	Up:1.5W+Down:4.5W	480 lm	Black	3000K / 4000K/6500K	20˚/40˚/60˚
INAMTI30335	5W	400 lm	Black	3000K / 4000K/6500K	17˚/24˚/36˚
INAMTI30336	5W	400 lm	Black	3000K / 4000K/6500K	17˚/24˚/36˚
INAMTI30337	5W	400 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚/50˚
INAMTI30338	5W	400 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚/50˚

ULTRA -THIN TRACK SYSTEM

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30339	5W	400 lm	Black	3000K / 4000K/6500K	27°

ULTRA -THIN TRACK SYSTEM

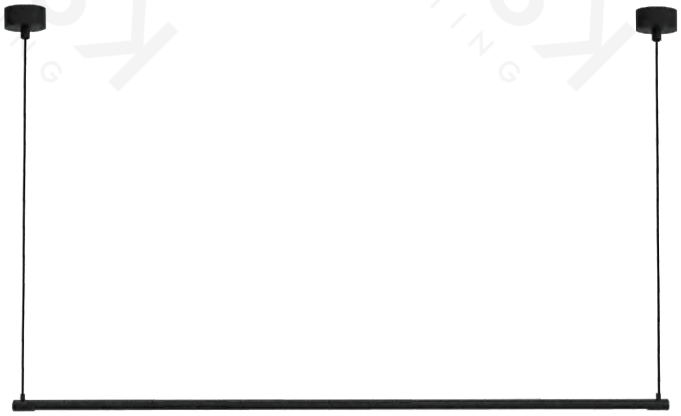

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

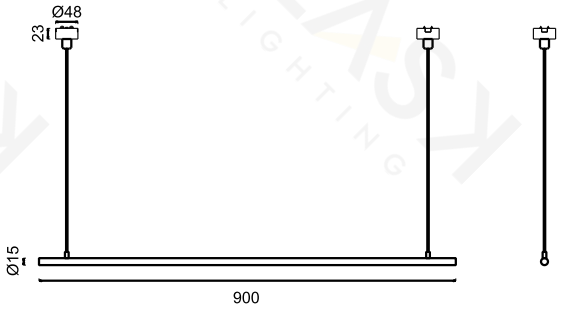

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30340	15W	1200 lm	Black	3000K / 4000K/6500K	120°

ULTRA -THIN TRACK SYSTEM

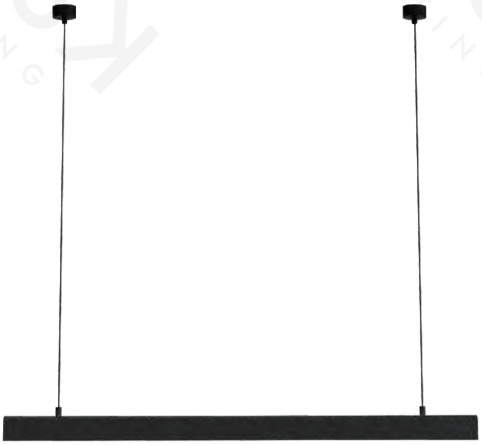

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

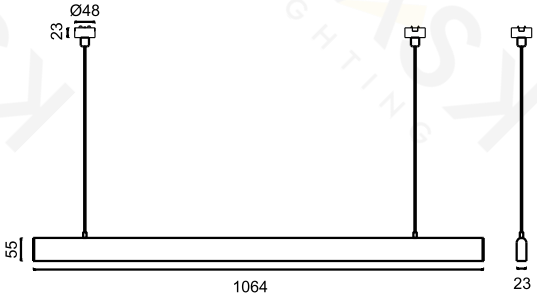

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30341	28W	2240 lm	Black	3000K / 4000K/6500K	30°

ULTRA -THIN TRACK SYSTEM

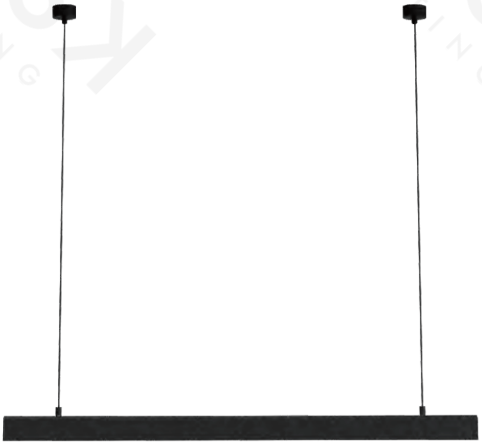

FEATURE

Aluminum lamp body
IP20
CRI>90
Anti glare design
DC24V
50 000 hours life
5 years warranty

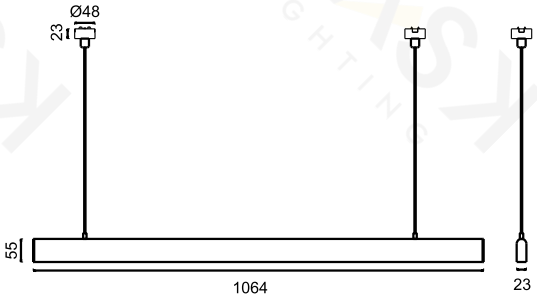

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAMTI30342	24W	1920 lm	Black	3000K / 4000K/6500K	120°



INAMTI30343

Material	Aluminum
Color	Black
Size	1000/2000x24x6.5mm



INAMTI30346

Material	Aluminum
Color	Black
Size	1000/2000x60x6.5mm



INAMTI30344

Material	PC
Color	Black
Size	46x35x6.5mm



INAMTI30347

Material	PC
Color	Black
Size	46x46x6.5mm



INAMTI30345

Material	PC
Color	Black
Size	68x24x9.5mm
Remark	Can rotate 0°-90°



INAMTI30348

Material	PC
Color	Black
Size	30x30x24mm



INAMTI30349

Material	PC
Color	Black
Size	33x24x6.5mm



INAMTI30351

Material	PC
Color	Black
Size	46x24x18mm

INAMTI30350

Material	PC
Color	Black
Size	285x26.6x26mm
Power	100W

ABOUT IMAGINE

This system is designed with a hole. The size of this hole is only 32mm. The entire system includes many types of products, such as down lights, chandeliers, ceiling lights, and spotlights ...
It can meet the needs of different scenarios. These products can be customized in a variety of colors. More products other than lamps will be added in the future. This system allows more products to be placed on the ceiling, which can make the entire space more concise.

PERFECT FIT

Gypsum downlight can perfectly integrate with ceiling panels.

MODULAR DESIGN

It is convenient to replace different module lights to suitable for different needs, while easy to repair.

BEAM ANGLE

15° / 24° / 36° / 50°

Multi -beam angle can be optional,
can apply different environments

GYPSUM DOWNLIGHT

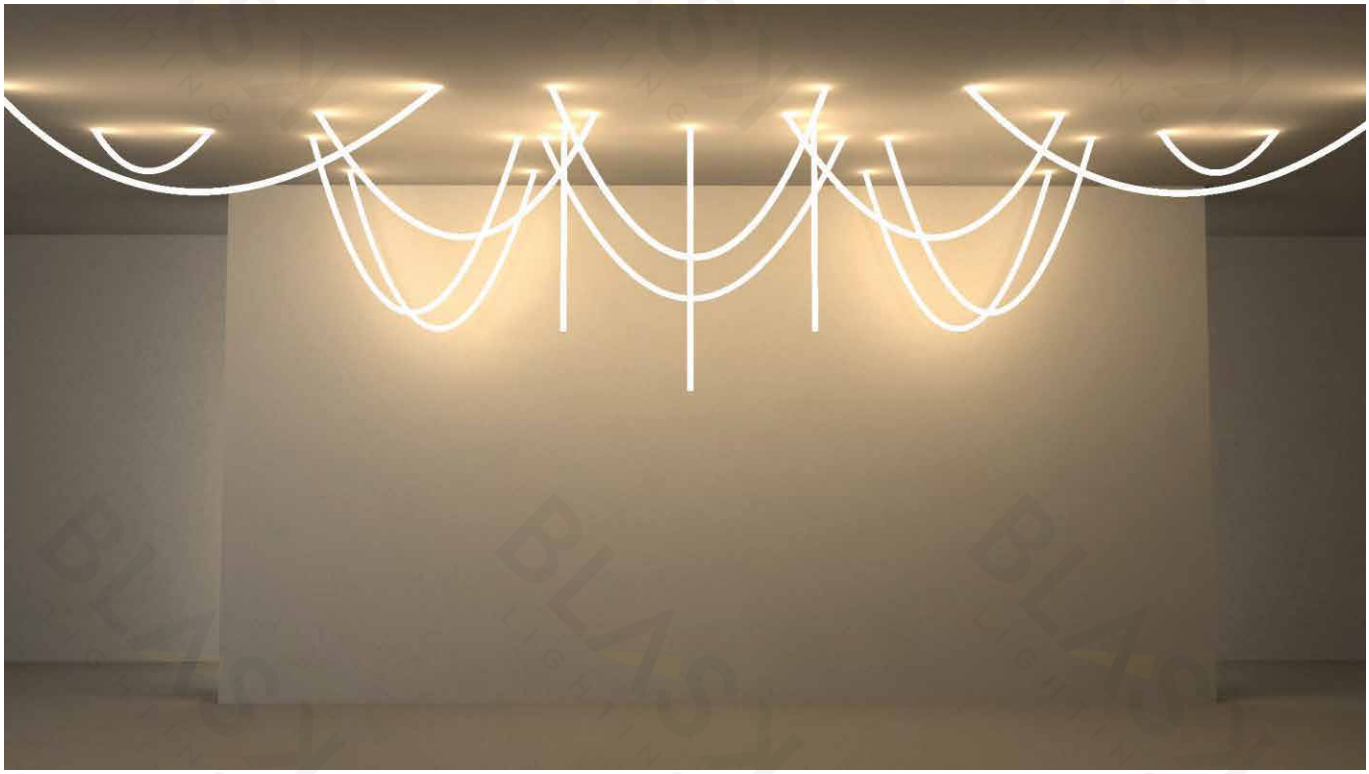

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30352	5W	400 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚/50˚

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty

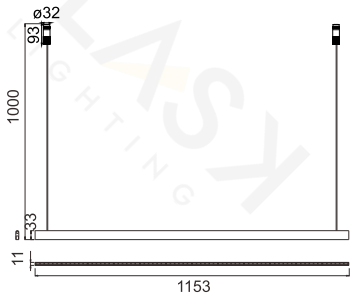

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30353	28W	2240 lm	Black	3000K / 4000K/6500K	30°

GYPSUM DOWNLIGHT

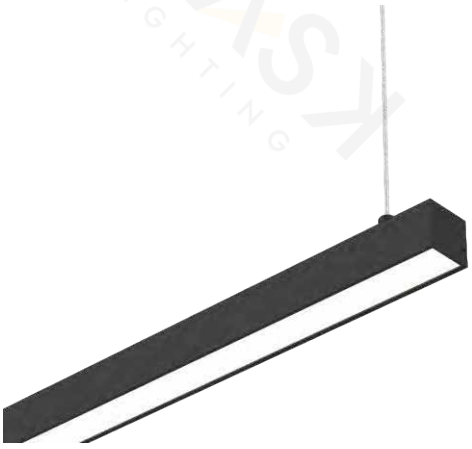

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30354	42W	3360 lm	Black	3000K / 4000K/6500K	120°

GYPSUM DOWNLIGHT

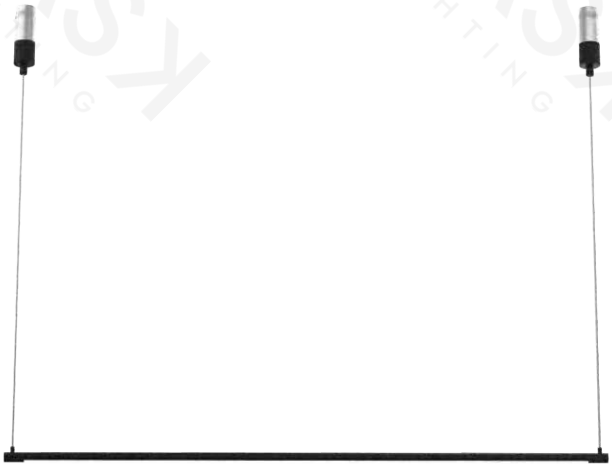

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty

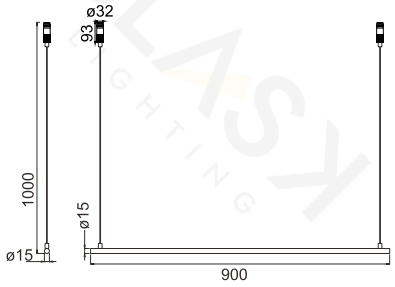

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30355	15W	1200 lm	Black	3000K / 4000K/6500K	120°

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty

L:1000/2000/3000

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30356	15W	1200 lm	Black	3000K / 4000K/6500K	360°
INAGLI30357	30W	2400 lm	Black	3000K / 4000K/6500K	360°
INAGLI30358	45W	3600 lm	Black	3000K / 4000K/6500K	360°

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30359	15W	1200 lm	Black	3000K / 4000K/6500K	360°

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30360	5W	400 lm	Black	3000K / 4000K/6500K	27°

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30361	5W	400 lm	Black	3000K / 4000K/6500K	15˚ / 24˚ / 36˚

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30362	5W	400 lm	Black	3000K / 4000K/6500K	17° / 24° / 36°

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30363	5W	400 lm	Black	3000K / 4000K/6500K	17° / 24° / 36°

GYPSUM DOWNLIGHT

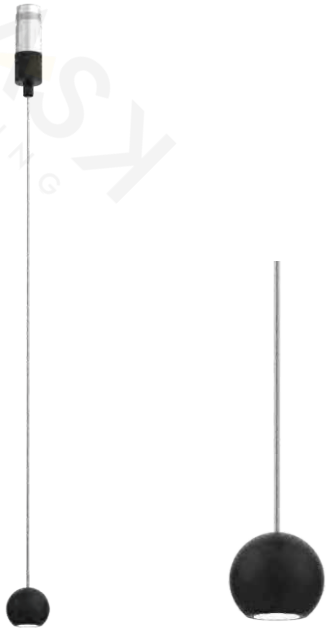

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30364	5W	400 lm	Black	3000K / 4000K/6500K	15˚ / 24˚ / 36˚ / 50˚

GYPSUM DOWNLIGHT

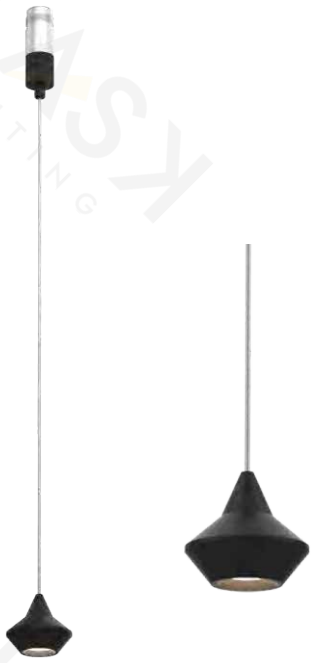

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30365	5W	400 lm	Black	3000K / 4000K/6500K	15˚ / 24˚ / 36˚ / 50˚

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty

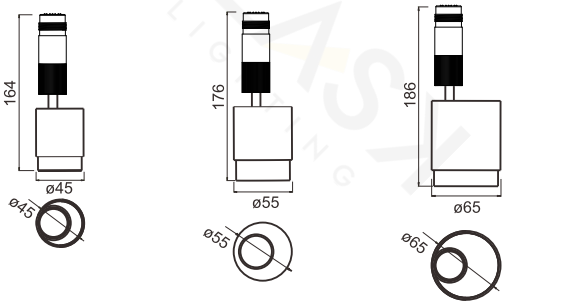

INAGLI30366 INAGLI30367 INAGLI30368

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30366	5W	400 lm	Black	3000K / 4000K/6500K	15˚ - 36˚
INAGLI30367	7W	560 lm	Black	3000K / 4000K/6500K	15˚ - 36˚
INAGLI30368	12W	960 lm	Black	3000K / 4000K/6500K	15˚ - 36˚

GYPSUM DOWNLIGHT

FEATURE

Aluminum body
IP20
DC24V
50 000 hours life
5 years warranty



INAGLI30369



INAGLI30370



INAGLI30371

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAGLI30369	5W	400 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚
INAGLI30370	7W	560 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚
INAGLI30371	12W	960 lm	Black	3000K / 4000K/6500K	15˚/24˚/36˚

GYPSUM DOWNLIGHT

FEATURE

Gypsum panel
IP20
DC24V
5 years warranty



SPECIFICATION

Item No.	Size	Cut-out	Color	Remark
INAGLI30372	156*105*93	105*105	White	Installation base

UNIQUE DESIGN

- Independent light module
- Multiple shapes available for selection

VARIABLE RING

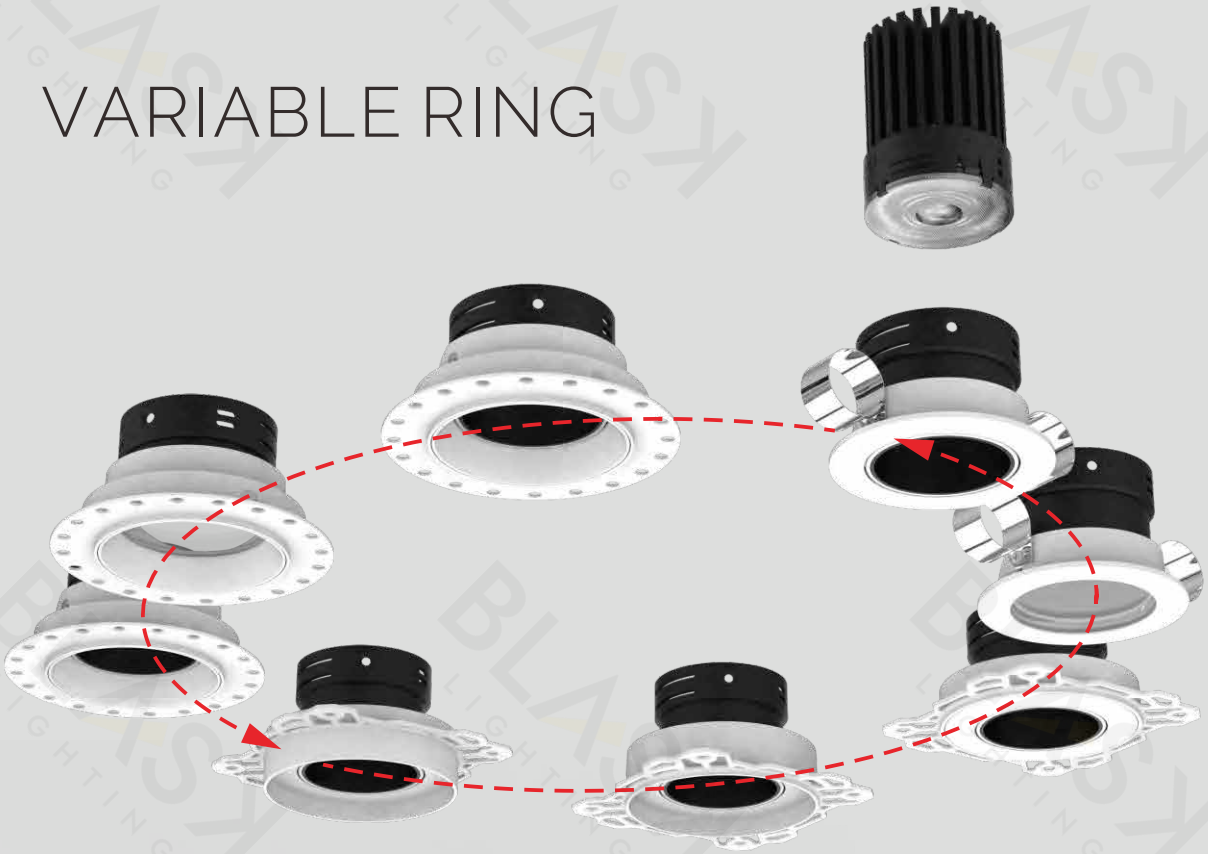

3 Installation

Wooden board

Gypsum board

Putty powder

2

Height / Power

(Anti -glare) (7W/12W)

<13
UGR

<10
UGR

SUITABLE

Different anti -glare heights can meet the anti -glare requirements of various spaces and reduce the change of optical lens beam as much as possible.

No glass
(Swing angle)
UGR<13

With glass in middle
(Swing angle)
UGR<15



With glass in front
(Non-swing angle)
UGR<14

LENS GLASS

In order to make the light effect more comfortable, lensglass can be added.

- Adjustable shrapnel

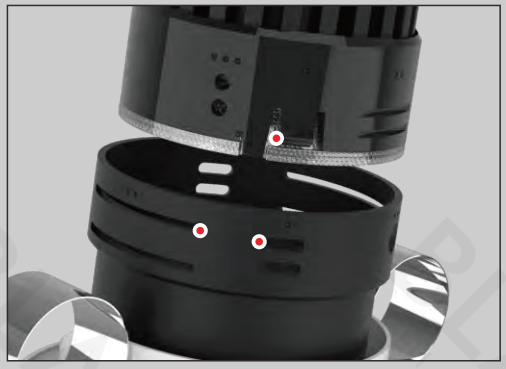

- Fast installation buckle

CONVENIENT DESIGN

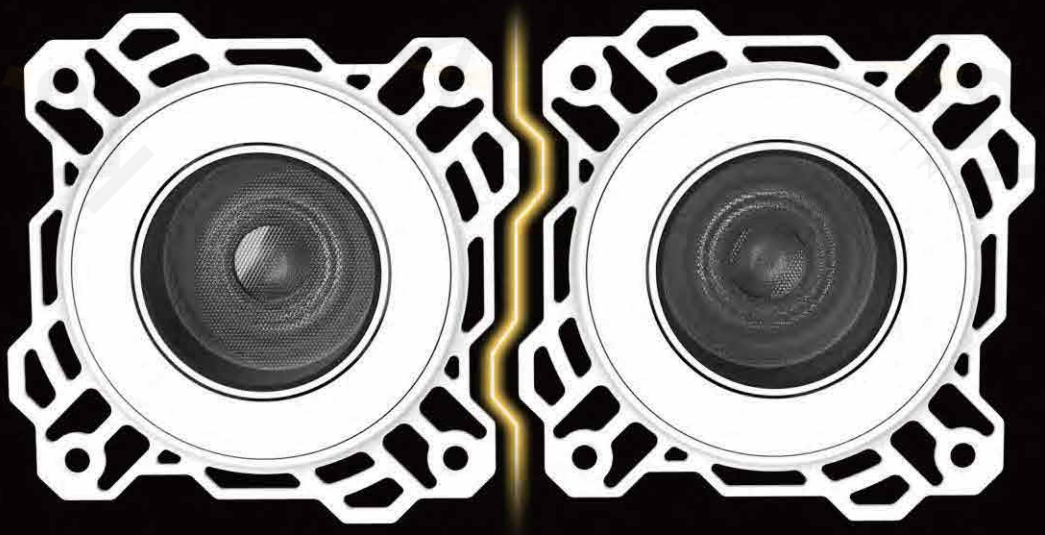

PERFECT DOCKING

Easy to install alignment



INASLI30373

Power	7W
CCT	3000K 4000K 6500K
Beam angle	15˚ / 18˚ / 24˚ / 36˚ / 60˚
Voltage	AC220-240V 50/60Hz
lumen	560LM
CRI	>90
Material	Aluminum
Color	Black
Remark	Light module

INASLI30374

Power	12W
CCT	3000K 4000K 6500K
Beam angle	15˚ / 18˚ / 24˚ / 36˚ / 60˚
Voltage	AC220-240V 50/60Hz
lumen	960LM
CRI	>90
Material	Aluminum
Color	Black
Remark	Light module



INASLI30375

Material	Aluminum+PC
Color	White / Black
Remark	No glass,swing angle



INASLI30378

Material	Aluminum+PC
Color	White / Black
Remark	No glass,swing angle



INASLI30376

Material	Aluminum+PC
Color	White / Black
Remark	With glass in front,non swing angle



INASLI30379

Material	Aluminum+PC
Color	White / Black
Remark	With glass in front,non swing angle



INASLI30377

Material	Aluminum+PC
Color	White / Black
Remark	With glass in middle,swing angle



INASLI30380

Material	Aluminum+PC
Color	White / Black
Remark	With glass in middle,swing angle



INASLI30381

Material	Aluminum+PC
Color	White / Black
Remark	No glass,swing angle



INASLI30384

Material	Aluminum+PC
Color	White / Black
Remark	No glass,swing angle



INASLI30382

Material	Aluminum+PC
Color	White / Black
Remark	With glass in front,swing angle



INASLI30385

Material	Aluminum+PC
Color	White / Black
Remark	No glass,swing angle



INASLI30383

Material	Aluminum+PC
Color	White / Black
Remark	With glass in middle,swing angle



INASLI30386

Material	Aluminum+PC
Color	White / Black
Remark	No glass,swing angle

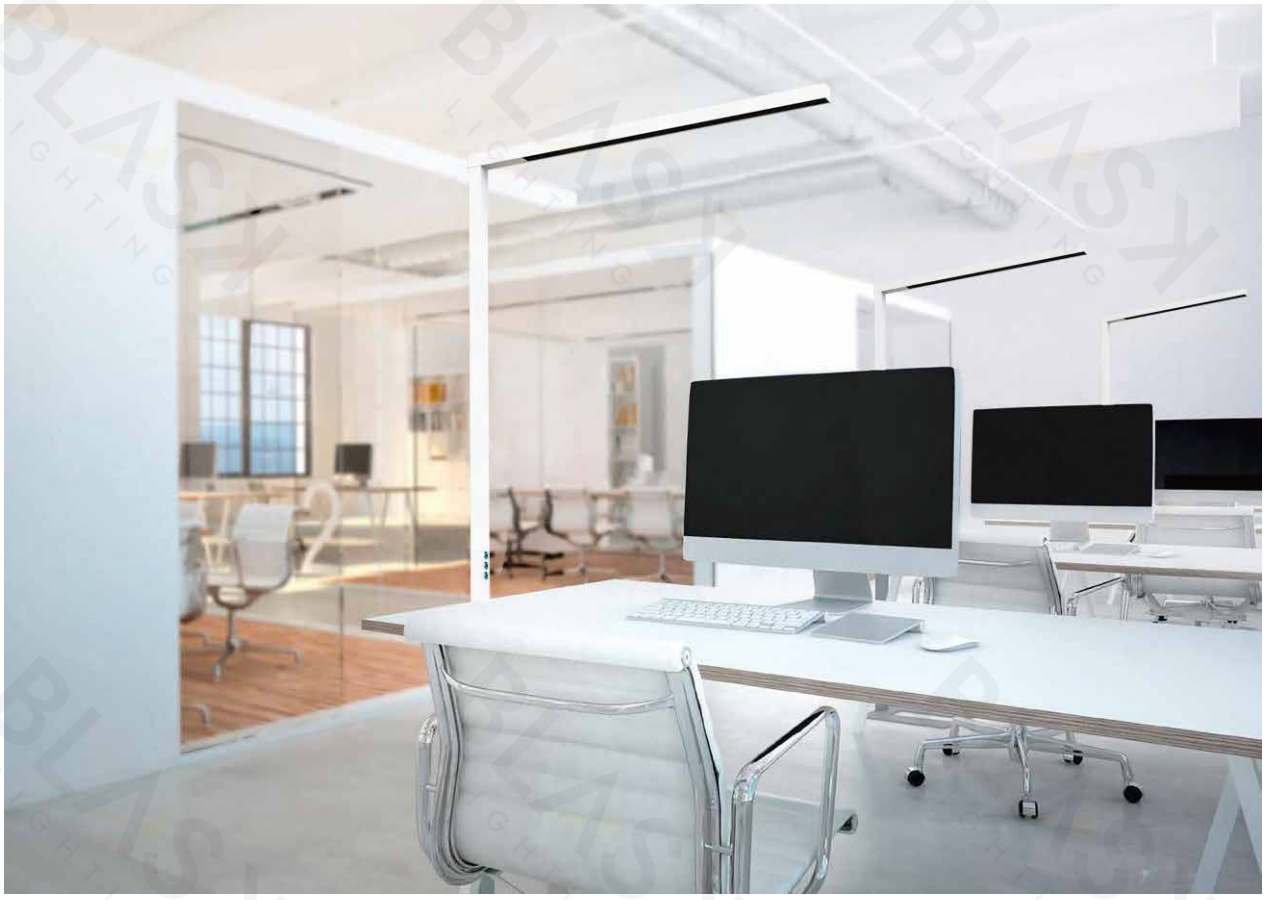

OFFICE LIGHTING advantage

- Anti-glare
- Up and down illumination
- Ra≥90
- ≤3 SDCM
- UGR<16
- Independent switch
- Dimming
- Simple shape

MULTI-MODEL DESIGN

INAFLI30387



Side view of workstation

INAFLI30389

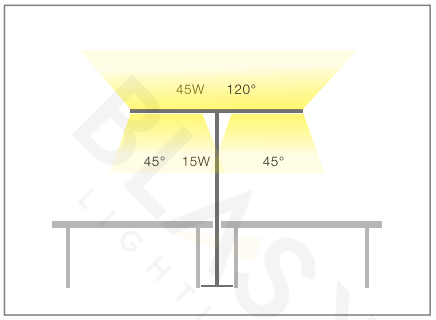

Side view of workstation

INAFLI30388



Side view of workstation

INAPLI30390



Side view of workstation

INAFLI30387





Power	Up 60W + Down 20w
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	Up 5400 lm + Down 1800lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	50 000 H
Warranty	5 Years

INAFLI30388





Power	Up 30W + Down 10w
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	Up 2700 lm + Down 900lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	50 000 H
Warranty	5 Years

INAFLI30389





Power	Up 45W + Down 15w
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	Up 4050 lm + Down 1350lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	50 000 H
Warranty	5 Years

INAPLI30390





Power	Up 30W + Down 15w
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	Up 4500 lm + Down 1350lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	50 000 H
Warranty	5 Years

INDEPENDANT LUMINAIRE USAGE

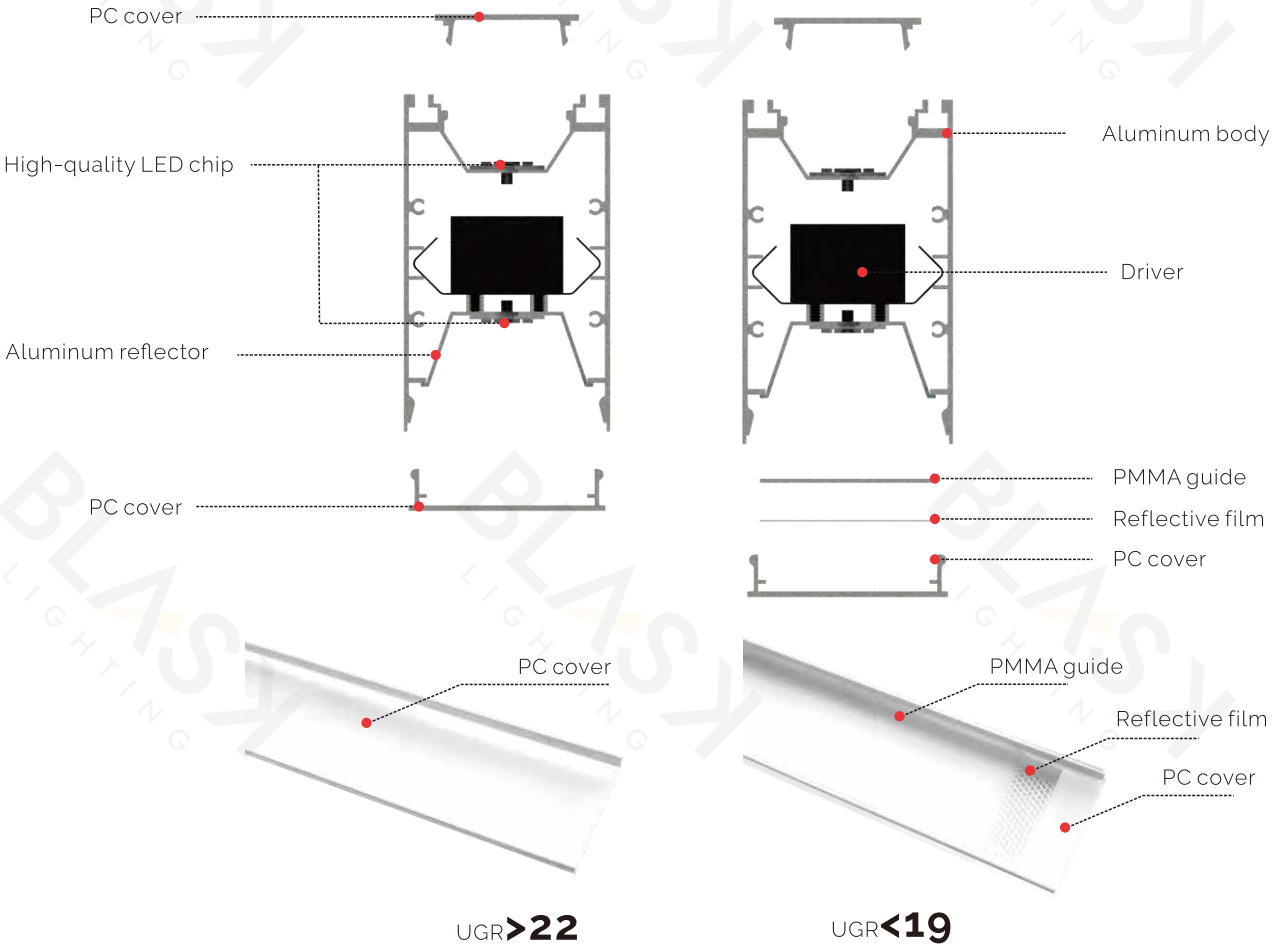

Visual comfort

With two different masks (creamy PC cover or transparent composite PC cover), you can customize the luminous characteristics.
According to requirements, different masks can be replaced into the product to meet special requirements to keep the UGR <19 or higher lumens.



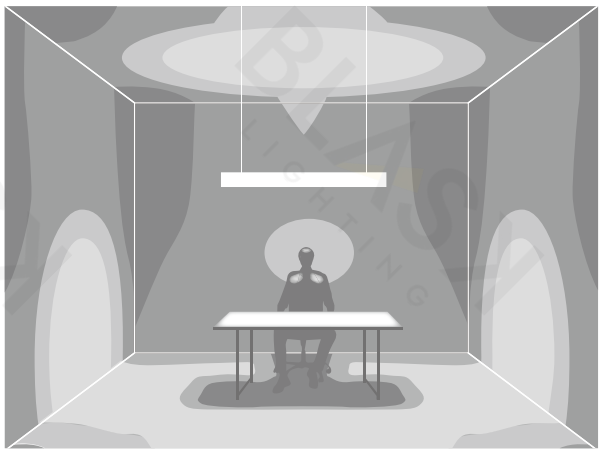

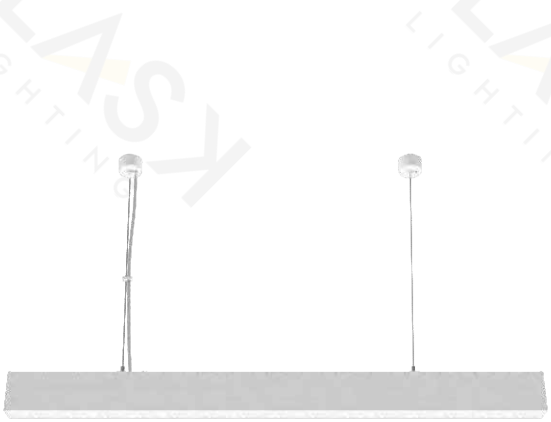

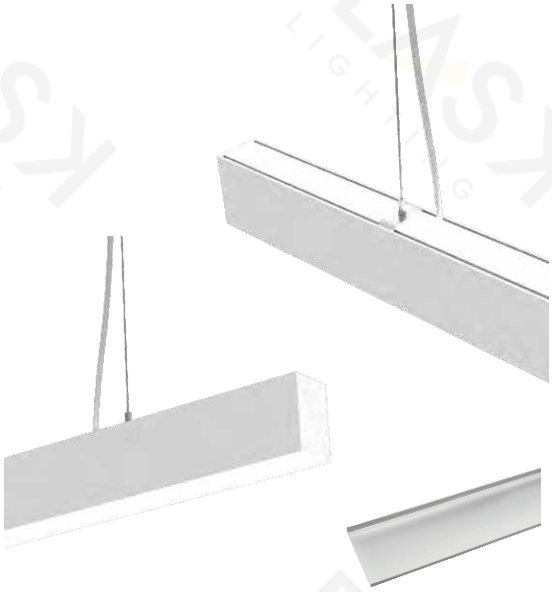

FEATURE

Aluminum lamp body
UGR>22
IP20
CRI>90
AC220-240V 50/60Hz
50 000 hours life
5 years warranty

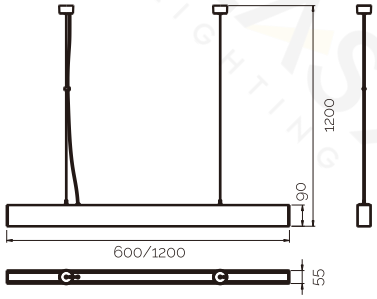

INSTALLATION

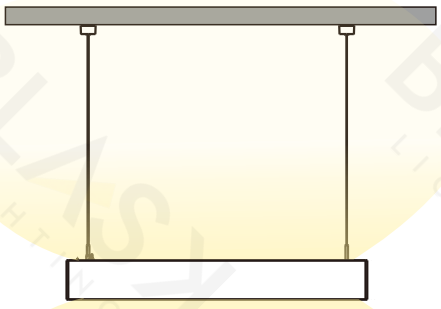

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	UGR
INAPLI30391	UP 10W+ DOWN 15W	UP 900 lm + DOWN 1350 lm	White / Black	3000K / 4000K/6500K	120°	>22
INAPLI30392	UP 20W+ DOWN 30W	UP 1800 lm + DOWN 2700 lm	White / Black	3000K / 4000K/6500K	120°	>22

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

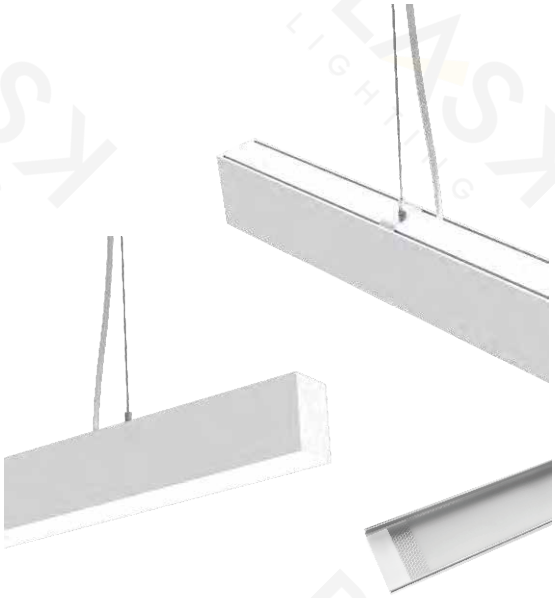

FEATURE

Aluminum lamp body
UGR<19
IP20
CRI>90
AC220-240V 50/60Hz
50 000 hours life
5 years warranty

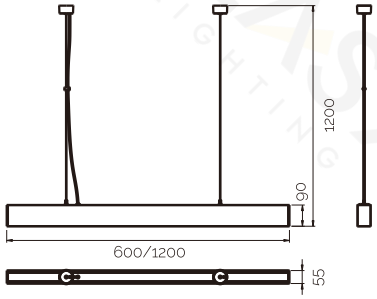

INSTALLATION

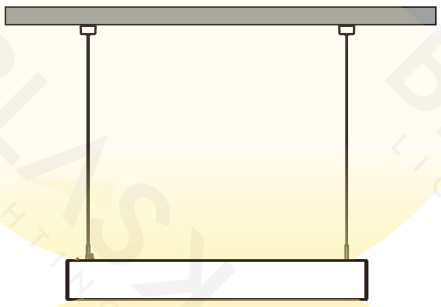

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	UGR
INAPLI30393	UP 10W+ DOWN 15W	UP 900 lm + DOWN 1350 lm	White / Black	3000K / 4000K/6500K	120°	<19
INAPLI30394	UP 20W+ DOWN 30W	UP 1800 lm + DOWN 2700 lm	White / Black	3000K / 4000K/6500K	120°	<19

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

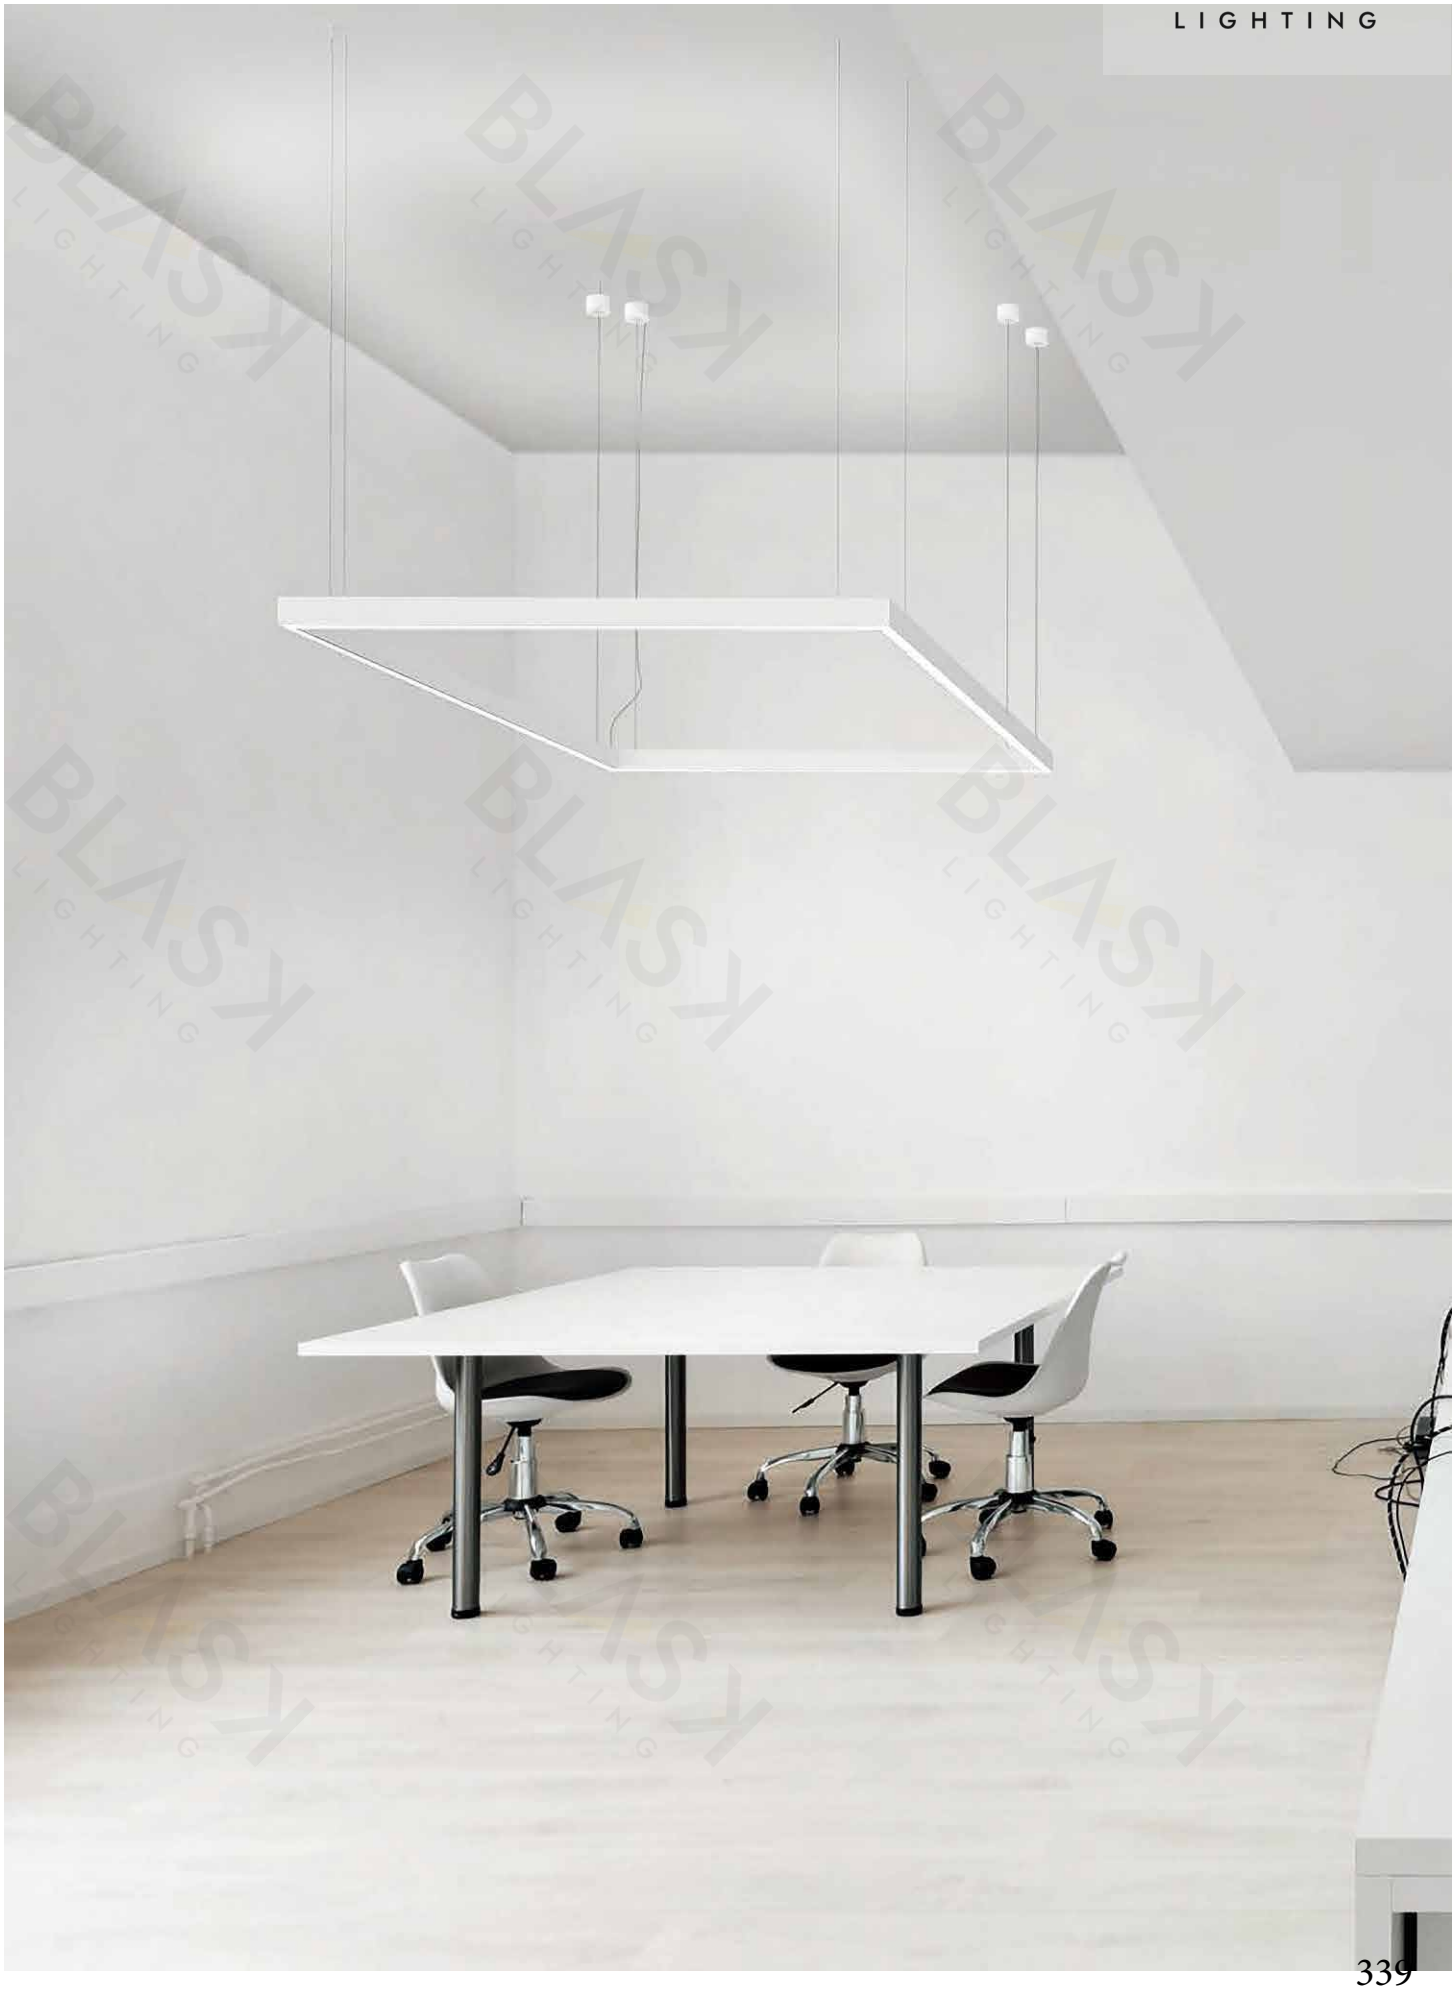

INSTALLATION EXPLODED VIEW

INPUT:AC220-240v 50/60Hz

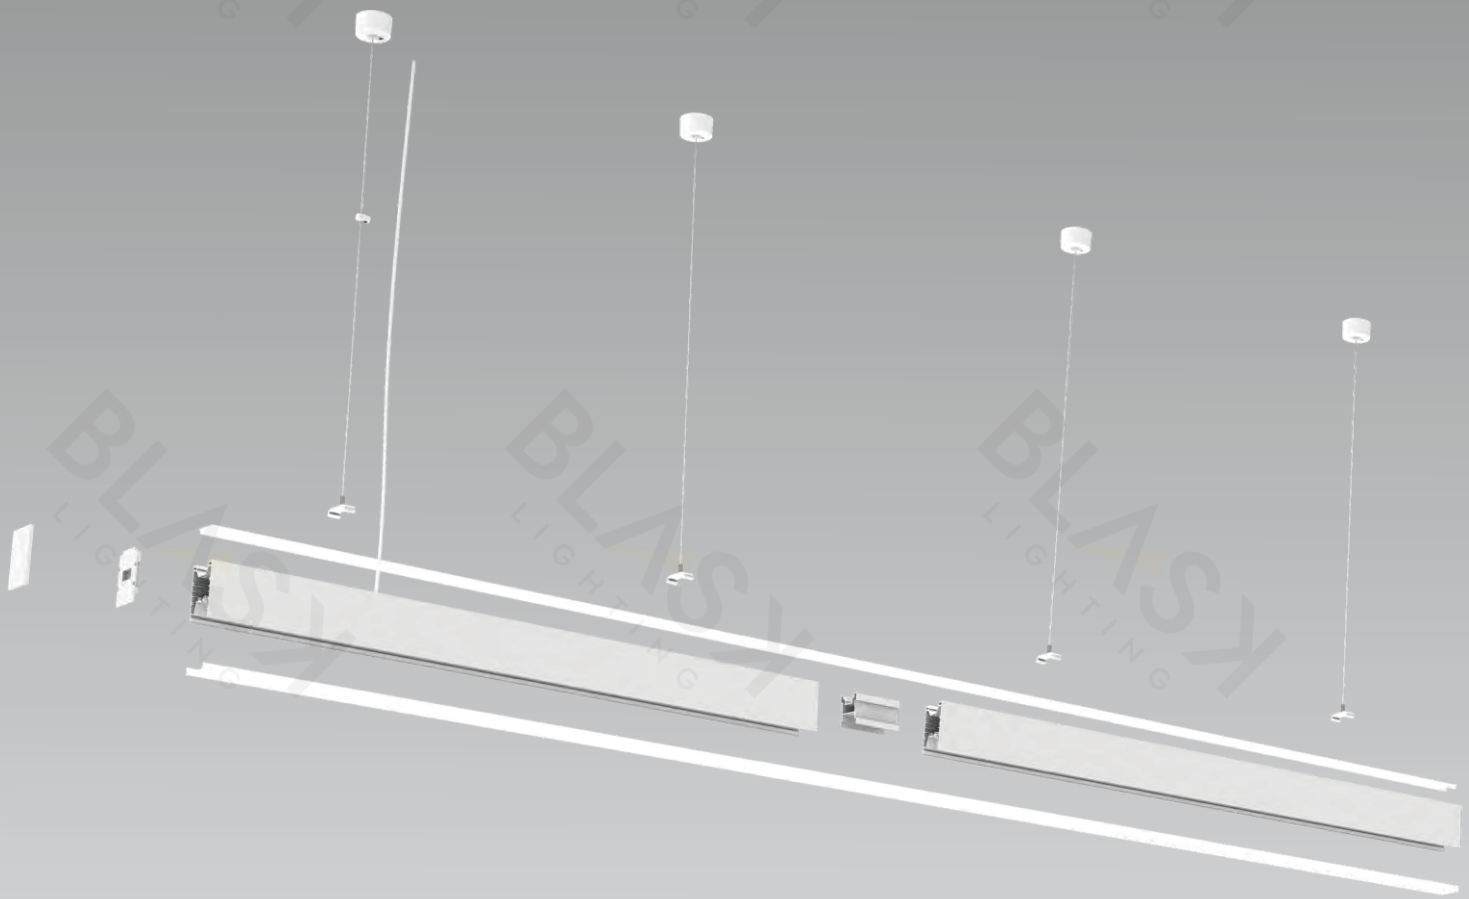

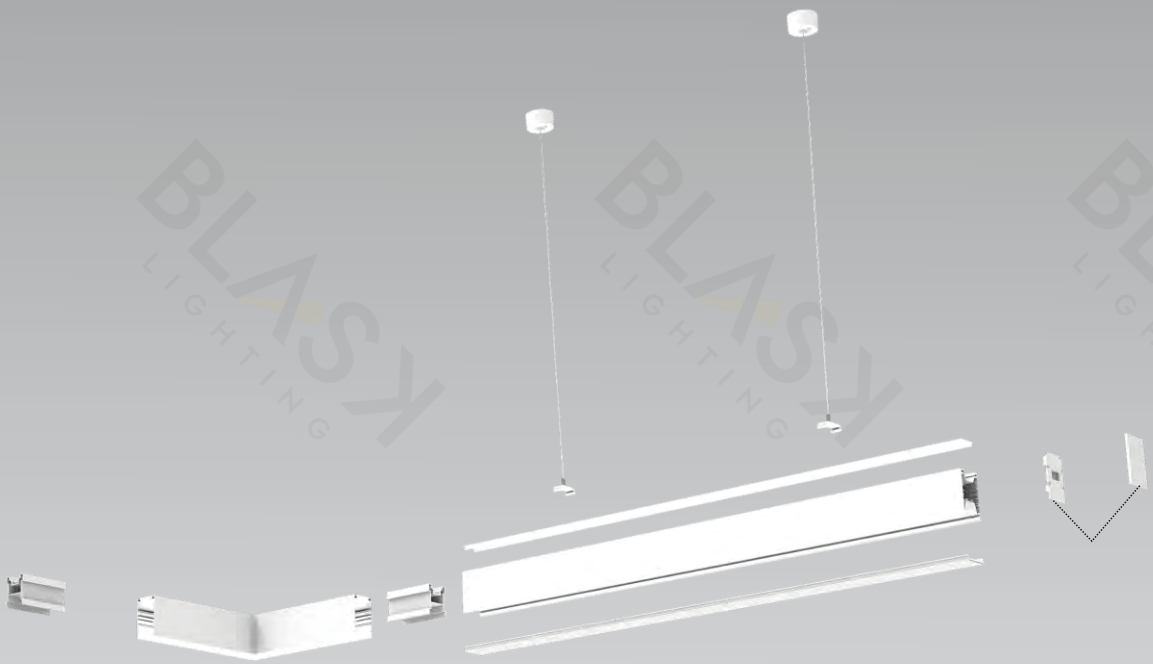

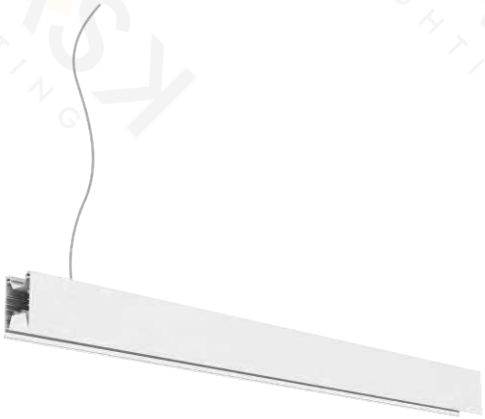

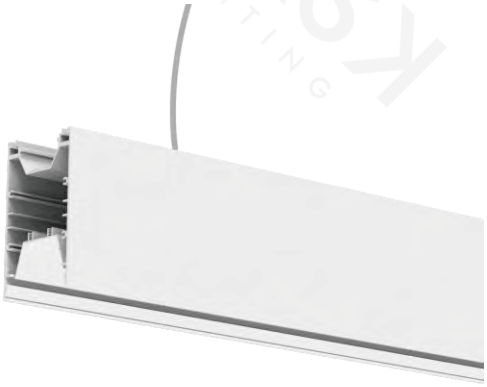

FEATURE

Aluminum lamp body
UGR>22
IP20
CRI>90
AC220-240V 50/60Hz
50 000 hours life
5 years warranty

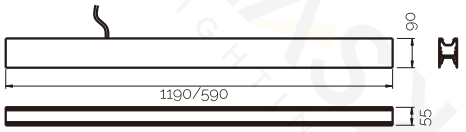

INSTALLATION

Note:0888 G2 A is corded, used to start the first section, the cord is connected to the external cord.

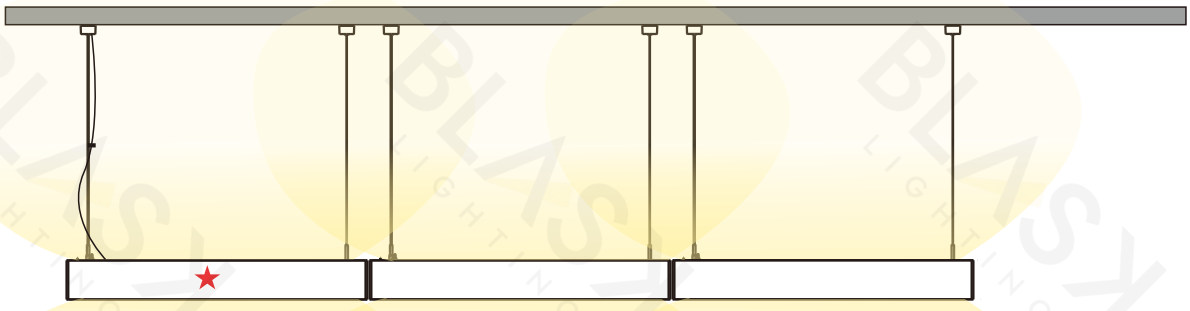

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	UGR
INAPLI30395	UP 10W+ DOWN 15W	UP 900 lm + DOWN 1350 lm	White / Black	3000K / 4000K/6500K	120°	>22
INAPLI30396	UP 20W+ DOWN 30W	UP 1800 lm + DOWN 2700 lm	White / Black	3000K / 4000K/6500K	120°	>22

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

FEATURE

Aluminum lamp body
UGR>22
IP20
CRI>90
AC220-240V 50/60Hz
50 000 hours life
5 years warranty

INSTALLATION

without wires and is used for the second and subsequent sections of the connection.

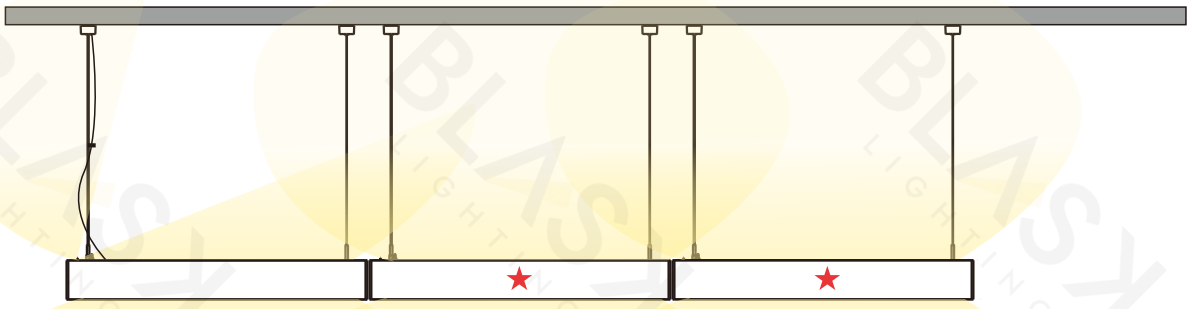

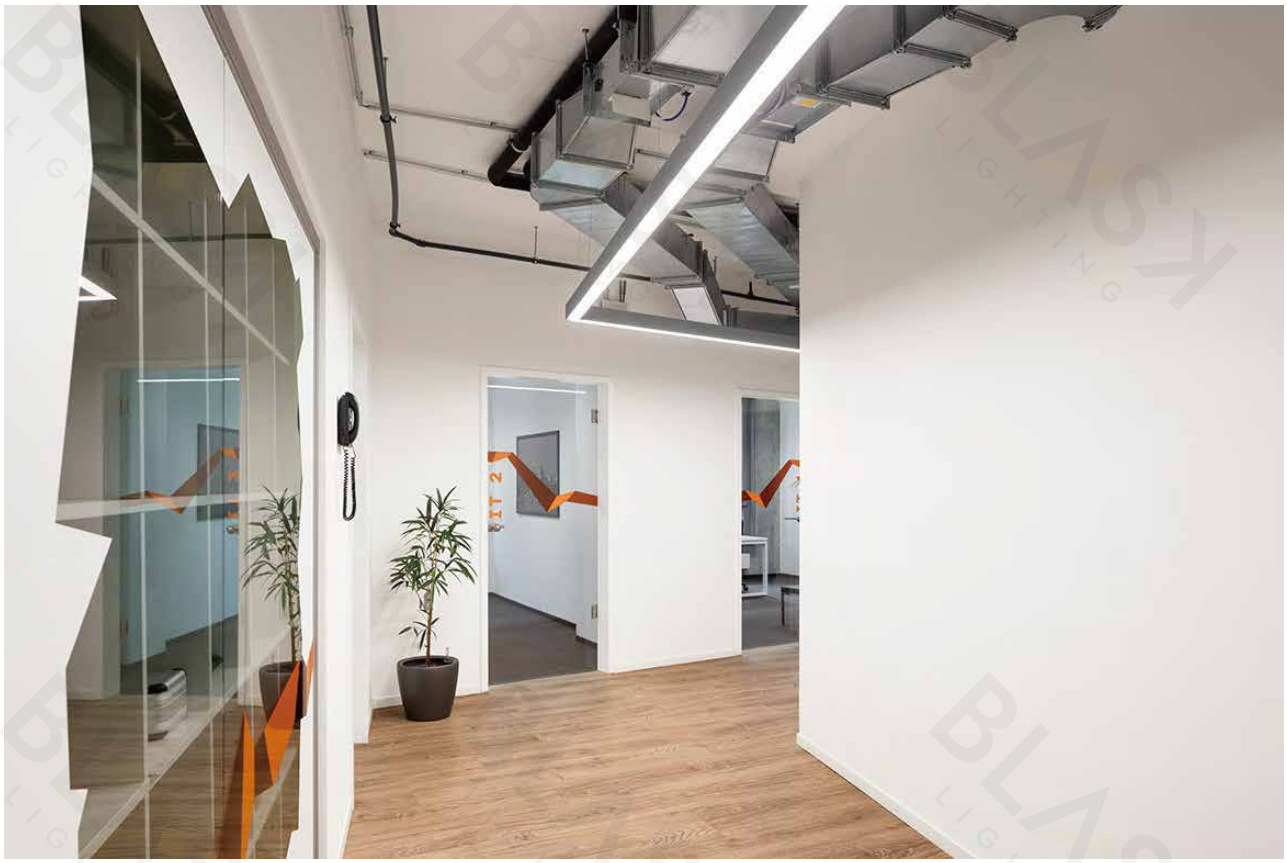

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	UGR
INAPLI30397	UP 10W+ DOWN 15W	UP 900 lm + DOWN 1350 lm	White / Black	3000K / 4000K/6500K	120°	>22
INAPLI30398	UP 20W+ DOWN 30W	UP 1800 lm + DOWN 2700 lm	White / Black	3000K / 4000K/6500K	120°	>22

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

UGR>22

UGR<19

FEATURE

Aluminum lamp body
UGR>22 / <19
IP20
CRI>90
AC220-240V 50/60Hz
50 000 hours life
5 years warranty



INSTALLATION

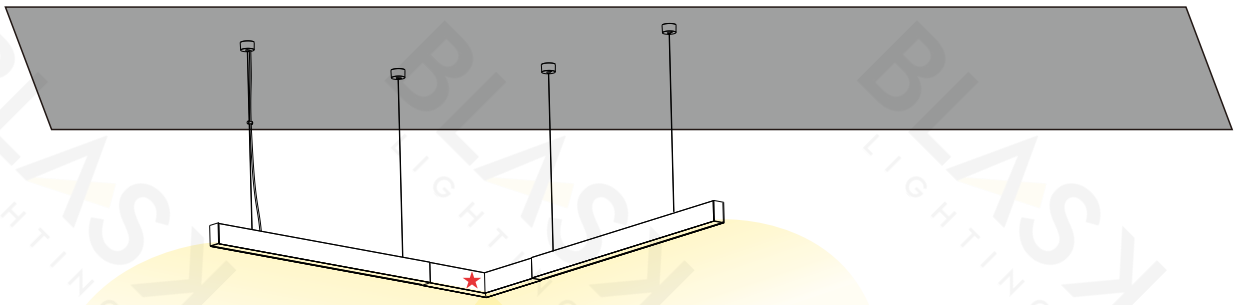

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	UGR
INAPLI30399	UP 10W+ DOWN 15W	UP 900 lm + DOWN 1350 lm	White / Black	3000K / 4000K/6500K	120°	>22
INAPLI30400	UP 10W+ DOWN 15W	UP 900 lm + DOWN 1350 lm	White / Black	3000K / 4000K/6500K	120°	<19

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

Suspend accessories usage

Note
Single input wire supports up to **1500W**

INPUT:AC220-240v 50/60Hz

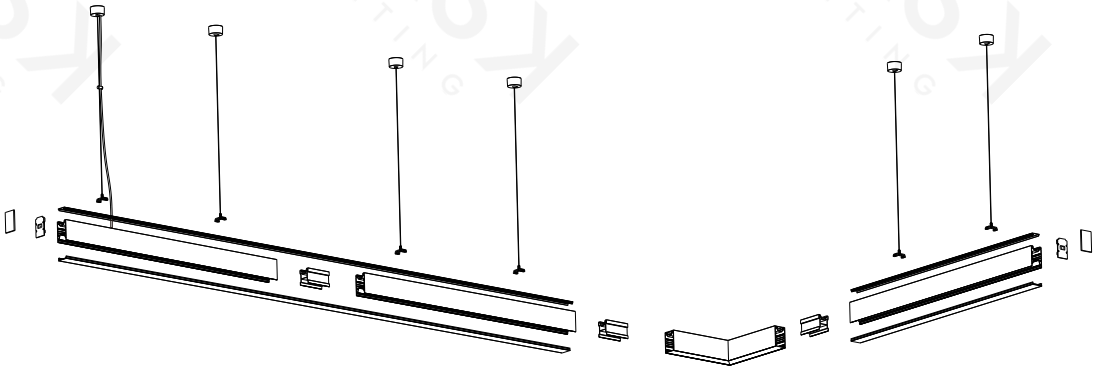



INAPLI30401

Material	Aluminum
Color	Black / White
Remark	The hanging pendant is used to start the first hanging wire of the linear light. It can be combined with the input wire.

INAPLI30403

Material	Aluminum
Color	Black / White
Remark	Intermediate support for hanging wire installation lights

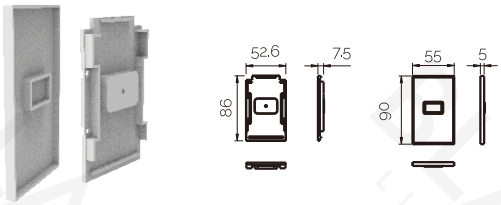

INAPLI30402

Material	Aluminum
Color	Black / White
Remark	For the beginning and end of the lamp body

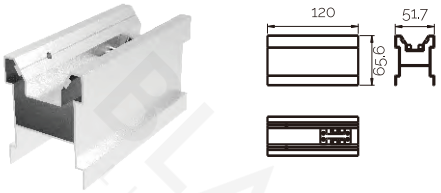

INAPLI30404

Material	Aluminum
Color	Black / White
Remark	Used for lights connection

Suspend accessories usage

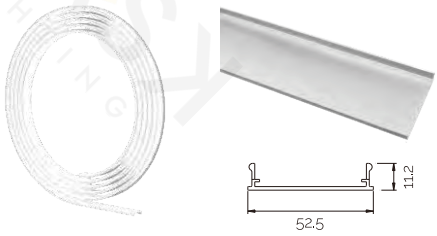

INAPLI30405

Material	PC
Color	Milky white
Remark	Lower cover for UGR 22
	Length:20 meters

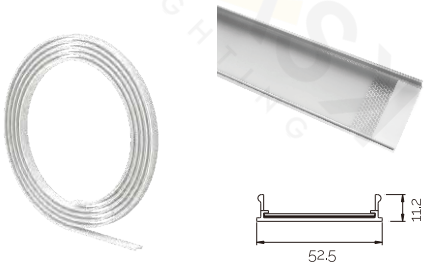

INAPLI30406

Material	PC+PMMA
Color	Transparent
Remark	Lower cover for UGR 19
	Length:20 meters

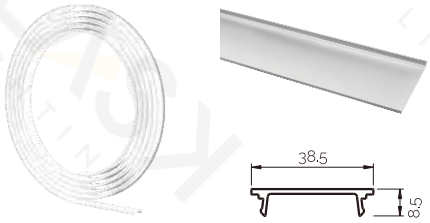

INAPLI30407

Material	PC
Color	Milky white
Remark	Upper cover for indirect light
	Length:20 meters

0099

OFFICE LIGHTING

CEILING SYSTEM

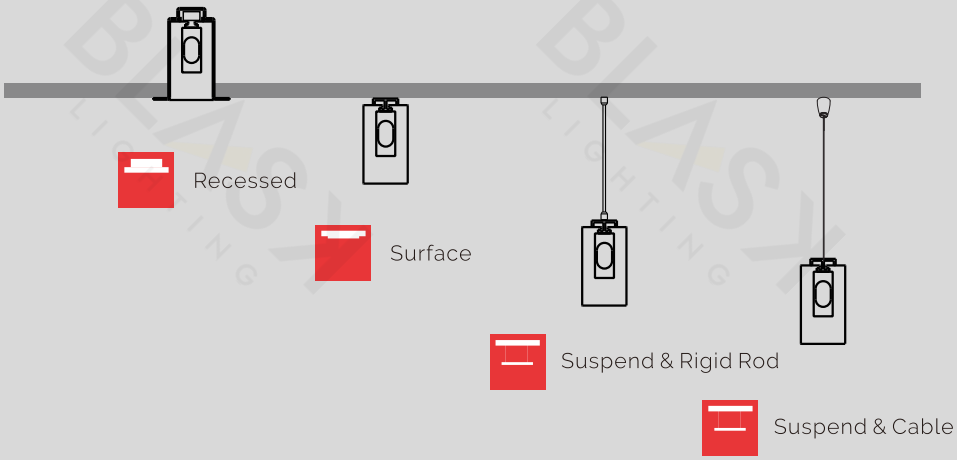

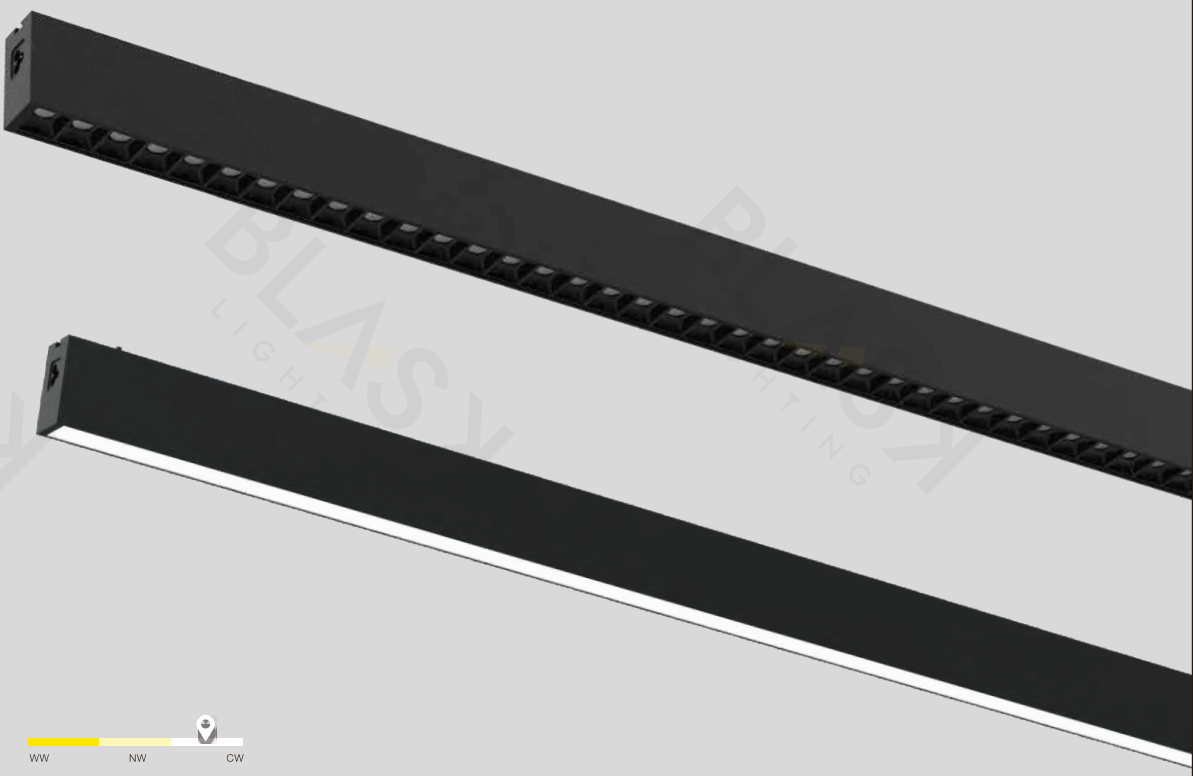

Optional

- Traic dimmable

- DIAL code to adjust CCT

- 2 Installation method
- 3 sizes

278mm

543mm

1205mm



DIAL CODE TO ADJUST CCT

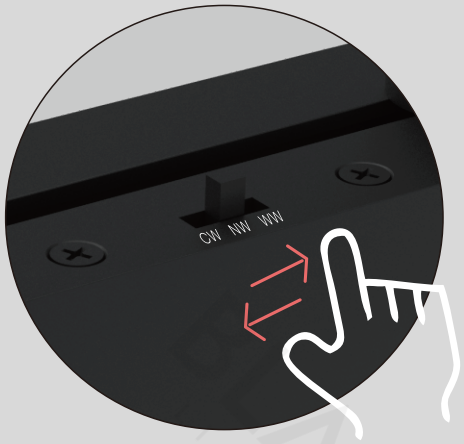

FEATURE

Aluminum lamp body
Anti-glare design
UGR<8
IP20
CRI>90
System light output efficiency:90 lm/W
AC100-240V 50/60Hz
50 000 hours life
5 years warranty



INSTALLATION

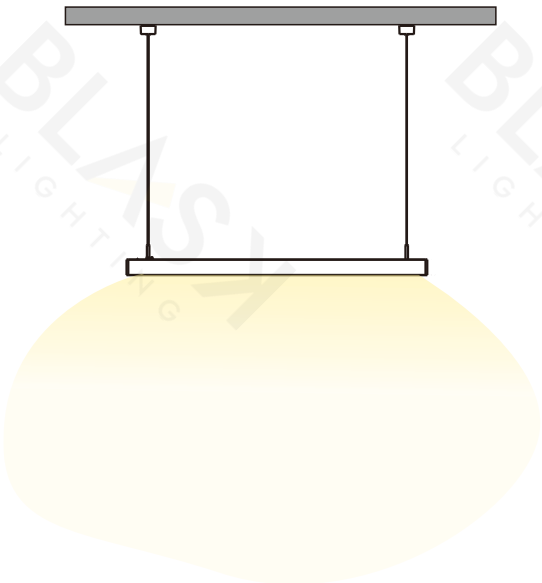

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAPLI30408	40W	3600 lm	White / Black	3000K / 4000K/6500K	15˚ / 30˚ / 45˚
INAPLI30409	40W	3600 lm	White / Black	3000K - 4000K-6500K	15˚ / 30˚ / 45˚

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light distributions
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

FEATURE

Aluminum lamp body
Anti-glare design
UGR<19
IP20
CRI>90
System light output efficiency:100 lm/W
AC100-240V 50/60Hz
50 000 hours life
5 years warranty



INSTALLATION

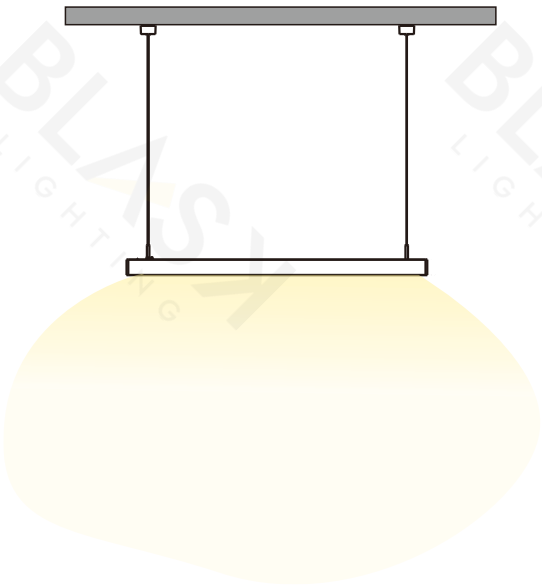

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAPLI30410	40W	4000 lm	White / Black	3000K / 4000K/6500K	120°
INAPLI30411	40W	4000 lm	White / Black	3000K - 4000K-6500K	120°

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INACLI30412	10W	900 lm	White / Black	3000K / 4000K/6500K	15˚ / 30˚ / 45˚
INACLI30413	20W	1800 lm	White / Black	3000K / 4000K/6500K	15˚ / 30˚ / 45˚
INACLI30414	40W	3600 lm	White / Black	3000K / 4000K/6500K	15˚ / 30˚ / 45˚
INACLI30415	10W	900 lm	White / Black	3000K - 4000K-6500K	15˚ / 30˚ / 45˚
INACLI30416	20W	1800 lm	White / Black	3000K - 4000K-6500K	15˚ / 30˚ / 45˚
INACLI30417	40W	3600 lm	White / Black	3000K - 4000K-6500K	15˚ / 30˚ / 45˚

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light distributions
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

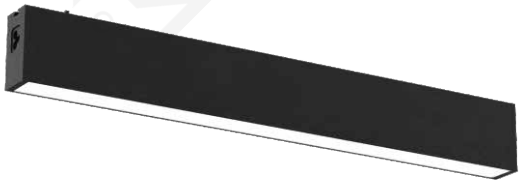

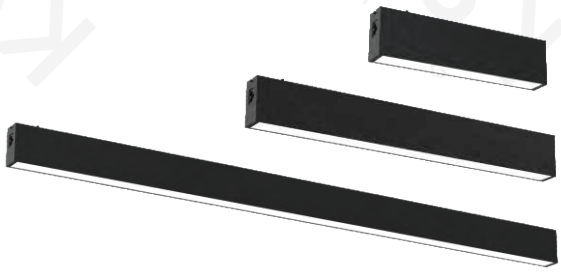

FEATURE

Aluminum lamp body
Anti-glare design
UGR<19
IP20
CRI>90
System light output efficiency:100 lm/W
AC100-240V 50/60Hz
50 000 hours life
5 years warranty

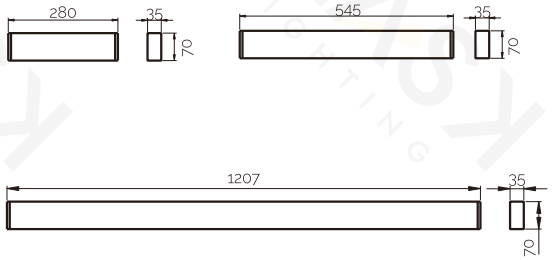

INSTALLATION

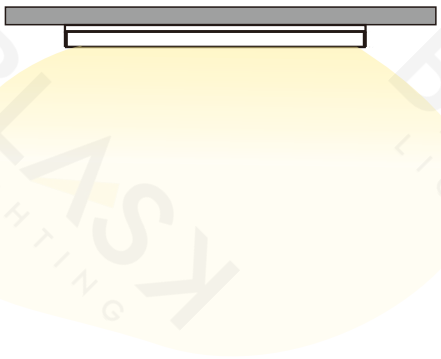

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INACLI30418	10W	1000 lm	White / Black	3000K / 4000K/6500K	120°
INACLI30419	20W	2000 lm	White / Black	3000K / 4000K/6500K	120°
INACLI30420	40W	4000 lm	White / Black	3000K / 4000K/6500K	120°
INACLI30421	10W	1000 lm	White / Black	3000K - 4000K-6500K	120°
INACLI30422	20W	2000 lm	White / Black	3000K - 4000K-6500K	120°
INACLI30423	40W	4000 lm	White / Black	3000K - 4000K-6500K	120°

SPECIAL CHARACTERISTICS

- Pantent Design
- RoHS Certification
- Class II
- IP20
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors

Surface mounted accessories usage

Note
Single input wire supports up to **1500W**

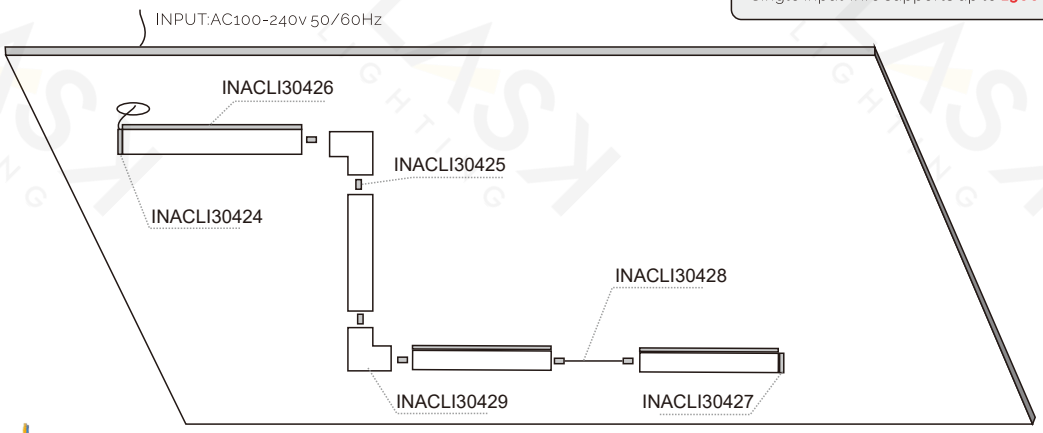

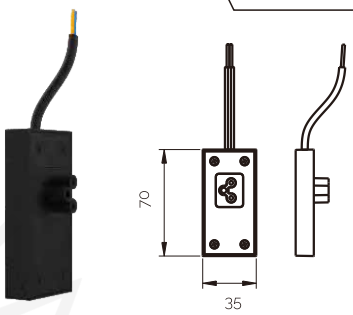

INACLI30424

Material	PC
Color	Black / White
Remark	Used for connection for lights and input



INACLI30427

Material	PC
Color	Black / White
Remark	Used for lights the end

INACLI30425

Material	PVC
Color	White
Remark	Used for lights connection

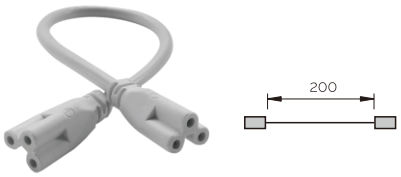

INACLI30428

Material	PVC
Color	White
Remark	Used for lights connection

INACLI30426

Material	Aluminum
Color	Black / White
Remark	For surface accessories

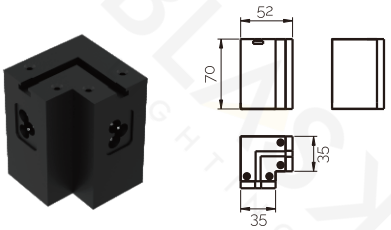

INACLI30429

Material	Aluminum
Color	Black / White
Remark	Plane right-angle connection for two lamps

Suspend accessories usage

Note
Single input wire supports up to **1500W**

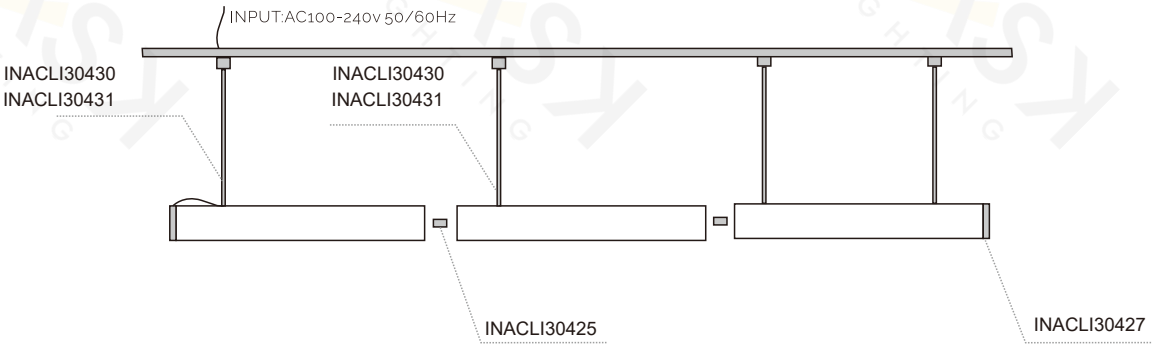



INACLI30430

Material	Aluminum
Color	Black / White
Remark	Used for hanging wire to start plug and power input



INACLI30432

Material	Aluminum
Color	Black / White
Remark	Intermediate support for hanging wire installation lights

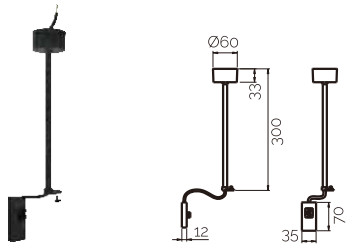

INACLI30431

Material	Aluminum
Color	Black / White
Remark	Used for hanging wire to start plug and power input



INACLI30433

Material	Aluminum
Color	Black / White
Remark	Intermediate support for hanging wire installation lights

Ceiling install kit usage

Step:1 Make holes in the ceiling as required

Step:2 TRACK C END CAP

Step:3 CAP KIT connect to power supply

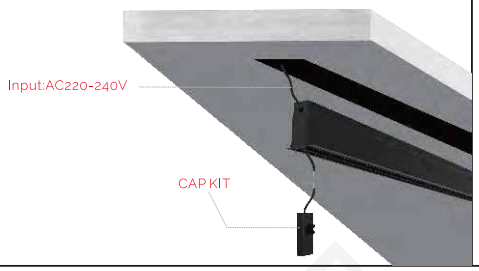

Step:4 TRACKis fixed to the ceiling with mounting screws

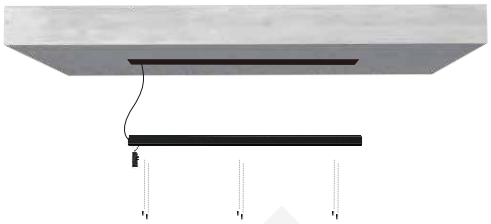

Step:5 Fan ash covers the edge.

Step:6 connect bar into the top of the lamp body

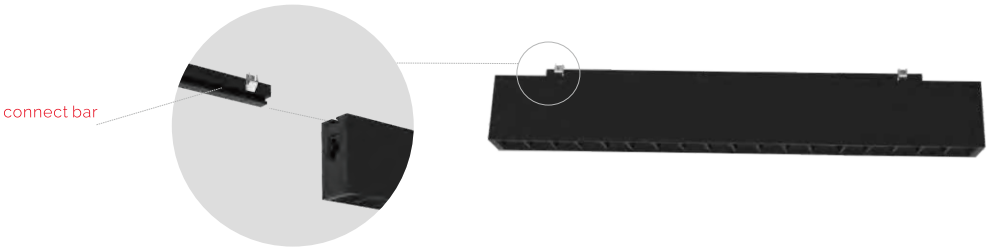

Step:7 CONNECTOR A to connect each lamp body

Step:8 Put the connected lamp body as a whole into TRACK

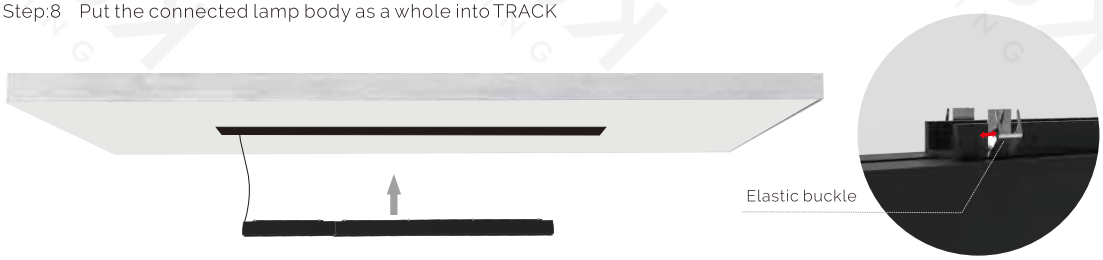

Ceiling install kit usage

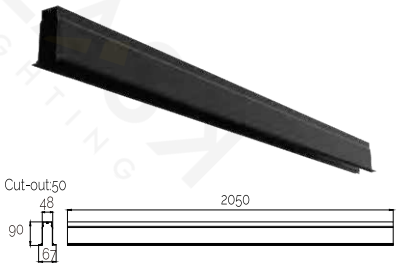

INACLI30434

Material	Aluminum
Color	Black / White
Remark	Track for concealed installation



INACLI30436

Material	Aluminum
Color	Black / White
Remark	Bracket for concealed installation

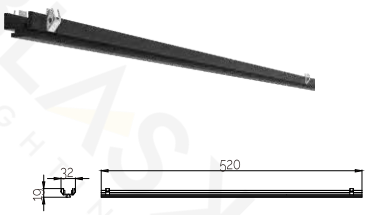

INACLI30435

Material	Aluminum
Color	Black / White
Remark	Bracket for concealed installation

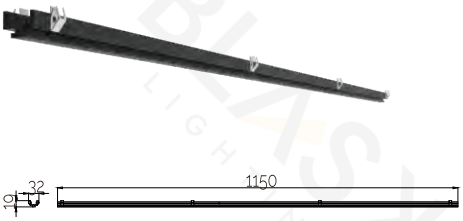

INACLI30437

Material	Aluminum
Color	Black / White
Remark	Bracket for concealed installation



INACLI30438

Material	Aluminum
Color	Black / White
Remark	Flat right angle for concealed installation





INACLI30439

Material	Aluminum
Color	Black / White
Remark	Bracket accessories for recessed ceilings

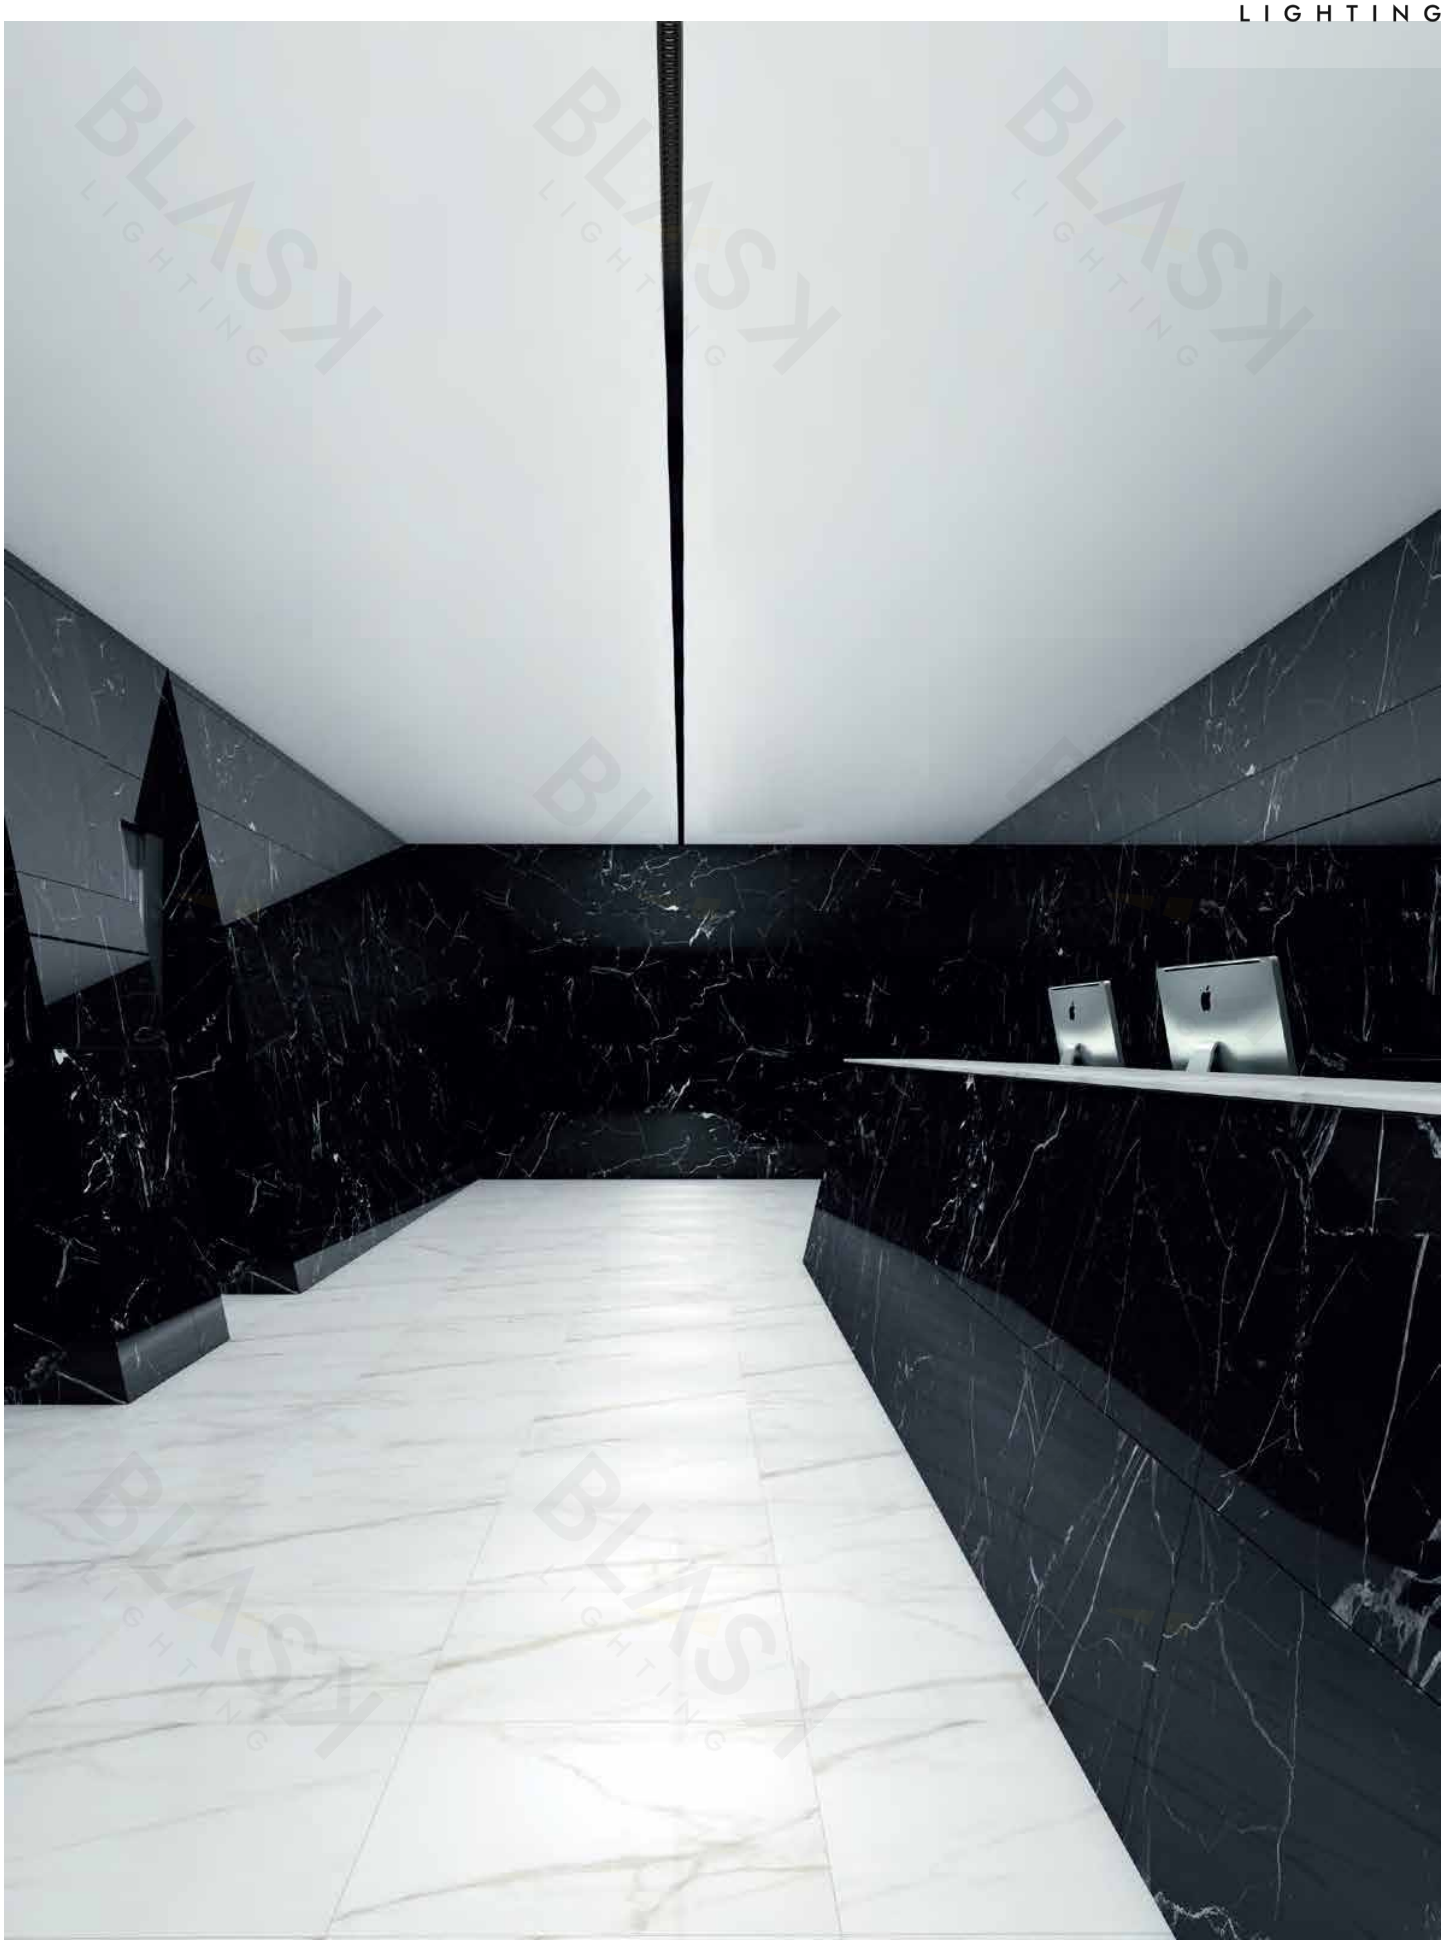

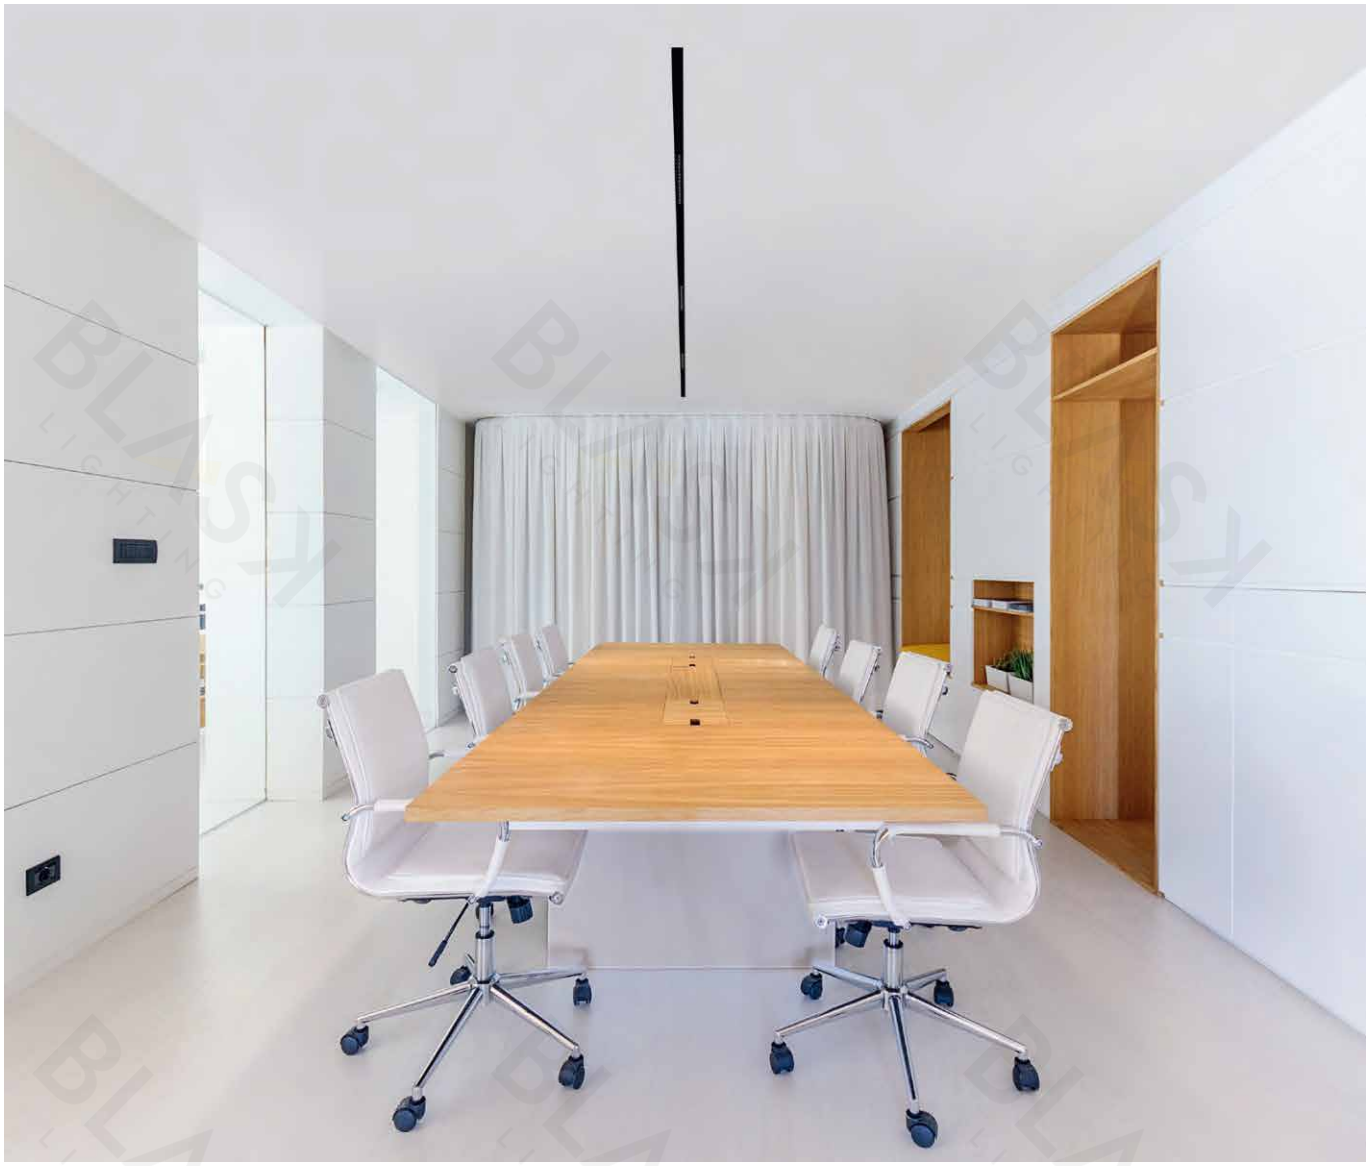

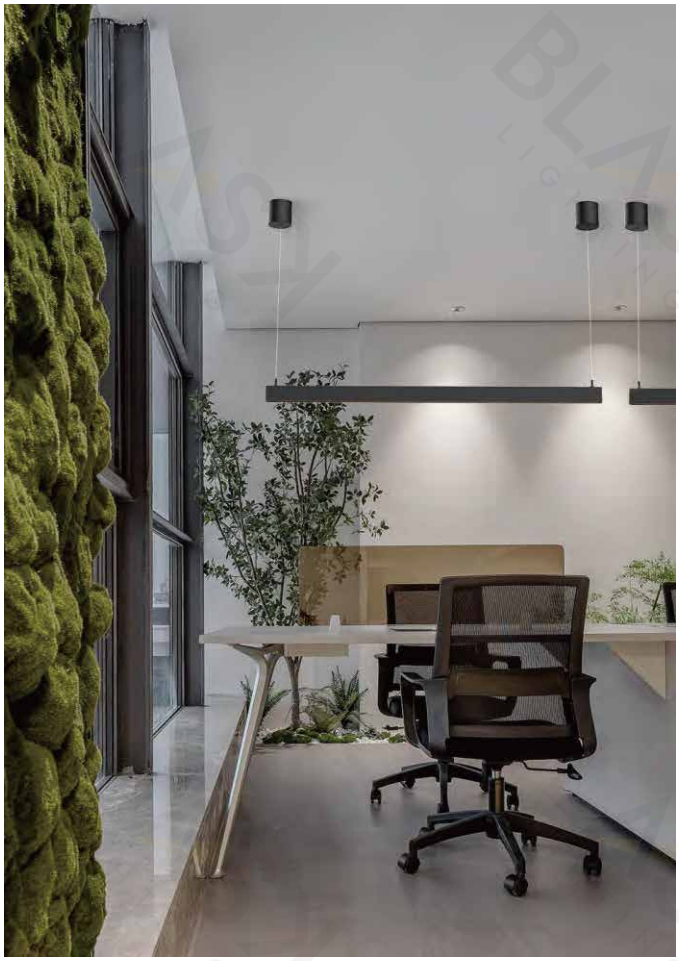

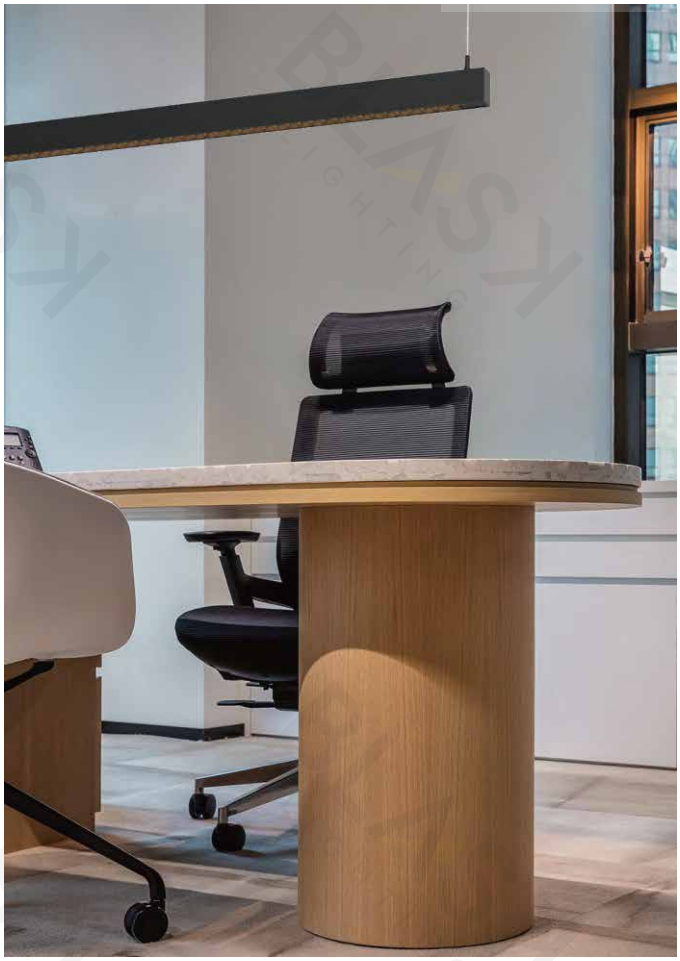

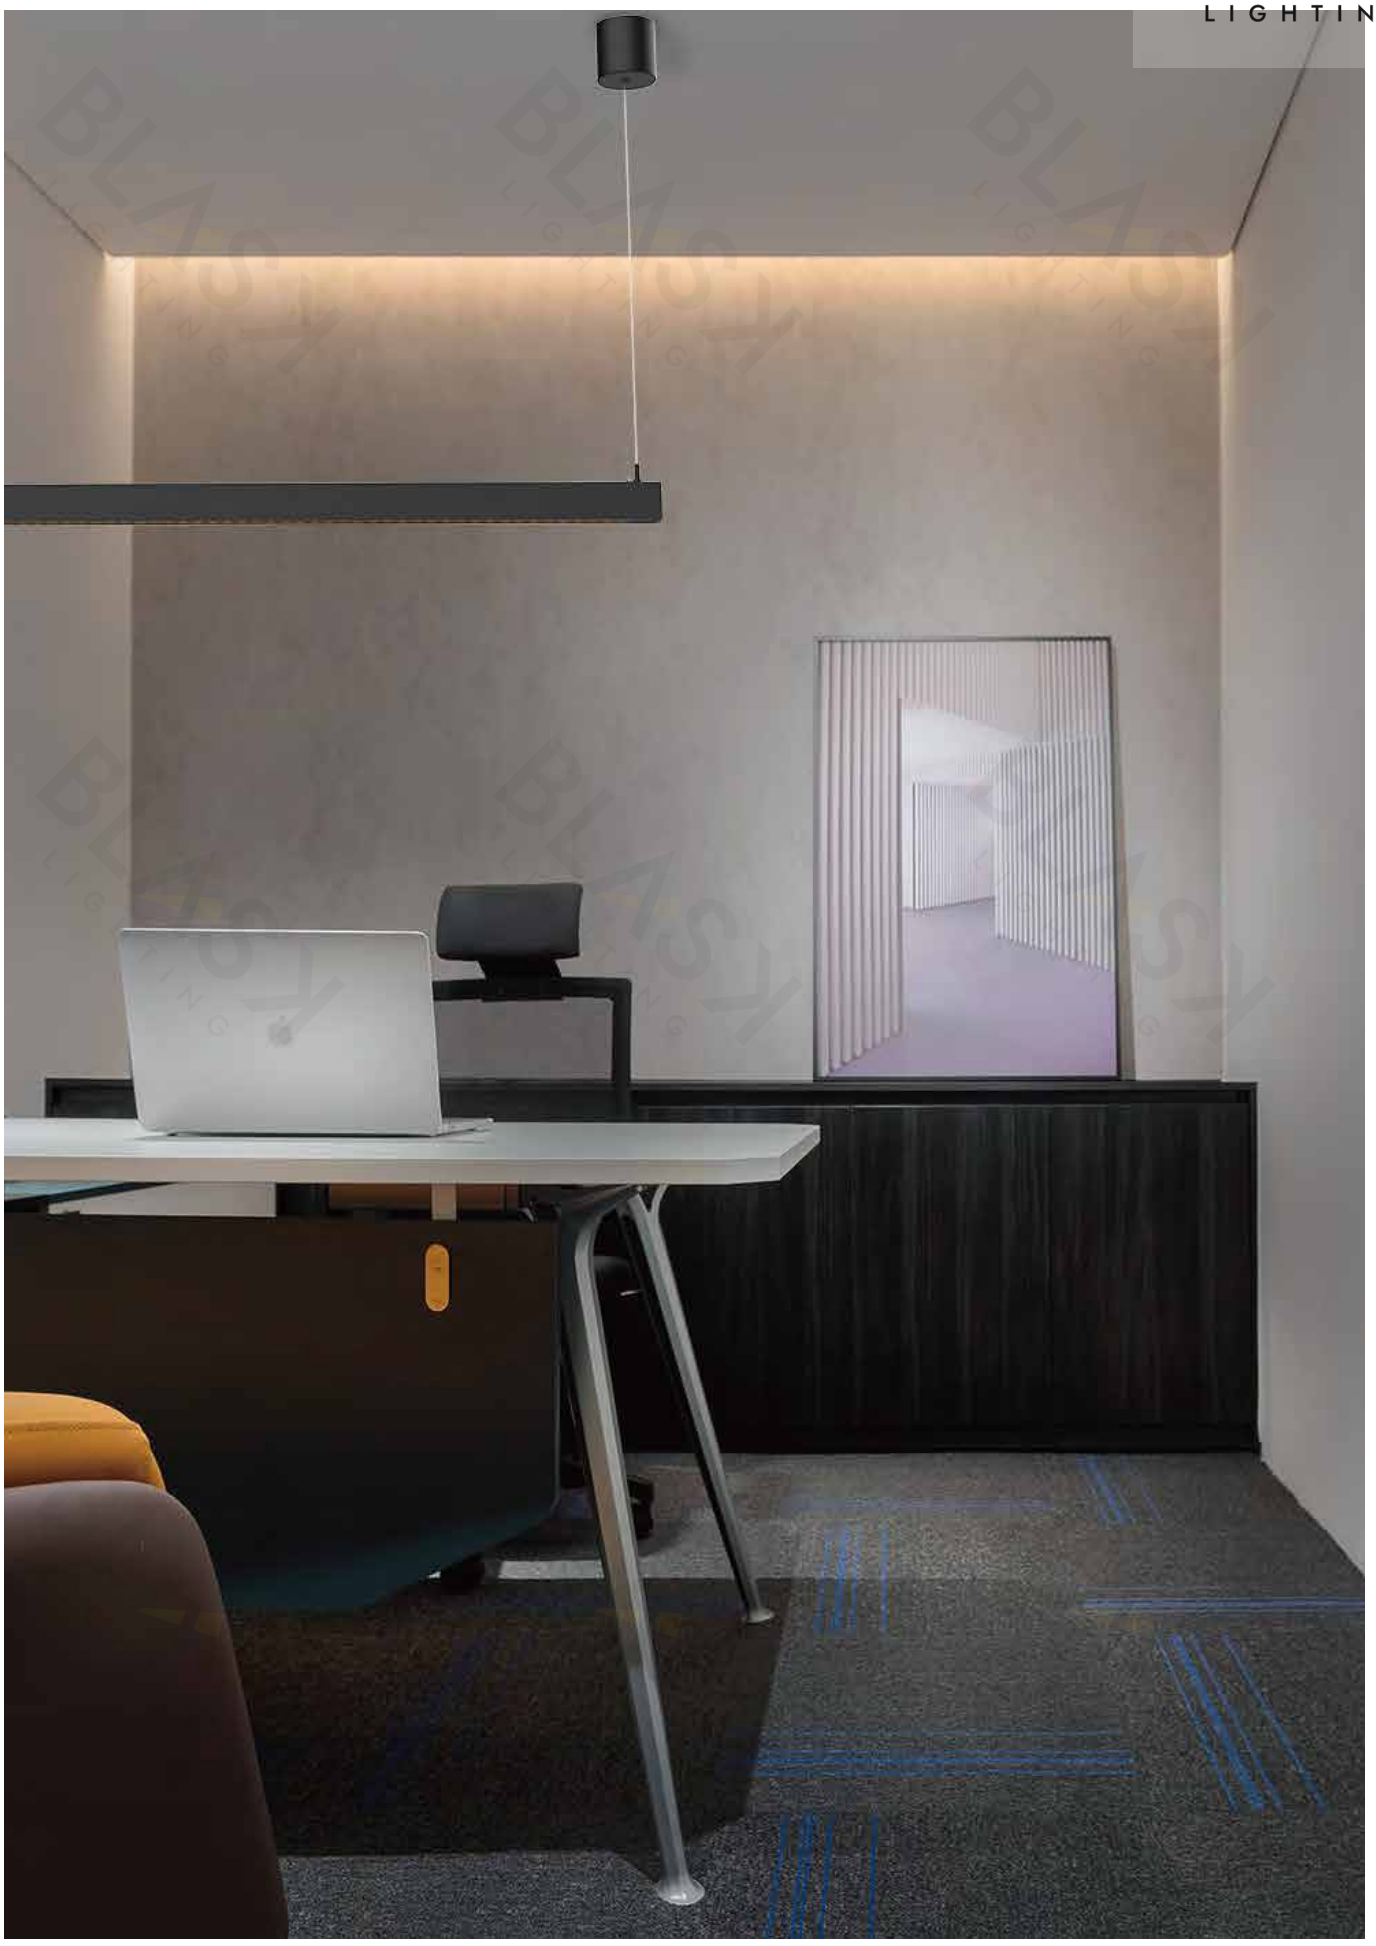

- Hand sweep sensor dimming
- Hand scan sensor switch
- Adjustable telescopic sling
- Anti-glare design
- UGR<8
- CRI>90

Put your hand under the sensing area and slide to the left or right, the light will turn on or off.

Put your hand under the sensing area and do not move, the lamp will enter the dimming mode, and the light can be dimmed or brightened.

Automatically retractable components

As long as the hovering position of the lamp is manually adjusted, the telescopic component can be automatically fixed, which is convenient and fast, and can be adapted to different environments and personal usage habits.

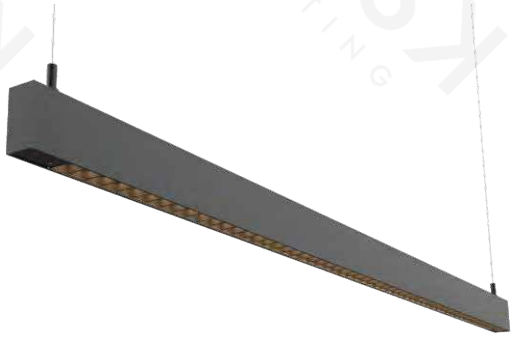

FEATURE

Aluminum lamp body
Hand sweep sensor dimming
Hand scan sensor switch
Adjustable telescopic sling
Anti-glare design
UGR<8
IP20
CRI>90
System light output efficiency:100 lm/W
AC220-240V 50/60Hz
50 000 hours life
5 years warranty



INAPLI30441



INAPLI30440

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INAPLI30440	16W	1280 lm	White / Black	3000K / 4000K/6500K	15˚ / 30˚ / 45˚
INAPLI30441	25W	2000 lm	White / Black	3000K / 4000K/6500K	15˚ / 30˚ / 45˚

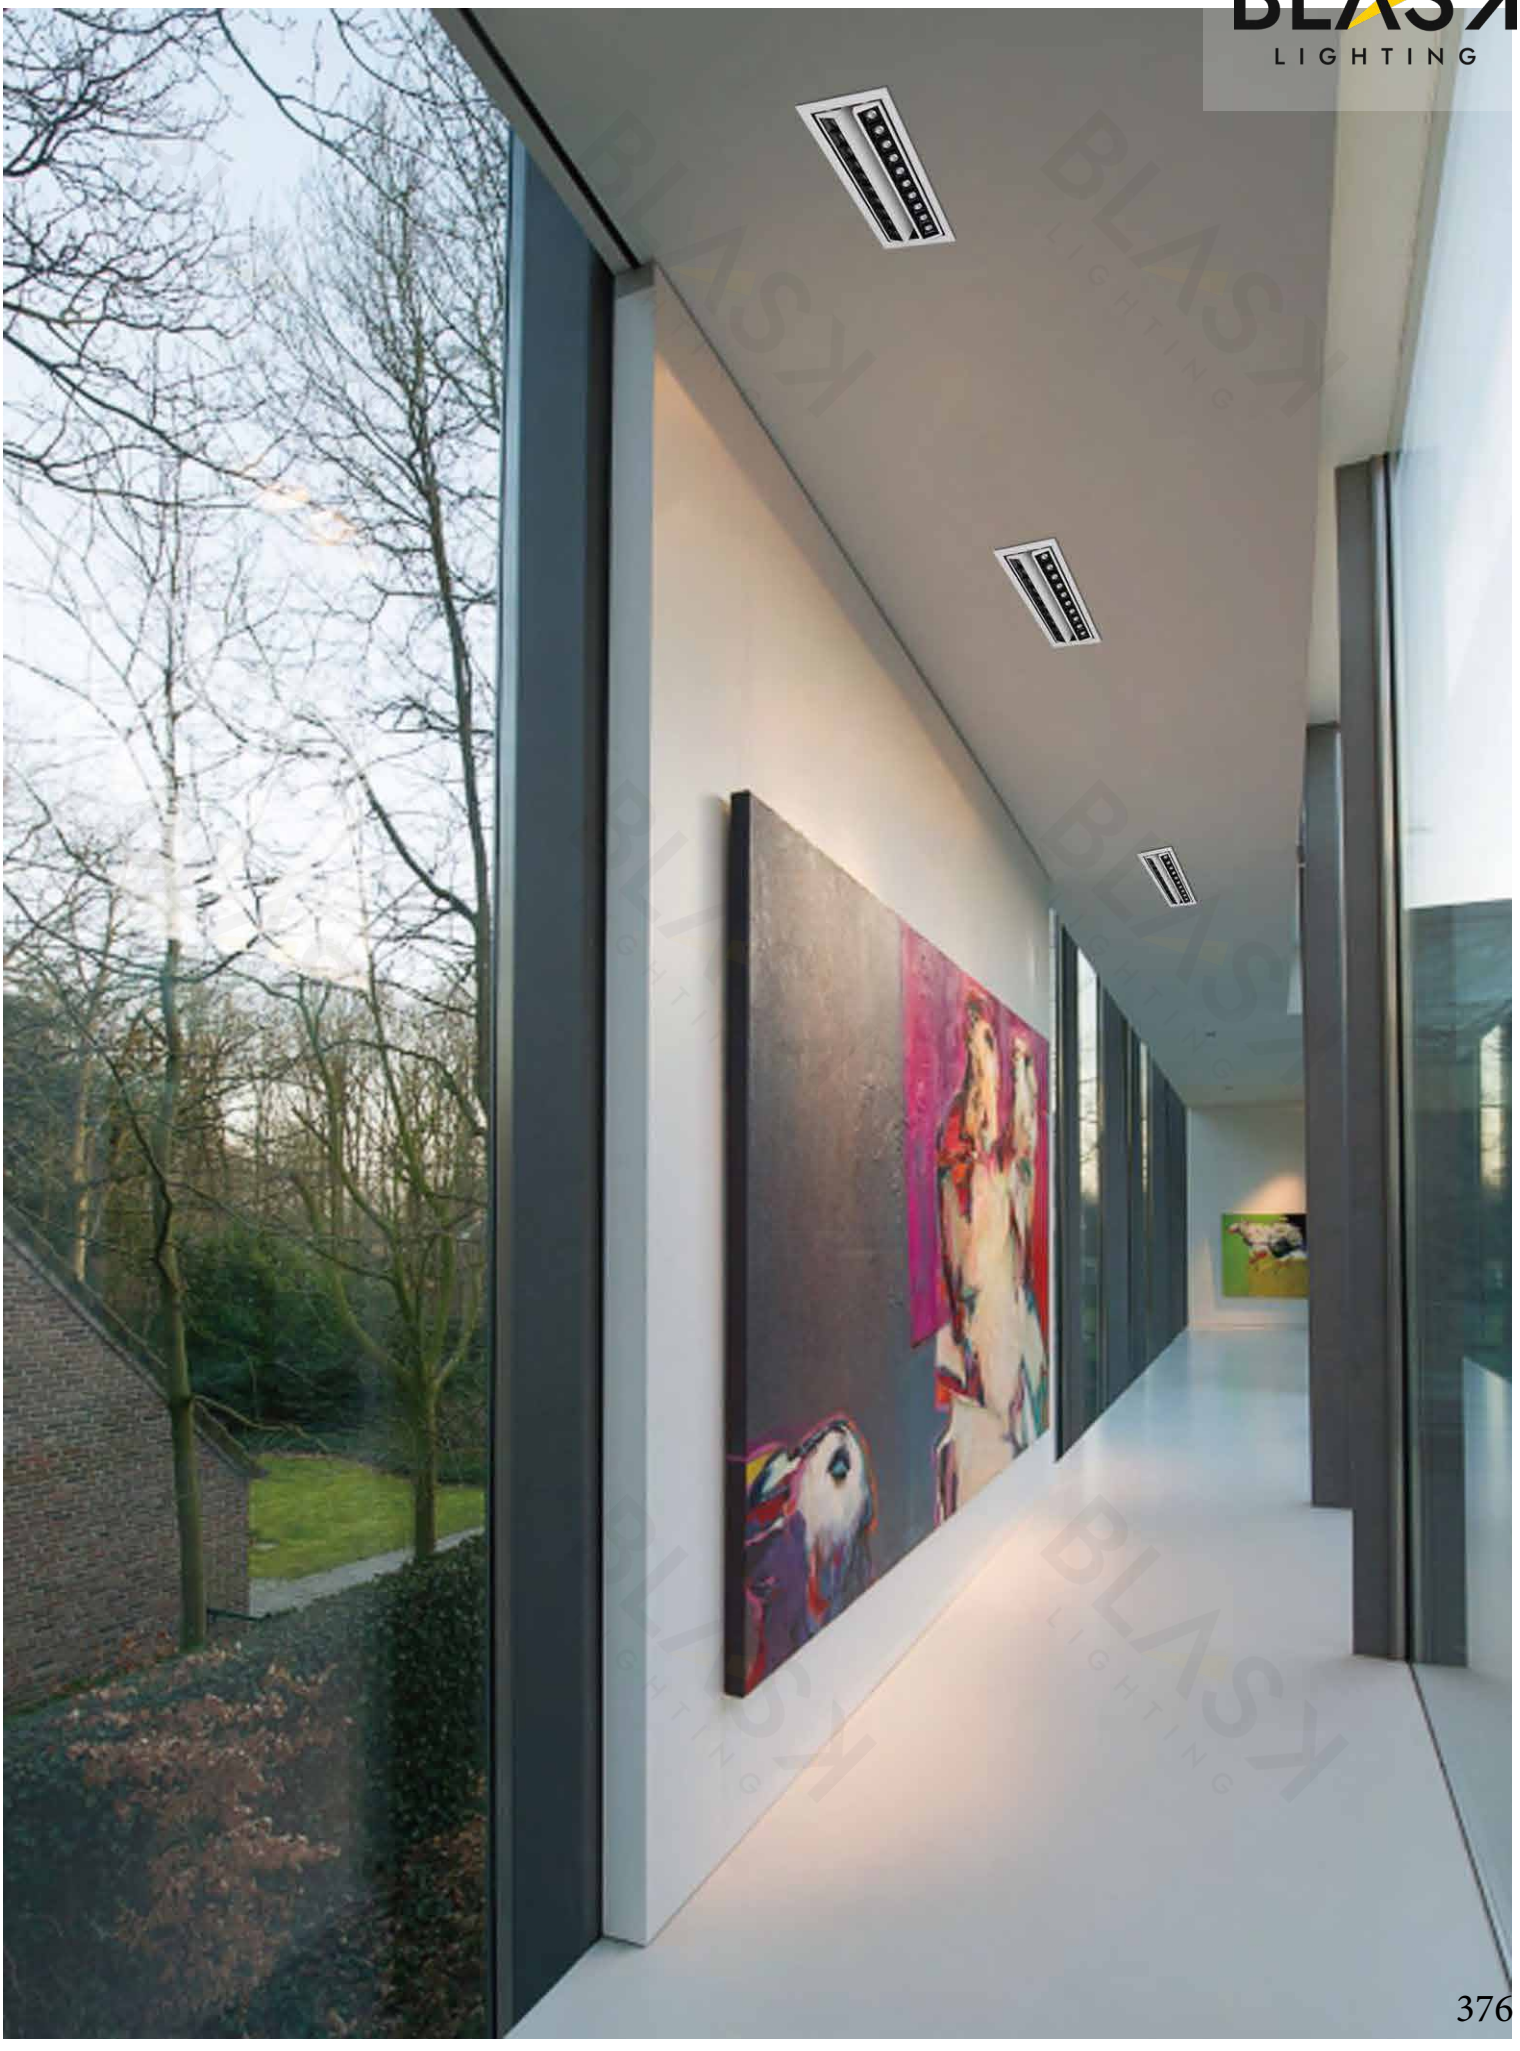

can replace
the traditional
beans gall lights

Single version
Tilting adjustability +/-30°.



Double version
Independent tilting adjustability of bodies +/-30°.

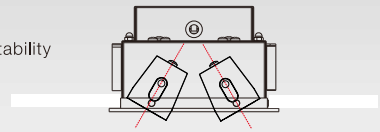

Mechanical locking



Body Color

WH BK



INASLI30442





Power	7.5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30443





Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30444





Power	22.5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30445



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30446





Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30447





Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30448





Power	45W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30449



Power	60W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

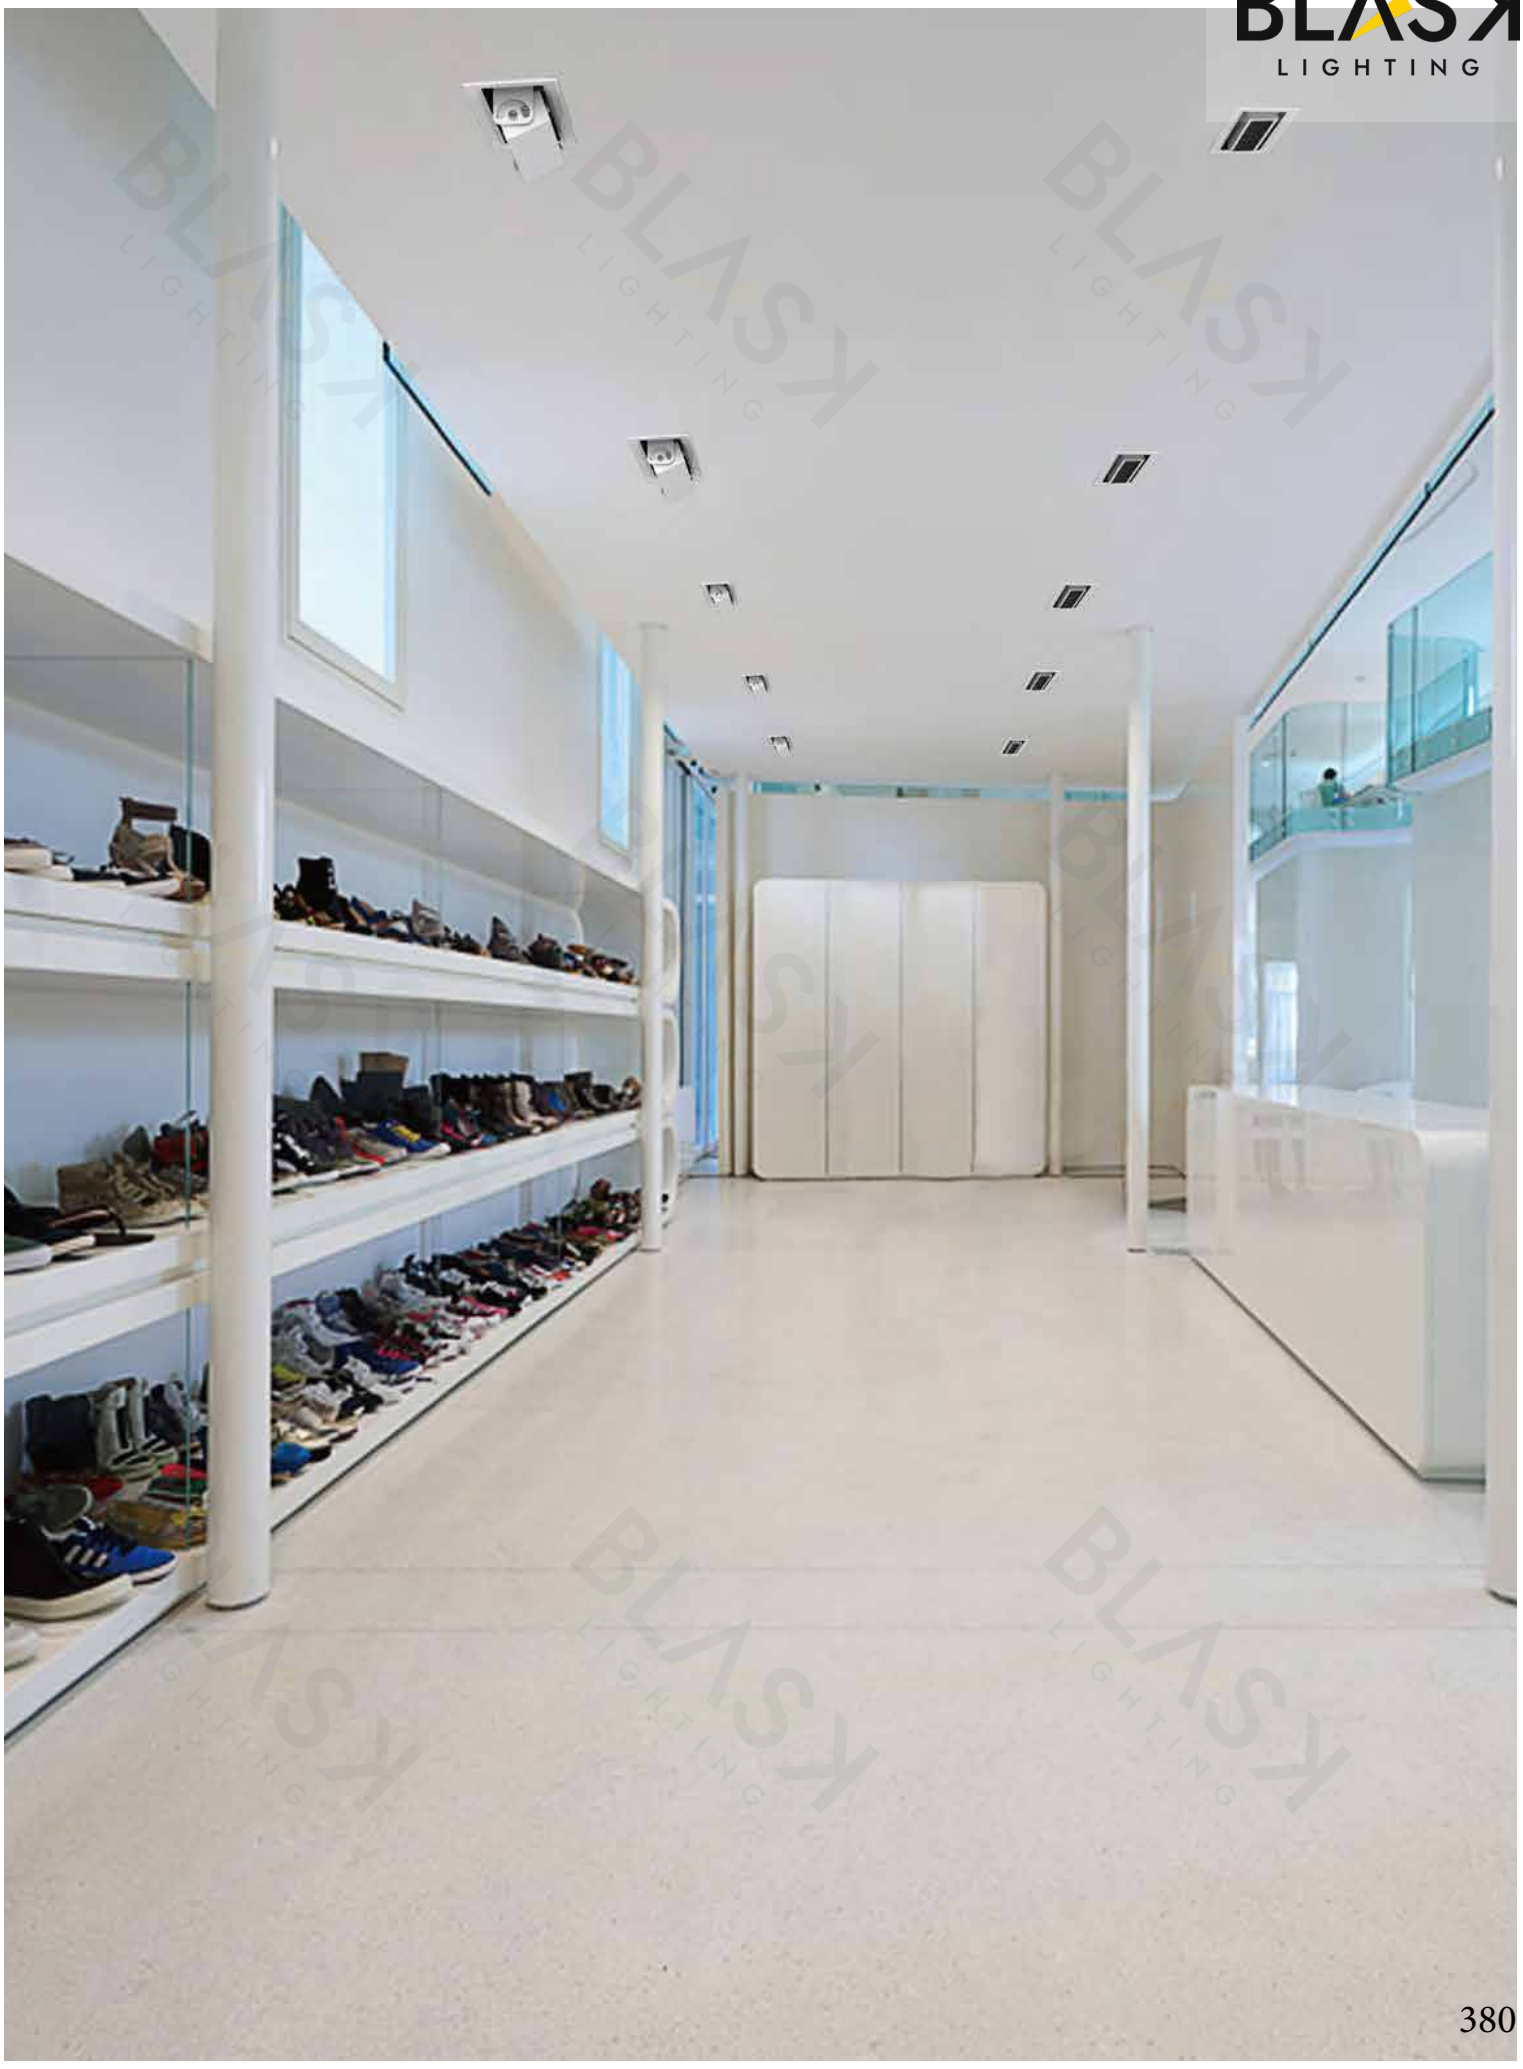

can rotate a larger angle as a track light to use

Installation:

Body Color

WH BK

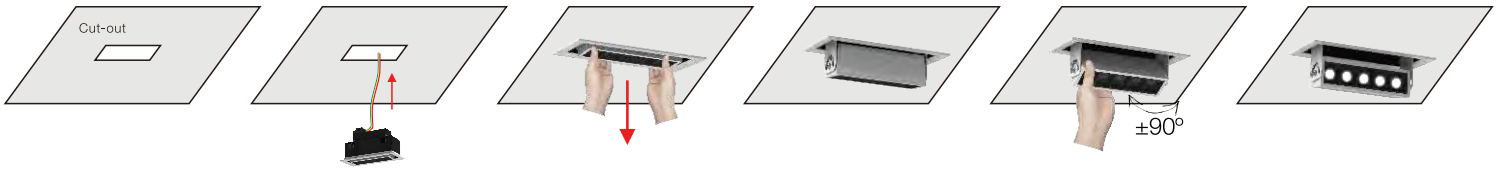

Inside the box

Tilting adjustability +/-30°.



Outside the box

Tilting adjustability +/-90°.

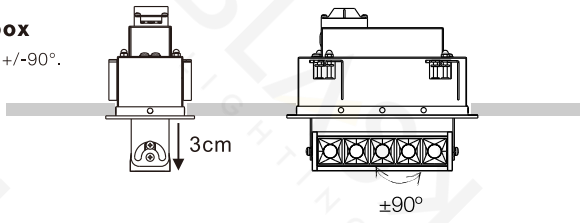

INASLI30450

15° 30° 45°

Power	7.5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30451

15° 30° 45°

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30452

15° 30° 45°

Power	22.5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30453

15° 30° 45°

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30454

15° 30° 45°



Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30455

15° 30° 45°



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30456

15° 30° 45°



Power	45W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INASLI30457

15° 30° 45°



Power	60W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30458

15° 30° 45°

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30459

15° 30° 45°

Power	22.5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30460

15° 30° 45°

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INATLI30461

15° 30° 45°

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INATLI30462





Power	22.5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INATLI30463





Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30464





Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30465



Power	22.5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

Product information

INACLI30466



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

RANGE ROVER

Installation

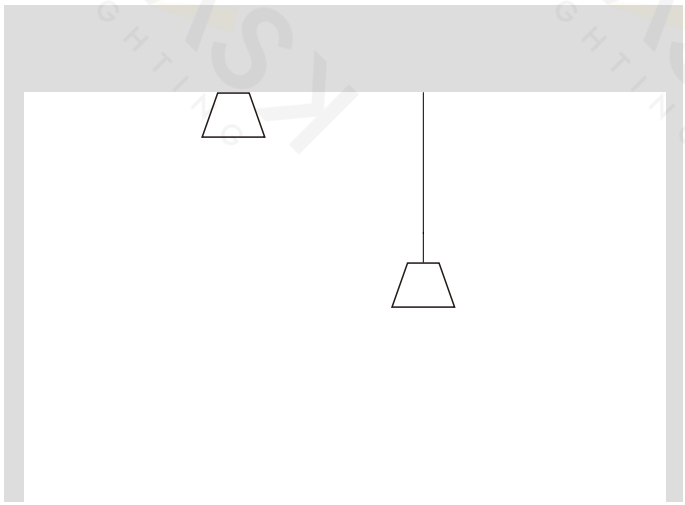

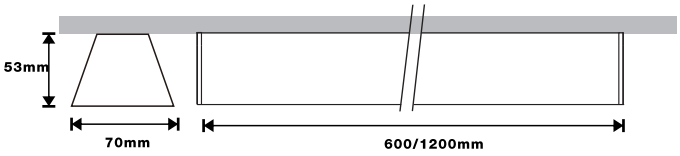

Products exploded view

① Extruded aluminium unit with electrical harness and end caps

② Parabolic reflector and LED sources

③ Diffuser

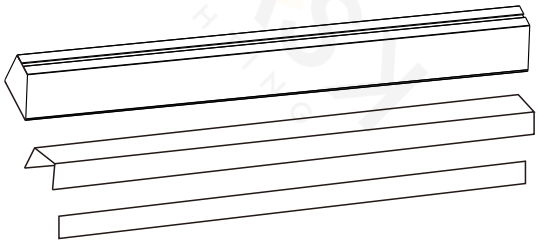

Example of suspended installation

Appliance suitable for suspended, ceiling or semi-recessed installation; shown here in the single suspension version with sliding cables.

Kit for suspension with sliding cables. Variable distancing between anchor points.



Example of the connection between linear

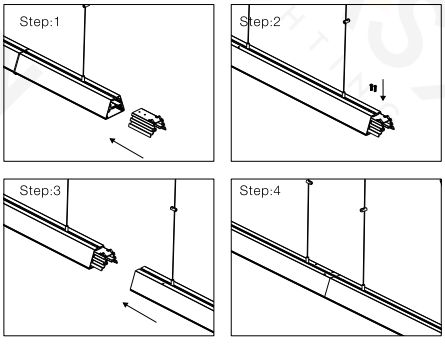

C-connector

Types of angular module

angular module
suspension /ceiling
small U





angular module
suspension /ceiling
big U





angular module
suspension /ceiling
Cross-shaped





Suspended installation







Ceiling installation







The surface mounted LED linear light can be installed with the profile against the ceiling, or by using the direct fixation set. Using the fixation set provides a 4mm shadow line between profile and ceiling, making LED linear light float through the room.

IP20

SMD2835

3 CCT

CRI >80

ECO

INACLI30467

120°

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30468

120°

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30469

120°

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30470

120°

Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30471



120°

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30472



120°

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30473



120°

Power	7.5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30474



120°

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30475



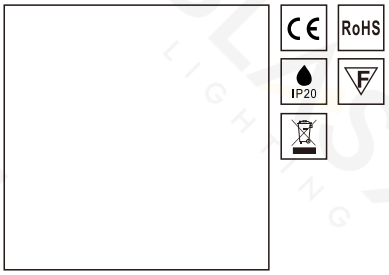

Power	18W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1440 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30476



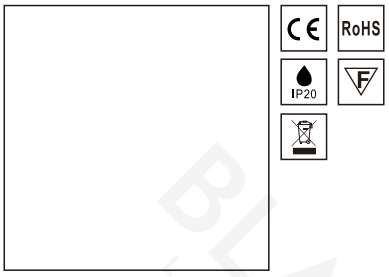

Power	36W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2880 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	30 000 H
Warranty	3 Years

INACLI30477

120°

Material Aluminum
Color White / Black

INACLI30478

120°

Material Aluminum
Color White / Black

INACLI30479

Material Iron
Color White / Black

INACLI30480

Material Aluminum
Color White / Black

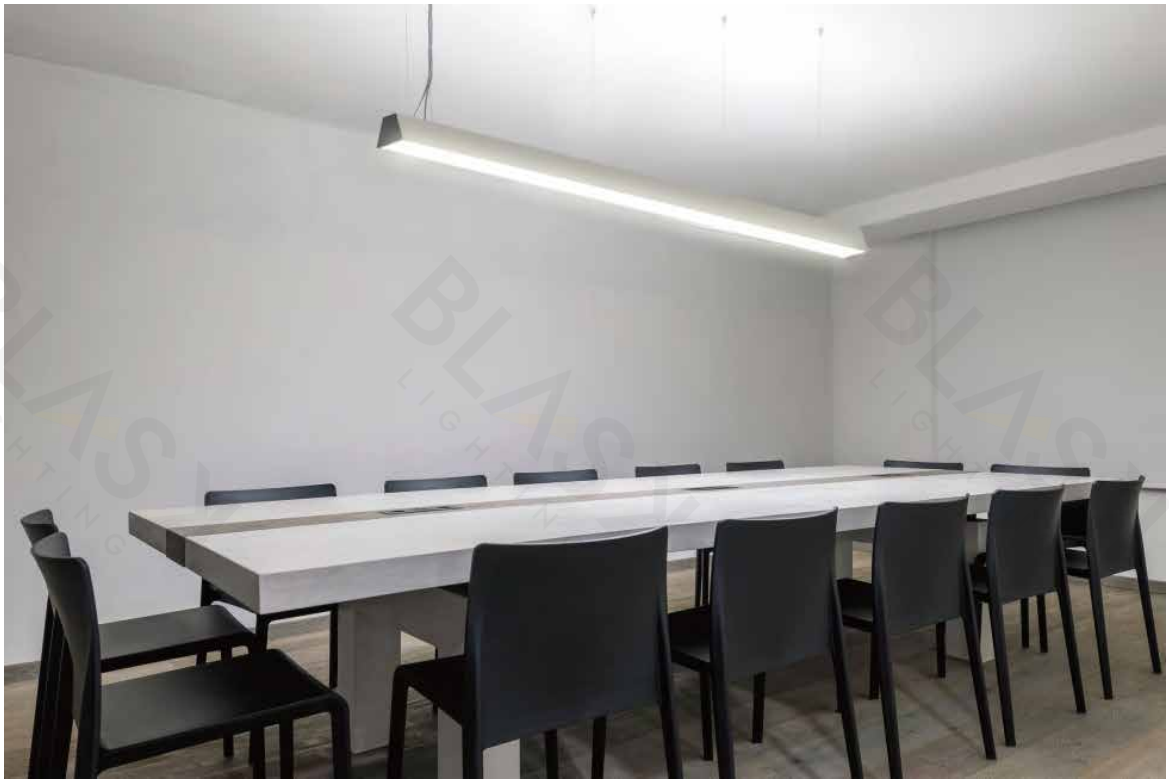

BLASK
LIGHTING
冰红茶
XINGX
今麦郎
试手气
中卤蛋
35%

Applications

- Supermarket
- Warehouse
- Workshop
- Public Area Indoor

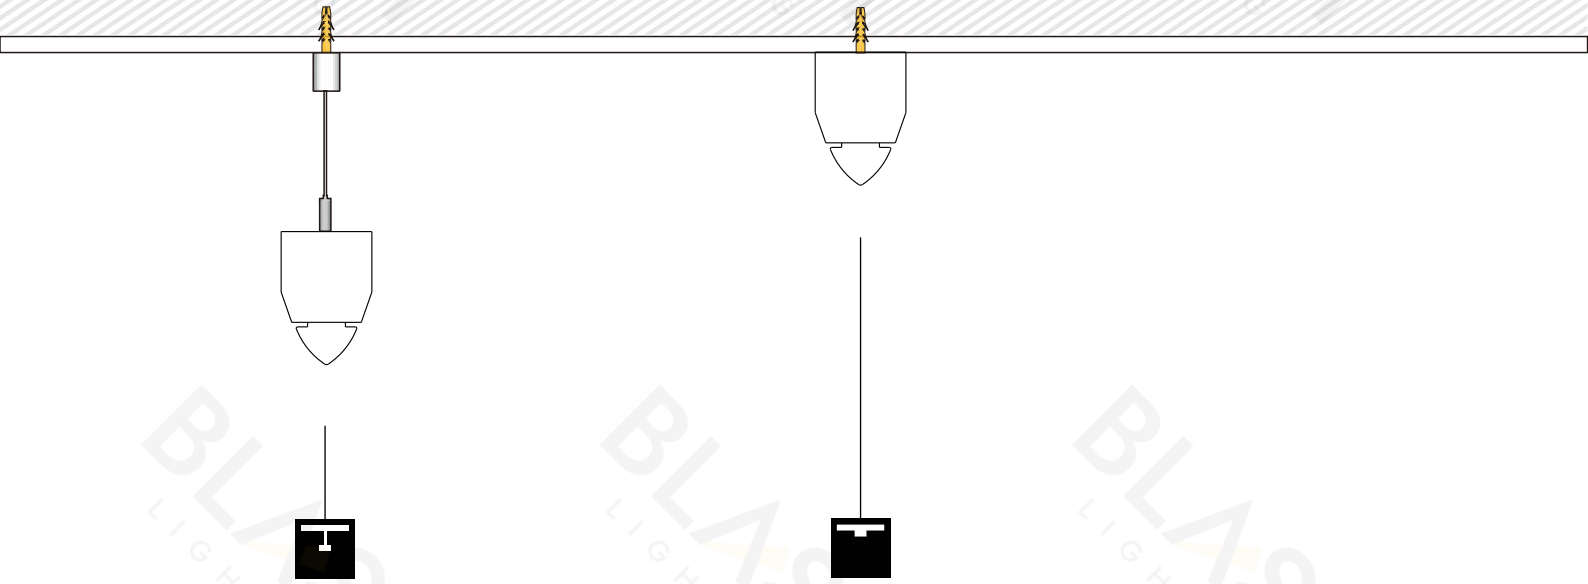

Standard

LED | IP20 | 220-240V 50/60Hz | CE | RoHS compliant

- **Mounting:**
  Surface or wall-mounted; in-line mounting possible with through-wiring and automatic connector (on request)
- **Lighting source:**
  Built-in LED module(s)
- **Electrical equipment:**
  LED driver
- **Housing:**
  White lacquered aluminum; end-caps made of iron
- **Optical system:**
  PC cover with high light transmission (> 92%)

Light effects

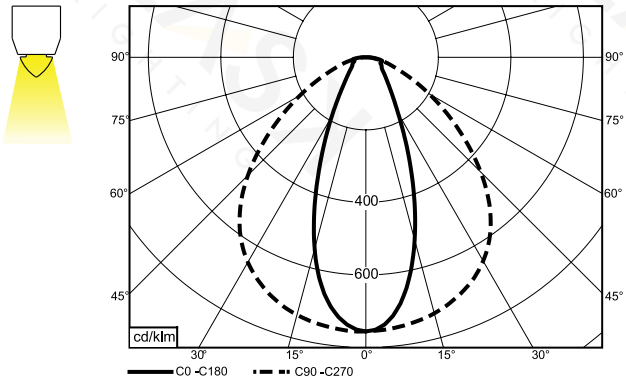

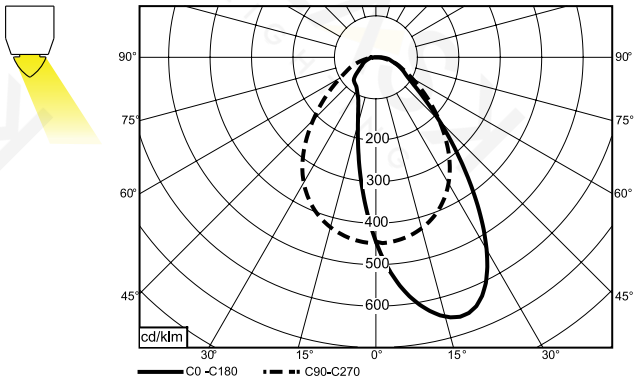

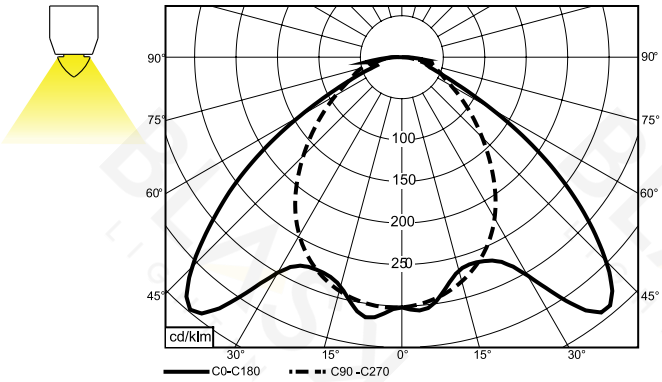

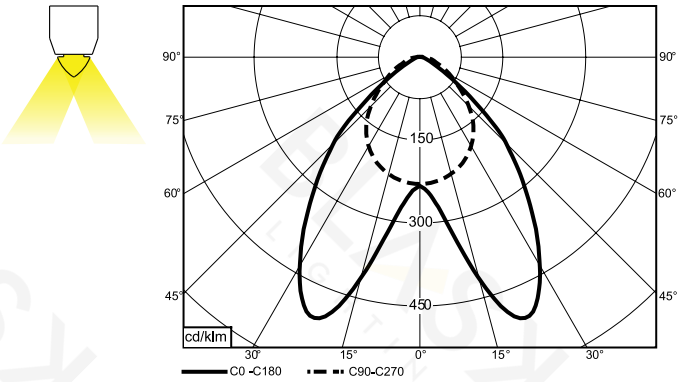

Installation diagram (wiring)

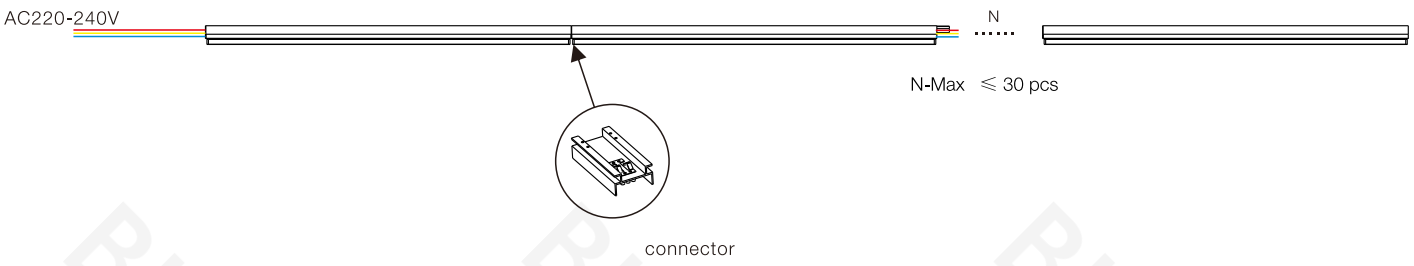

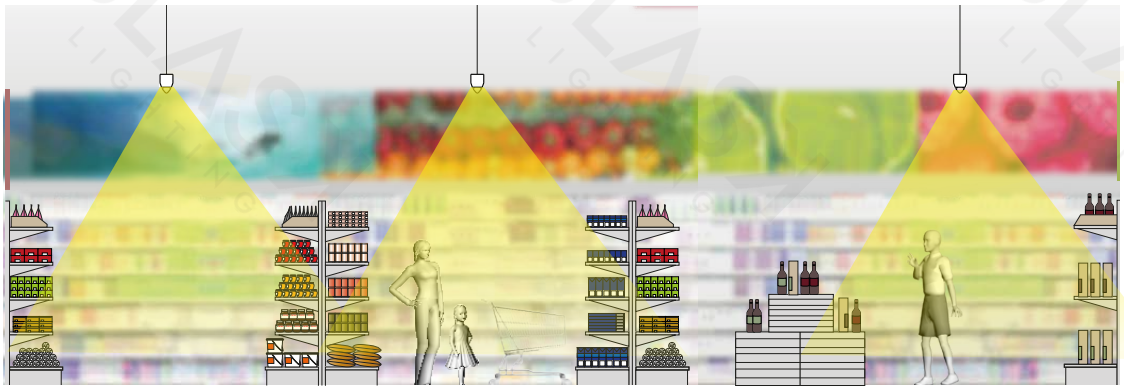

Applications

- Supermarket
- Warehouse
- Workshop
- Public Area Indoor

INACLI30481



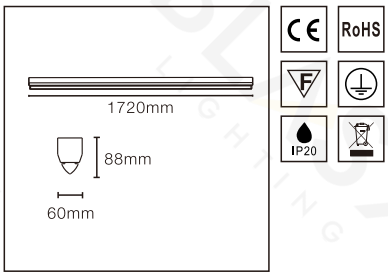

Power	75W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	7500 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30482



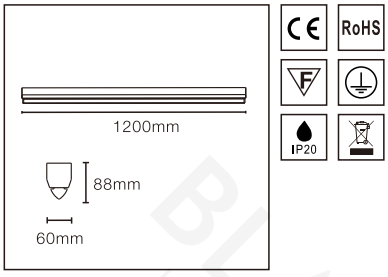

Power	60W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	6600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30483



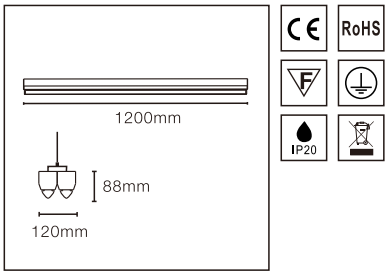

Power	120W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	13200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30484

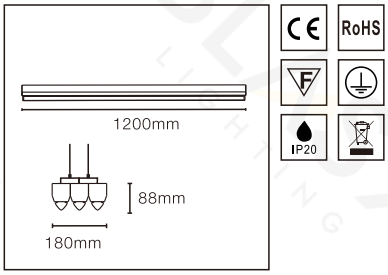

Power	180W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	19800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30485



Power	240W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	26400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30486



Material	Aluminum
Color	White / Black

INACLI30487



Material	Aluminum
Color	White / Black

INACLI30488



Material	Aluminum
Color	White / Black

INACLI30489

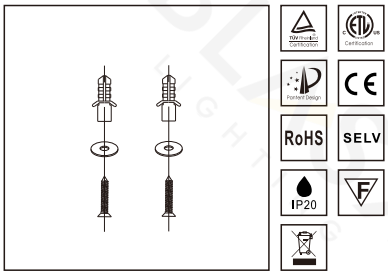

Material	Iron
Color	Chrome

INACLI30490

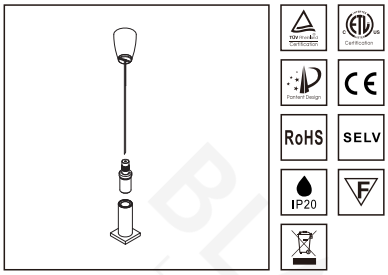

Material	Aluminum
Color	Black

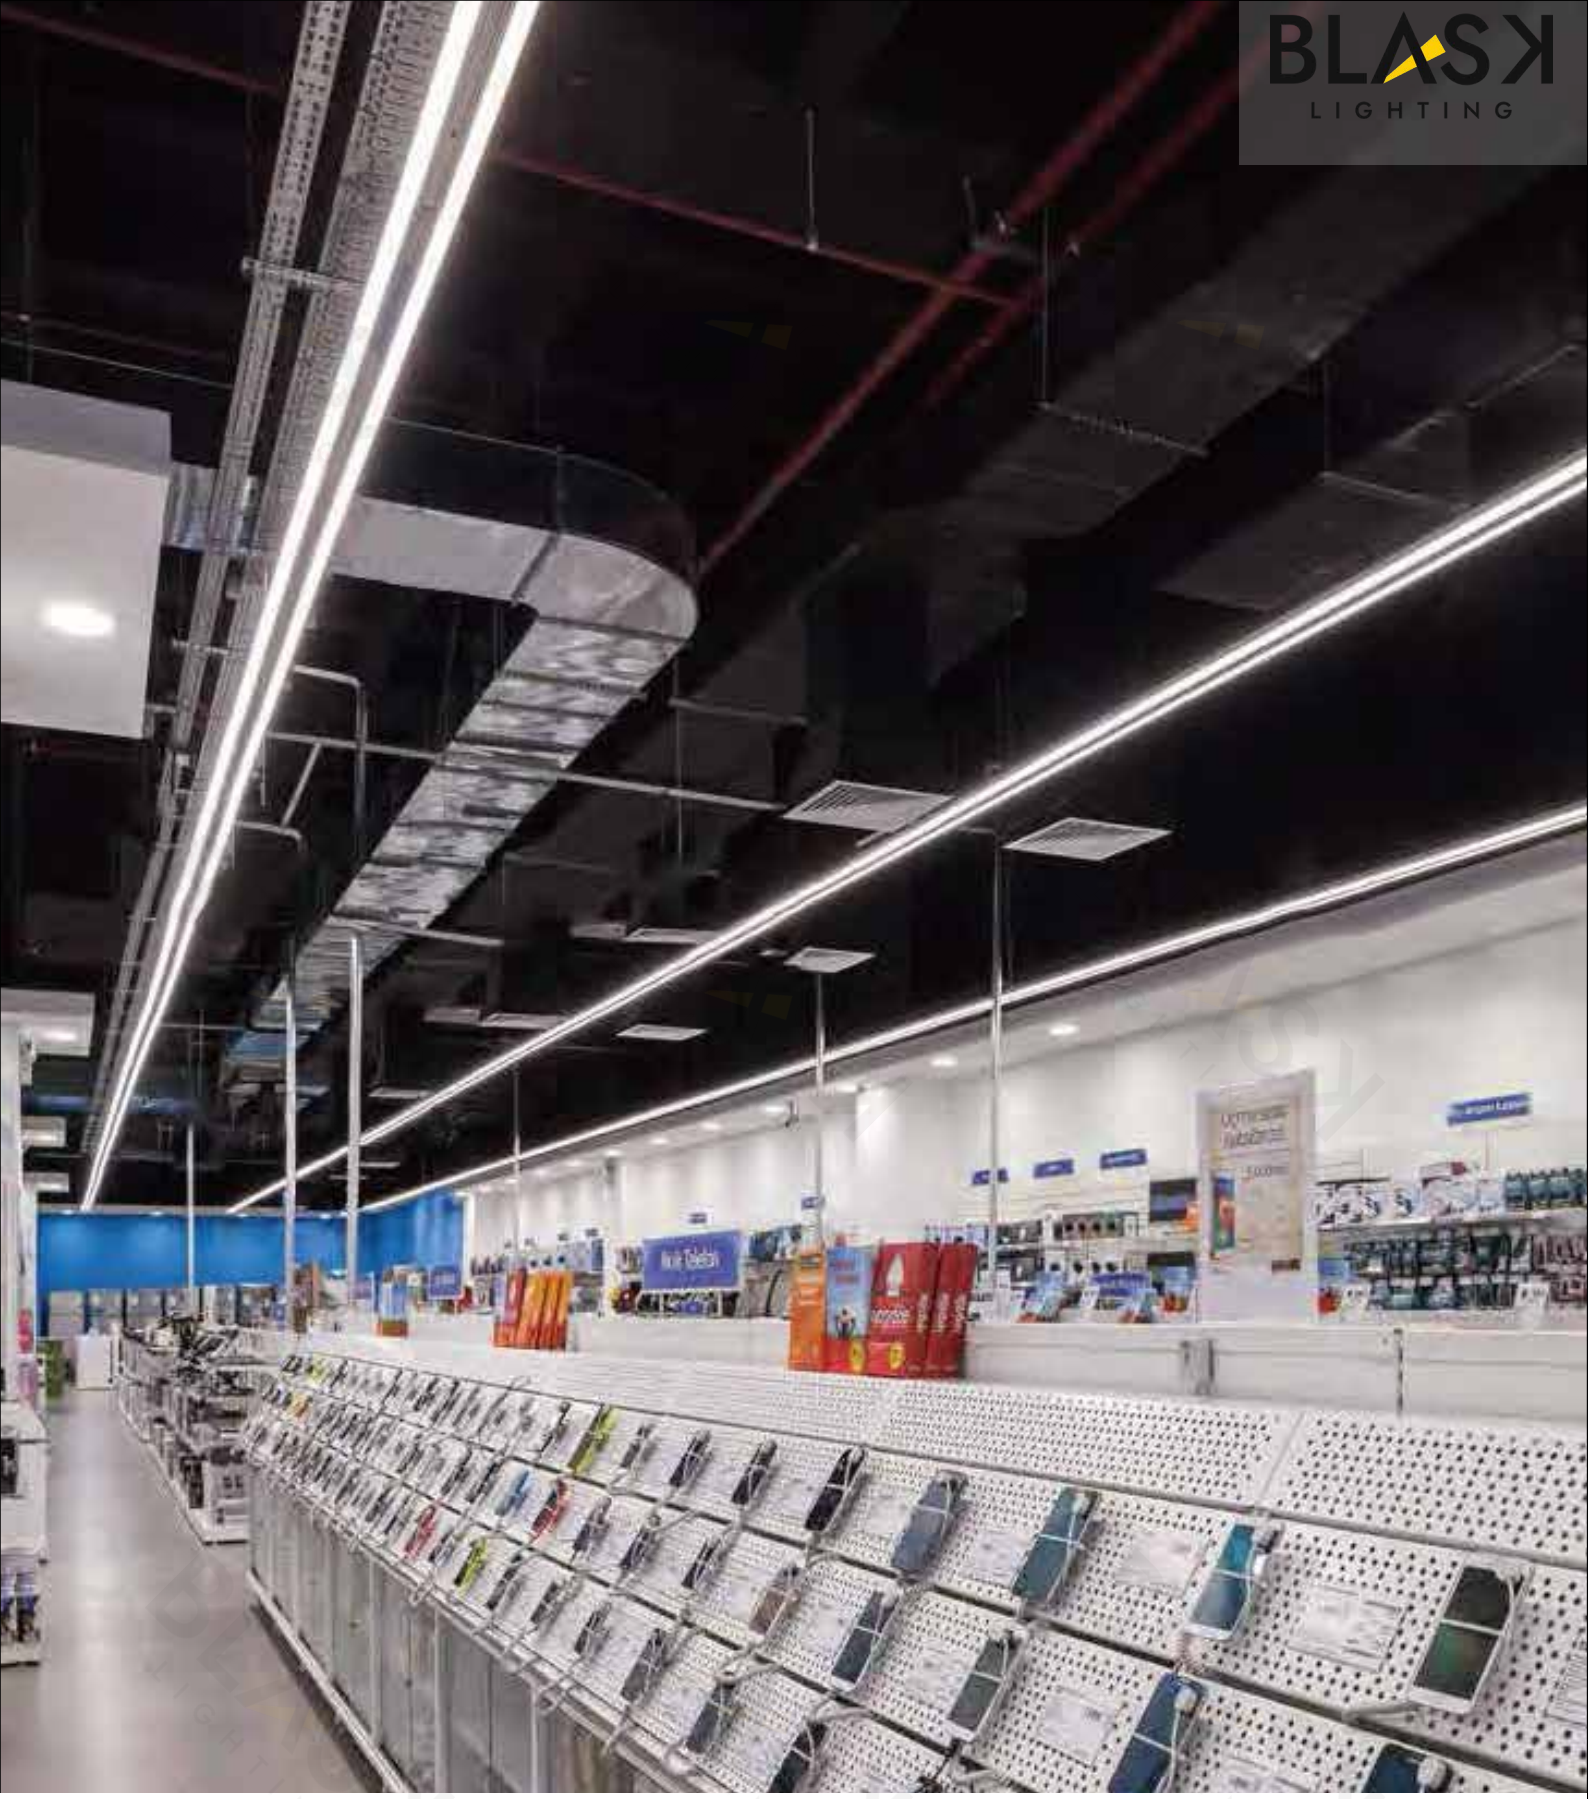

Applications

- Supermarket
- Warehouse
- Workshop
- Public Area Indoor

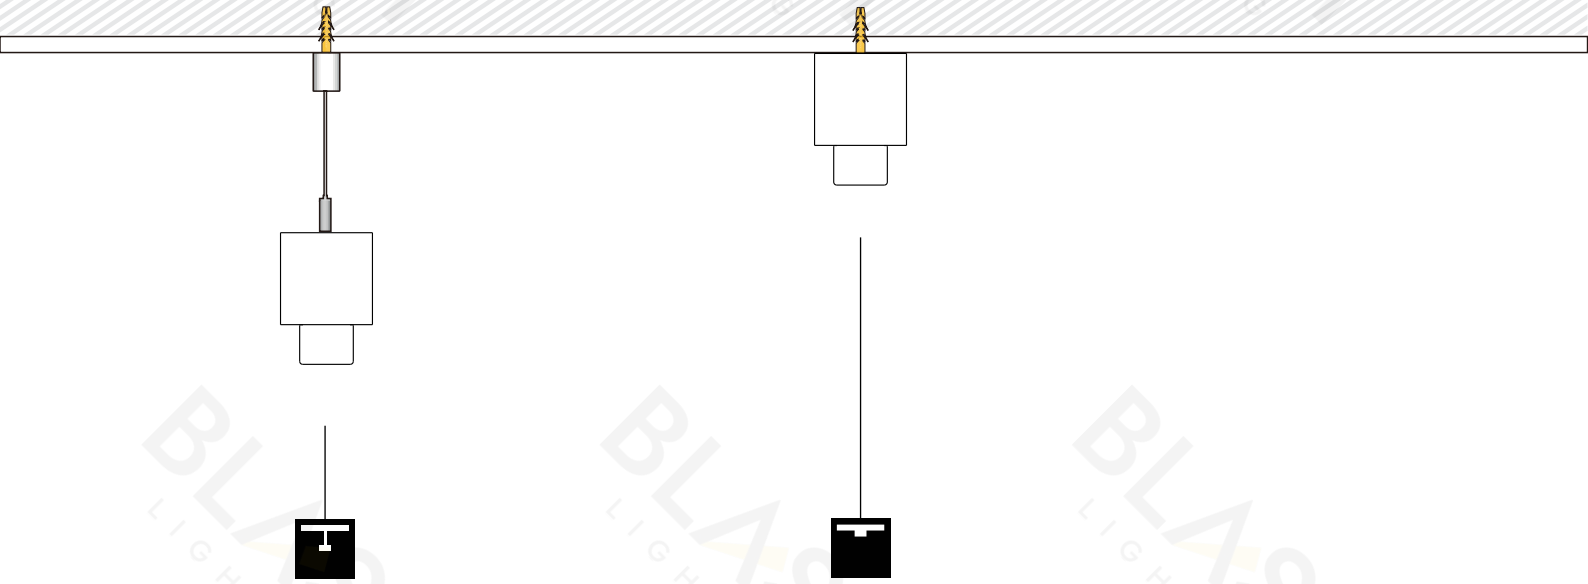

Standard

LED | IP20 | 220-240V 50/60Hz | CE | RoHS compliant

- **Mounting:**
  Surface or wall-mounted; in-line mounting possible with through-wiring and automatic connector (on request)
- **Lighting source:**
  Built-in LED module(s)
- **Electrical equipment:**
  LED driver
- **Housing:**
  White lacquered aluminum; end-caps made of iron
- **Optical system:**
  PC cover with high light transmission (> 92%)

- **Applications**
  Supermarket
  Warehouse
  Workshop
  Public Area Indoor

Free splice extension

Light effects

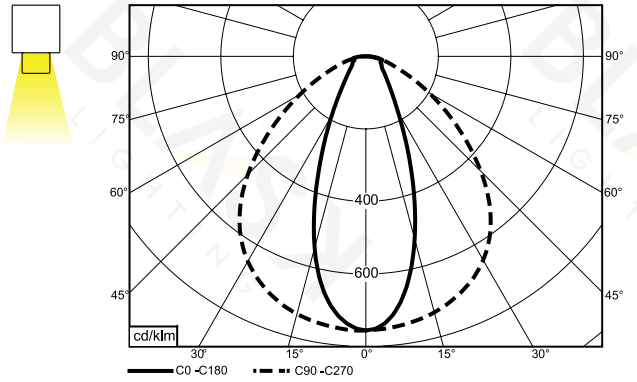

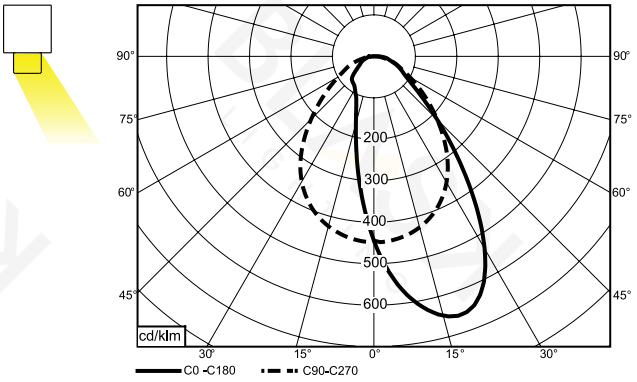

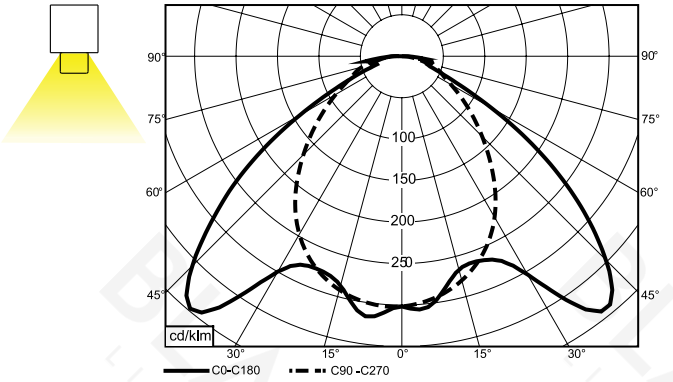

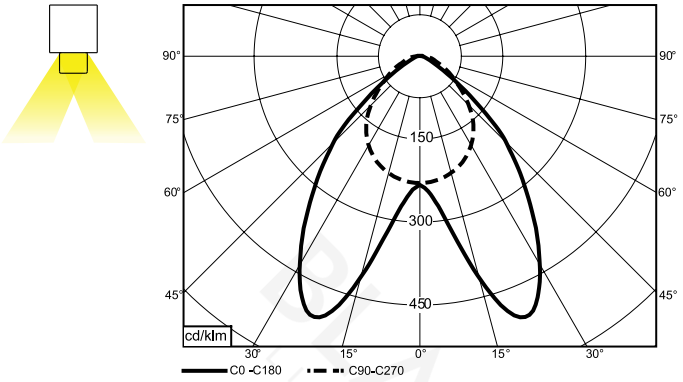

Installation diagram (wiring)

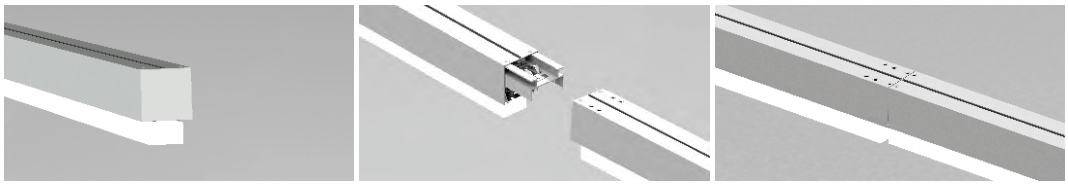

Applications

- Supermarket
- Warehouse
- Workshop
- Public Area Indoor

INACLI30491

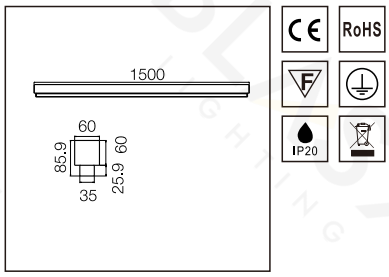

Power	62W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	6820 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30492

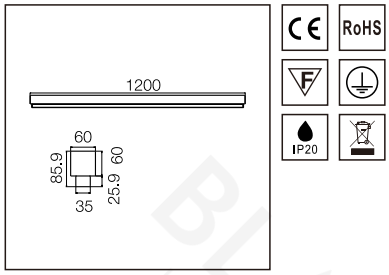

Power	60W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	6600 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30493

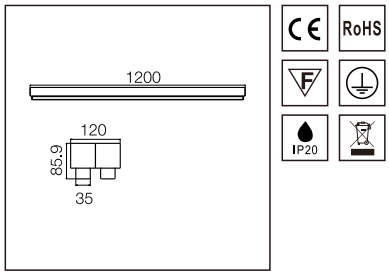

Power	120W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	13200 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30494

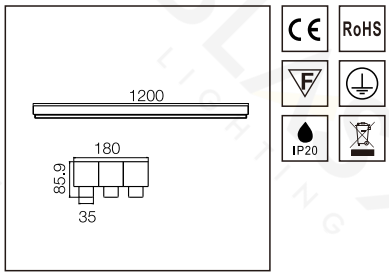

Power	180W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	19800 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30495



Power	240W
CCT	3000K 4000K 6500K
Voltage	AC220-240V
Output Lumens	26400 lm
CRI	>80
Material	Aluminum
Color	White / Black
Life	50 000 H
Warranty	5 Years

INACLI30496



Material	Aluminum
Color	White / Black

INACLI30497





Material	Aluminum
Color	White / Black

INACLI30498



Material	Aluminum
Color	White / Black

INACLI30499

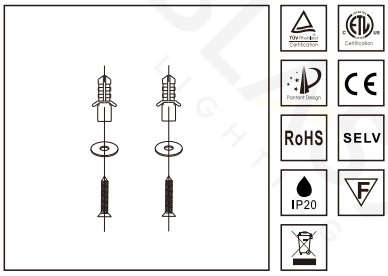

Material	Iron
Color	Chrome

INACLI30500

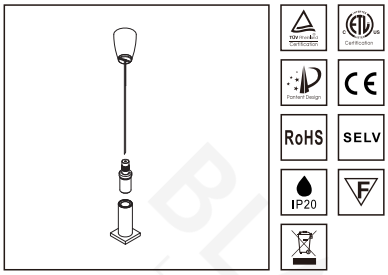

Material	Aluminum
Color	Black

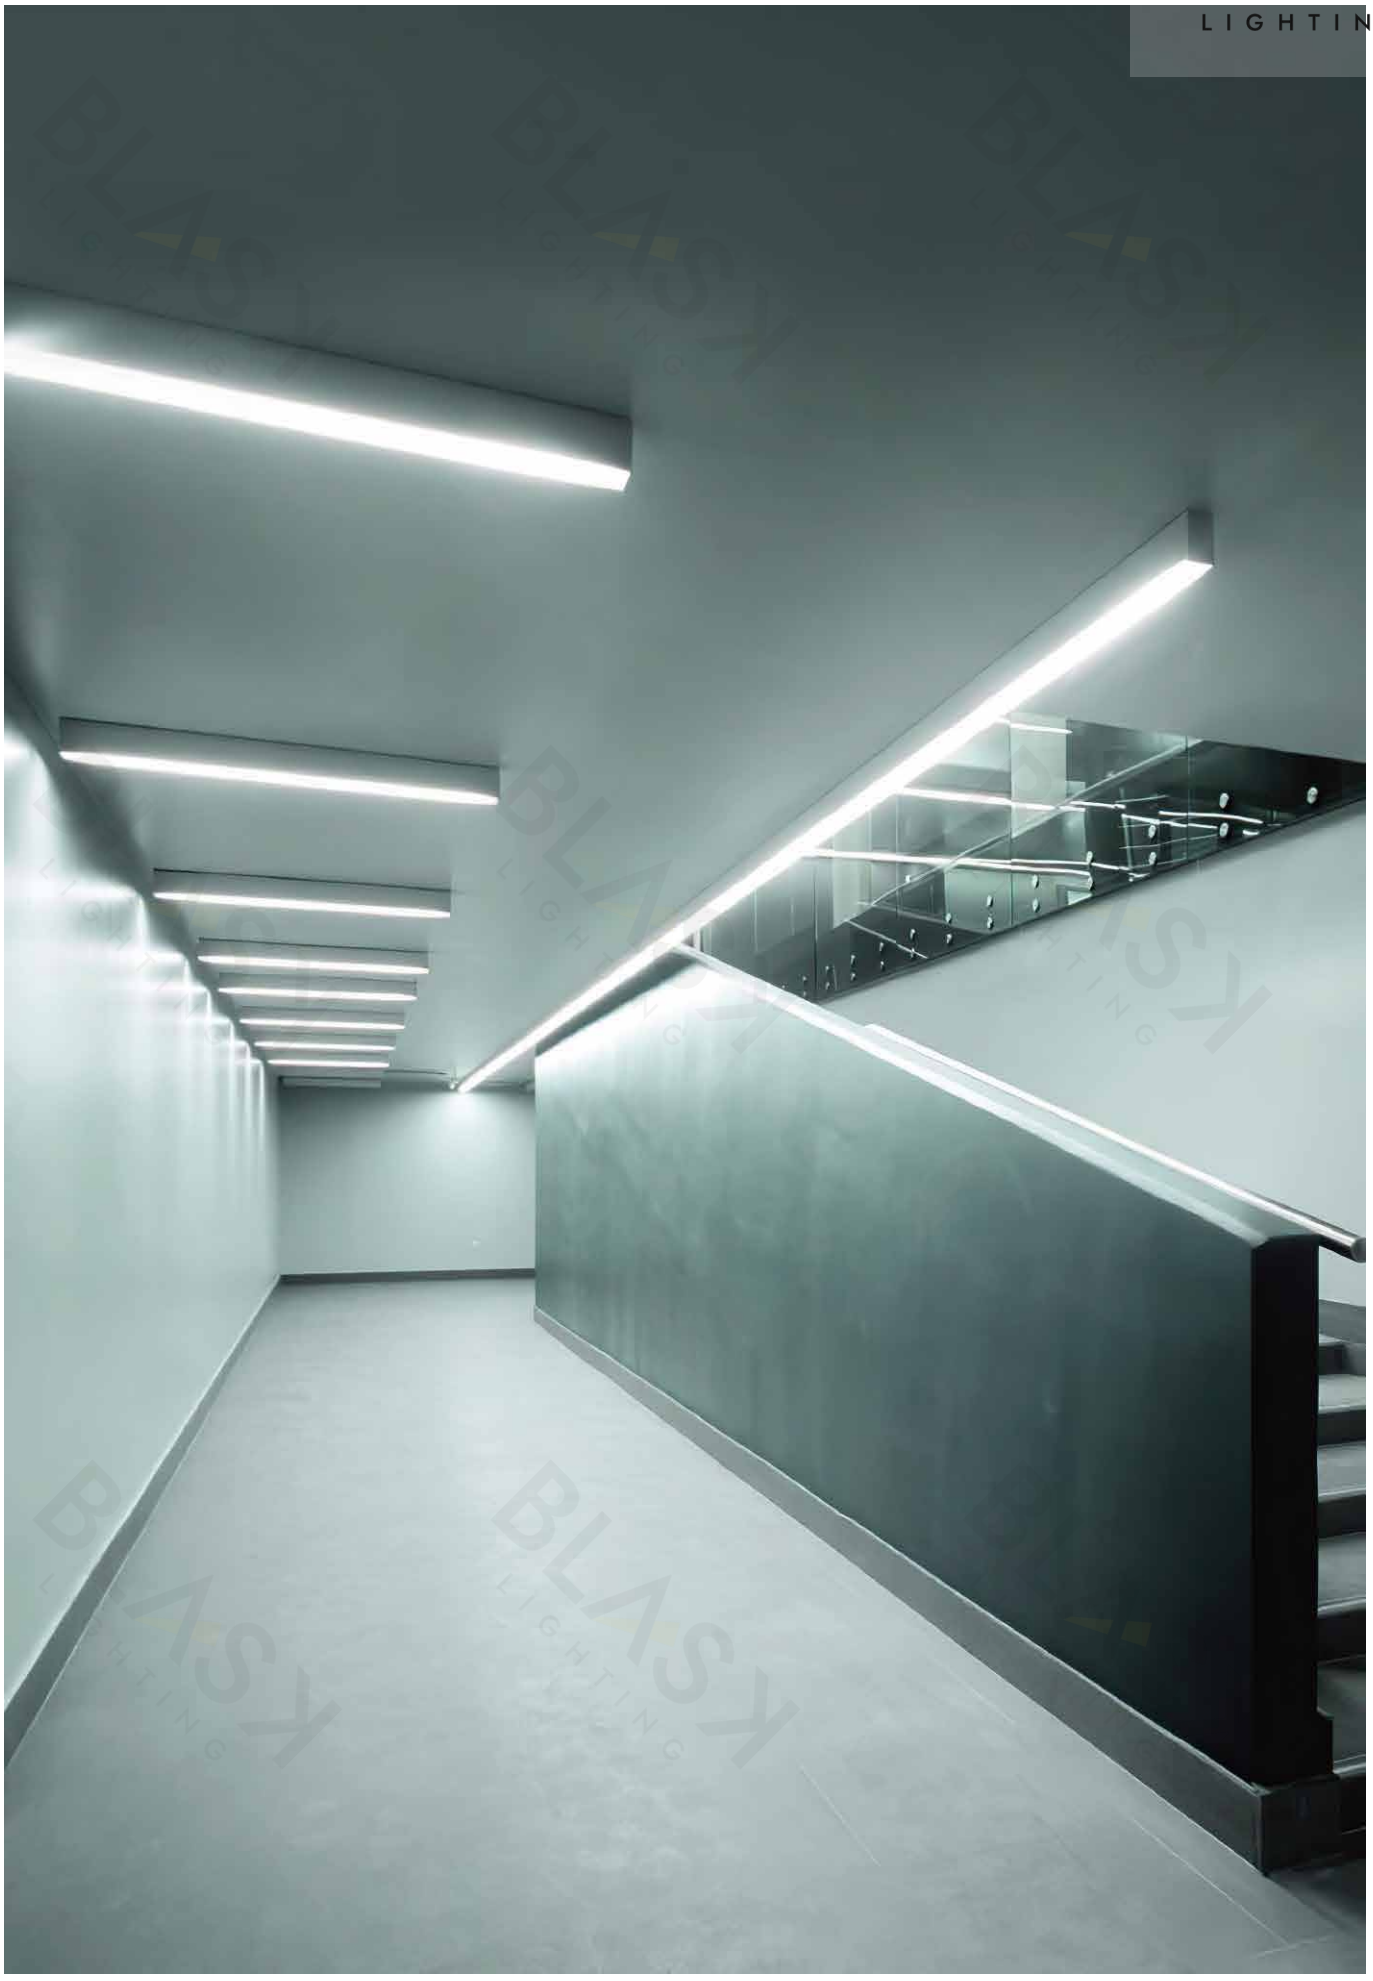

LED linear light profile can be used for general lighting to wallwash or accent lighting, from office to public, educational, retail and many other projects.

LED linear light enables you to create an endless line of light without shadows by use of LED or T16 lamps, either seamless or by system with overlap lamps. All light modules guarantee high efficiency, low energy and ease of use.

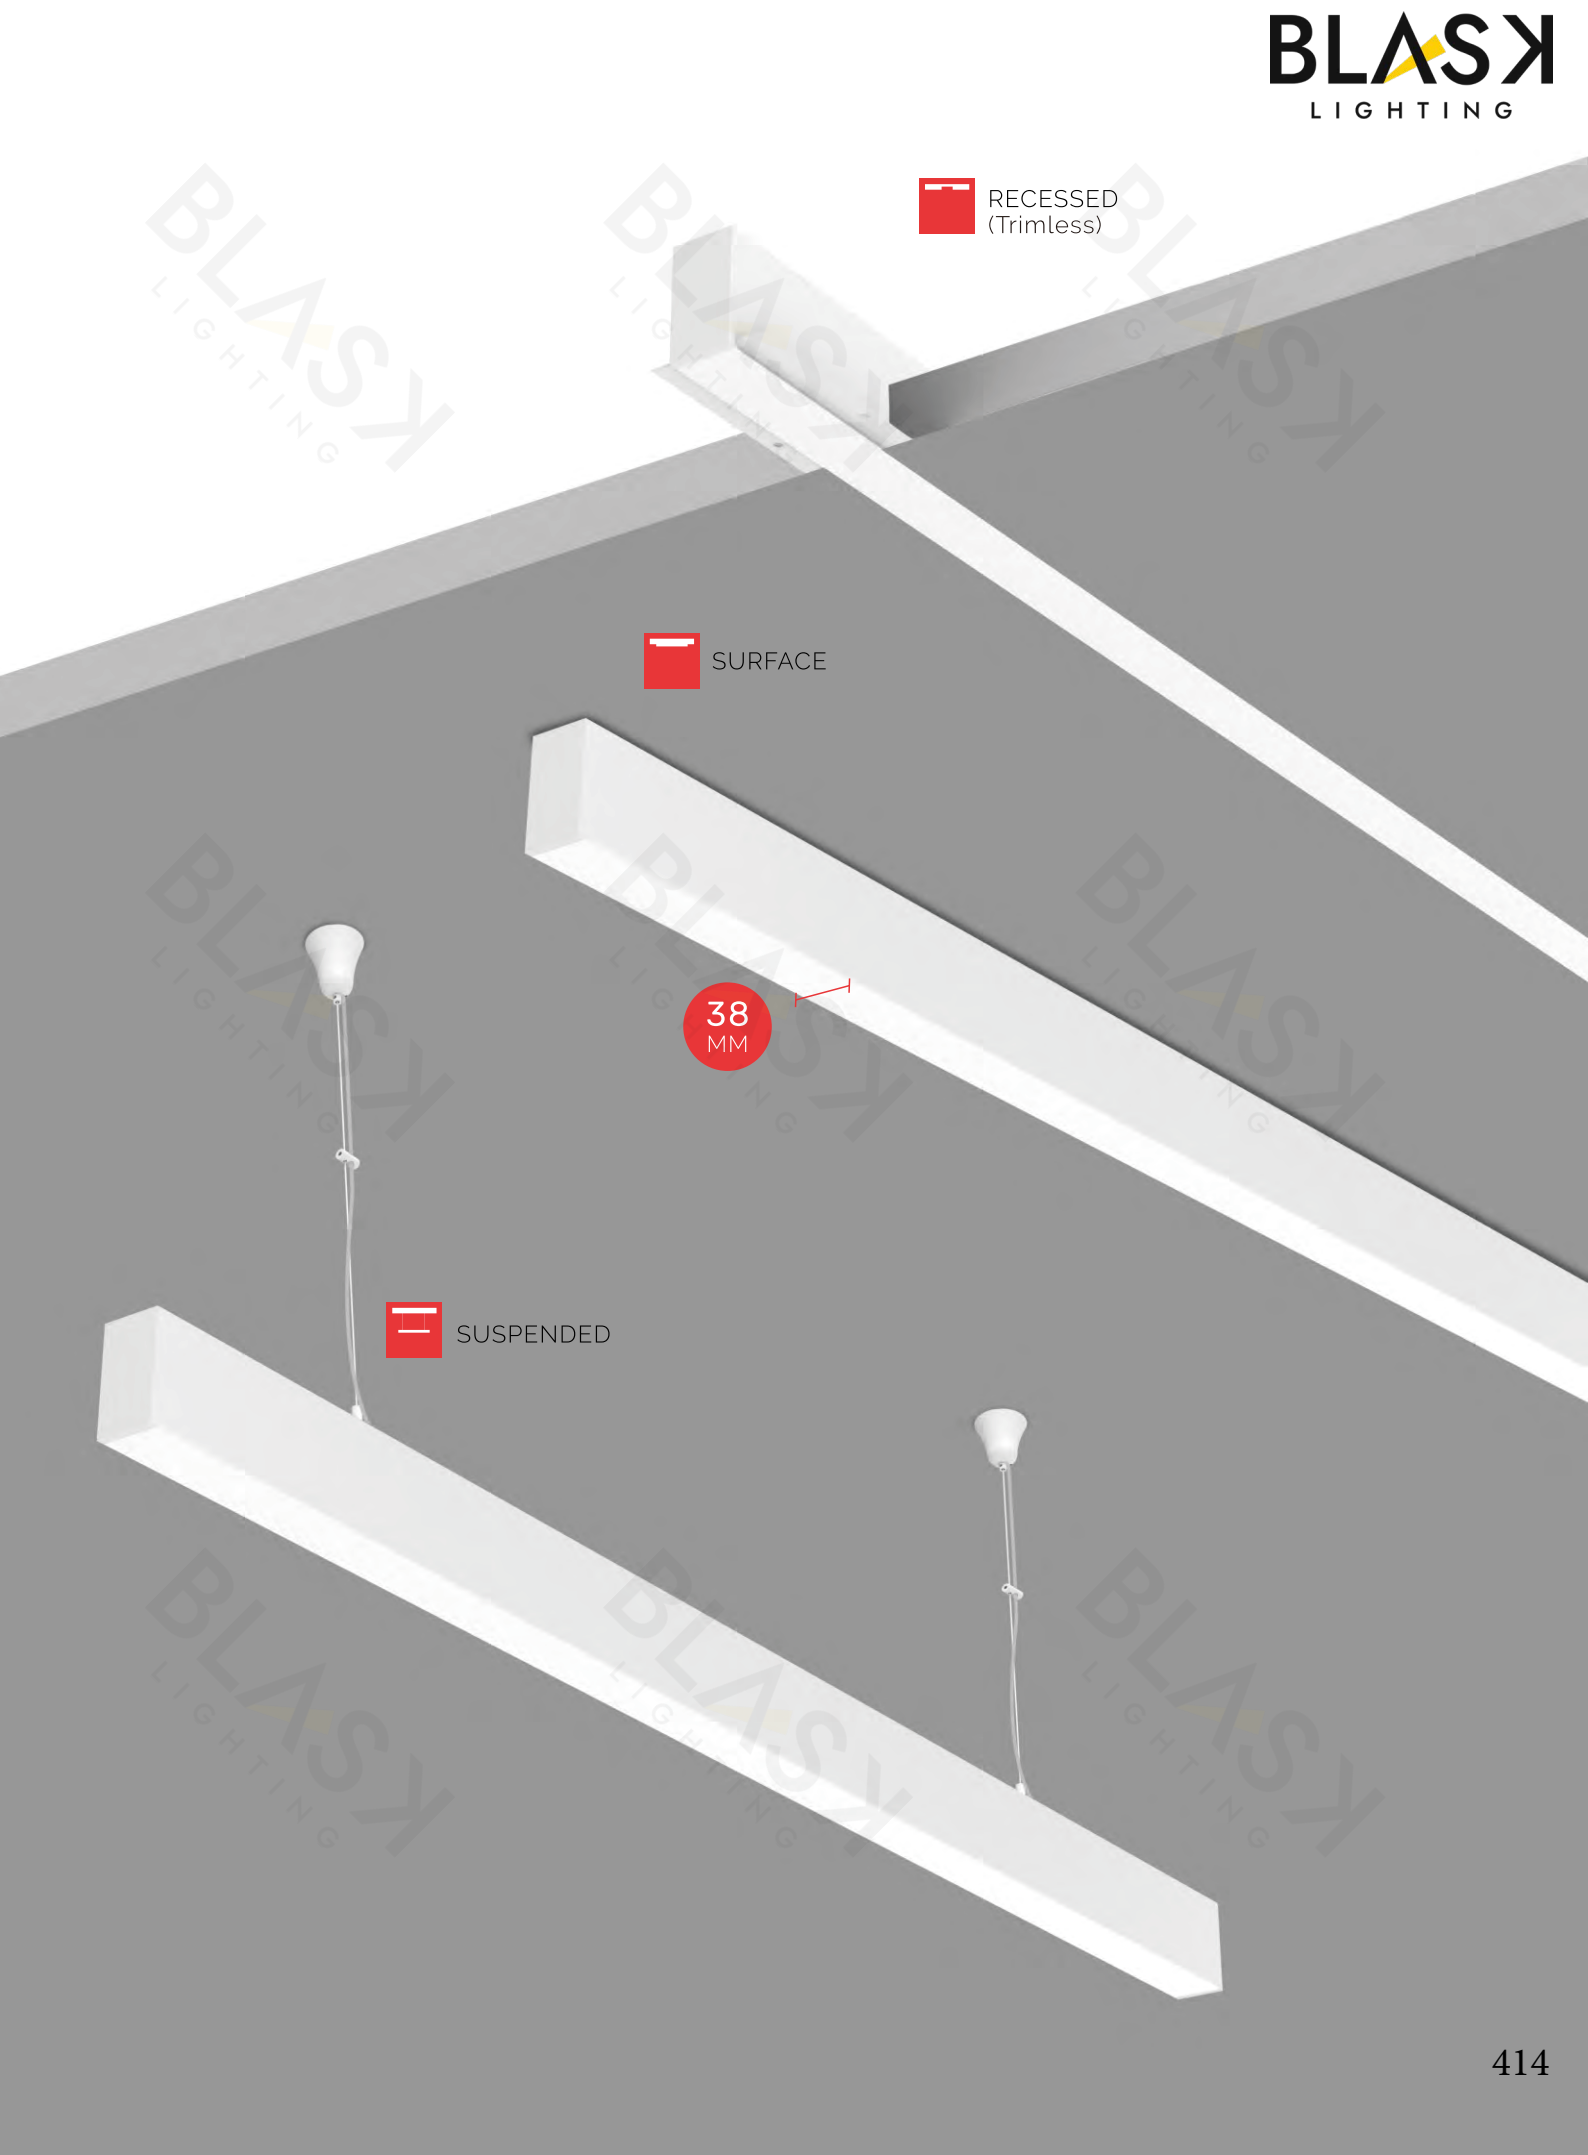
RECESSED
(Trimless)
SURFACE
38
MM
SUSPENDED

Corner

The addition of the plane right angle and the vertical corner device can enrich the installation style of the line lamp, and can also adapt to more installation environment requirements.

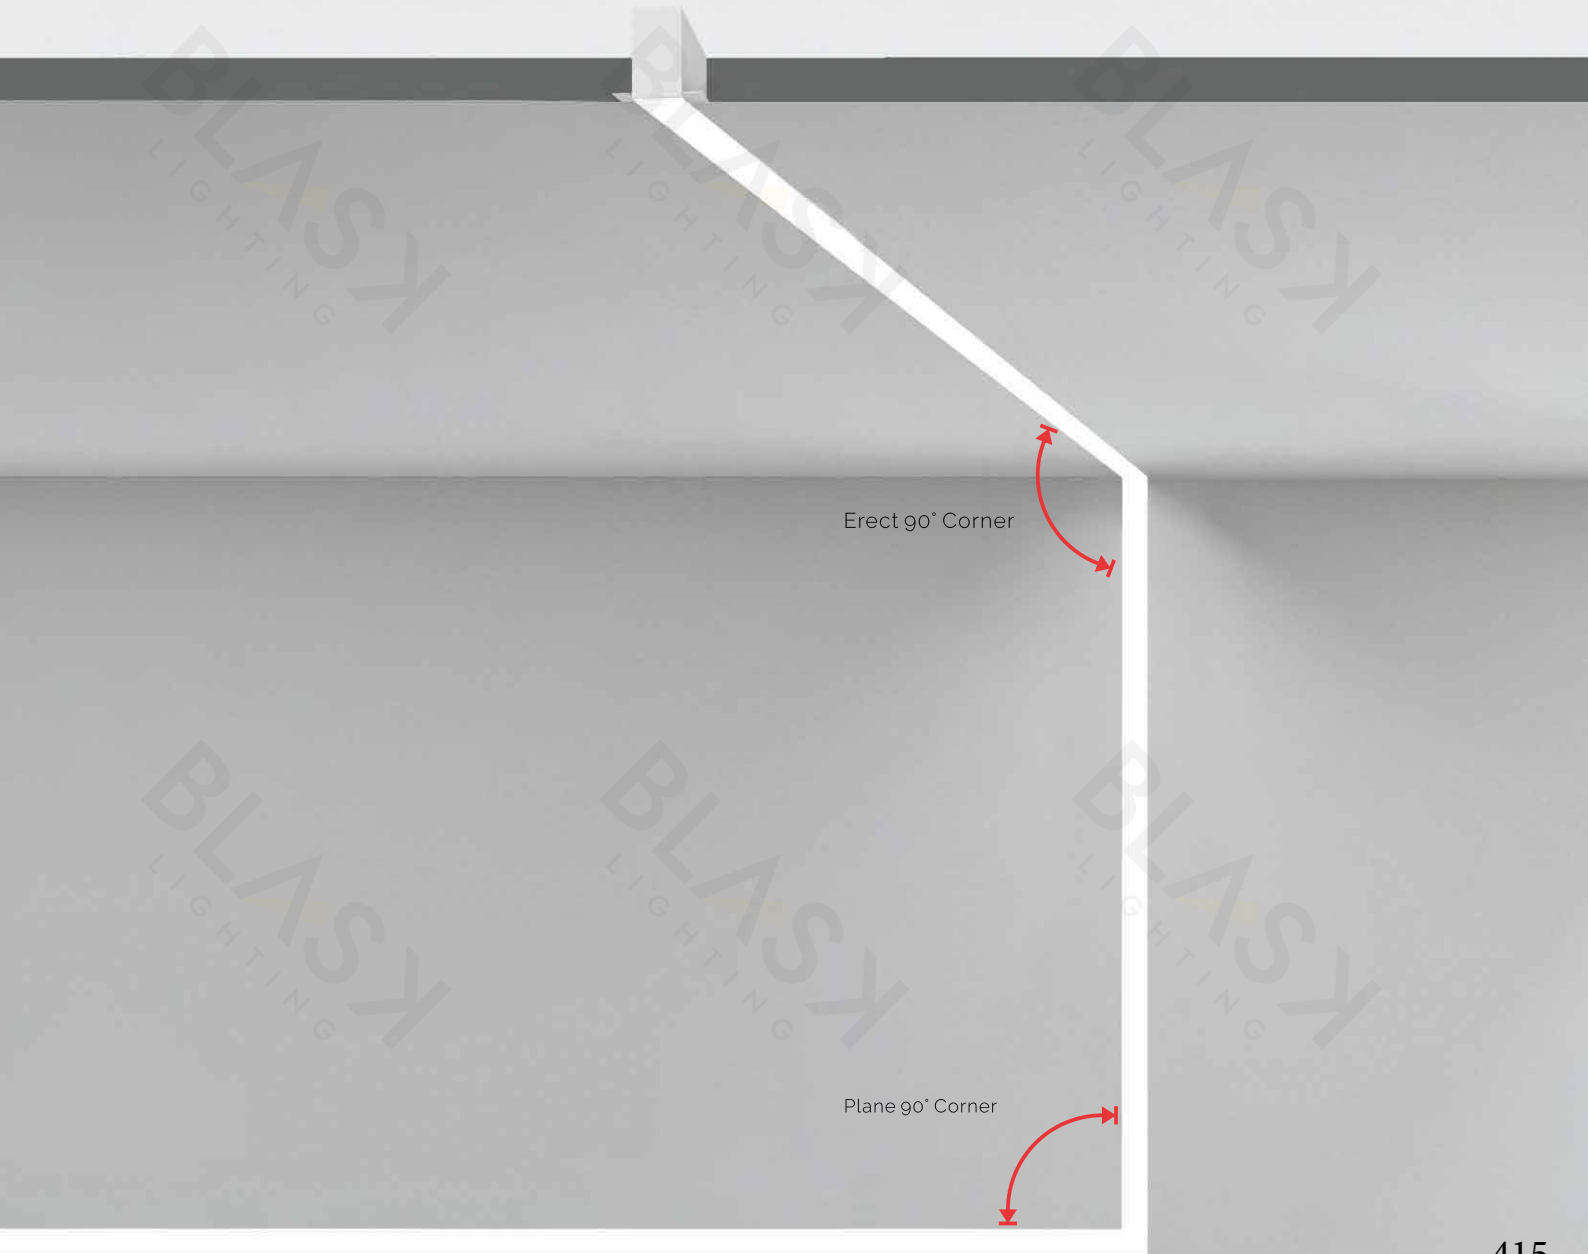

LED LINEAR LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
AC220-240V 50/60Hz
5-year warranty

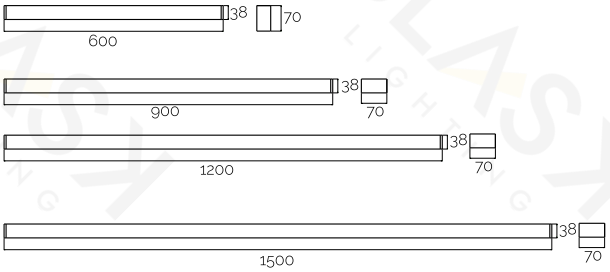

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30501	20W	1600 lm	3000K/4000K/6500K	120°
INACLI30502	30W	2400 lm	3000K/4000K/6500K	120°
INACLI30503	40W	3200 lm	3000K/4000K/6500K	120°
INACLI30504	50W	4000 lm	3000K/4000K/6500K	120°

LED LINEAR LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
AC220-240V 50/60Hz
5-year warranty

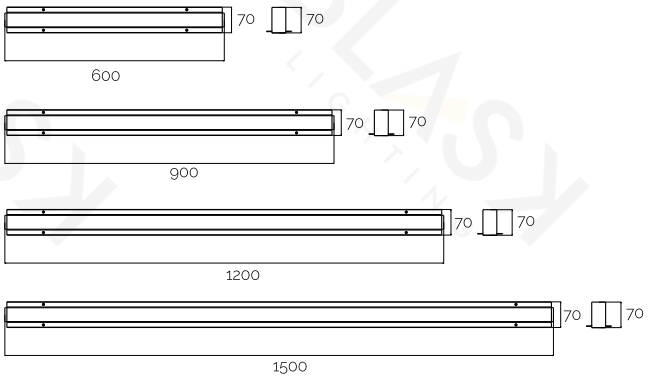

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30505	20W	1600 lm	3000K/4000K/6500K	120°
INACLI30506	30W	2400 lm	3000K/4000K/6500K	120°
INACLI30507	40W	3200 lm	3000K/4000K/6500K	120°
INACLI30508	50W	4000 lm	3000K/4000K/6500K	120°

LED LINEAR LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
AC220-240V 50/60Hz
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30509	20W	1600 lm	3000K/4000K/6500K	120°

LED LINEAR LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
AC220-240V 50/60Hz
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30510	20W	1600 lm	3000K/4000K/6500K	120°

LED LINEAR LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
AC220-240V 50/60Hz
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30511	20W	1600 lm	3000K/4000K/6500K	120°

LED LINEAR LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
AC220-240V 50/60Hz
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30512	20W	1600 lm	3000K/4000K/6500K	120°

INACLI30513



Material	Aluminum
Color	White / Black

INACLI30514





Material	Aluminum
Color	White / Black

INACLI30515

Material	Iron
Color	White / Black

INACLI30516

Material	Aluminum
Color	White / Black

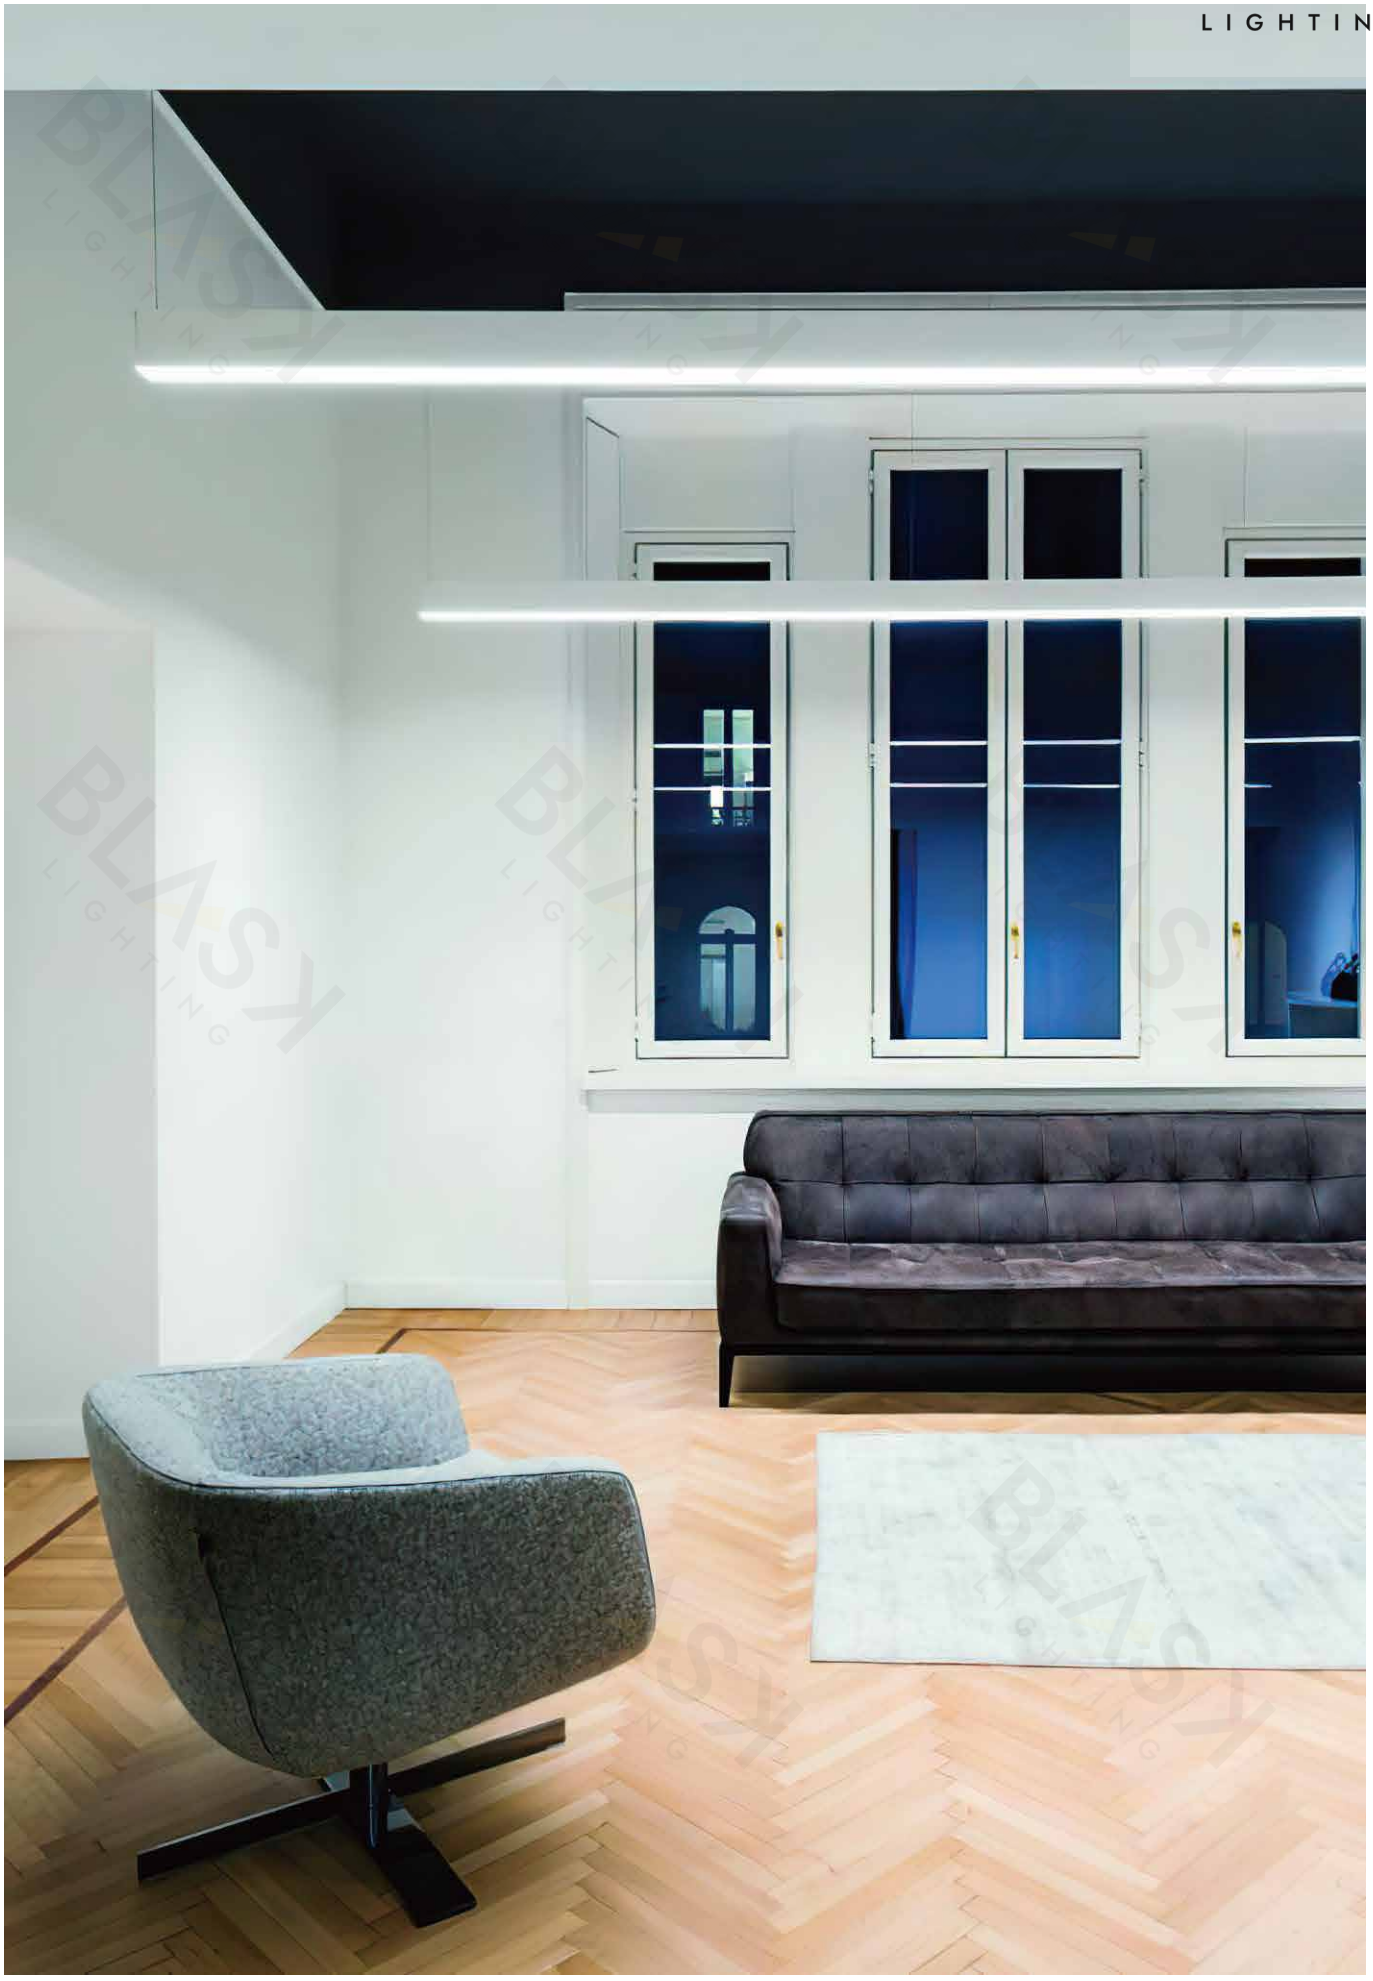

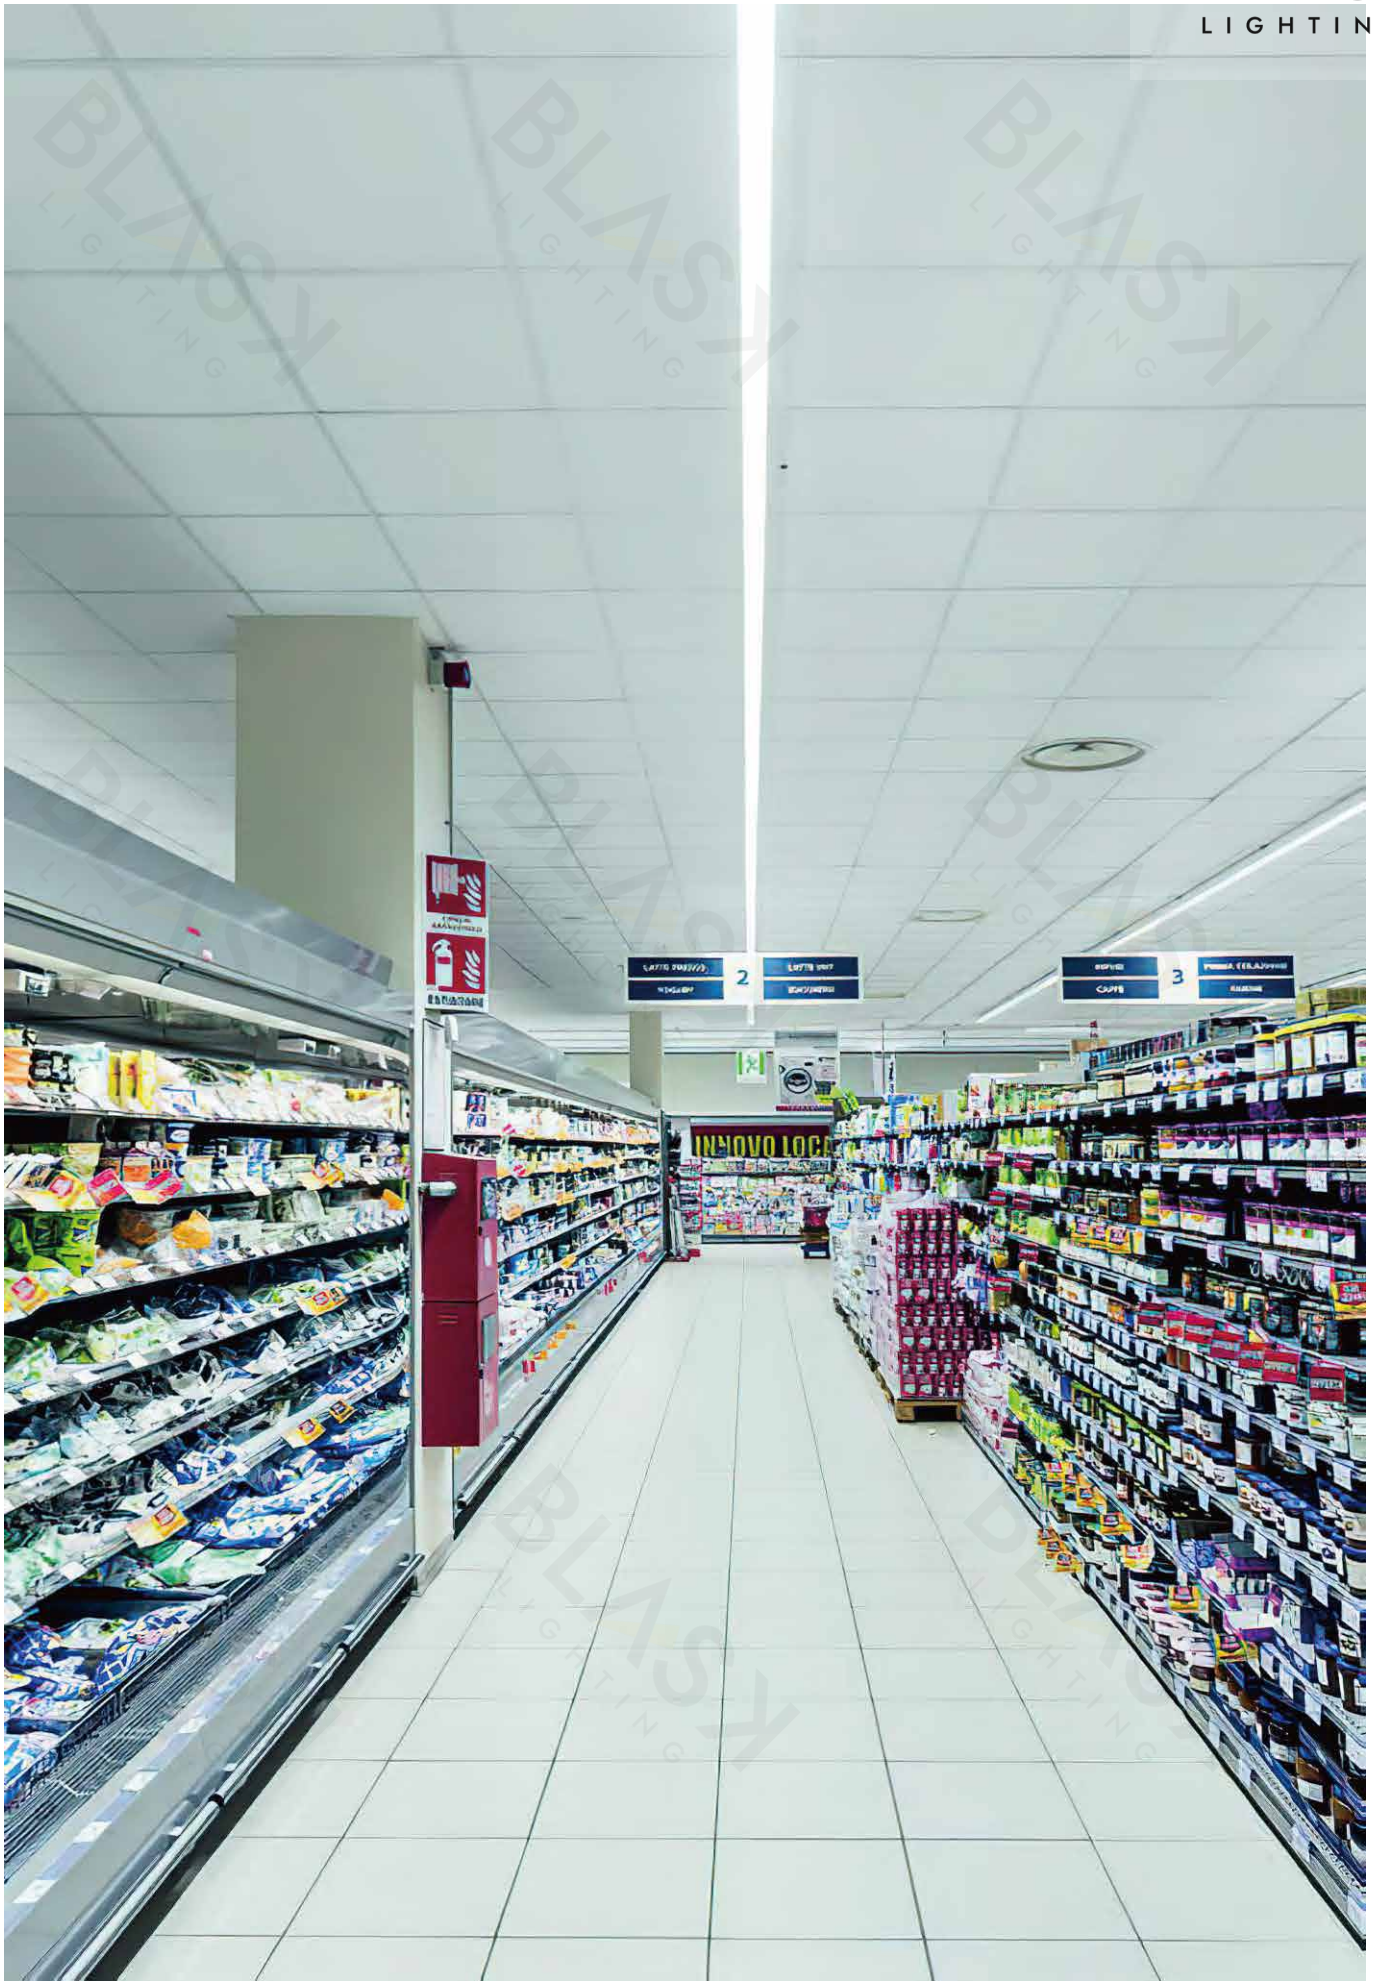
2
3

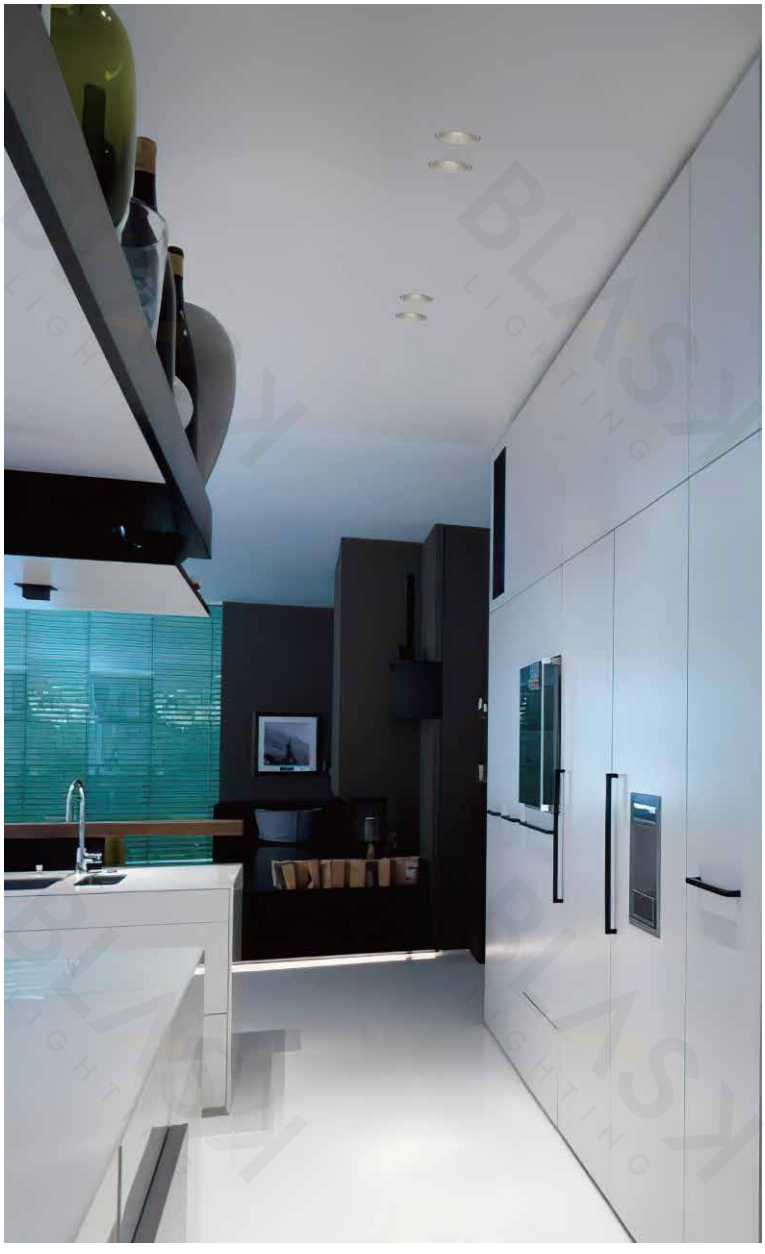

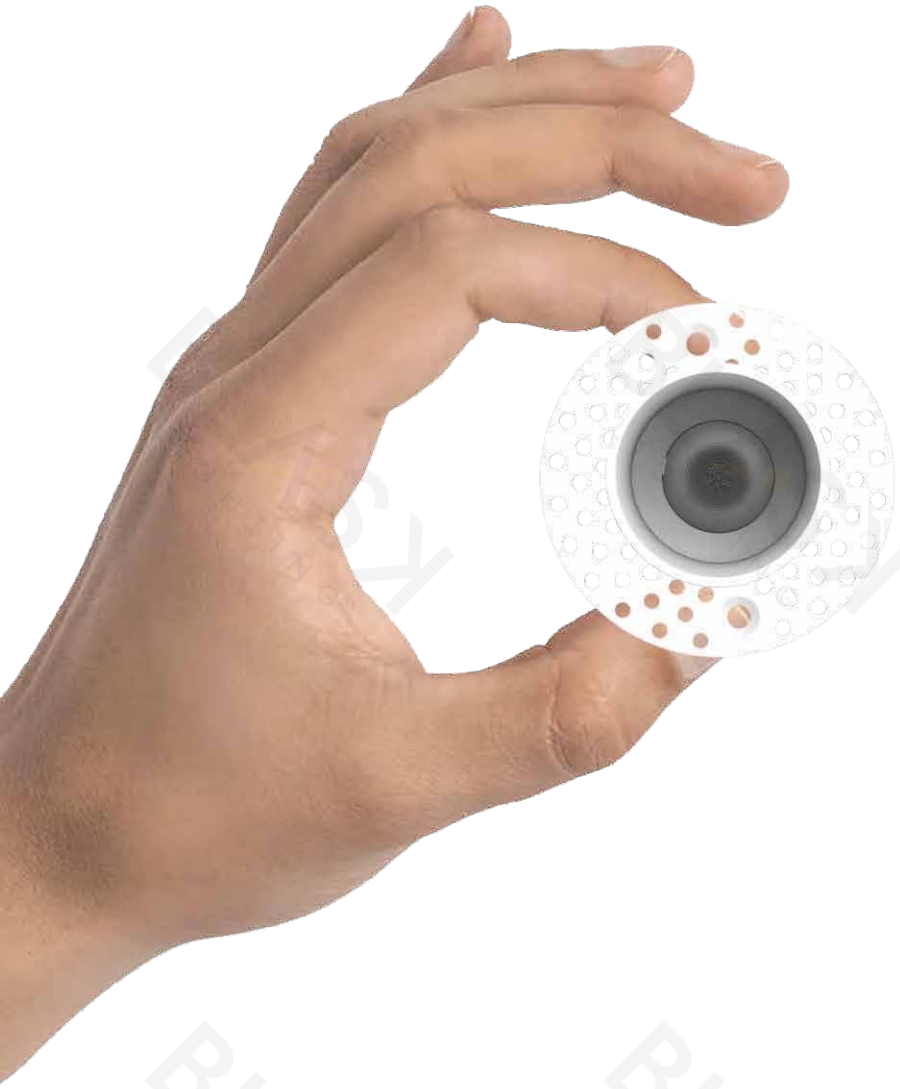

MINI DOWNLIGHT

HIGH QUALITY LIGHT

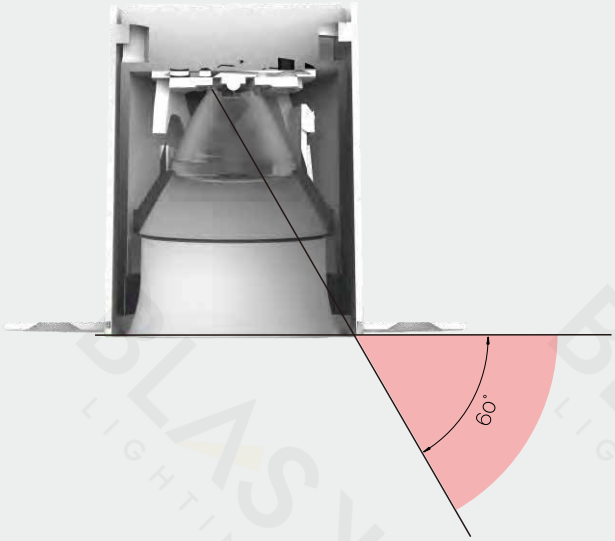
60°

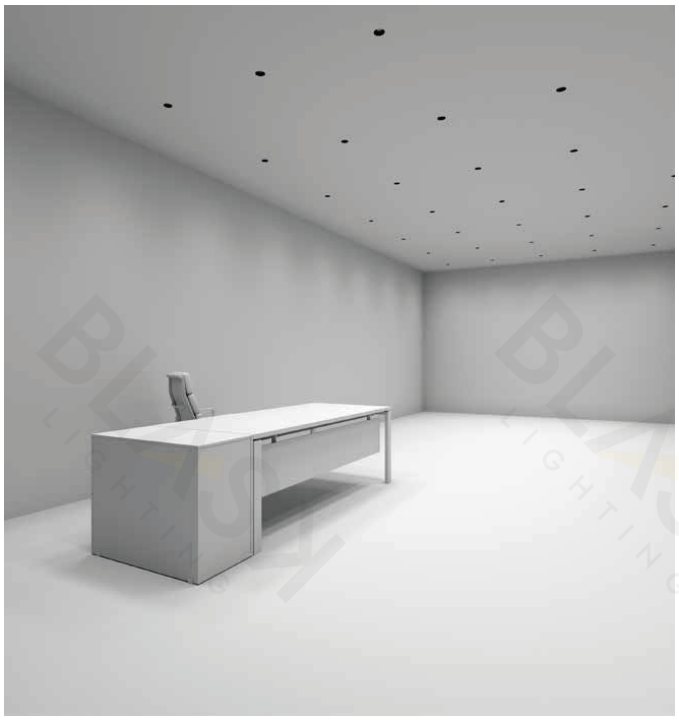

VARIOUS OPTICAL LENSES TO CHOOSE

4 different beam angle lenses, each of them is developed for specific scenarios.
Excellent optical control, whether it is a strong beam or a diffuse lighting effect, there is no stray light.

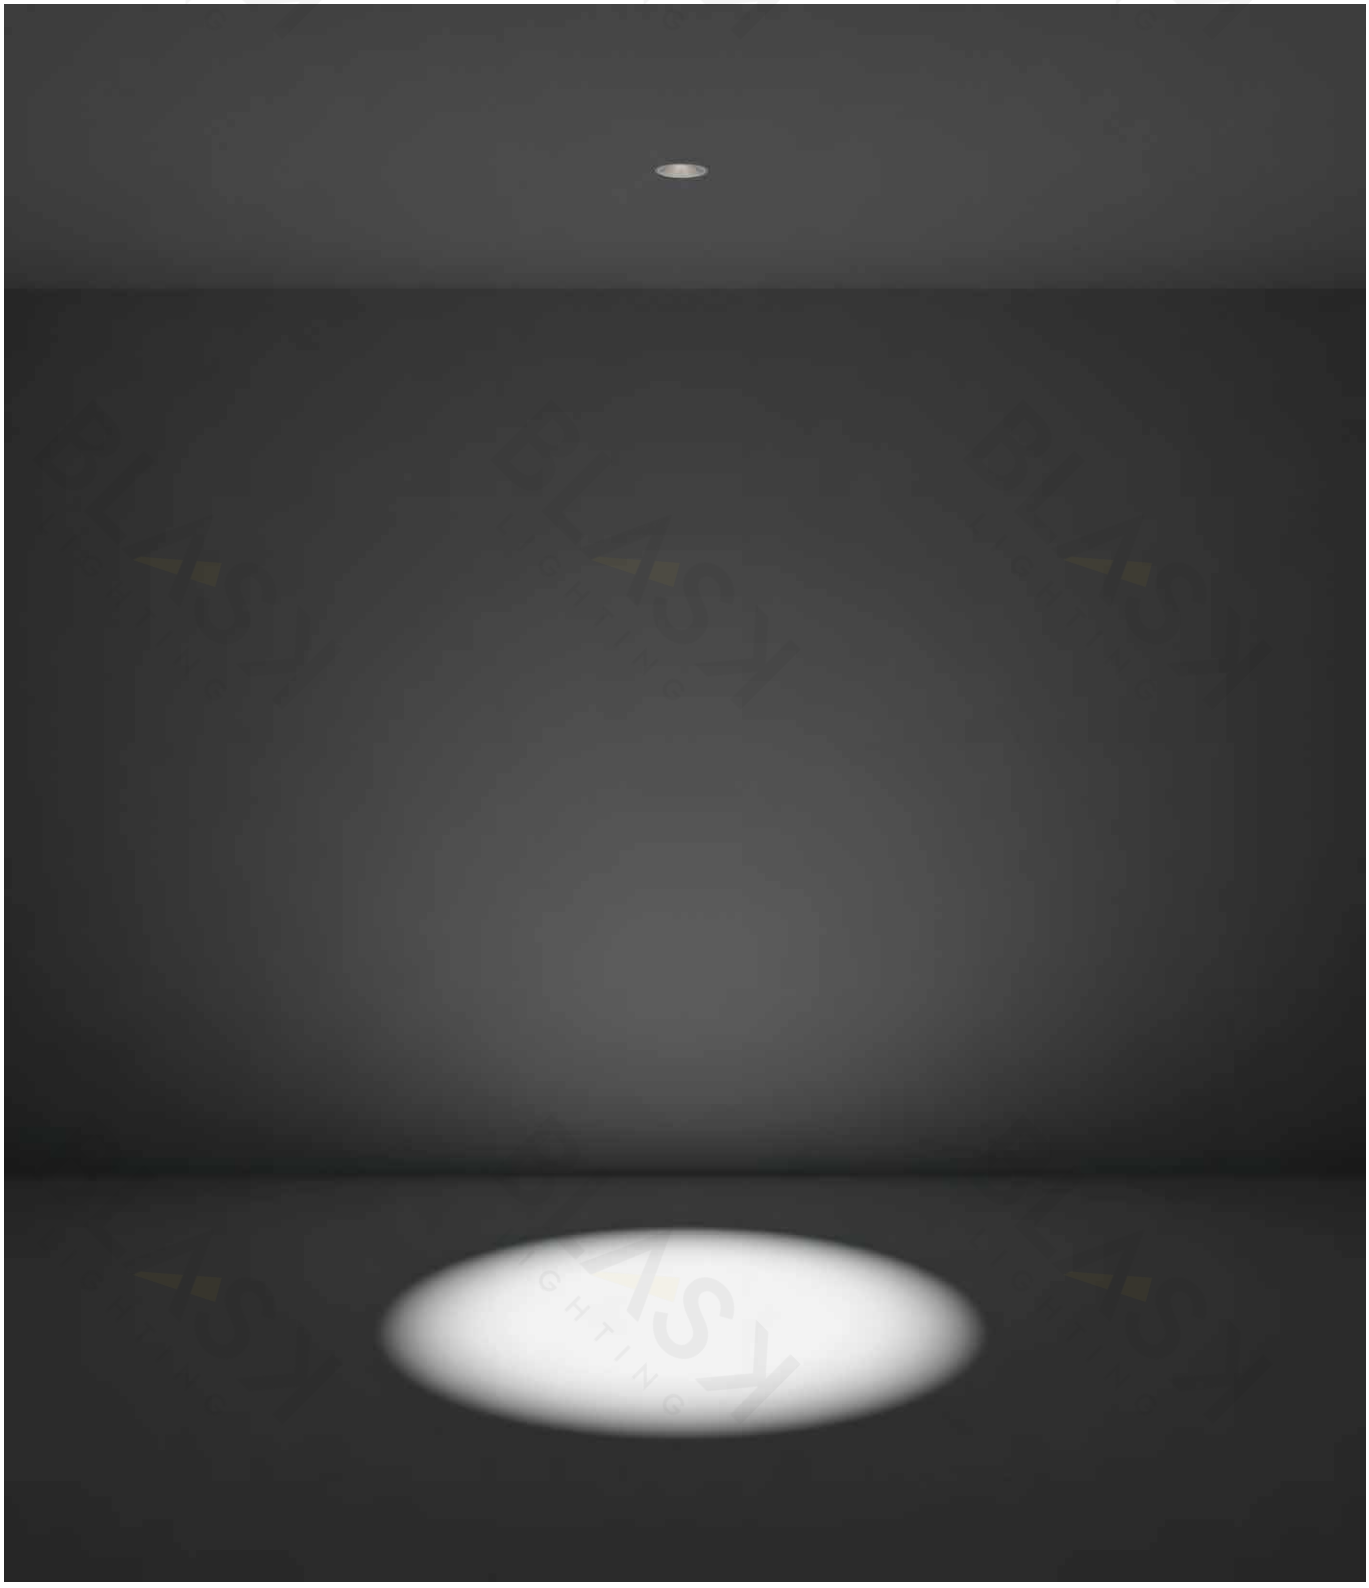

HIGH QUALITY LIGHT

EASY INSTALLATION

1.Cut-out

2. Fix the concealed embedded parts with screws

3.Make plaster covers the frame of embedded parts



Make plaster before

Make plaster after

4. Connect the external drive to the power cord and place the drive in the ceiling

5. Insert the lamp body into the embedded part and rotate it to fix.

6. Turn on the light

EASY MAINTENANCE

1. Rotate to remove the lamp body or driver

2. You can remove and replace the power supply and lamp body at any time, just press them in and put them back in place without damaging the surface appearance of the ceiling.

MODULAR LIGHT

PRODUCT FEATURES

Aluminum lamp body
Trimless installation
Front disassembly design
IP20
CRI>90 / Full spectrum
UGR<6
AC220-240V 50/60Hz
5-year warranty
Light body color: Black, White
Optical anti-glare cover: Black,White

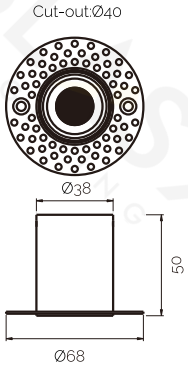

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30517	3W	330 lm	3.3W	240 lm	3000K/4000K/6500K	15° / 24° / 38° / 50°	Ø68	Ø40

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90 / Full spectrum
UGR<6
AC220-240V　50/60Hz
5-year warranty
Light body color: Black, White
Optical anti-glare cover：Black,White

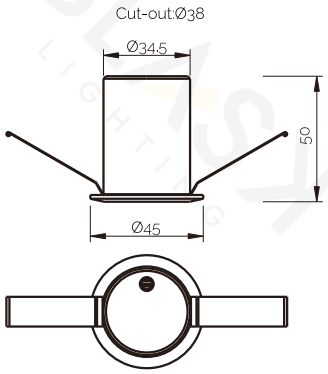

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30518	3W	330 lm	3.3W	240 lm	3000K/4000K/6500K	15° / 24° / 38° / 50°	Ø45	Ø38

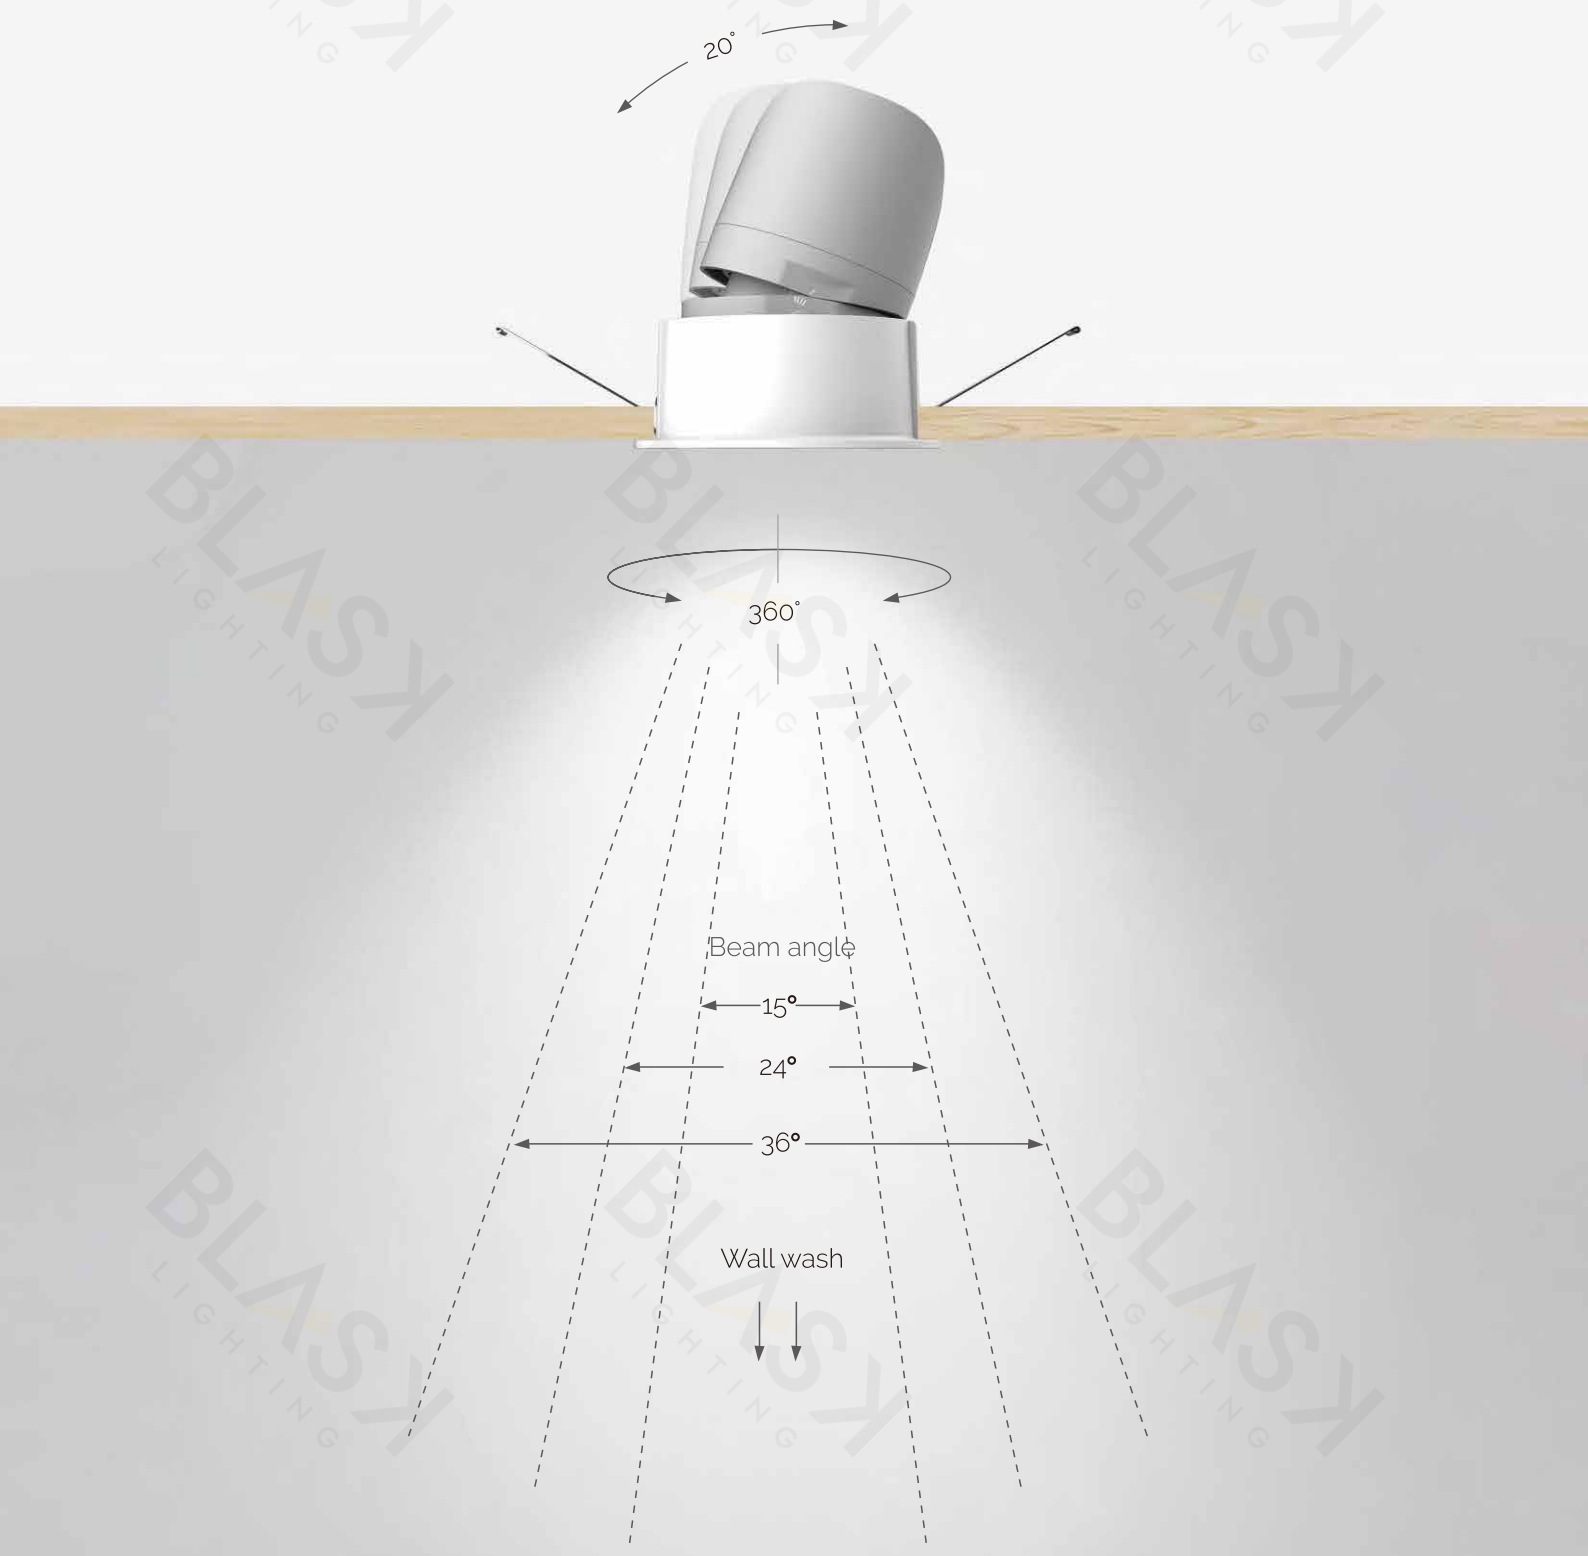
20°
360°
Beam angle
15°
24°
36°
Wall wash

Front disassembly design

Convenient

Humanized installation design considerations, all series of products support front-mounted disassembly, which is convenient for maintenance and testing.

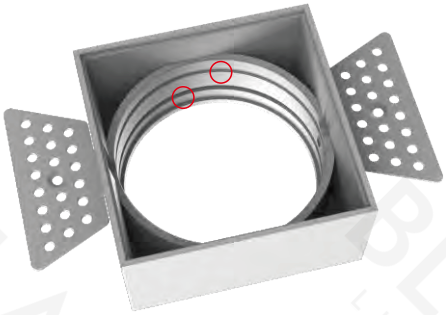

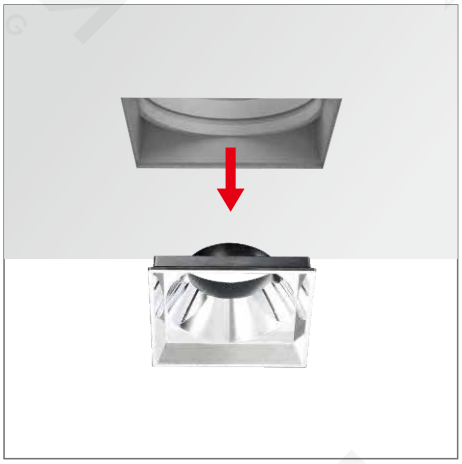

The concealed mounting bracket can be adjusted up and down to adapt to different installation methods.



Installation of concealed bracket adjustment on



Installation of concealed bracket adjustment under

HEALTHY LIGHT

FLICKER
FREE

High display index,
high color consistency
Ra>90,SDCM<1.5

Optional
- Ra>90
- Full spectrum

Application of full spectrum lamp bead products

American bridgelux. Thrive series natural spectrum series lamp beads, close to the natural spectrum of sunlight, fully care for human health and bring high-quality sunlight into the house.Really create a people-oriented healthy lighting environment.

The spectrum designed by Bridgelux can accurately simulate natural light the spectral characteristics are increased in an efficient, economical and safe waystrengthen human health.

- Life/family
- Work/study
- Rest/recovery
- Leisure/entertainment
- Healthy growth

Bridgelux Thrive uses special chip, phosphor and packaging technology to accurately simulate natural spectrum

Features	Advantages
The spectrum is carefully designed to accurately simulate natural light Reduce the blue light intensity	**Complete and consistent spectrum, with fewer abrupt peaks, which is closest to natural light**
Natural and vivid color reproduction ability	**Mean value of CRI (R1-R15) is 98, excellent TM-30 grease standard (R1-R99), and R** (forced Truth) 96-98, R_9 saturation 99-101
The most efficient natural spectrum in the industry	The light efficiency is as high as 132lm/w, which is more environmentally friendly and energy-saving, and reduces the cost of public utilities and the environment
Economical natural spectrum, optimizing human health	Accelerate the comprehensive popularization of natural spectrum
There is no ultraviolet light harmful to human body or articles	Improve reliability and service life
Full platform design, including COB, SMD, dual color temperature module,wait for multiple options	Achieve design flexibility and product color consistency

Matching with Nature: Average Spectral Difference

- Bridgelux has created a new index, which eliminates the uncertainty of comparing LED light sources with natural light
- The value of average spectral difference (ASD) comes from the ratio of different spectra to natural spectra in the visible range
- Bridgelux Thrive ASD value is the lowest, which is closest to natural light
- By comparison, we find that the ASD index of other LED light sources exceeds our ThrvieASD value by 100% to 300%

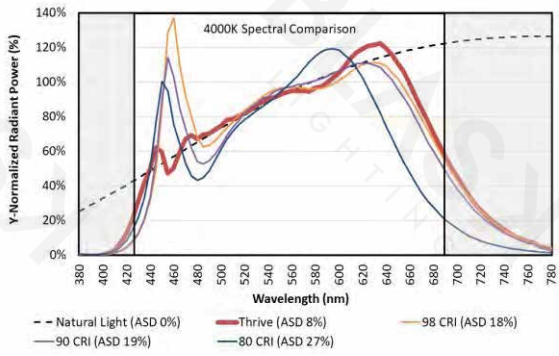

Average spectral difference: 3000K comparison

Wavelength coverage	Thrive	80 CRI	90 CRI	98 CRI
425-690 nm Visible spectrum	9%	28%	20%	18%
425-475 nm **Blue light spectrum**	8%	44%	43%	48%
475-530 nm Cyan spectrum	5%	19%	14%	14%

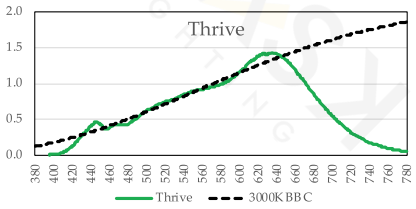

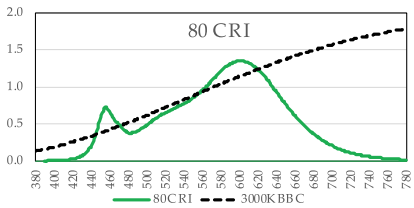

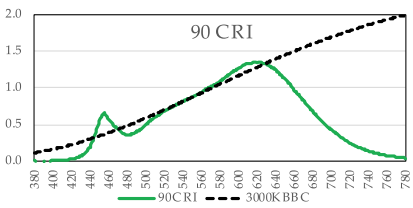

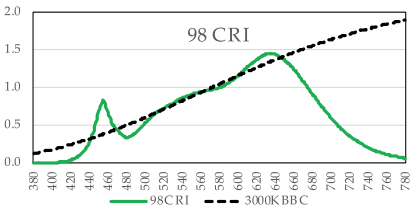

·Over the full range of 425-690 nm Thrive is within 9% of natural light where standard sources may deviate by 18-30% or more(2-3X)
·Over the blue range of 425-475 nm Thrive is within 8% of natural light where standard sources may deviate by 40-50% or more(4-5X)
·Over the cyan range of 475-530 nm Thrive is within 5% of natural light where standard sources may deviate by 14-20% or more(3-4X)

Understanding of artificial light source

·By enhancing or inhibiting blue light excitation, it can regulate the secretion of melatonin
  ·This can affect the individual's alertness or sense of tranquility
·Will unnatural light sources have long-term effects on humans due to the huge difference in the spectrum? Not yet known
  ·And will remain unknown until long-term research
·Bridgelux's philosophy: copying is safe and beneficial to human natural light
  ·Will too much or too little blue light overflow affect human health? This requires long-term inspection and testing

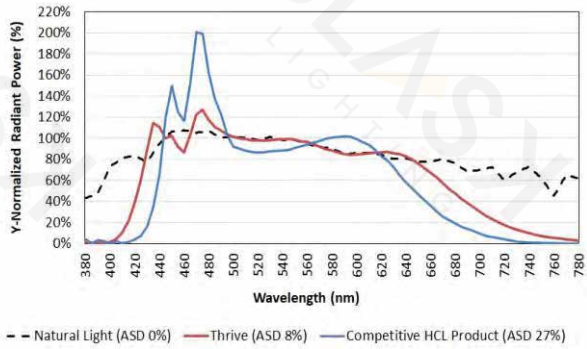

Comparing the spectrum of the 6500k D65 standard light source with our Thrive 6500k product, we can see that the blue part of the D65 standard light source is far beyond the natural spectrum.

Full spectrum application market

- For classroom lighting, it is necessary to protect eyesight, reduce the harm of blue light, help students improve their learning efficiency, and even apply different learning modes, which requires products to reduce blue light content, high color fidelity, high saturation and continuous spectrum.
- For office lighting, it is necessary to have the functions of high alertness, high apparent finger and physiological rhythm adjustment, to meet the needs of office workers for simplicity, efficiency, comfort, softness, strong color rendering, less blue light, and adjusting the brightness of work and rest.
- Household lighting is mainly warm and white, which can simulate continuous spectrum, reasonable spectral energy distribution can affect the level of melatonin, improve room illuminance, improve brightness uniformity, warm color temperature, enhance color rendering, and reduce glare and light mutation.
- In addition, the lighting used in hospitals is soft and comfortable, which can not only regulate sleep, but also simulate daylight; the lighting used in restaurants has high design, adjustable color temperature and high color rendering, which can make guests feel private and comfortable.

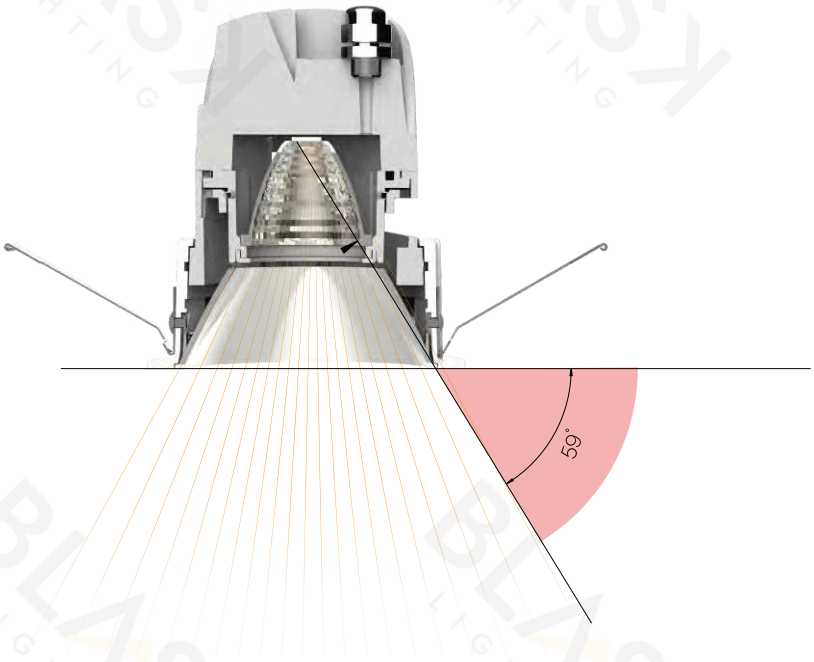

Black light technology

UGR<6

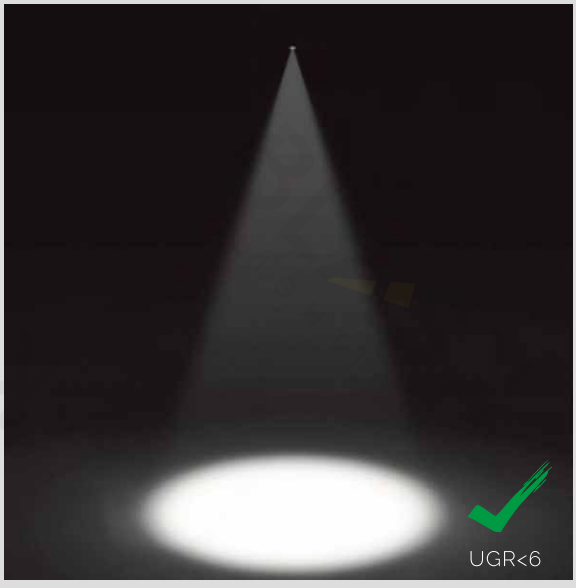

INTELLIGENT
InCare
Smart IoT

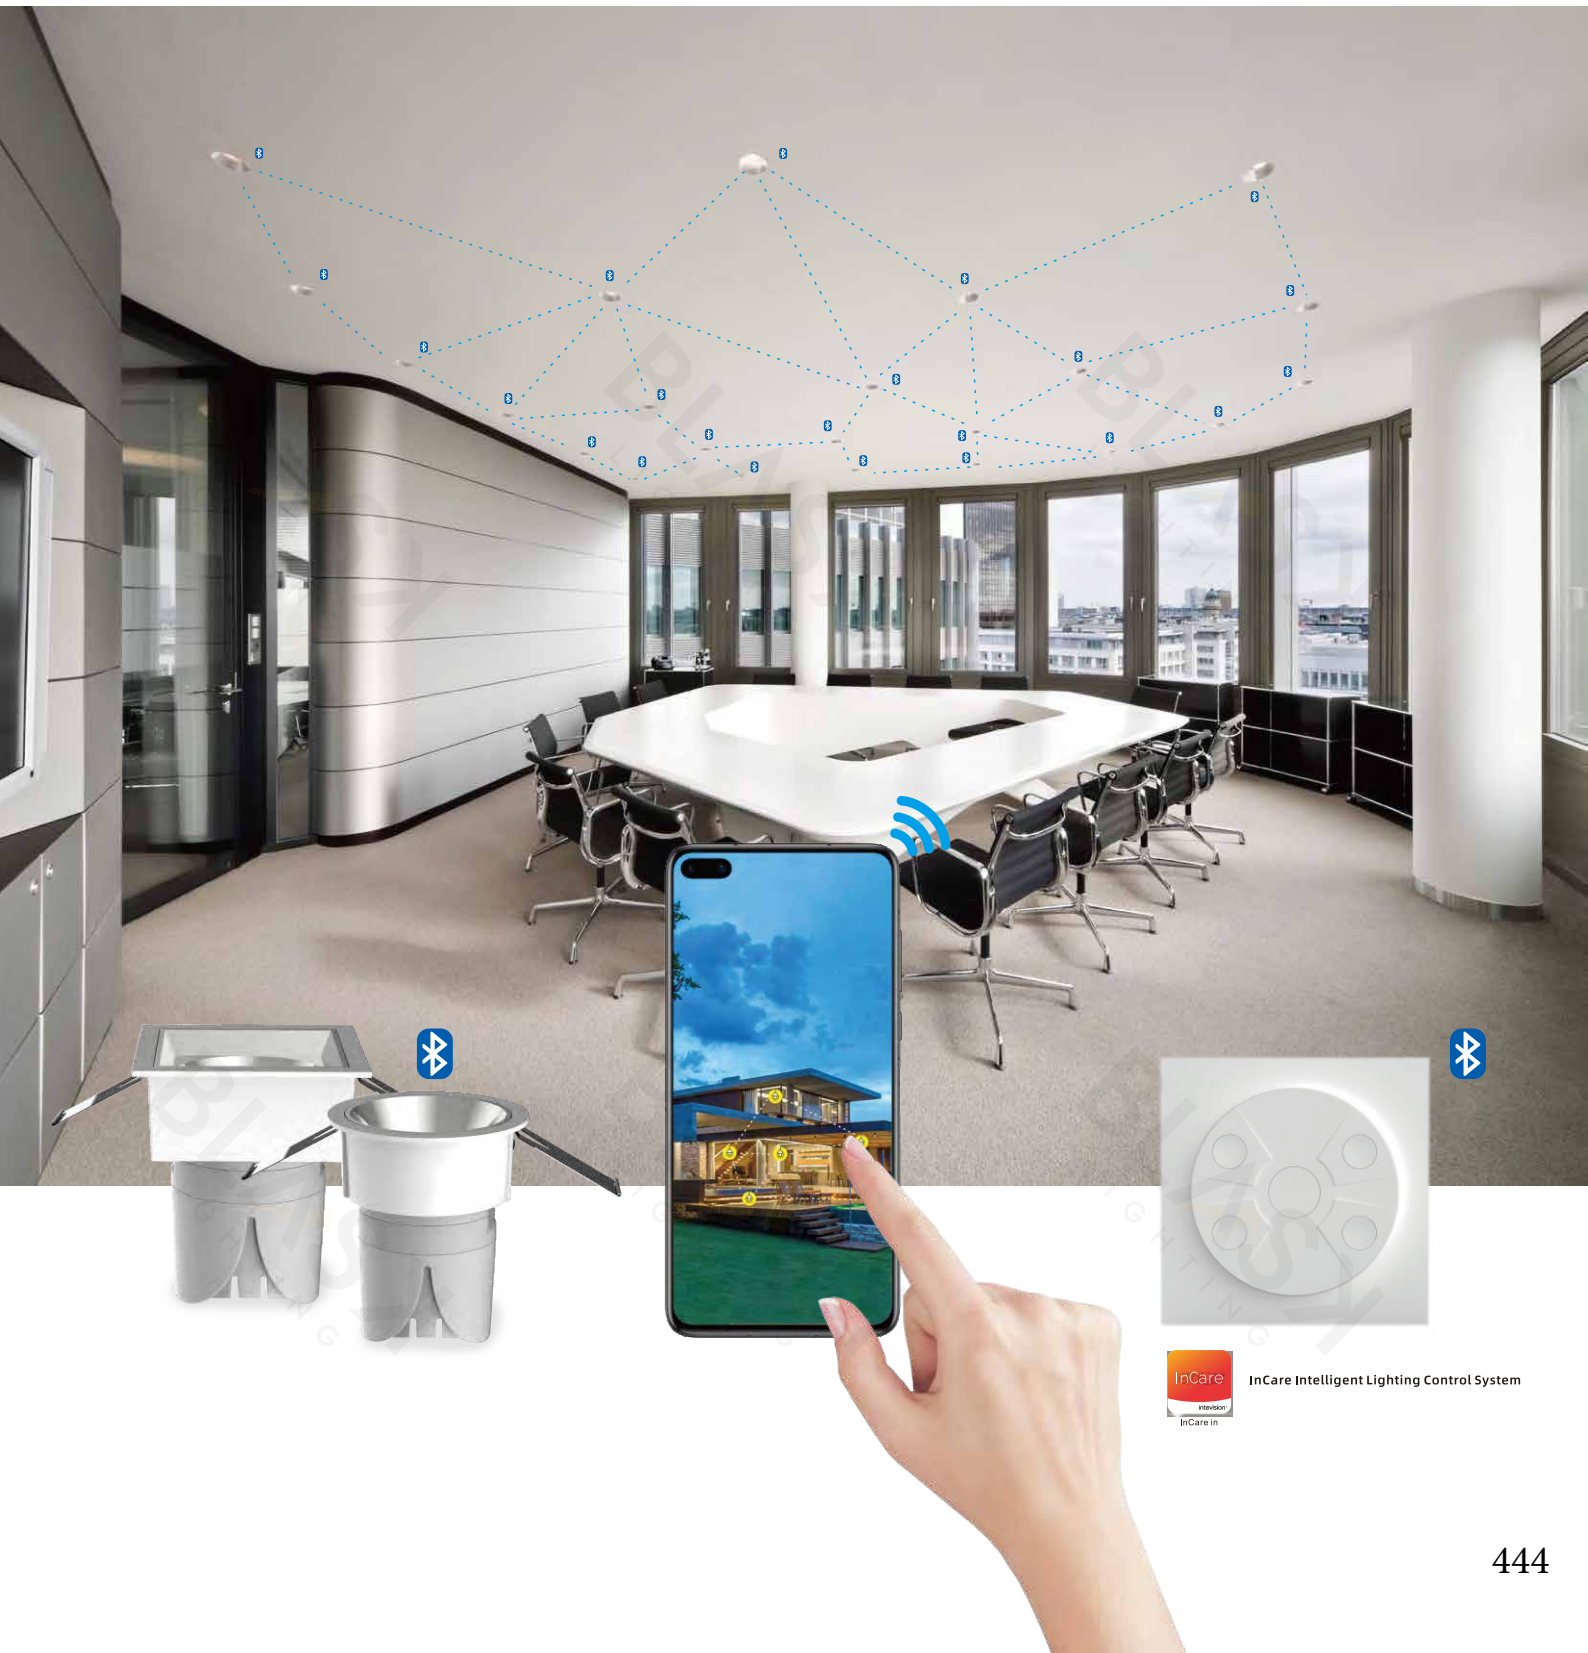

InCare Intelligent Lighting Control System

Human lighting: definition

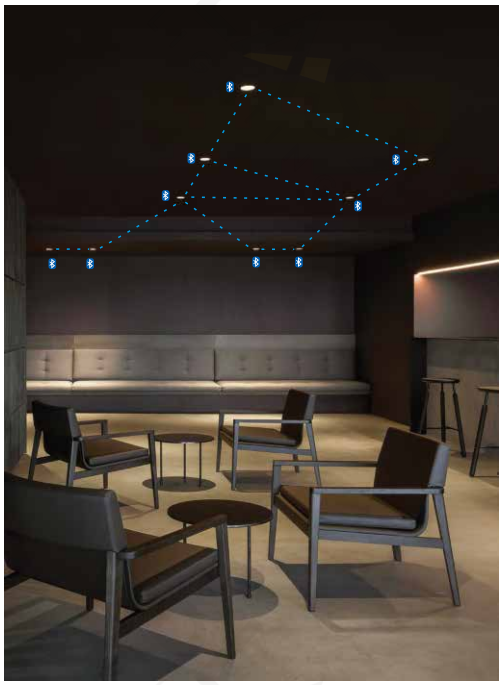

- The broad idea of human lighting is:
  - It is the application of lighting technology to perfectly integrate lighting, climate and space, so that people can get help in physical, emotional and health aspects, so as to meet the humanized lighting needs of people in a specific application environment.
  - Provide high-quality light sources to increase visual attractiveness
    - The full spectrum can bring higher color restoration indicators in the visual range of the naked eye, especially CRI and R1-R99.
  - Achieve personalized needs and control
    - Support adjustment according to personal preference: lighting intensity, color, atmosphere
    - The circadian rhythm is adjustable to mimic the all-weather level of sunlight
  - Make sure that the light transmitted is close to that of natural light
    - The spectrum must be able to simulate the spectrum as natural as possible, because people have lived in natural light for nearly a million years, especially the sun during the day and moonlight and fire at night.
    - Avoid disrupting circadian rhythm due to spectral deviation

Human lighting index: comparison with natural light

- The influence of light on human beings is not limited to our visual perception.
- At present, a variety of indicators are used in the lighting industry to describe the effects of light sources on human circadian cycles.
- These include melanin ratio (MR), circadian action factor (CAF) and circadian stimulation (CS)
  - The circadian rhythm of Thrive light source is very similar to that of natural light, but it is different within the tolerance of measurement error.
  - This is another indicator that Thrive mimics the closeness of natural light sources in visual and non-visual responses, and is an ideal solution for human-centered lighting applications.

CCT	MR Value			CAF Value			CS Value 300 LUX Eye Illuminance		
	Thrive™	Natural Light	Difference	Thrive™	Natural Light	Difference	Thrive™	Natural Light	Difference
2700K	0.52	0.52	-0.01	0.34	0.35	-0.02	0.30	0.30	-0.01
3000K	0.60	0.60	-0.01	0.42	0.43	-0.01	0.33	0.33	0.00
3500K	0.67	0.68	-0.01	0.49	0.50	-0.02	0.36	0.36	0.00
4000K	0.74	0.73	0.01	0.54	0.56	-0.02	0.25	0.26	-0.01
5000K	0.95	0.93	0.01	0.74	0.76	-0.02	0.34	0.34	0.00
5700K	1.02	1.02	0.01	0.83	0.84	-0.01	0.36	0.37	-0.01
6500K	1.09	1.08	0.01	0.90	0.91	-0.01	0.39	0.39	-0.01

PRODUCT EXPLODED VIEW

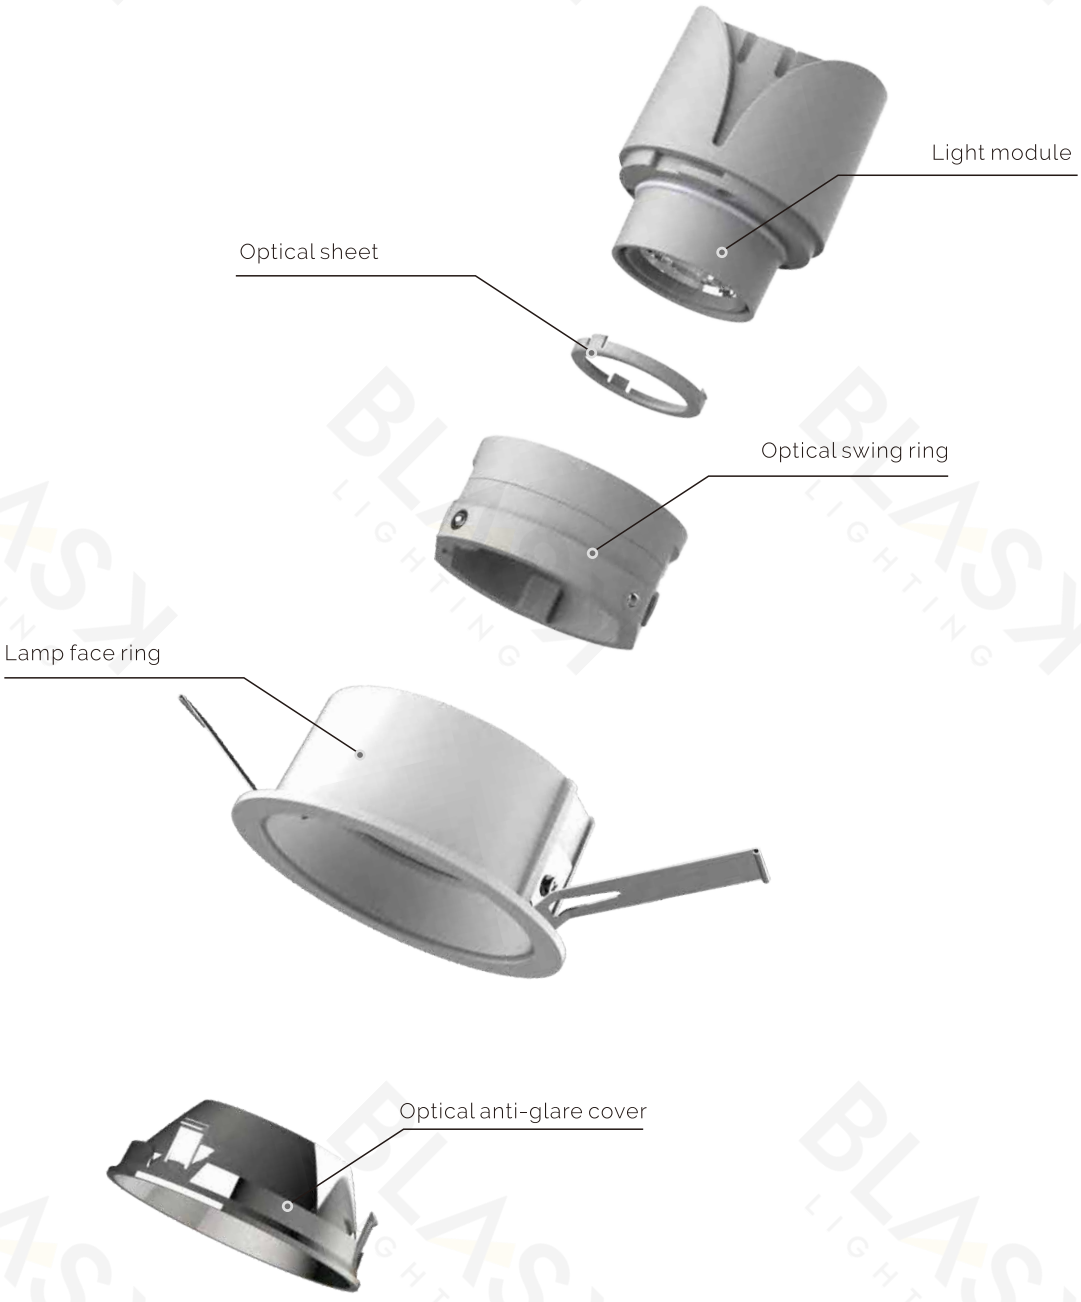

product composition diagram

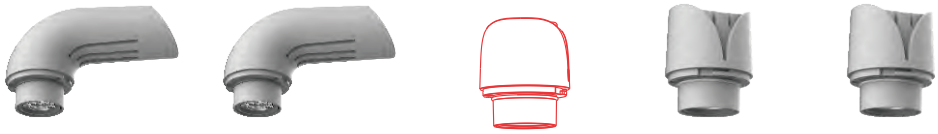

Light module

Soft lens Clear lens **Optical sheet** No lens Cellular network Mirror stretch film

Optical swing ring Optical swing ring

Trimless Ring Ring **Lamp face ring** Ring Trimless Ring

fixed anti-glare cover adJustable anti-glare cover wall wash anti-glare cover **Optical anti-glare cover** fixed anti-glare cover adJustable anti-glare cover wall wash anti-glare cover

Optical anti-glare cover color selection

White Black Sand silver Bright silver Golden

INASL I30519

INASL I30522

INASL I30525

INASL I30528

PRODUCT FEATURES

Aluminum lamp body
Optional trimless installation
Front disassembly design
IP20
CRI>90 / Full spectrum
UGR<6
AC220-240V 50/60Hz
5-year warranty
Light body color: black, white
Optical anti-glare cover: White, Black,Sand silver,Bright silver,Golden
Optical sheet: No lens, Cellular network,Mirror stretch film,Soft lens,Clear lens

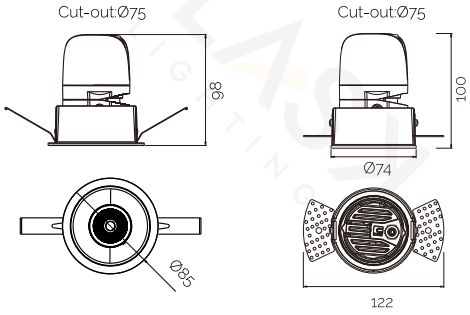

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30519	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø85	Ø75
INASL I30520	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø85	Ø75
INASL I30521	15W	1650 lm	15.7W	1200 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø85	Ø75
INASL I30522	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø85	Ø75
INASL I30523	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø85	Ø75
INASL I30524	15W	1650 lm	15.7W	1200 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø85	Ø75
INASL I30525	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø74	Ø75
INASL I30526	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø74	Ø75
INASL I30527	15W	1650 lm	15.7W	1200 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø74	Ø75
INASL I30528	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø74	Ø75
INASL I30529	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø74	Ø75
INASL I30530	15W	1650 lm	15.7W	1200 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø74	Ø75

INASL I30531

INASL I30533

PRODUCT FEATURES

Aluminum lamp body
Optional trimless installation
Front disassembly design
IP20
CRI>90 / Full spectrum
UGR<6
AC220-240V 50/60Hz
5-year warranty
Light body color: black, white
Optical anti-glare cover: White, Black,Sand silver,Bright silver,Golden
Optical sheet: No lens, Cellular network,Mirror stretch film,Soft lens,Clear lens

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30531	20W	2200 lm	21.6W	1800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø85	Ø75
INASL I30532	30W	3300 lm	32.1W	2400 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø85	Ø75
INASL I30533	20W	770 lm	16.1W	1800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø74	Ø75
INASL I30534	30W	3300 lm	32.1W	2400 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	Ø74	Ø75

0009A

0009B

0009 Trimless A

0009 Trimless B

PRODUCT FEATURES

Aluminum lamp body
Optional trimless installation
Front disassembly design
IP20
CRI>90 / Full spectrum
UGR<6
AC220-240V 50/60Hz
5-year warranty
Light body color: black, white
Optical anti-glare cover: White, Black,Sand silver,Bright silver,Golden
Optical sheet: No lens, Cellular network,Mirror stretch film,Soft lens,Clear lens

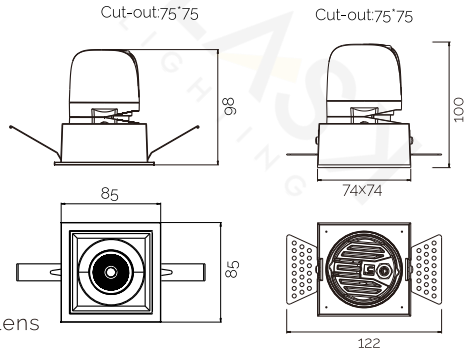

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30535	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	85*85	75*75
INASL I30536	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	85*85	75*75
INASL I30537	15W	1650 lm	15.7W	1200 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	85*85	75*75
INASL I30538	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	85*85	75*75
INASL I30539	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	85*85	75*75
INASL I30540	15W	1650 lm	15.7W	1200 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	85*85	75*75
INASL I30541	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	74*74	75*75
INASL I30542	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	74*74	75*75
INASL I30543	15W	1650 lm	15.7W	1200 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	74*74	75*75
INASL I30544	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	74*74	75*75
INASL I30545	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	74*74	75*75
INASL I30546	15W	1650 lm	15.7W	1200 lm	3000K/4000K/6500K	15° / 24° / 36° / wall-wash	74*74	75*75

INASL I30547

INASL I30549

PRODUCT FEATURES

Aluminum lamp body
Optional trimless installation
Front disassembly design
IP20
CRI>90 / Full spectrum
UGR<6
AC220-240V 50/60Hz
5-year warranty
Light body color: black, white
Optical anti-glare cover: White, Black,Sand silver,Bright silver,Golden
Optical sheet: No lens, Cellular network,Mirror stretch film,Soft lens,Clear lens

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30547	20W	2200 lm	21.6W	1800 lm	3000K/4000K/6500K	15˚ / 24˚ / 36˚ / wall-wash	85*85	75*75
INASL I30548	30W	3300 lm	32.1W	2400 lm	3000K/4000K/6500K	15˚ / 24˚ / 36˚ / wall-wash	85*85	75*75
INASL I30549	20W	770 lm	16.1W	1800 lm	3000K/4000K/6500K	15˚ / 24˚ / 36˚ / wall-wash	74*74	75*75
INASL I30550	30W	3300 lm	32.1W	2400 lm	3000K/4000K/6500K	15˚ / 24˚ / 36˚ / wall-wash	74*74	75*75

This projector incorporates an innovative adjustable system with double bifocal lenses, which allows the light beam opening angle to be controlled from 15 degrees to 36 degrees, while maintaining high levels of efficiency.

15° - 36°

- No light loss luminous angle change
- The light output efficiency of the adjustable luminous angle optical device is maintained above 95%.

INASL I30551

INASL I30552

INASL I30553

INASL I30554

PRODUCT FEATURES

Aluminum lamp body
Optional trimless installation
Front disassembly design
IP20
CRI>90 / Full spectrum
AC220-240V 50/60Hz
5-year warranty



0008 Spot 5W



0008 Spot 10W



0008 Spot Trimless 5W



0008 Spot Trimless 10W

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30551	5W	550 lm	5.8W	400 lm	3000K/4000K/6500K	15° - 36°	Ø85	Ø75
INASL I30552	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° - 36°	Ø85	Ø75
INASL I30553	5W	550 lm	5.8W	400 lm	3000K/4000K/6500K	15° - 36°	Ø74	Ø75
INASL I30554	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° - 36°	Ø74	Ø75

INASL I30555

INASL I30556

PRODUCT FEATURES

Aluminum lamp body
Optional trimless installation
Front disassembly design
IP20
CRI>90 / Full spectrum
AC220-240V 50/60Hz
5-year warranty



INASL I30555



INASL I30556

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30555	7W	770 lm	7.9W	560 lm	3000K/4000K/6500K	120°	Ø85	Ø75
INASL I30556	7W	770 lm	7.9W	560 lm	3000K/4000K/6500K	120°	Ø74	Ø75

INASL I30557

Power	7W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	560LM
CRI	>90 / Full spectrum
Material	aluminum
Color	Grey
Remark	Light module

INASL I30559

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	800LM
CRI	>90 / Full spectrum
Material	aluminum
Color	Grey
Remark	Light module

INASL I30558

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	1600LM
CRI	>90 / Full spectrum
Material	aluminum
Color	Grey
Remark	Light module

INASL I30560

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	2400LM
CRI	>90 / Full spectrum
Material	aluminum
Color	Grey
Remark	Light module

INASL I30561

Power	5W
CCT	3000K● 4000K○ 6500K○
Voltage	AC220-240V 50/60Hz
lumen	400LM
CRI	>90 / Full spectrum
Material	aluminum
Color	Black
Remark	Light module

INASL I30563

Power	10W
CCT	3000K● 4000K○ 6500K○
Voltage	AC220-240V 50/60Hz
lumen	800LM
CRI	>90 / Full spectrum
Material	aluminum
Color	Black
Remark	Light module

INASL I30562

Power	7W
CCT	3000K● 4000K○ 6500K○
Voltage	AC220-240V 50/60Hz
lumen	560LM
CRI	>90 / Full spectrum
Material	aluminum
Color	White
Remark	Light module

INASL I30564

Material	PC
Color	Black
Remark	No lens

INASL I30567

Material	PC
Color	Black
Remark	Cellular network

INASL I30565

Material	PC
Color	Black
Remark	Mirror stretch film

INASL I30568

Material	PC
Color	Black
Remark	Soft lens

INASL I30566

Material	PC
Color	Black
Remark	Clear lens

INASL I30569

Material	Aluminum
Color	White
Remark	Optical swing ring

INASL I30570

Material	Aluminum
Color	White / Black
Remark	Decent ring with edge round lamp

INASL I30572

Material	Aluminum
Color	White / Black
Remark	Trimless round lamp decent ring

INASL I30571

Material	Aluminum
Color	White / Black
Remark	Decent ring with edge square lamp

INASL I30573

Material	Aluminum
Color	White / Black
Remark	Trimless square lamp decent ring

INASL I30574

Material	Plastic
Color	White, Black,Sand silver,Bright silver,Golden
Remark	Fixed angle round optical anti-glare cover

INASL I30577

Material	Plastic
Color	White, Black,Sand silver,Bright silver,Golden
Remark	Adjustable angle round optical anti-glare cover

INASL I30575

Material	Plastic
Color	White, Black,Sand silver,Bright silver,Golden
Remark	Wall-washing angle round optical anti-glare cover

INASL I30578

Material	Plastic
Color	White, Black,Sand silver,Bright silver,Golden
Remark	Fixed angle square optical anti-glare cover

INASL I30576

Material	Plastic
Color	White, Black,Sand silver,Bright silver,Golden
Remark	Wall-washing angle square optical anti-glare cover

INASL I30579

Material	Plastic
Color	White, Black,Sand silver,Bright silver,Golden
Remark	Fixed angle square optical anti-glare cover

LED DOWNLIGHT

Three sizes to choose from

Cut-out:Ø55



Cut-out:Ø75

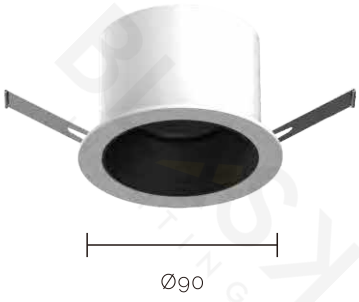

Cut-out:Ø95

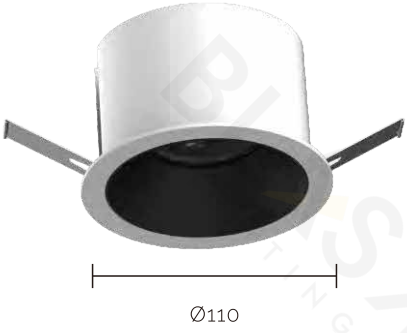

Aluminum lamp body
1
50°
36°
24°
15°
High quality lens
2
Anti-glare cup
3

Thanks to the unique optical solution, 0010 series can control the cut-off angle of the light without changing the light efficiency of the product.

Black light technology

UGR<15

The development of the 0010 series meets the needs of lighting while taking into account the anti-glare effect. The UGR of each Ruoran series lamp is <15, and the European standard is UGR <19.

VARIOUS OPTICAL LENSES TO CHOOSE

4 different beam angle lenses, each of them is developed for specific scenarios.
Excellent optical control, whether it is a strong beam or a diffuse lighting effect, there is no stray light.

LED DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>98 / Full spectrum
UGR<15
AC220-240V 50/60Hz
5-year warranty
Light body color: Black, White
Optical anti-glare cover: Black,White

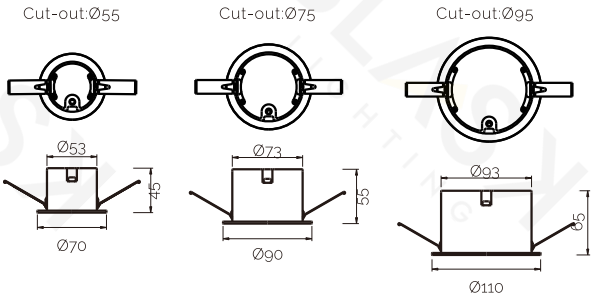

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30580	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36°	Ø70	Ø55
INASL I30581	10W	1100 lm	10.5W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / 50°	Ø90	Ø75
INASL I30582	20W	2200 lm	20.7W	1600 lm	3000K/4000K/6500K	15° / 24° / 36° / 50°	Ø110	Ø95

HEALTHY LIGHT

FLICKER
FREE

High display index,
high color consistency
Full spectrum,SDCM<1.5

Optional
· Ra>98
· Full spectrum

Application of full spectrum lamp bead products

American bridgelux. Thrive series natural spectrum series lamp beads, close to the natural spectrum of sunlight, fully care for human health and bring high-quality sunlight into the house.Really create a people-oriented healthy lighting environment.

The spectrum designed by Bridgelux can accurately simulate natural light the spectral characteristics are increased in an efficient, economical and safe waystrengthen human health.

- Life/family
- Work/study
- Rest/recovery
- Leisure/entertainment
- Healthy growth

Bridgelux Thrive uses special chip, phosphor and packaging technology to accurately simulate natural spectrum

Features	Advantages
The spectrum is carefully designed to accurately simulate natural light Reduce the blue light intensity	**Complete and consistent spectrum, with fewer abrupt peaks, which is closest to natural light**
Natural and vivid color reproduction ability	**Mean value of CRI (R1-R15) is 98, excellent TM-30 grease standard (R1-R99), and R** (forced Truth) 96-98, R_9 saturation 99-101
The most efficient natural spectrum in the industry	The light efficiency is as high as 132lm/w, which is more environmentally friendly and energy-saving, and reduces the cost of public utilities and the environment
Economical natural spectrum, optimizing human health	Accelerate the comprehensive popularization of natural spectrum
There is no ultraviolet light harmful to human body or articles	Improve reliability and service life
Full platform design, including COB, SMD, dual color temperature module,wait for multiple options	Achieve design flexibility and product color consistency

Matching with Nature: Average Spectral Difference

- Bridgelux has created a new index, which eliminates the uncertainty of comparing LED light sources with natural light
- The value of average spectral difference (ASD) comes from the ratio of different spectra to natural spectra in the visible range
- Bridgelux Thrive ASD value is the lowest, which is closest to natural light
- By comparison, we find that the ASD index of other LED light sources exceeds our ThrvieASD value by 100% to 300%

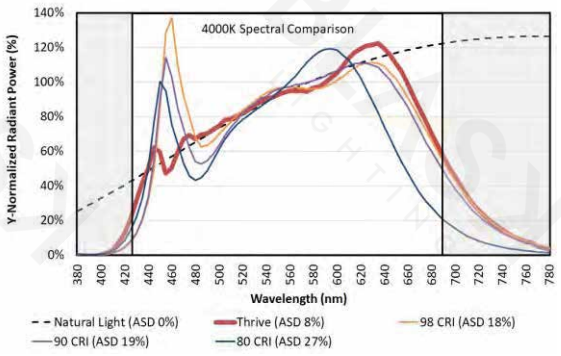

Average spectral difference: 3000K comparison

Wavelength coverage	Thrive	80 CRI	90 CRI	98 CRI
425-690 nm Visible spectrum	9%	28%	20%	18%
425-475 nm **Blue light spectrum**	8%	44%	43%	48%
475-530 nm Cyan spectrum	5%	19%	14%	14%

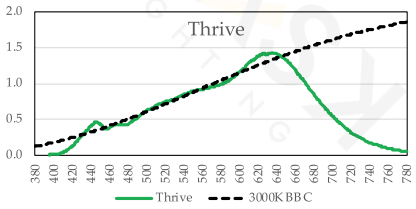

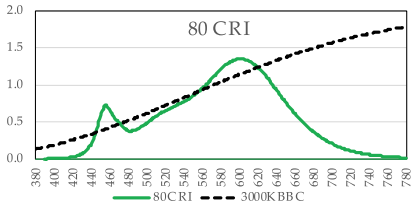

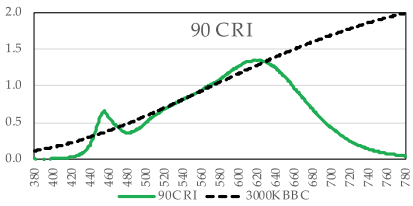

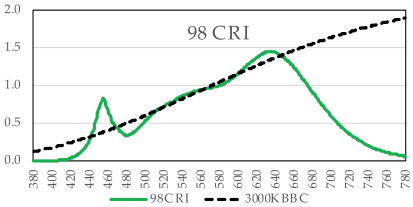

·Over the full range of 425-690 nm Thrive is within 9% of natural light where standard sources may deviate by 18-30% or more(2-3X)
·Over the blue range of 425-475 nm Thrive is within 8% of natural light where standard sources may deviate by 40-50% or more(4-5X)
·Over the cyan range of 475-530 nm Thrive is within 5% of natural light where standard sources may deviate by 14-20% or more(3-4X)

Understanding of artificial light source

·By enhancing or inhibiting blue light excitation, it can regulate the secretion of melatonin
  ·This can affect the individual's alertness or sense of tranquility
·Will unnatural light sources have long-term effects on humans due to the huge difference in the spectrum? Not yet known
  ·And will remain unknown until long-term research
·Bridgelux's philosophy: copying is safe and beneficial to human natural light
  ·Will too much or too little blue light overflow affect human health? This requires long-term inspection and testing

Comparing the spectrum of the 6500k D65 standard light source with our Thrive 6500k product, we can see that the blue part of the D65 standard light source is far beyond the natural spectrum.

Full spectrum application market

- For classroom lighting, it is necessary to protect eyesight, reduce the harm of blue light, help students improve their learning efficiency, and even apply different learning modes, which requires products to reduce blue light content, high color fidelity, high saturation and continuous spectrum.
- For office lighting, it is necessary to have the functions of high alertness, high apparent finger and physiological rhythm adjustment, to meet the needs of office workers for simplicity, efficiency, comfort, softness, strong color rendering, less blue light, and adjusting the brightness of work and rest.
- Household lighting is mainly warm and white, which can simulate continuous spectrum, reasonable spectral energy distribution can affect the level of melatonin, improve room illuminance, improve brightness uniformity, warm color temperature, enhance color rendering, and reduce glare and light mutation.
- In addition, the lighting used in hospitals is soft and comfortable, which can not only regulate sleep, but also simulate daylight; the lighting used in restaurants has high design, adjustable color temperature and high color rendering, which can make guests feel private and comfortable.

INTELLIGENT
InCare
Smart IoT

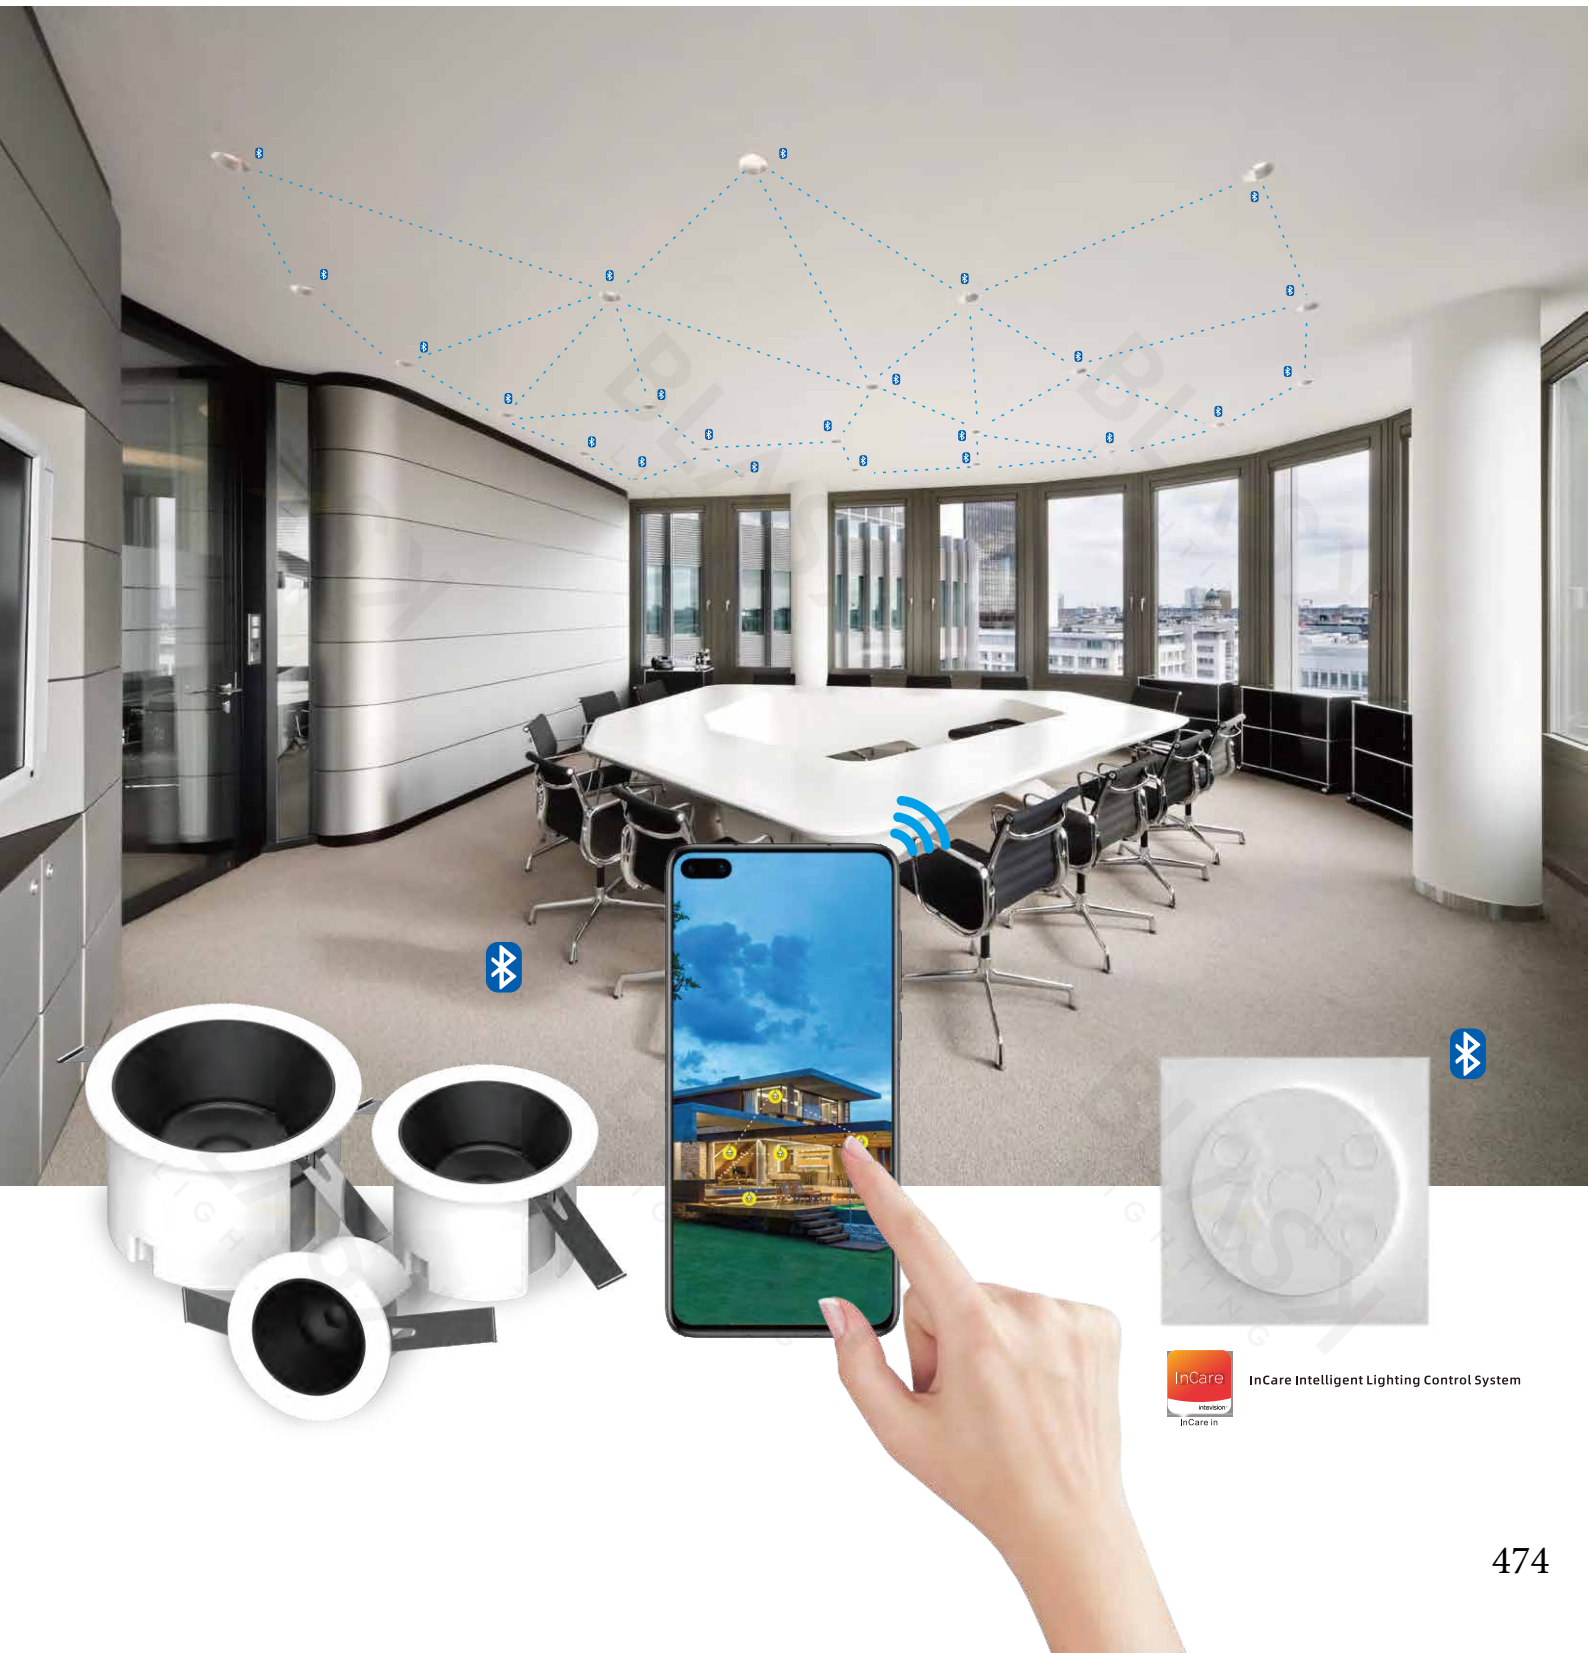

InCare Intelligent Lighting Control System

Human lighting: definition

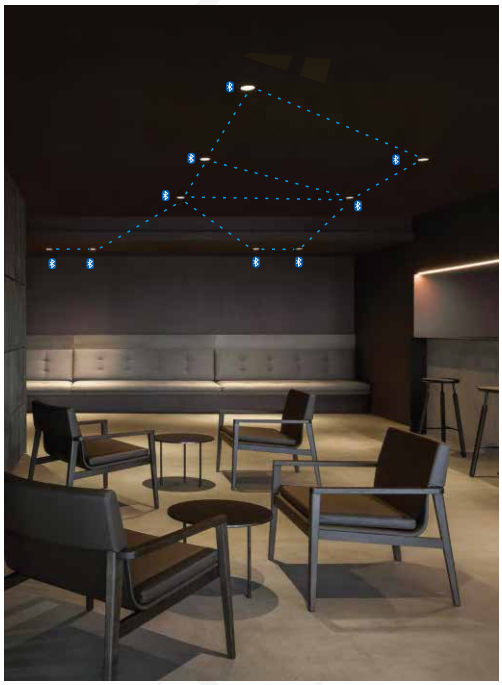

- The broad idea of human lighting is:
  - It is the application of lighting technology to perfectly integrate lighting, climate and space, so that people can get help in physical, emotional and health aspects, so as to meet the humanized lighting needs of people in a specific application environment.
  - Provide high-quality light sources to increase visual attractiveness
    - The full spectrum can bring higher color restoration indicators in the visual range of the naked eye, especially CRI and R1-R99.
  - Achieve personalized needs and control
    - Support adjustment according to personal preference: lighting intensity, color, atmosphere
    - The circadian rhythm is adjustable to mimic the all-weather level of sunlight
  - Make sure that the light transmitted is close to that of natural light
    - The spectrum must be able to simulate the spectrum as natural as possible, because people have lived in natural light for nearly a million years, especially the sun during the day and moonlight and fire at night.
    - Avoid disrupting circadian rhythm due to spectral deviation

Human lighting index: comparison with natural light

- The influence of light on human beings is not limited to our visual perception.
- At present, a variety of indicators are used in the lighting industry to describe the effects of light sources on human circadian cycles.
- These include melanin ratio (MR), circadian action factor (CAF) and circadian stimulation (CS)
  - The circadian rhythm of Thrive light source is very similar to that of natural light, but it is different within the tolerance of measurement error.
  - This is another indicator that Thrive mimics the closeness of natural light sources in visual and non-visual responses, and is an ideal solution for human-centered lighting applications.

CCT	MR Value			CAF Value			CS Value 300 LUX Eye Illuminance		
	Thrive™	Natural Light	Difference	Thrive™	Natural Light	Difference	Thrive™	Natural Light	Difference
2700K	0.52	0.52	-0.01	0.34	0.35	-0.02	0.30	0.30	-0.01
3000K	0.60	0.60	-0.01	0.42	0.43	-0.01	0.33	0.33	0.00
3500K	0.67	0.68	-0.01	0.49	0.50	-0.02	0.36	0.36	0.00
4000K	0.74	0.73	0.01	0.54	0.56	-0.02	0.25	0.26	-0.01
5000K	0.95	0.93	0.01	0.74	0.76	-0.02	0.34	0.34	0.00
5700K	1.02	1.02	0.01	0.83	0.84	-0.01	0.36	0.37	-0.01
6500K	1.09	1.08	0.01	0.90	0.91	-0.01	0.39	0.39	-0.01

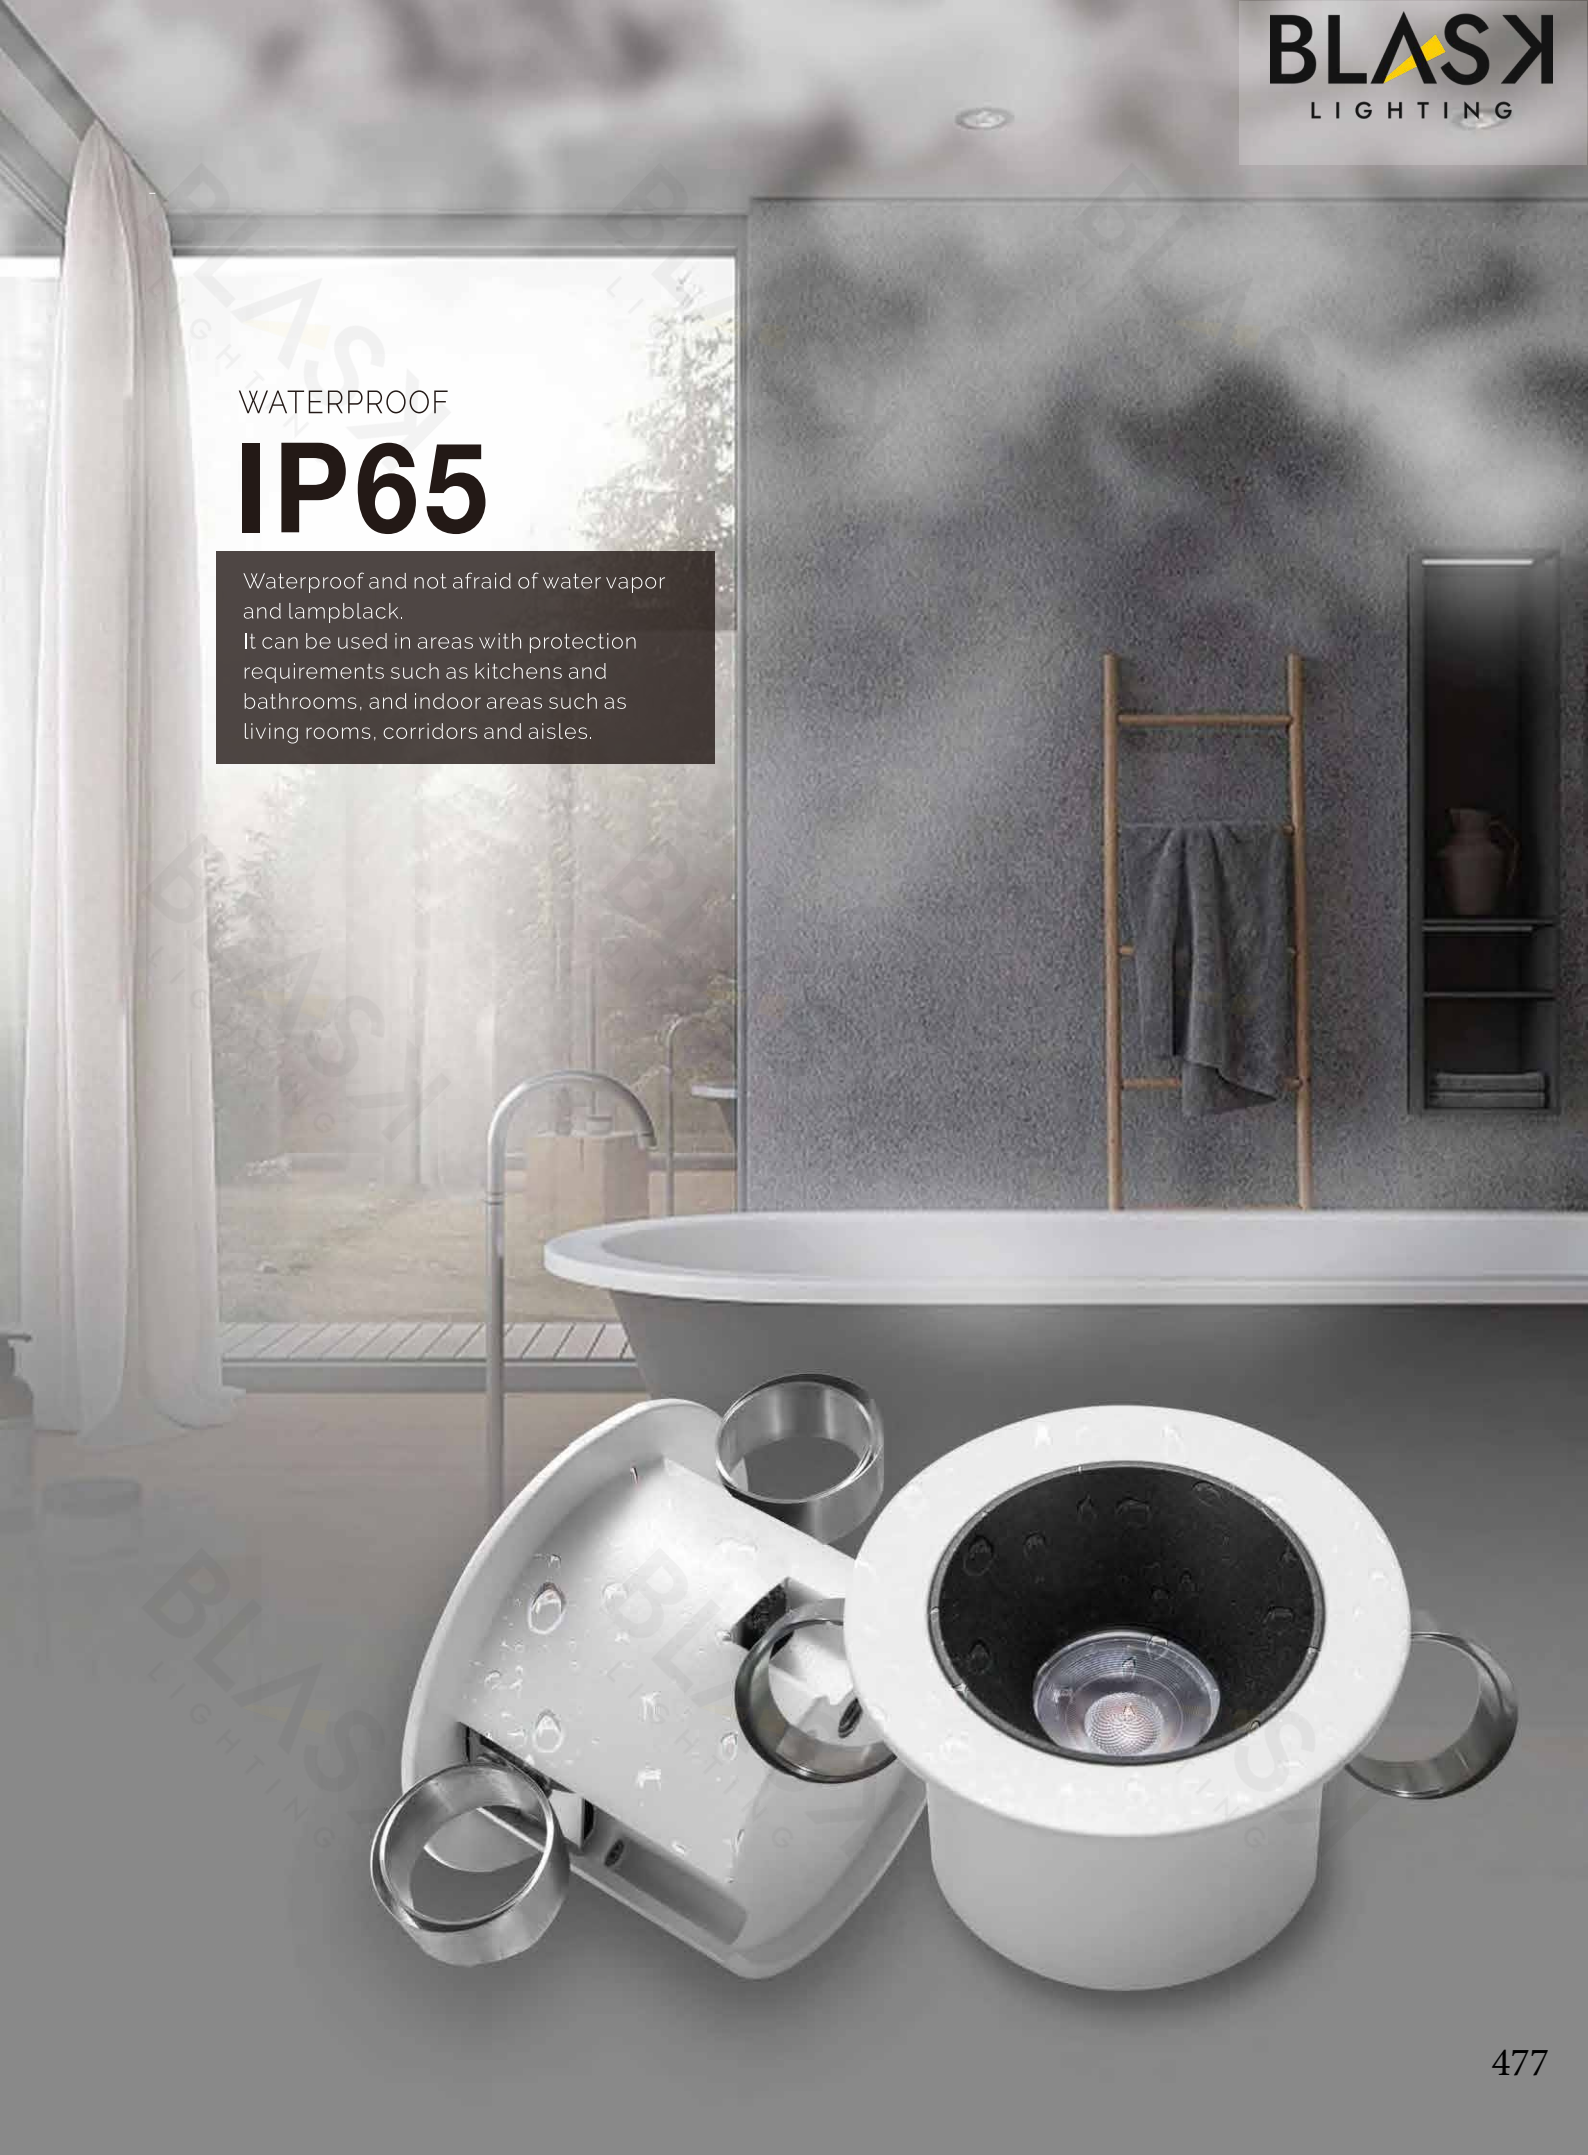

WATERPROOF

IP65

Waterproof and not afraid of water vapor and lampblack.
It can be used in areas with protection requirements such as kitchens and bathrooms, and indoor areas such as living rooms, corridors and aisles.

LED IP65 DOWNLIGHT

Three sizes to choose from

Cut-out:Ø55

Cut-out:Ø75



Cut-out:Ø95

HIGH QUALITY LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP65
CRI>98 / Full spectrum
UGR<15
AC220-240V 50/60Hz
5-year warranty
Light body color: Black, White
Optical anti-glare cover: Black,White

Cut-out:Ø55



Cut-out:Ø75



Cut-out:Ø95



PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30583	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	15° / 24° / 36°	Ø70	Ø55
INASL I30584	10W	1100 lm	10.5W	800 lm	3000K/4000K/6500K	15° / 24° / 36° / 50°	Ø90	Ø75
INASL I30585	20W	2200 lm	20.7W	1600 lm	3000K/4000K/6500K	15° / 24° / 36° / 50°	Ø110	Ø95

LED DOWNLIGHT

Variety of colors

WH

BK

WH+GD

BK+GD

Thanks to the unique optical solution, 20621 series can control the cut-off angle of the light without changing the light efficiency of the product.

Black light technology

UGR<15

The development of the 20621 series meets the needs of lighting while taking into account the anti-glare effect. The UGR of each Ruoran series lamp is <15, and the European standard is UGR <19.

HIGH QUALITY LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>80
UGR<15
AC220-240V 50/60Hz
5-year warranty

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	szie	Cut-out szie
INASL I30586	12W	1200 lm	13.2W	960 lm	3000K/4000K/6500K	38°	Ø85*75	Ø75
INASL I30587	12W	1200 lm	13.2W	960 lm	3000K/4000K/6500K	38°	Ø85*75	Ø75
INASL I30588	12W	1200 lm	13.2W	960 lm	3000K/4000K/6500K	38°	Ø85*75	Ø75
INASL I30589	12W	1200 lm	13.2W	960 lm	3000K/4000K/6500K	38°	Ø85*75	Ø75

BLASK LIGHTING

LED DOWNLIGHT

BLASK LIGHTING

LED DOWNLIGHT

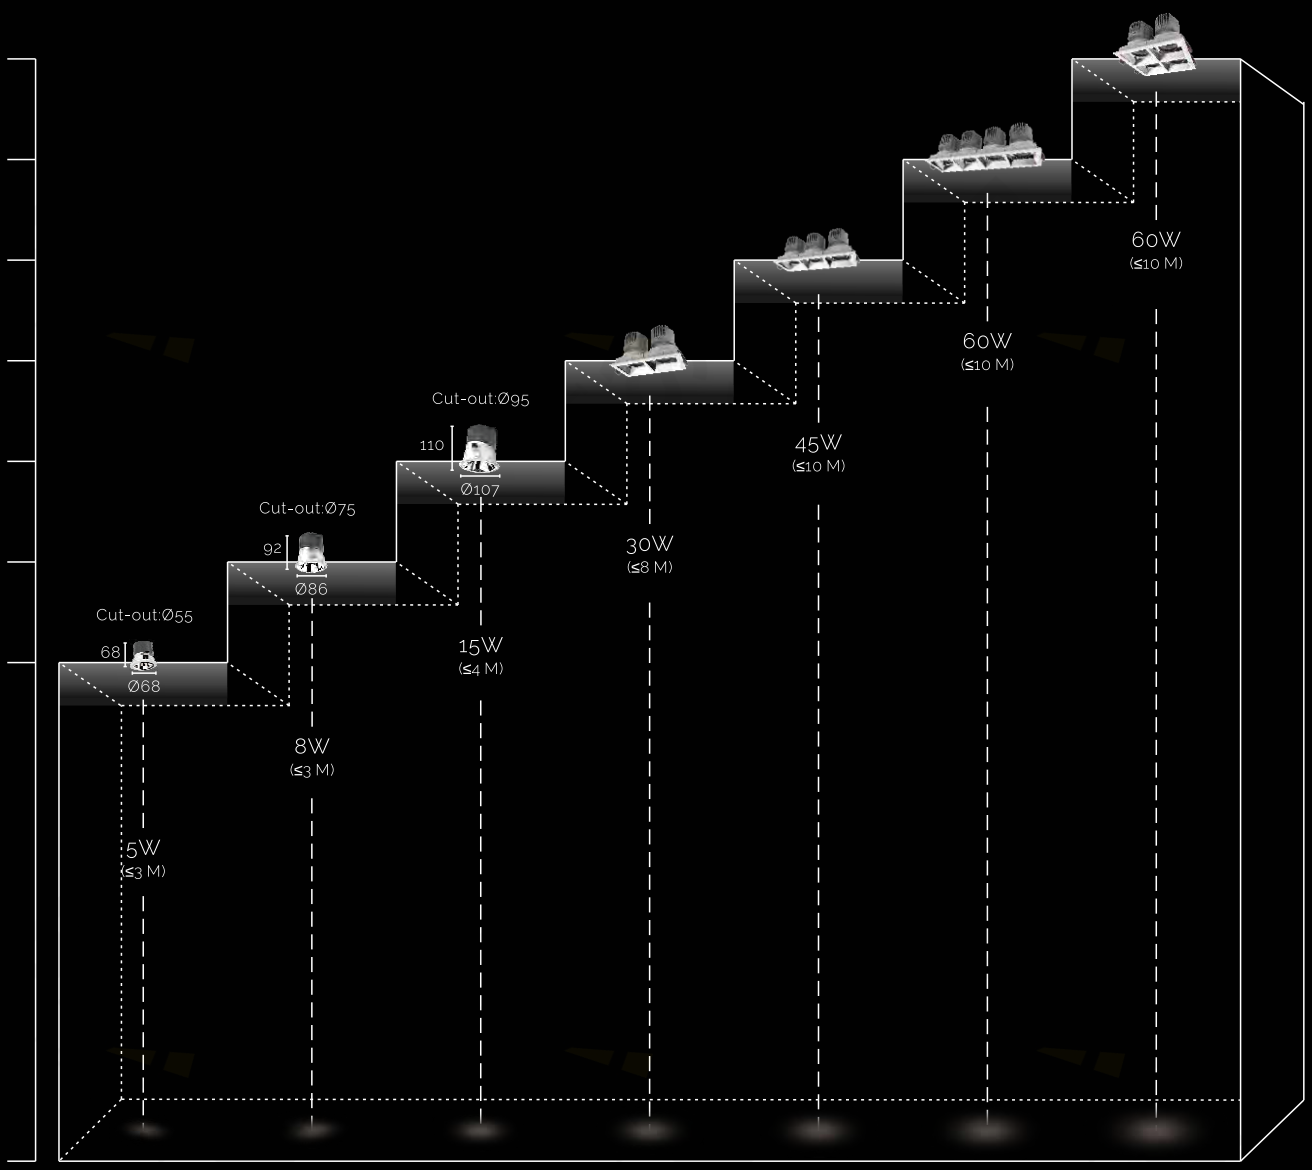

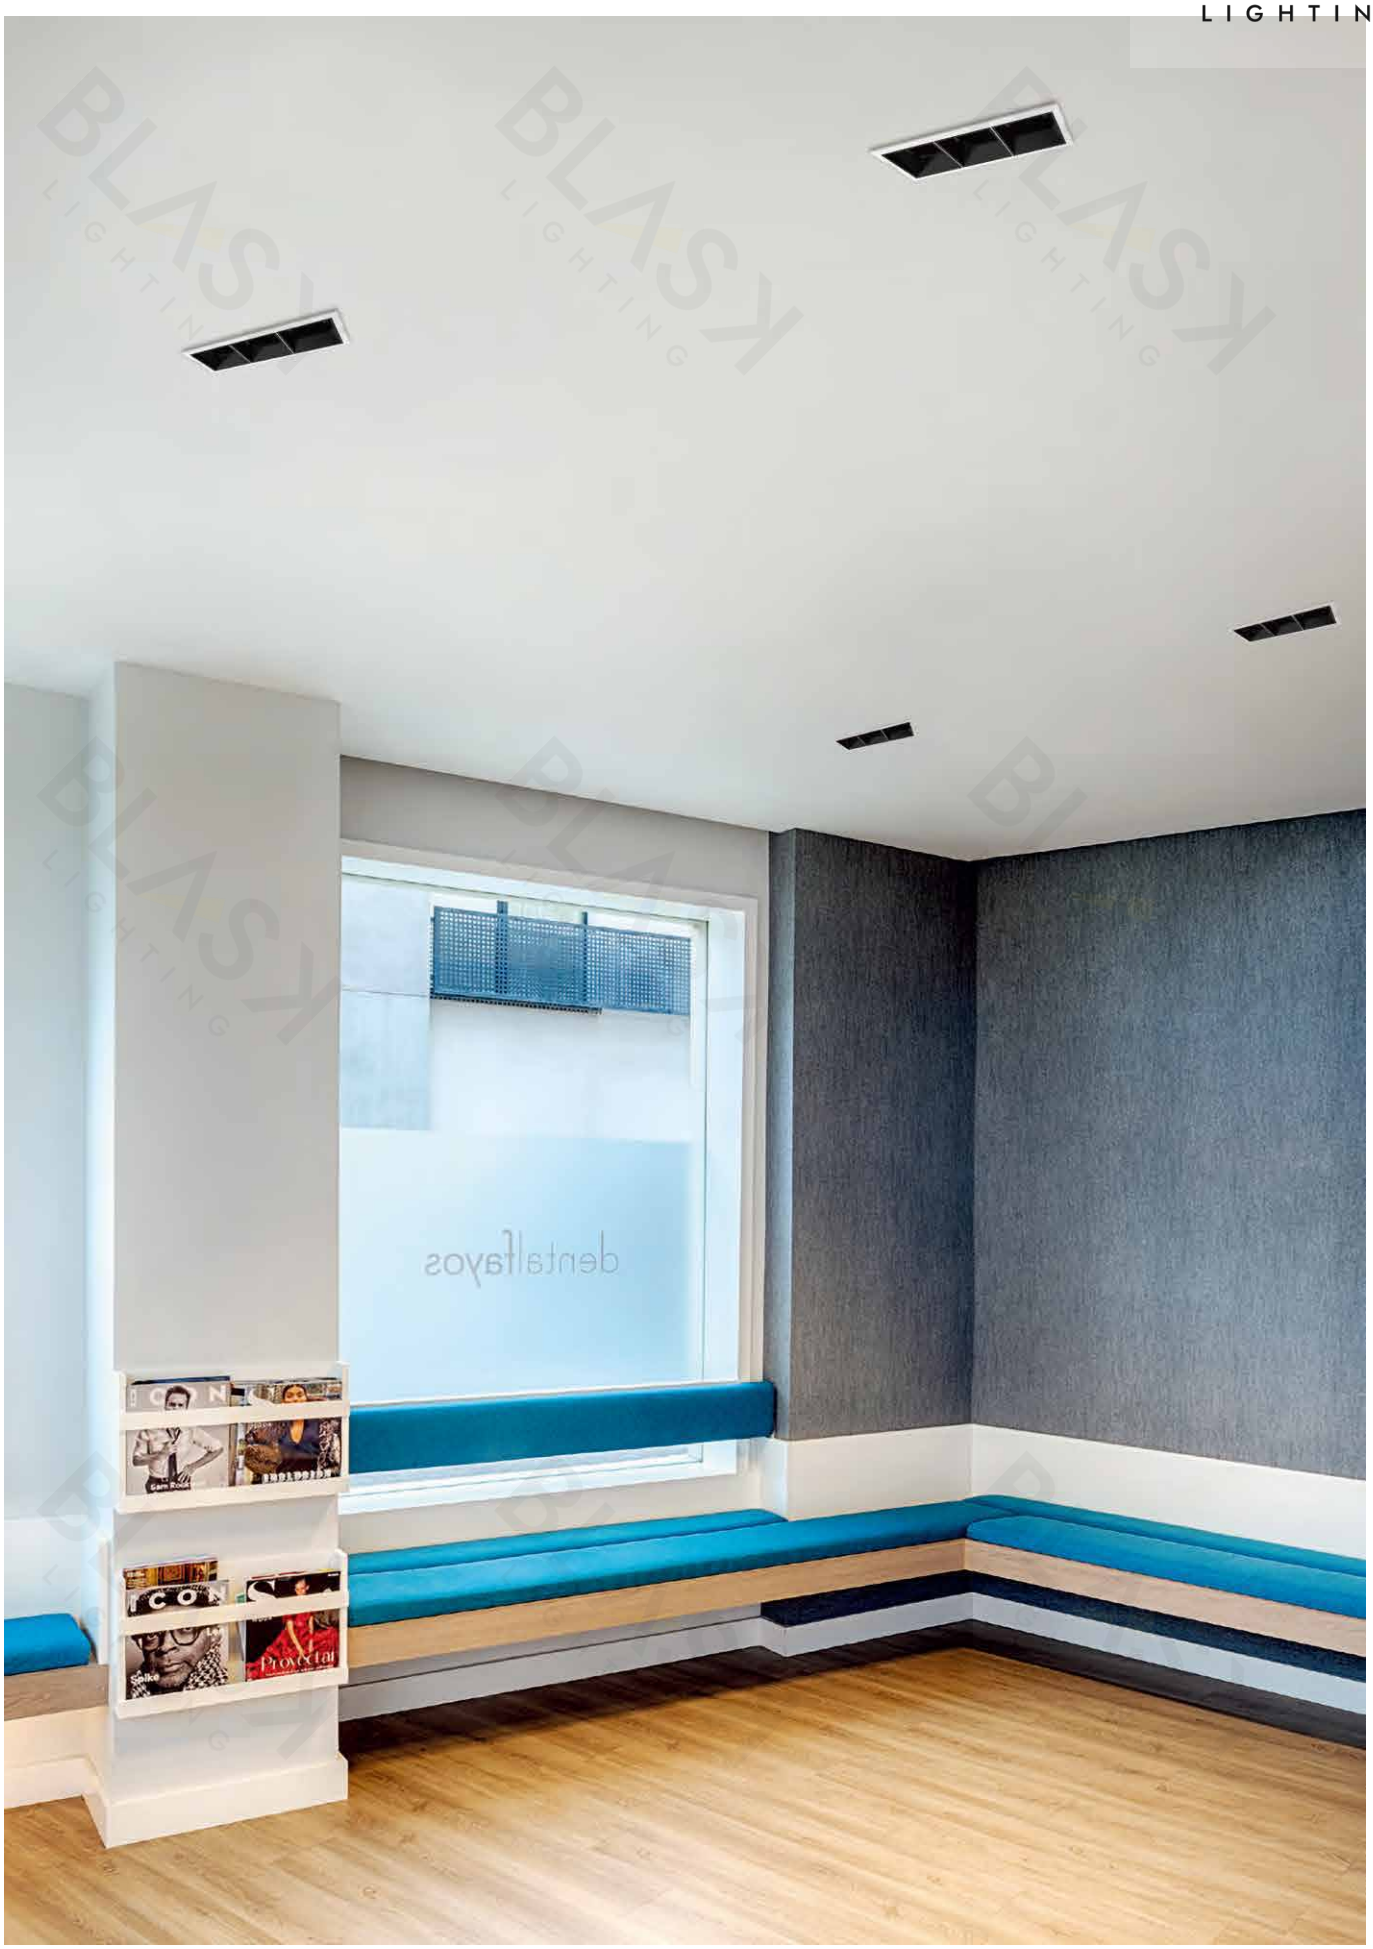
dentalfayos

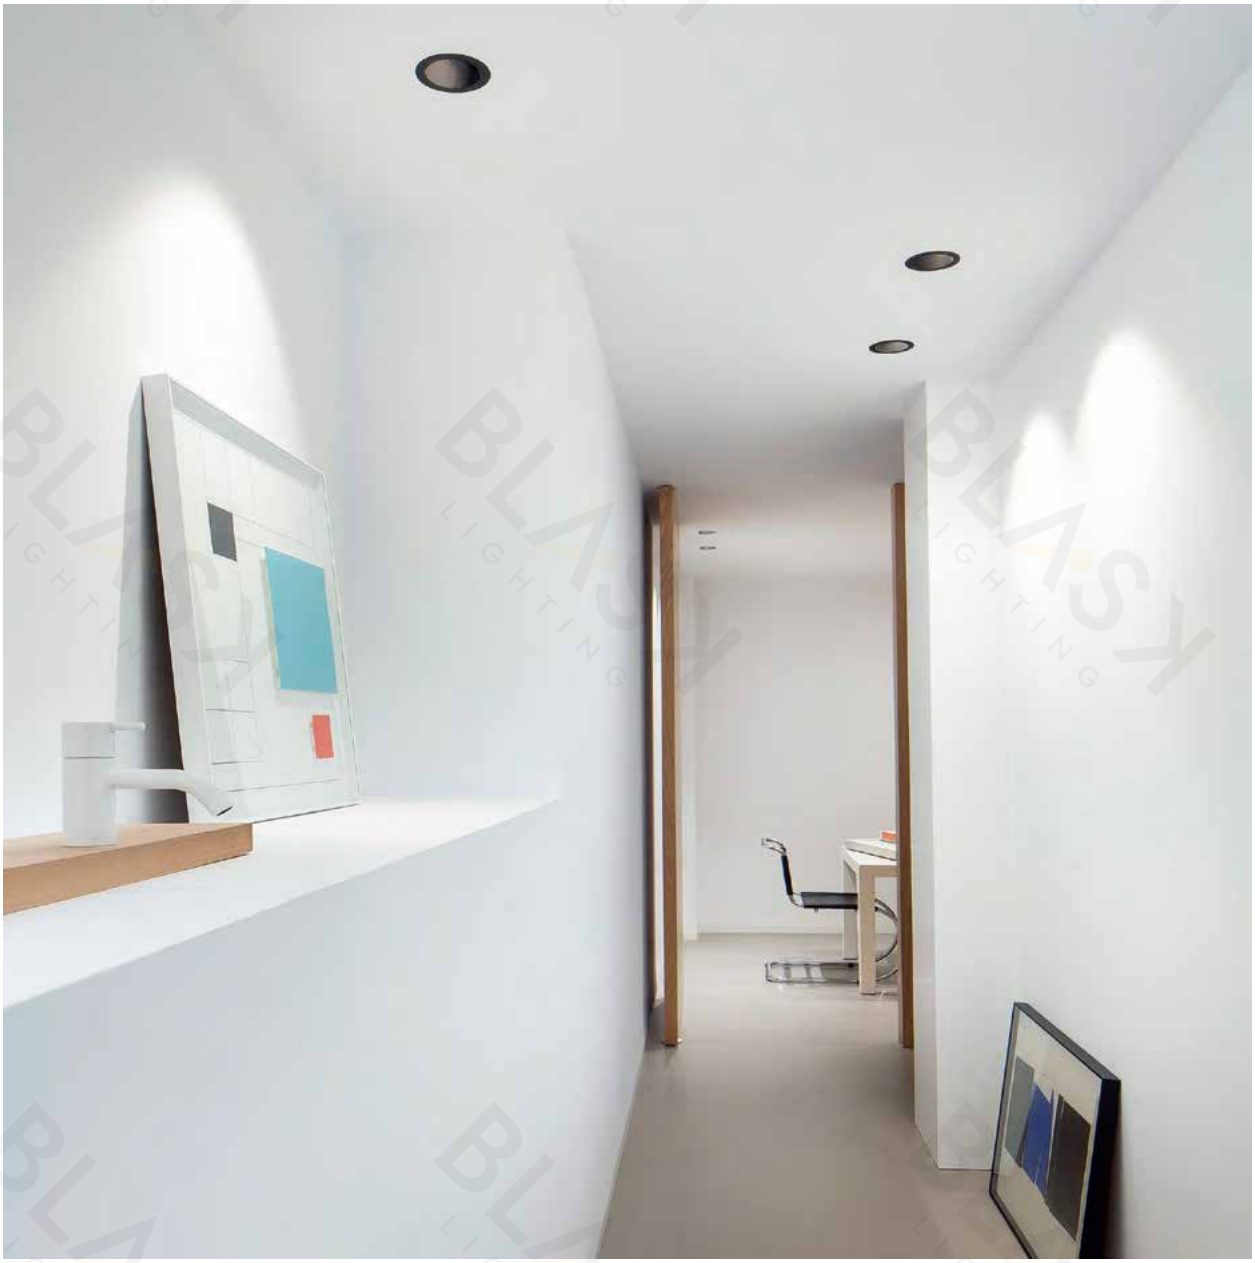

LED DOWNLIGHT

FEATURE

Aluminum lamp body
Unadjustable angle
UGR<12
IP20
CRI>90
AC220-240V 50/60Hz
5 years warranty
Reflector color: Black, White, Metal black, Chrome, Silver, Gold

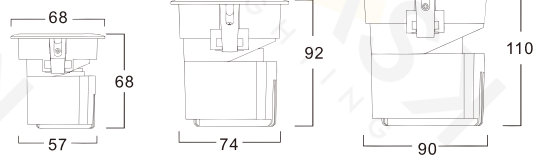

Cut-out:Ø55 5W — INASL I30590
Cut-out:Ø75 8W — INASL I30591
Cut-out:Ø95 15W — INASL I30592

SPECIFICATION

Item No.	Power	Lumens	Size	Cut-out Size	Color	CCT	Beam Angle
INASL I30590	5W	400 lm	Ø68	Ø55	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
INASL I30591	8W	640 lm	Ø86	Ø75	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
INASL I30592	15W	1200 lm	Ø107	Ø95	White / Black	3000K / 4000K/6500K	15° / 24° / 38°

SPECIAL CHARACTERISTICS

- RoHS Certification
- High-power LEDs / chip-on-Board LED
- Excellent thermal manage-ment
- CE Certification
- Efficient Spherolit techno-logy
- EMC-optimised
- IP20
- Different beam angle
- Various housing colors
- Class II
- Different color temperature
- Various construction sizes

LED DOWNLIGHT

FEATURE

Aluminum lamp body
Adjustable angle
UGR<12
IP20
CRI>90
AC220-240V 50/60Hz
5 years warranty
Reflector color: Black, White, Metal black, Chrome, Silver, Gold

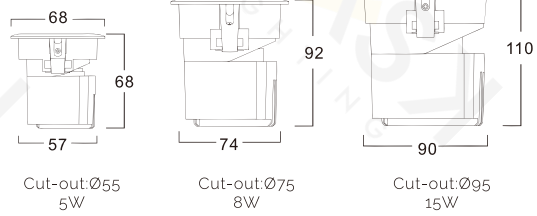

Cut-out:Ø55 5W
INASL I30593

Cut-out:Ø75 8W
INASL I30594

Cut-out:Ø95 15W
INASL I30595

SPECIFICATION

Item No.	Power	Lumens	Size	Cut-out Size	Color	CCT	Beam Angle
INASL I30593	5W	400 lm	Ø68	Ø55	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
INASL I30594	8W	640 lm	Ø86	Ø75	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
INASL I30595	15W	1200 lm	Ø107	Ø95	White / Black	3000K / 4000K/6500K	15° / 24° / 38°

SPECIAL CHARACTERISTICS

- RoHS Certification
- CE Certification
- IP20
- Class II
- Adjustable angle
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different beam angle
- Different color temperature
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors
- Various construction sizes

LED DOWNLIGHT

FEATURE

Aluminum lamp body
Adjustable angle
UGR<12
IP20
CRI>90
AC220-240V 50/60Hz
5 years warranty
Reflector color: Black, White, Metal black, Chrome, Silver, Gold



Cut-out:55*55
5W

INASL I30596



Cut-out:75*75
8W

INASL I30597



Cut-out:95*95
15W

INASL I30598

SPECIFICATION

Item No.	Power	Lumens	Size	Cut-out Size	Color	CCT	Beam Angle
INASL I30596	5W	400 lm	68*68	55*55	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
INASL I30597	8W	640 lm	89*89	75*75	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
INASL I30598	15W	1200 lm	107*107	95*95	White / Black	3000K / 4000K/6500K	15° / 24° / 38°

SPECIAL CHARACTERISTICS

- RoHS Certification
- CE Certification
- IP20
- Class II
- Adjustable angle
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Different beam angle
- Different color temperature
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors
- Various construction sizes

LED DOWNLIGHT

FEATURE

Aluminum lamp body
Adjustable angle
UGR<12
IP20
CRI>90
AC220-240V 50/60Hz
5 years warranty
Reflector color: Black, White, Metal black, Chrome, Silver, Gold

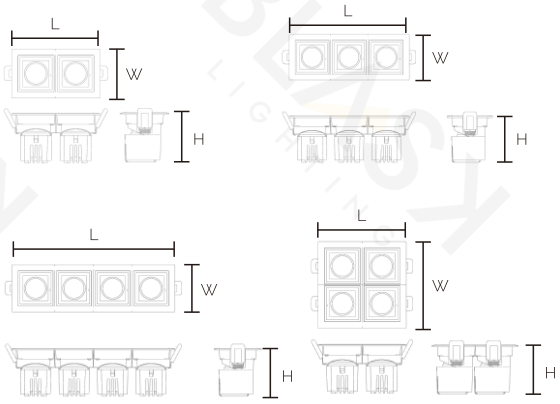

SPECIFICATION

Product photo	Item No.	Power	Lumens	Size(L*W*H)	Cut-out Size	Color	CCT	Beam Angle
	INASL I30599	2*5W	800 lm	123*68*69	110*53	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30600	2*8W	1280 lm	167*89*92	151*73	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30601	2*15W	2400 lm	200*107*107	182*89	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30602	3*5W	1200 lm	178*68*69	166*53	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30603	3*8W	1920 lm	234*89*92	218*73	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30604	3*15W	3600 lm	283*107*107	265*89	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30605	4*5W	1600 lm	234*68*69	221*53	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30606	4*8W	2560 lm	307*89*92	291*73	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30607	4*15W	4800 lm	372*107*10	353*89	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30608	4*5W	1600 lm	123*121*69	110*105	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30609	4*8W	2560 lm	161*161*92	145*146	White / Black	3000K / 4000K/6500K	15° / 24° / 38°
	INASL I30610	4*15W	4800 lm	195*195*107	177*177	White / Black	3000K / 4000K/6500K	15° / 24° / 38°

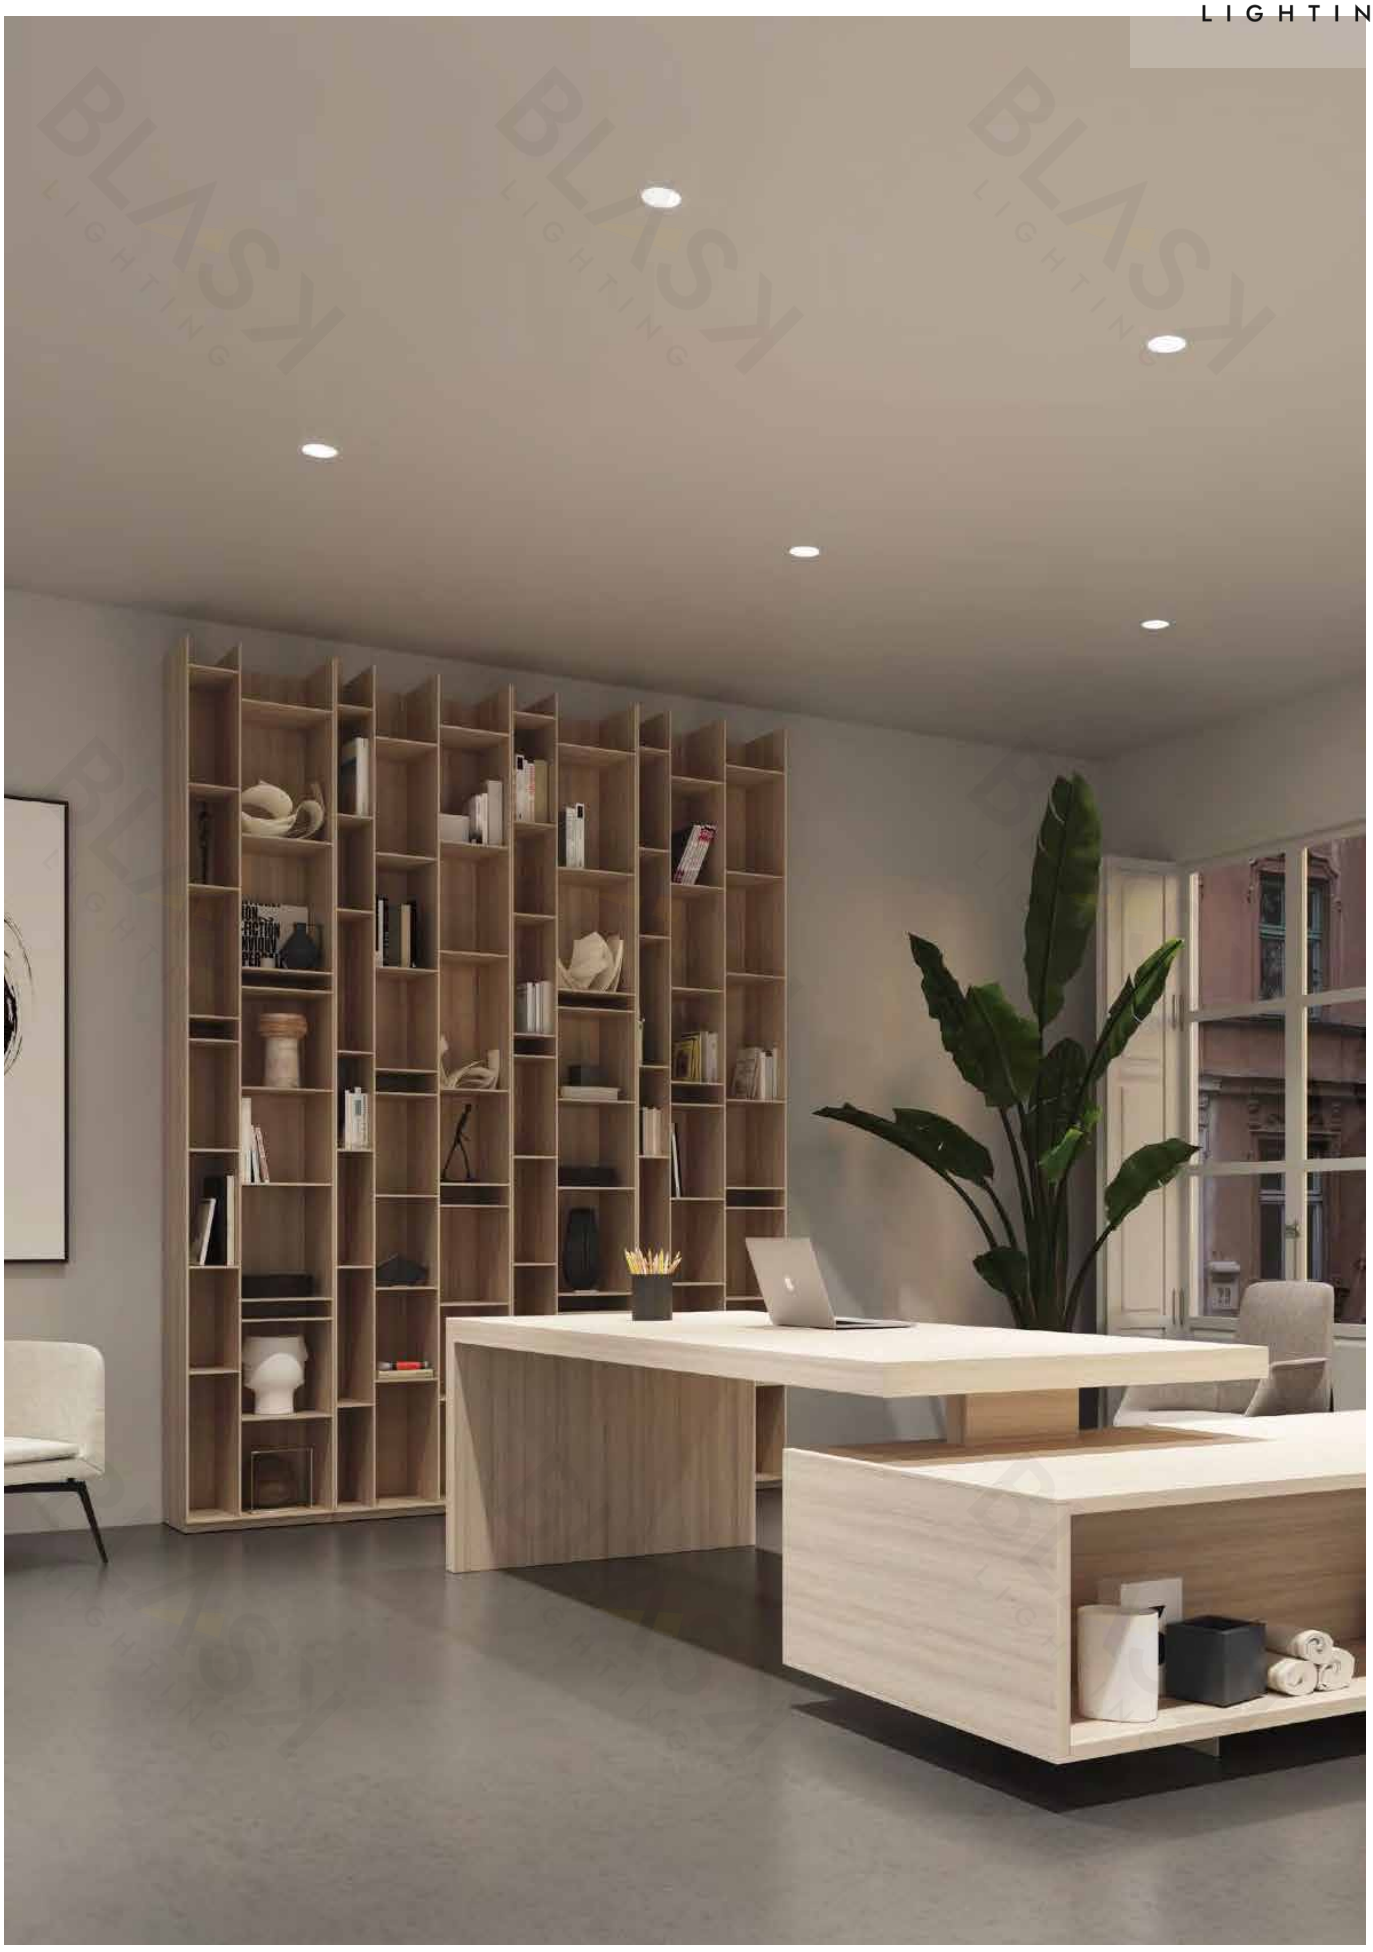

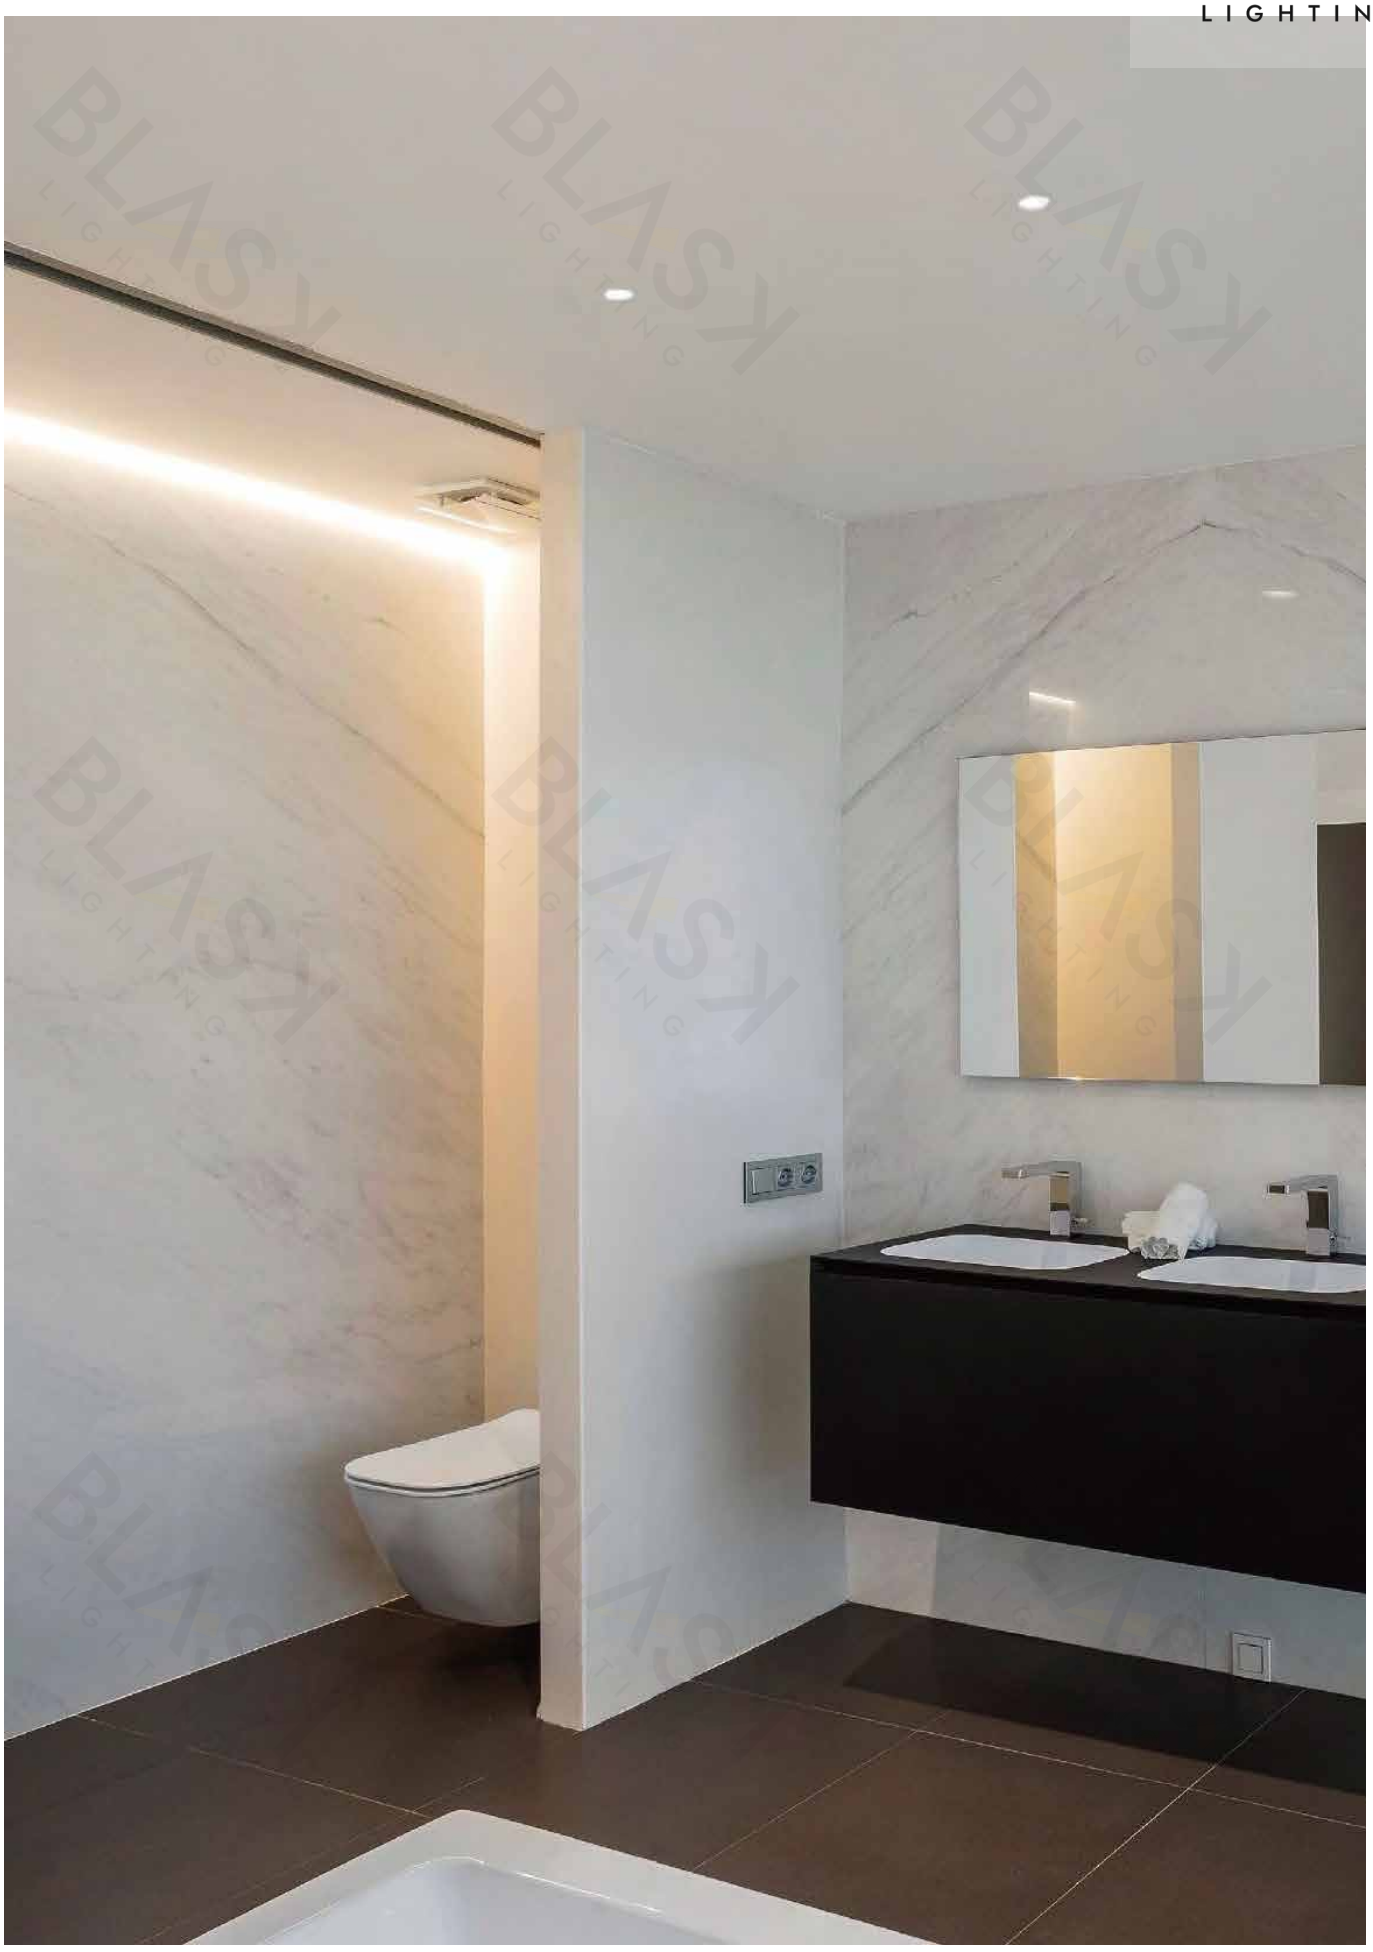

LED DOWNLIGHT

LED DOWNLIGHT

FEATURE

Aluminum lamp body
Adjustable angle
Trimless install
UGR<12
IP20
CRI>90
AC220-240V 50/60Hz
5 years warranty
Reflector color: Black, White, Metal black, Chrome, Silver, Gold





SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle	Size	Cut-out Size
INASL I30611	8W	640 lm	Black/White	3000K / 4000K/6500K	18°/24°/38°	Ø125*H99	Ø79
INASL I30612	15W	1200 lm	Black/White	3000K / 4000K/6500K	18°/24°/38°	Ø143*H110	Ø94

Rouscunelas

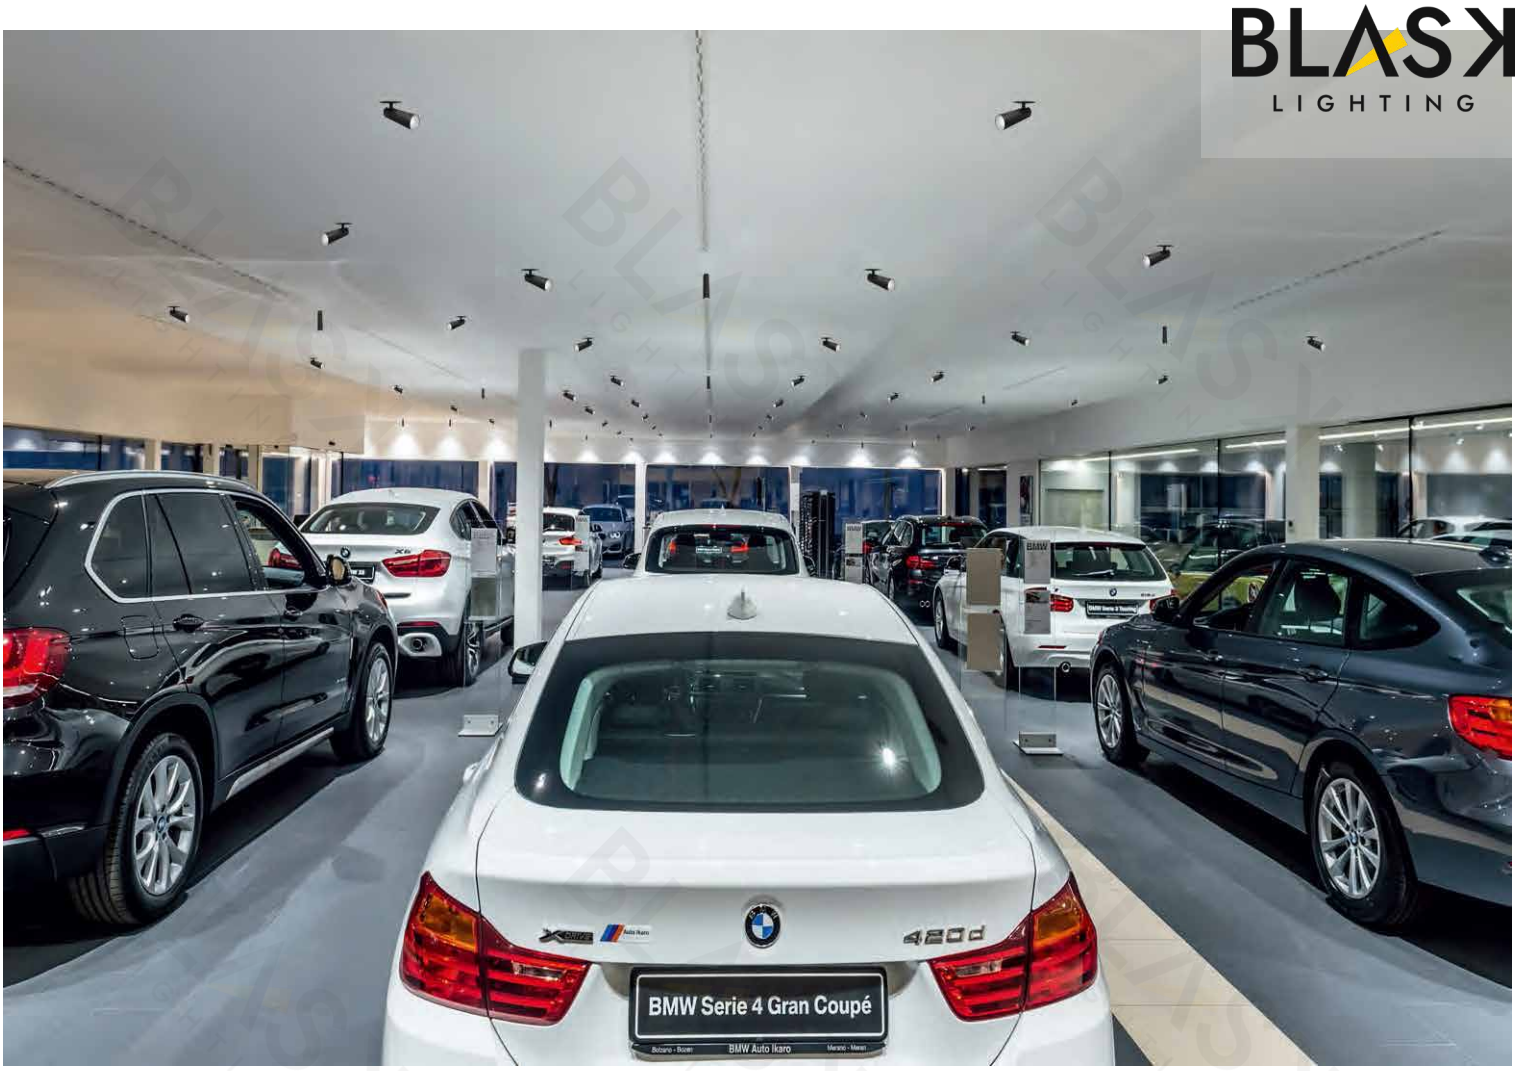
BMW Serie 4 Gran Coupé
BMW Auto Ikaro
420d

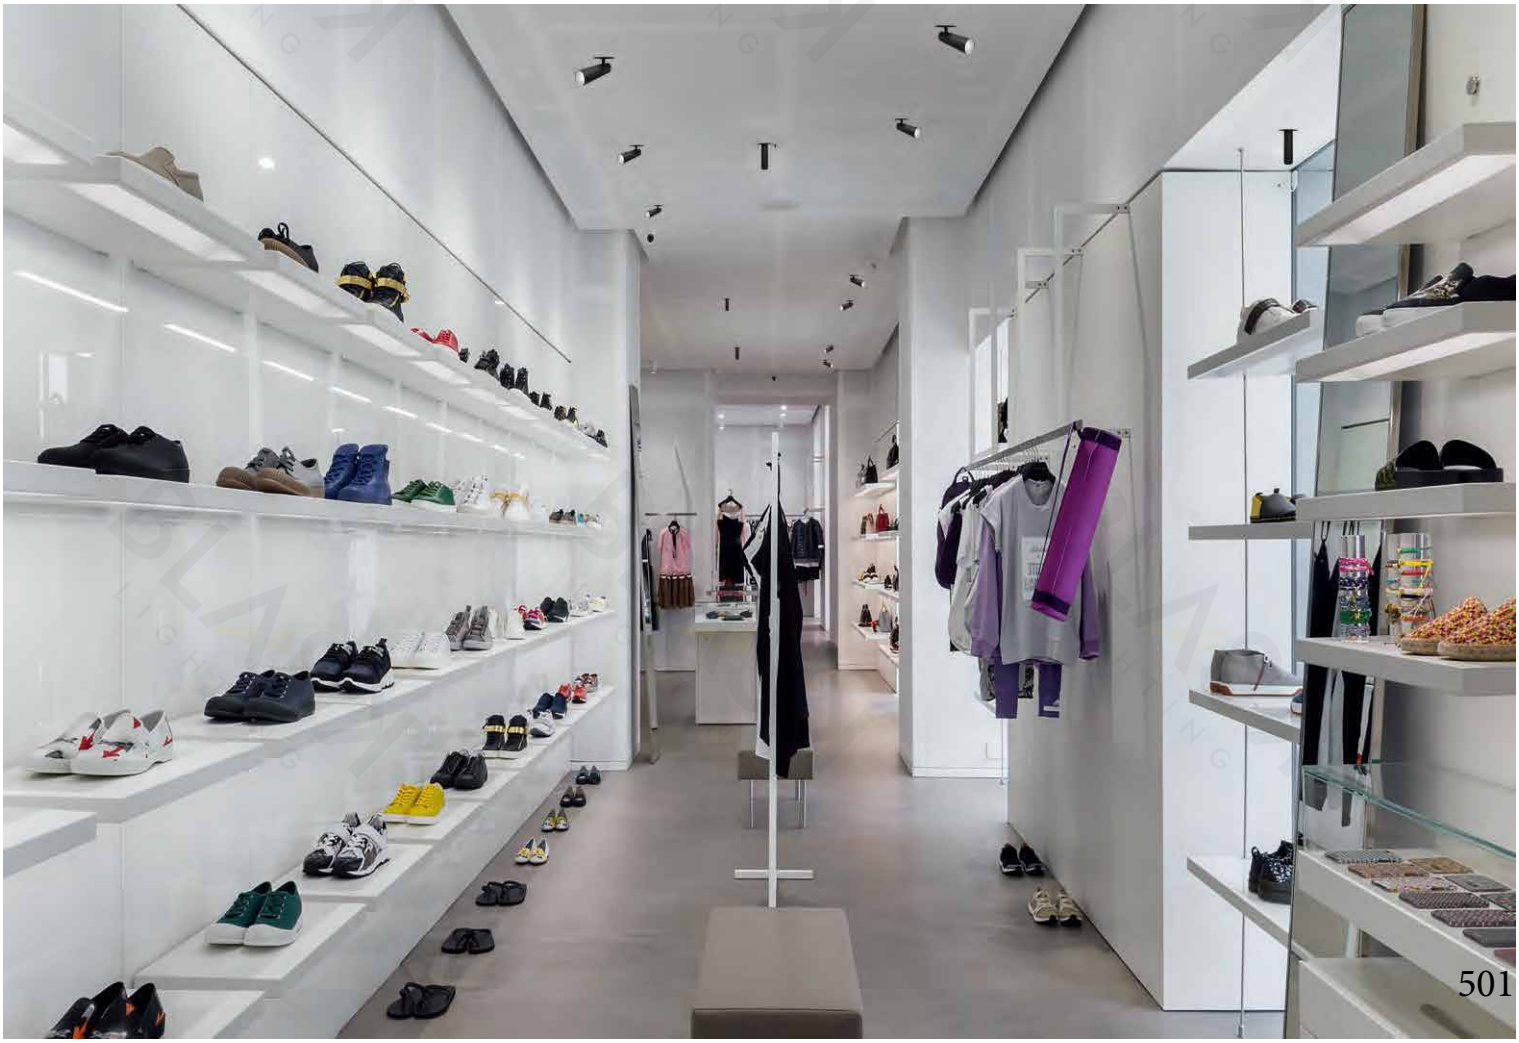

LED DOWNLIGHT

- Anti-glare
- Mini design
- Easy install

Recessed

Surface

Surface

INASL I30613





Power	5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	50 000 H
Warranty	5 Years

INASL I30614





Power	5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	50 000 H
Warranty	5 Years

INASL I30615





Power	5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	50 000 H
Warranty	5 Years

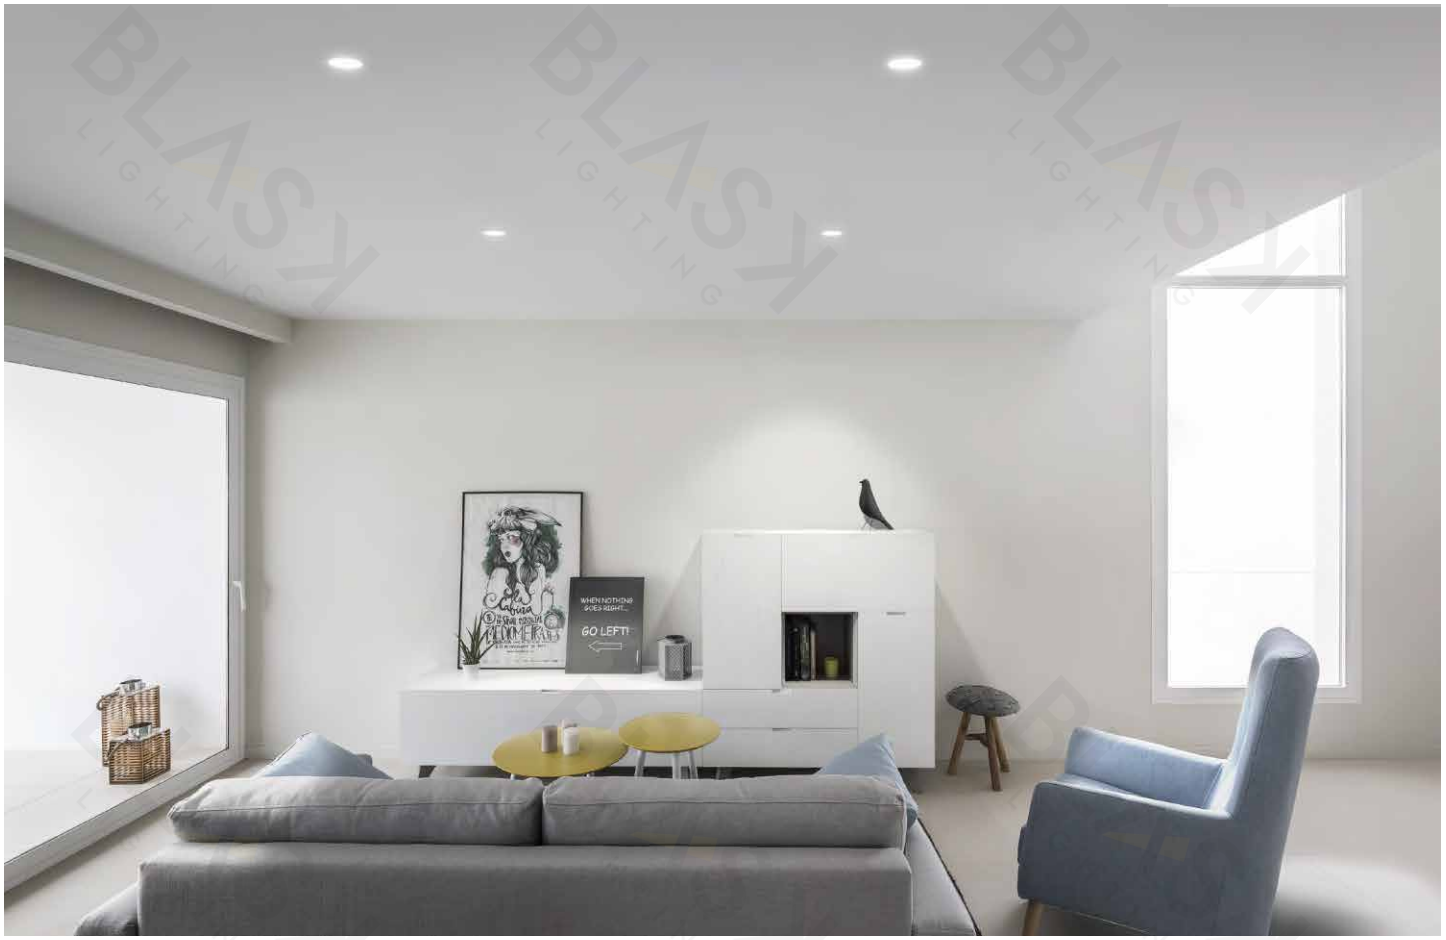
GO LEFT!

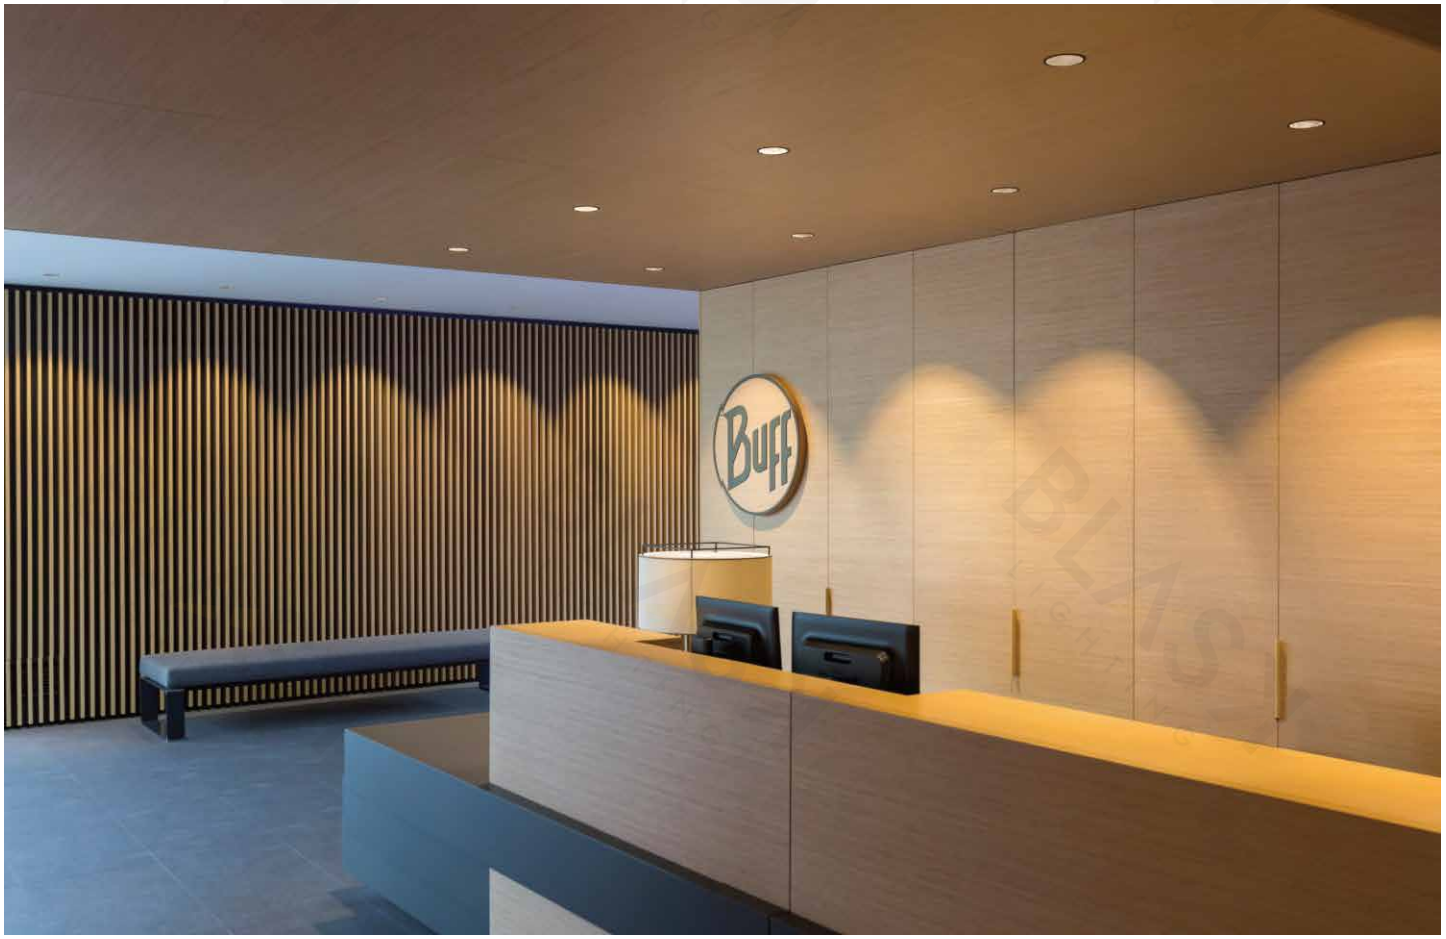
BUFF

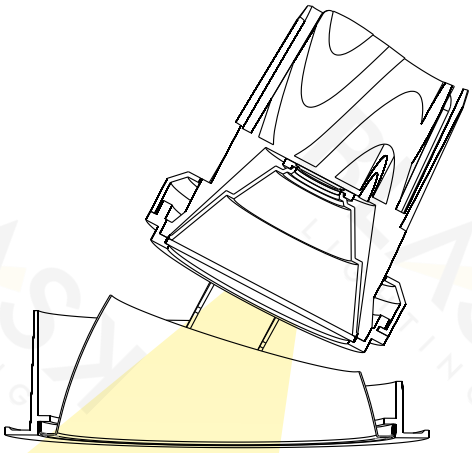

Downlight

Maintenance simple and quick,
cost savings.

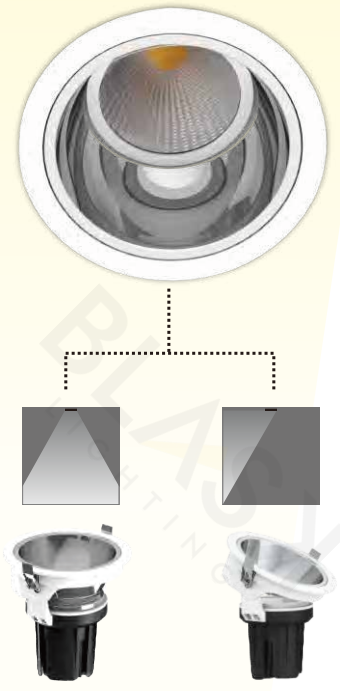

Fixed angle Wall Washer

APPLICATIONS:
Government and Office buildings
• Entries,lobbies,corridorsandhallways
• Conferencerooms
Shopping Malls and Retail Stores
• Open-trafficarea,entries,passageways,merchandise displays,showrooms,restrooms,foodserviceareas
Hospital and Health Care Facilities
• Entries,receptionarea,corridors,treatment rooms,doctors/nurses/techniciansoffices, foodserviceandrestrooms.
Theaters and Museum
• Lobbies,foodserviceareas,aisleways,restrooms
Hotels
• Lobbies,receptionareas,guestrooms,barand diningareas,meetingandexerciserooms

INASL I30616





Power	8W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30617





Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2000 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30618





Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3000 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30619





Power	45W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4500 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30620



Power	8W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	8000 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30621



Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2000 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30622



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3000 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30623



Power	45W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4500 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

Angle adjustable

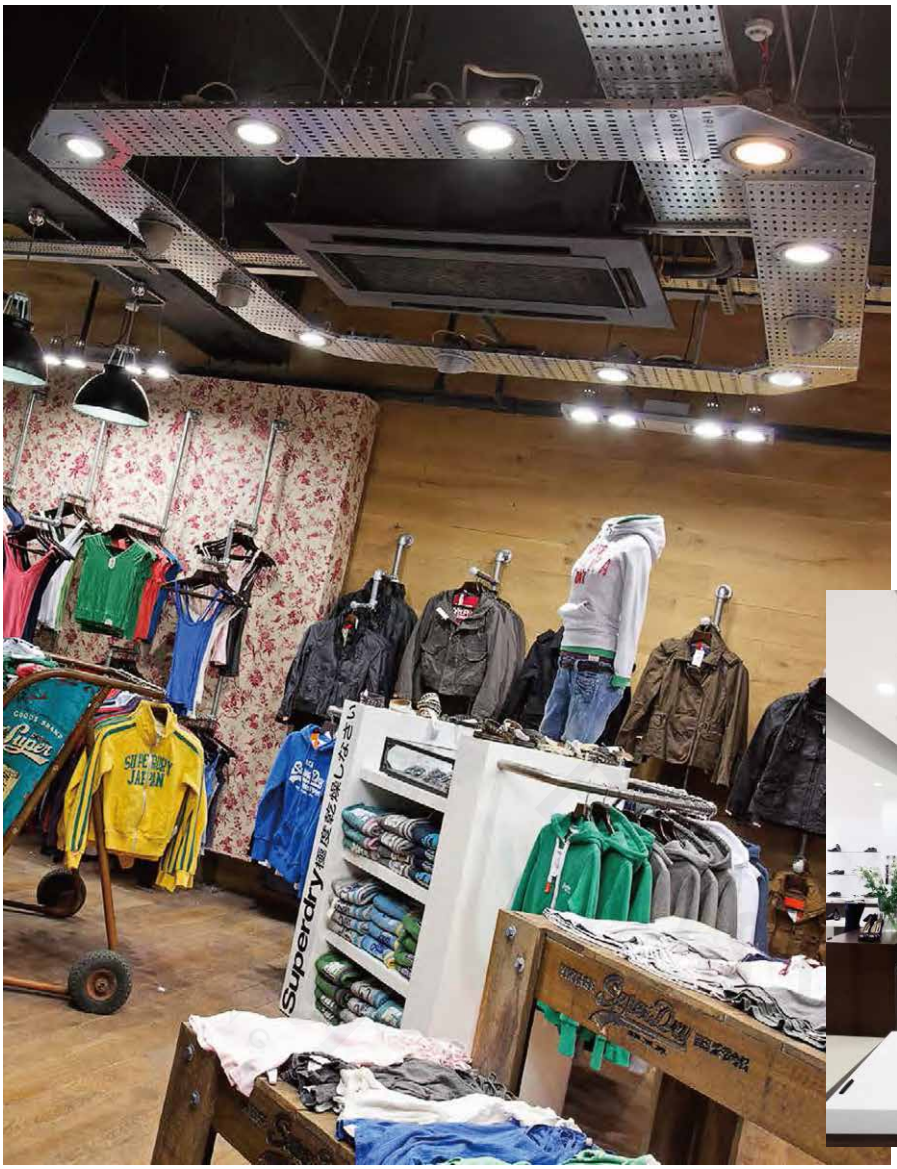
Superdry

JOHN LEWIS & Co.
JOHN LEWIS & Co.

Products exploded view

•Pivots out up to 60°, rotates 0-355°, position lockable
•Choice of flood (38°) or spot (24°) reflector, supplied complete with protective glass
•CREE COB chip with TUV/SAA led driver
•Dimming options are available
•Replace for traditional gimbal recessed downlight

INASL I30624



Power	7W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	560 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30625



Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30626



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

INASL I30627



Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum
Color	White
Life	50 000 H
Warranty	5 Years

IP20 HIGH CRI UGR<19

Features

- Recessed installation in false ceilings.
- Main body with radiant surface made of die-cast aluminium.
- High-definition optics made of metallised thermoplastic material, integrated in the innovative black anti-glare screen that defines emission with luminance control UGR<19.
- The special configuration of the optical system delivers a precise circular distribution without punctiform effect.
- High visual comfort.
- Installation without tools.
- IP20

Frame

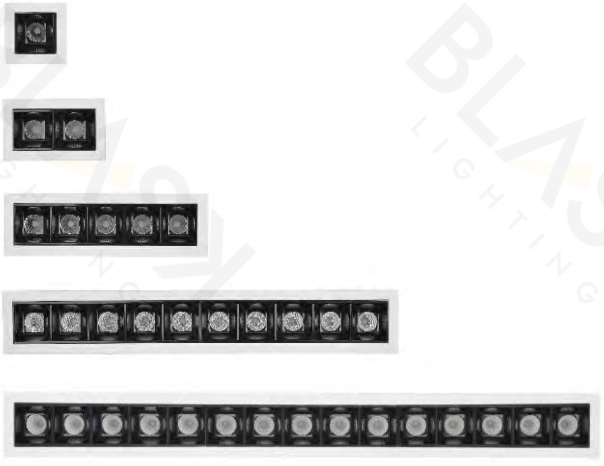

INASL I30628





Power	2W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	160 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASL I30629



Power	4W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	320 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASL I30630





Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASL I30631





Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASL I30632





Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

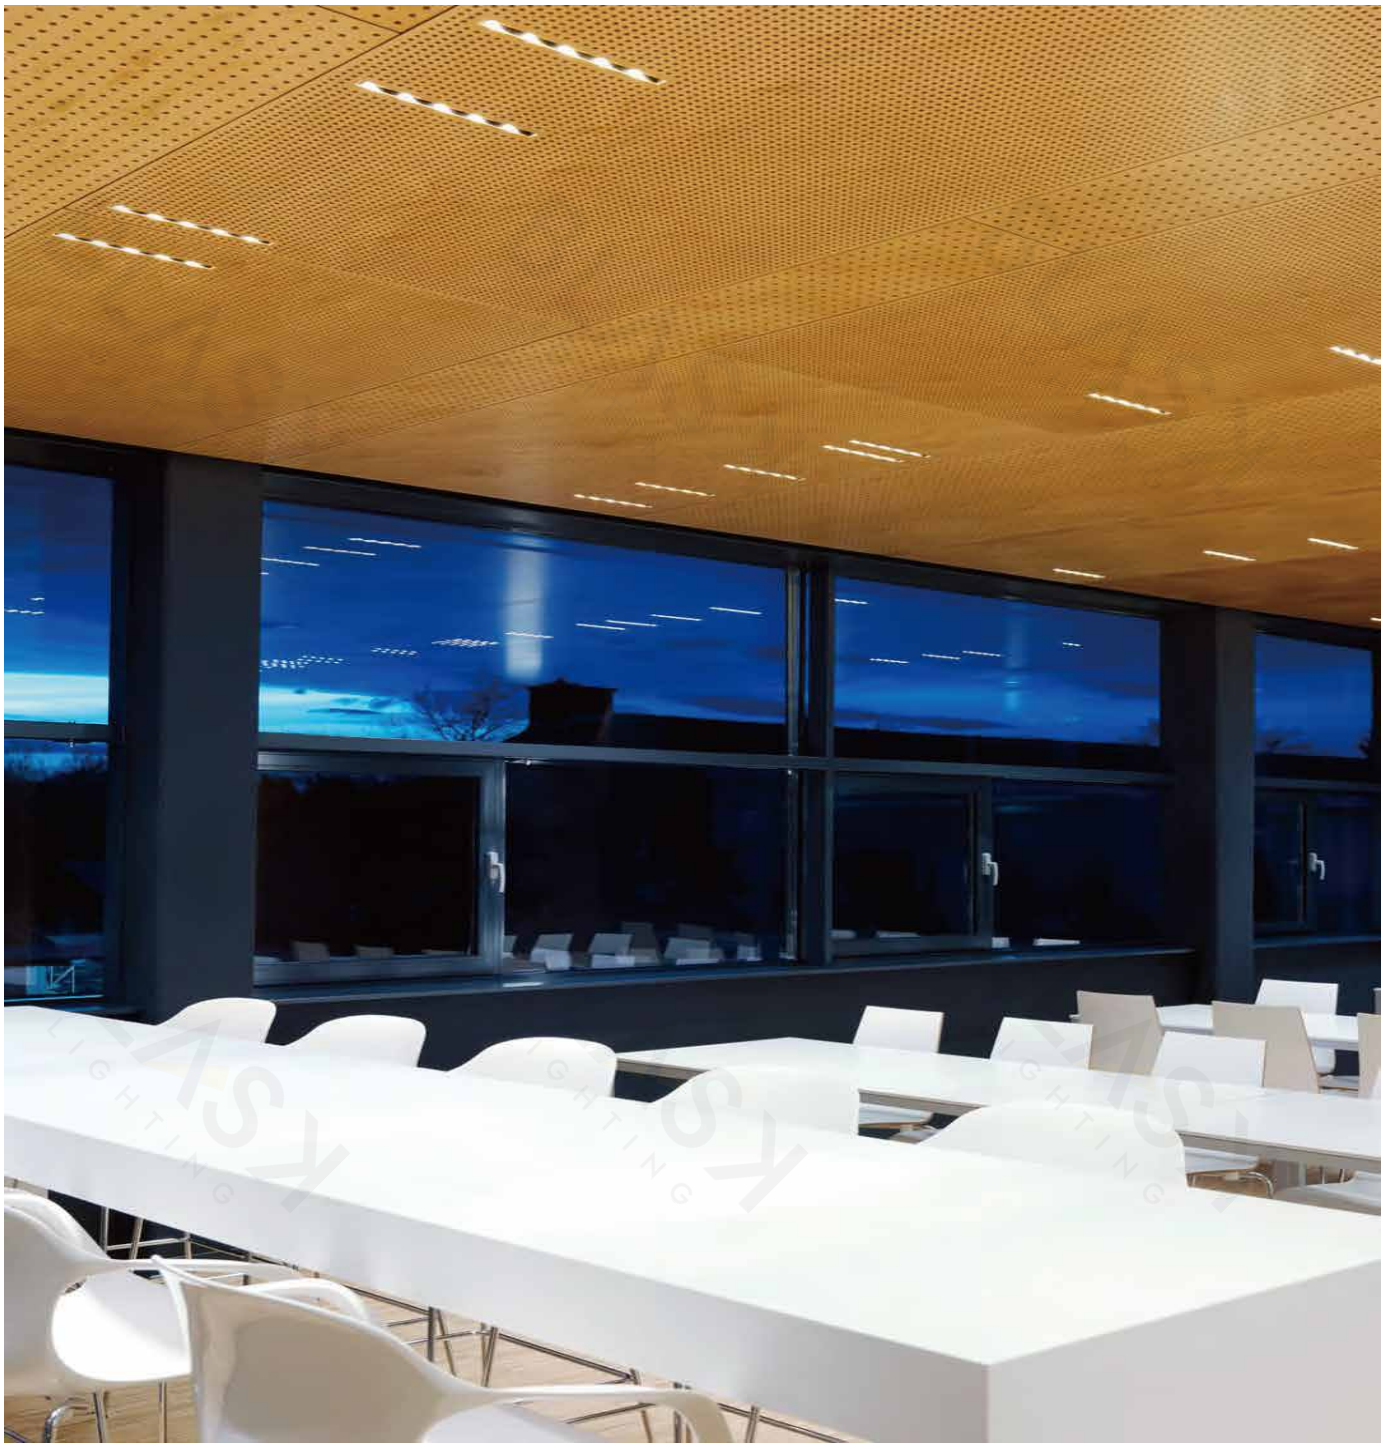

IP20 HIGH CRI UGR<19

Features

- Recessed installation in false ceilings.
- Main body with radiant surface made of die-cast aluminium.
- High-definition optics made of metallised thermoplastic material, integrated in the innovative black anti-glare screen that defines emission with luminance control UGR<19.
- The special configuration of the optical system delivers a precise circular distribution without punctiform effect.
- High visual comfort.
- Installation without tools.
- IP20

Frame

INASL I30633



Power	2W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	160 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASL I30634



Power	4W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	320 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASL I30635



Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASL I30636



Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASL I30637





Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

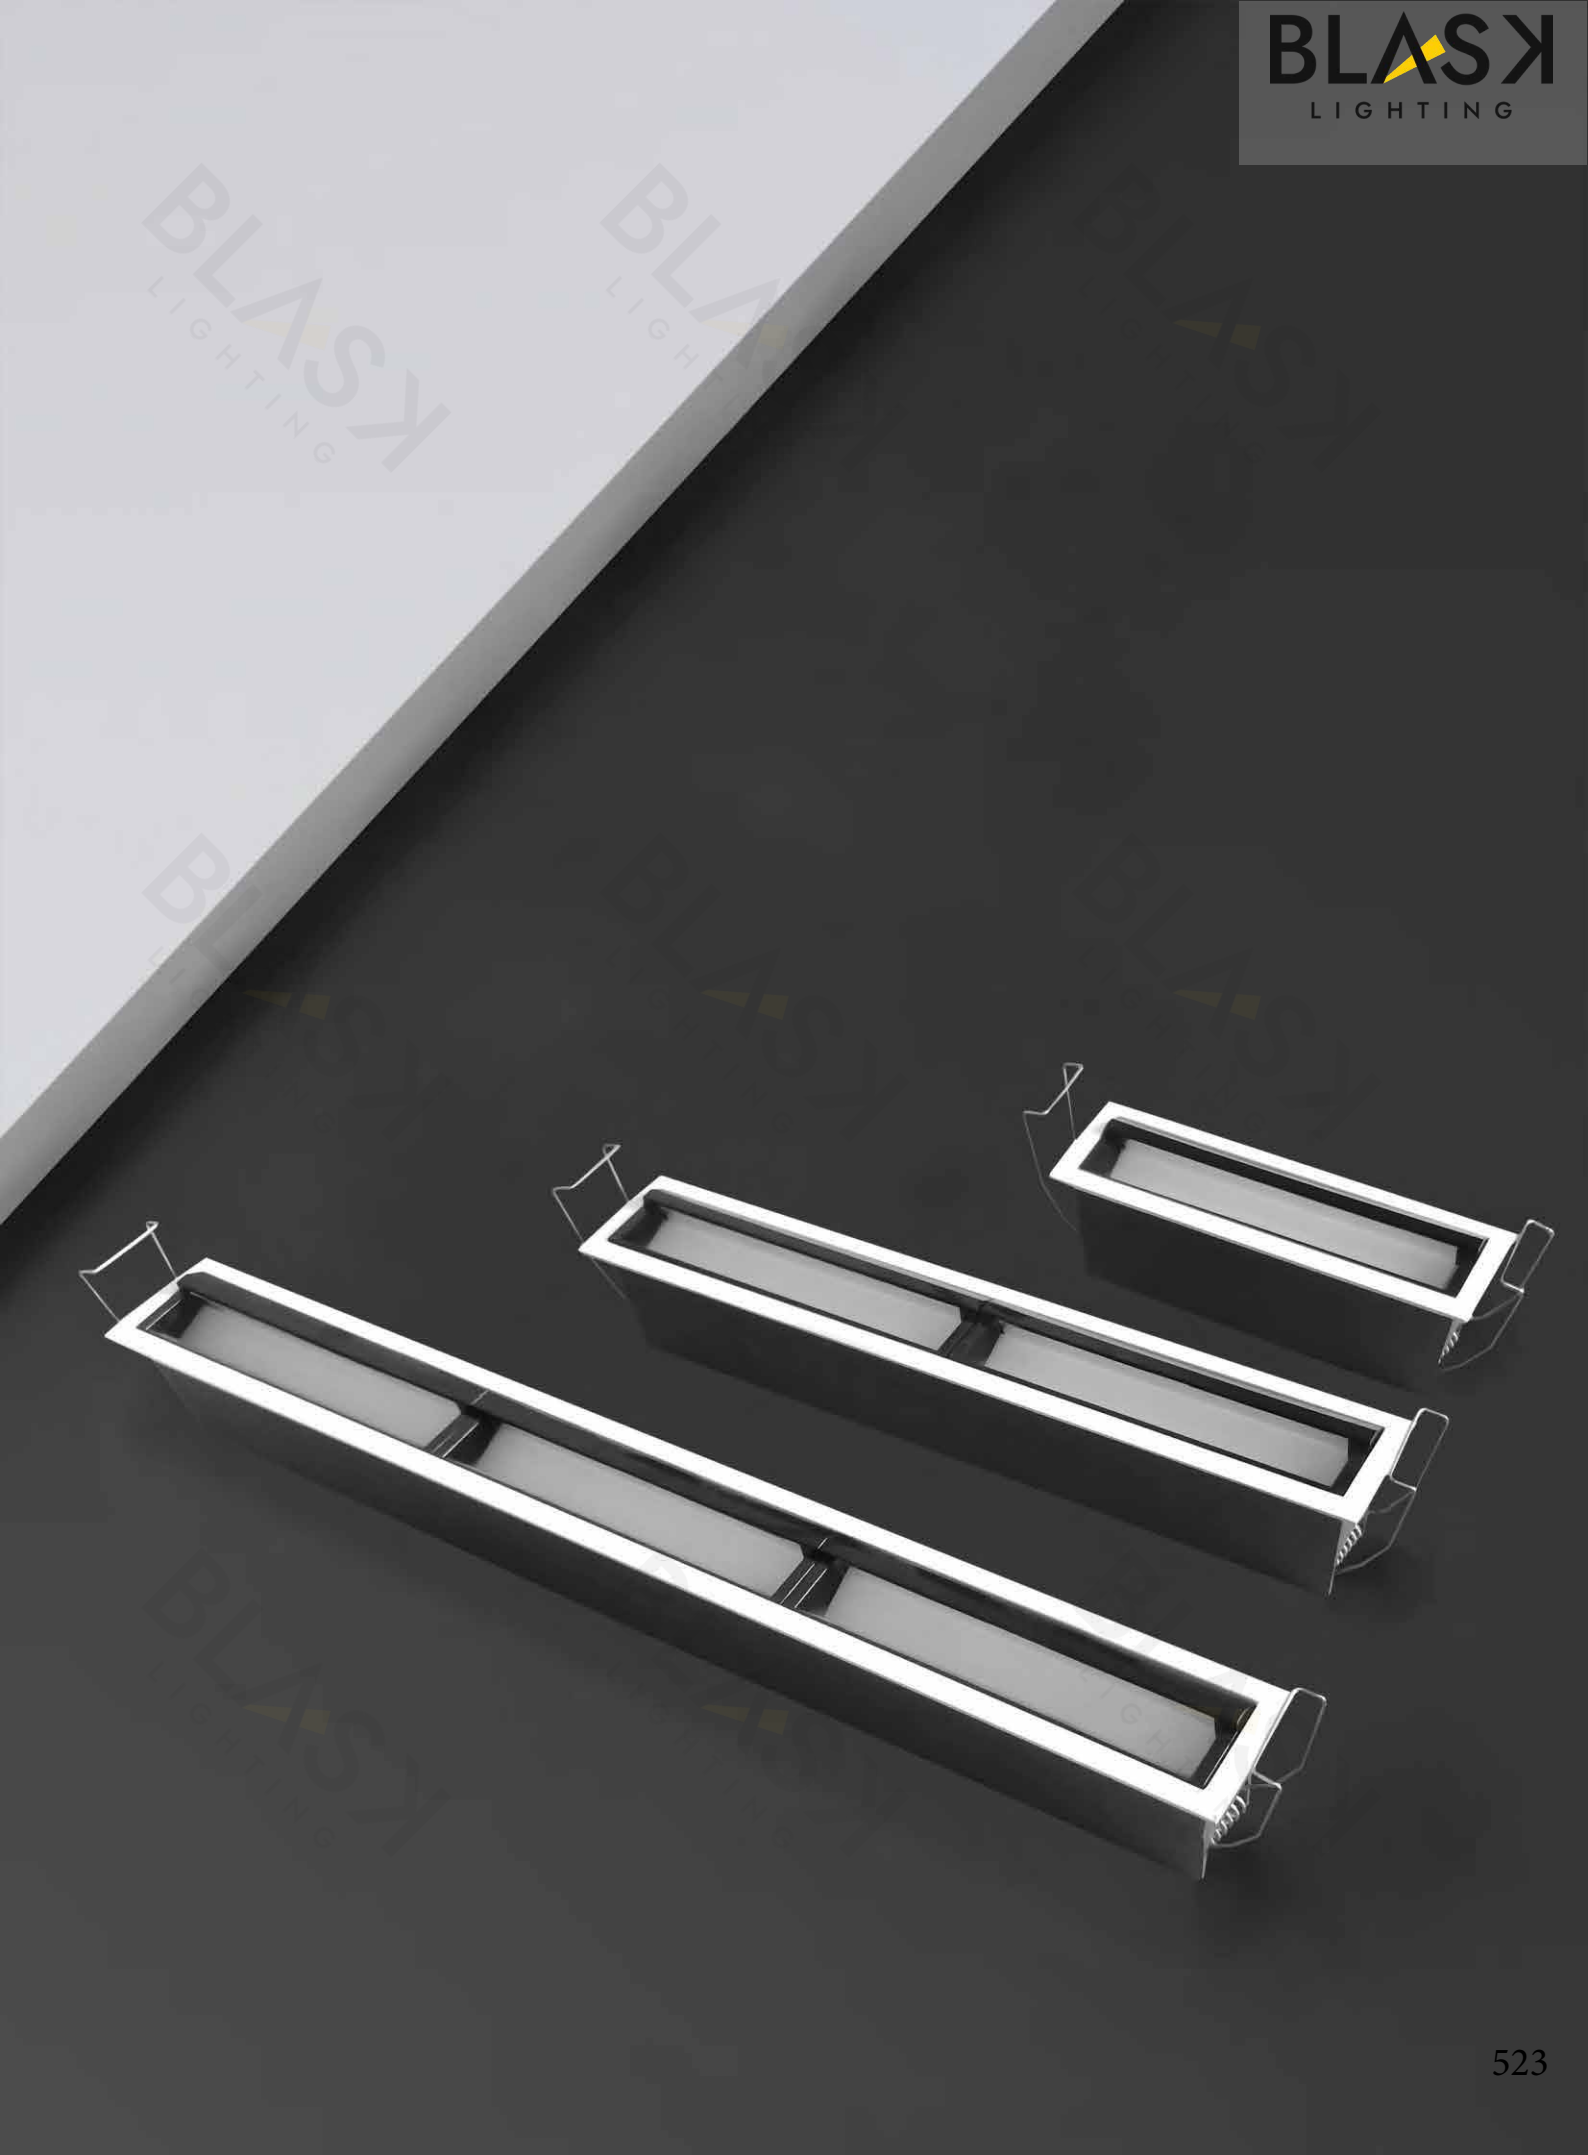

LED DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
UGR<16
AC220-240V 50/60Hz
5-year warranty

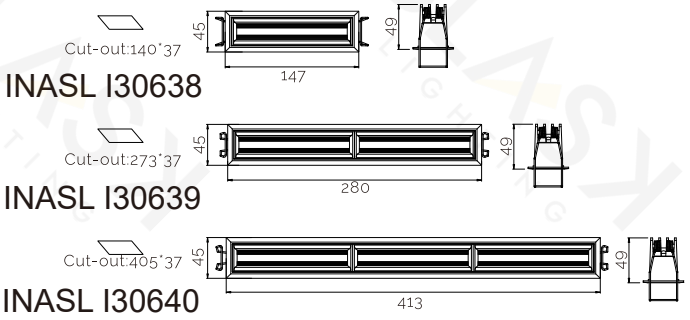

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INASL I30638	10W	800 lm	3000K/4000K/6500K	60°
INASL I30639	20W	1600 lm	3000K/4000K/6500K	60°
INASL I30640	30W	2400 lm	3000K/4000K/6500K	60°

LED DOWNLIGHT

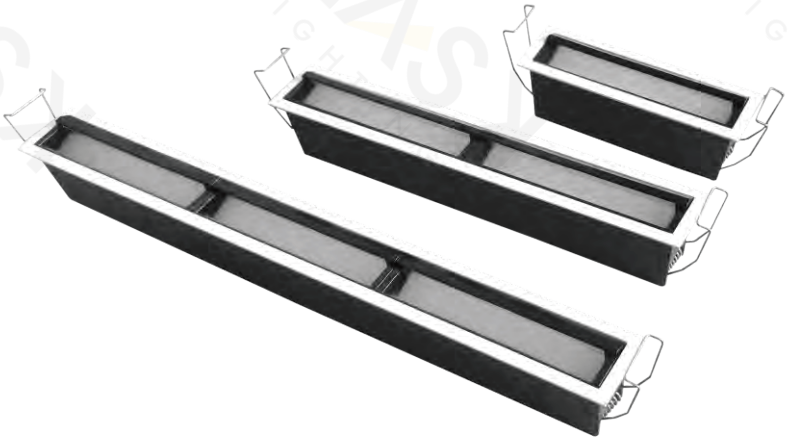

PRODUCT FEATURES

Aluminum lamp body
Wall wash
IP20
CRI>90
UGR<16
AC220-240V 50/60Hz
5-year warranty

Wall washing Lighting

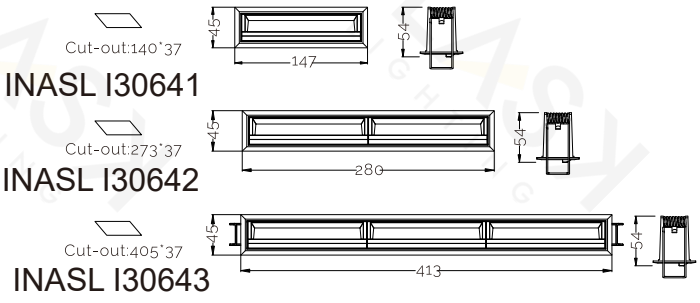

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INASL I30641	10W	800 lm	3000K/4000K/6500K	wall wash
INASL I30642	20W	1600 lm	3000K/4000K/6500K	wall wash
INASL I30643	30W	2400 lm	3000K/4000K/6500K	wall wash

CINECA

- **Waterproof design** IP67

- **Optional baffle colors**
  - Up to 5 colors to choose from for different ceilings

Chrome Gold Silver Black White

- **High quality LED chip**
  - CREE chip
  - CRI>80/90
  - >80lm/w

- **Anti-glare design**

- **DIAL 0-10V (** Optional **)**

INASL I30644

45°



Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	Chrome / Black / Gold / Silver / White
Life	50 000 H
Warranty	5 Years

INASL I30645

45°



Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	Chrome / Black / Gold / Silver / White
Life	50 000 H
Warranty	5 Years

INASL I30646

45°



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	Chrome / Black / Gold / Silver / White
Life	50 000 H
Warranty	5 Years

INASL I30647

30°



Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum
Color	Chrome / Black / Gold / Silver / White
Life	50 000 H
Warranty	5 Years

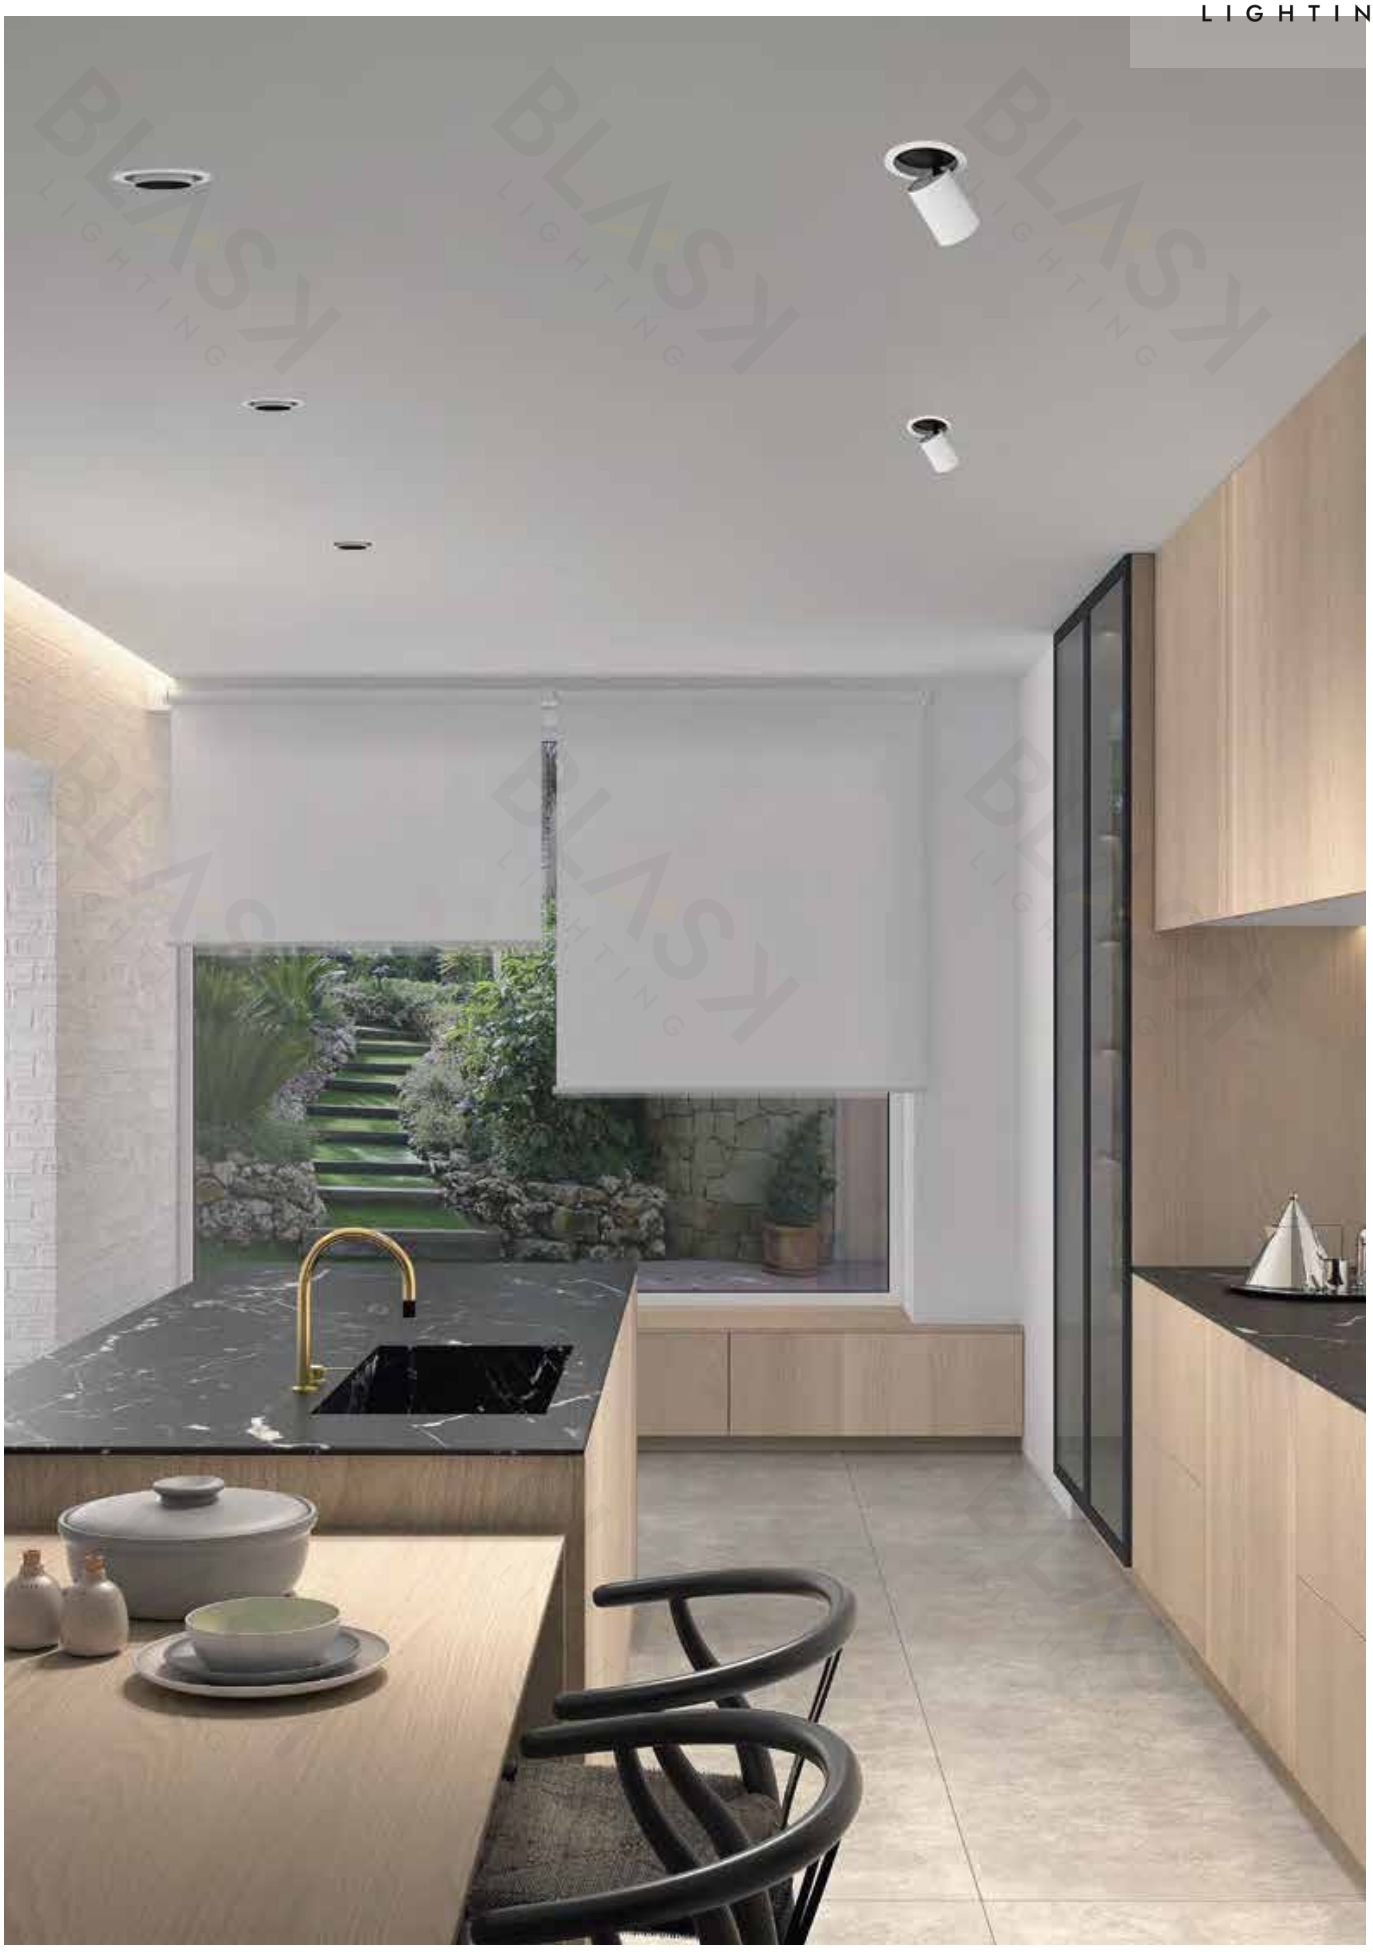

STRETCH ROTATING DOWNLIGHT

The lamp holder can be stretched freely, and the lighting angle is more convenient.
The lamp holder can be adjusted by 90° vertically and 350° horizontally.

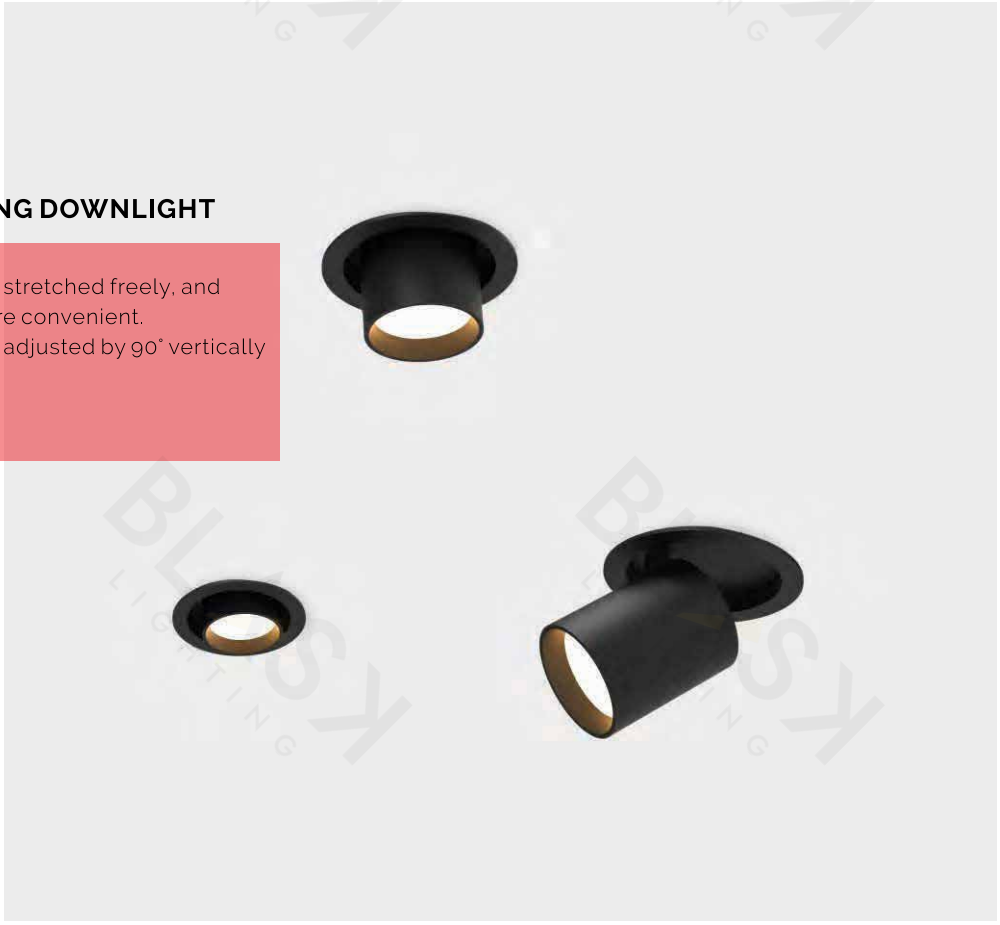

Stretch rotating downlight

FEATURE

Aluminum lamp body
Anti-glare design
UGR<12
IP20
CRI>90
AC220-240V 50/60Hz
50 000 hours life
5 years warranty



INASL I30648



INASL I30649

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INASL I30648	15W	1200 lm	White / Black	3000K / 4000K/6500K	38°
INASL I30649	20W	1600 lm	White / Black	3000K / 4000K/6500K	38°

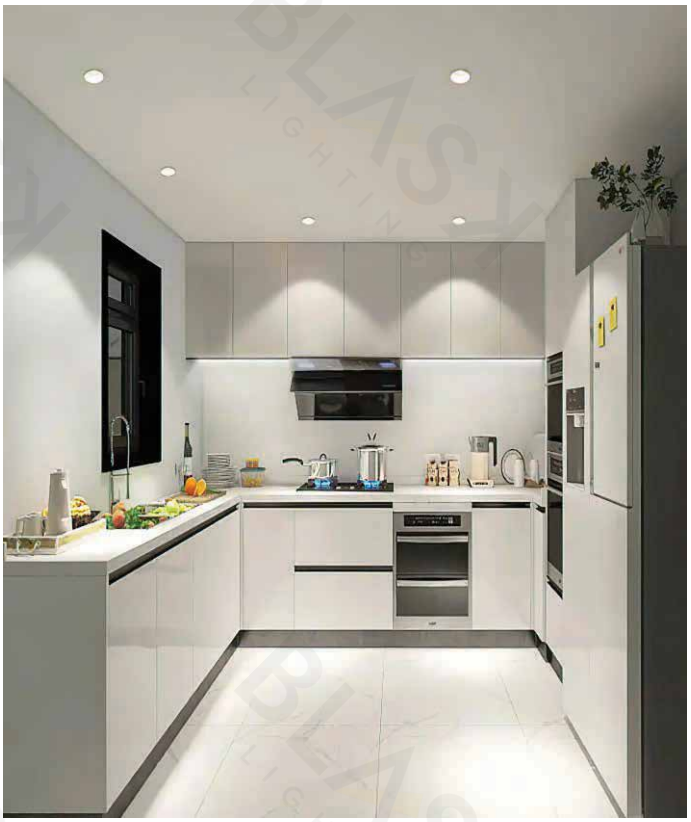

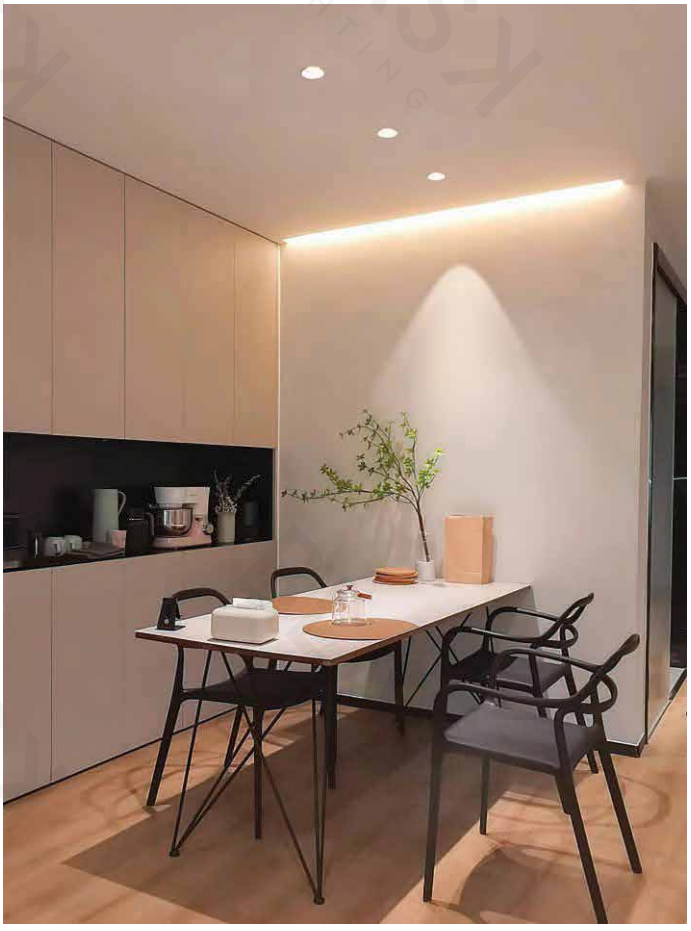

2 CUT-OUT SIZE

Face ring size:Ø88mm

Cut-out:**Ø75mm**

Face ring size:Ø110mm

Cut-out:**Ø95mm**

2 COB / SMD LED CHIP

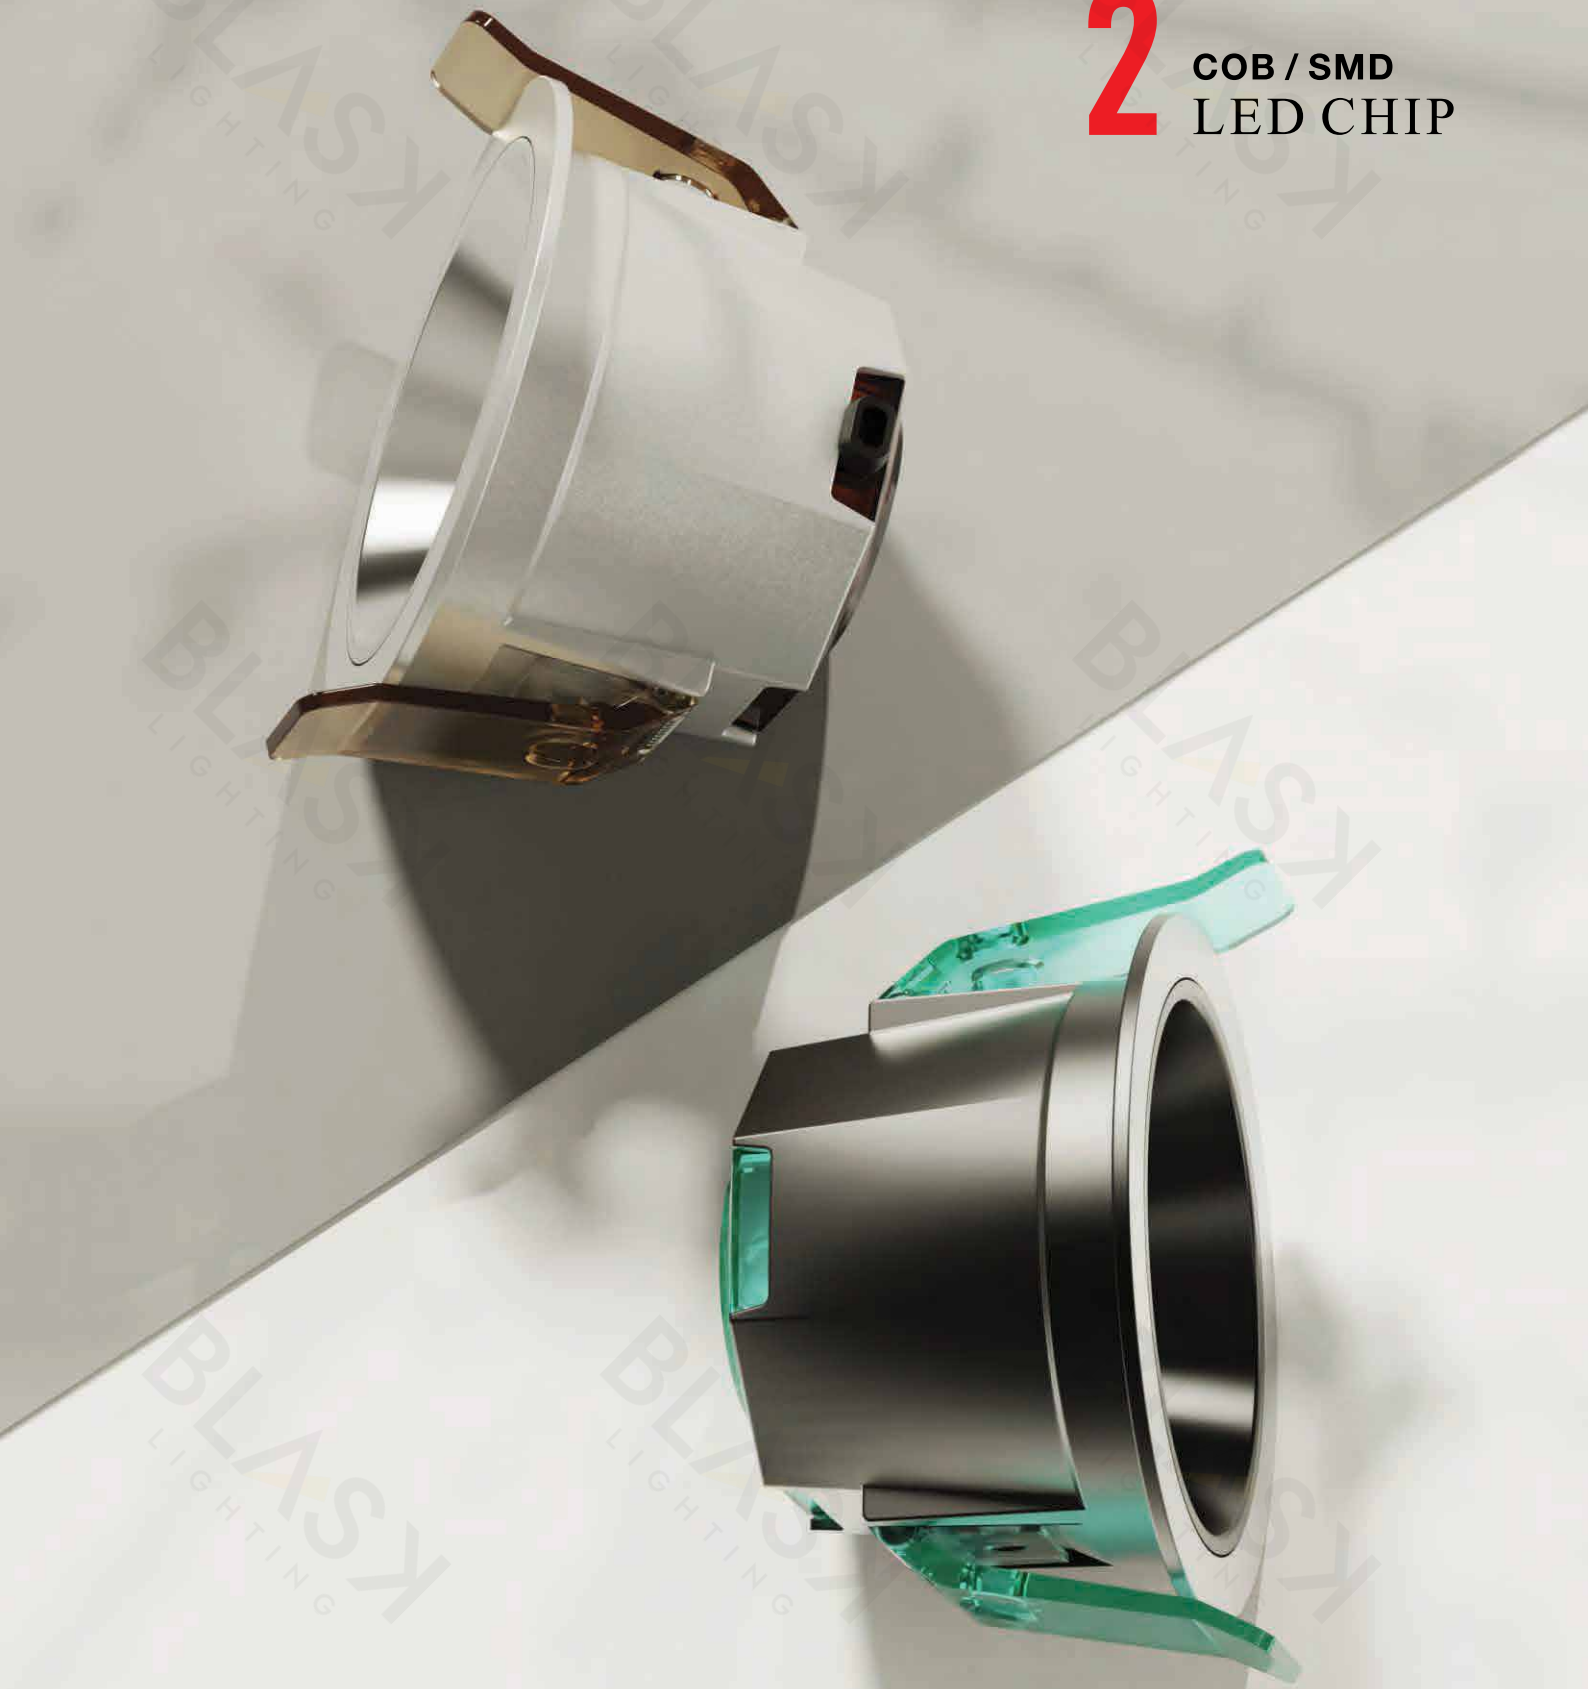

MULTIPLE COLOR CHOICES

LED DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
LED chip:COB
Reflective cup: lens
IP20
CRI>90
UGR<16
AC220-240V 50/60Hz
5-year warranty

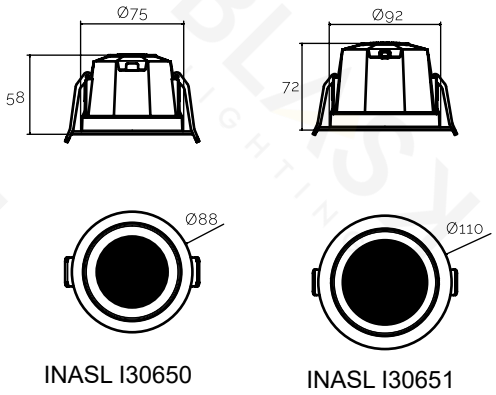

INASL I30650

INASL I30651

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30650	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	24° / 38° / 60°	Ø88	Ø75
INASL I30651	15W	1100 lm	15.5W	1200 lm	3000K/4000K/6500K	24° / 38° / 60°	Ø110	Ø95

LED DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
LED chip:SMD
Reflective cup: Diffuser
IP20
CRI>90
UGR<16
AC220-240V 50/60Hz
5-year warranty

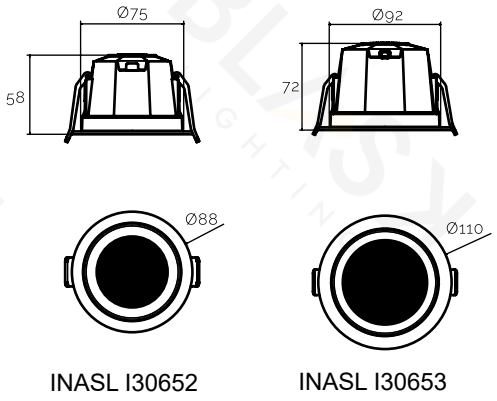

INASL I30652 INASL I30653

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle	Face szie	Cut-out szie
INASL I30652	7W	770 lm	7.6W	560 lm	3000K/4000K/6500K	120°	Ø88	Ø75
INASL I30653	15W	1100 lm	15.5W	1200 lm	3000K/4000K/6500K	120°	Ø110	Ø95

OPEN
BREADWAY
HERE
THE TRAY!
BREADWAY
UP TO
THE SKY
BAGELS

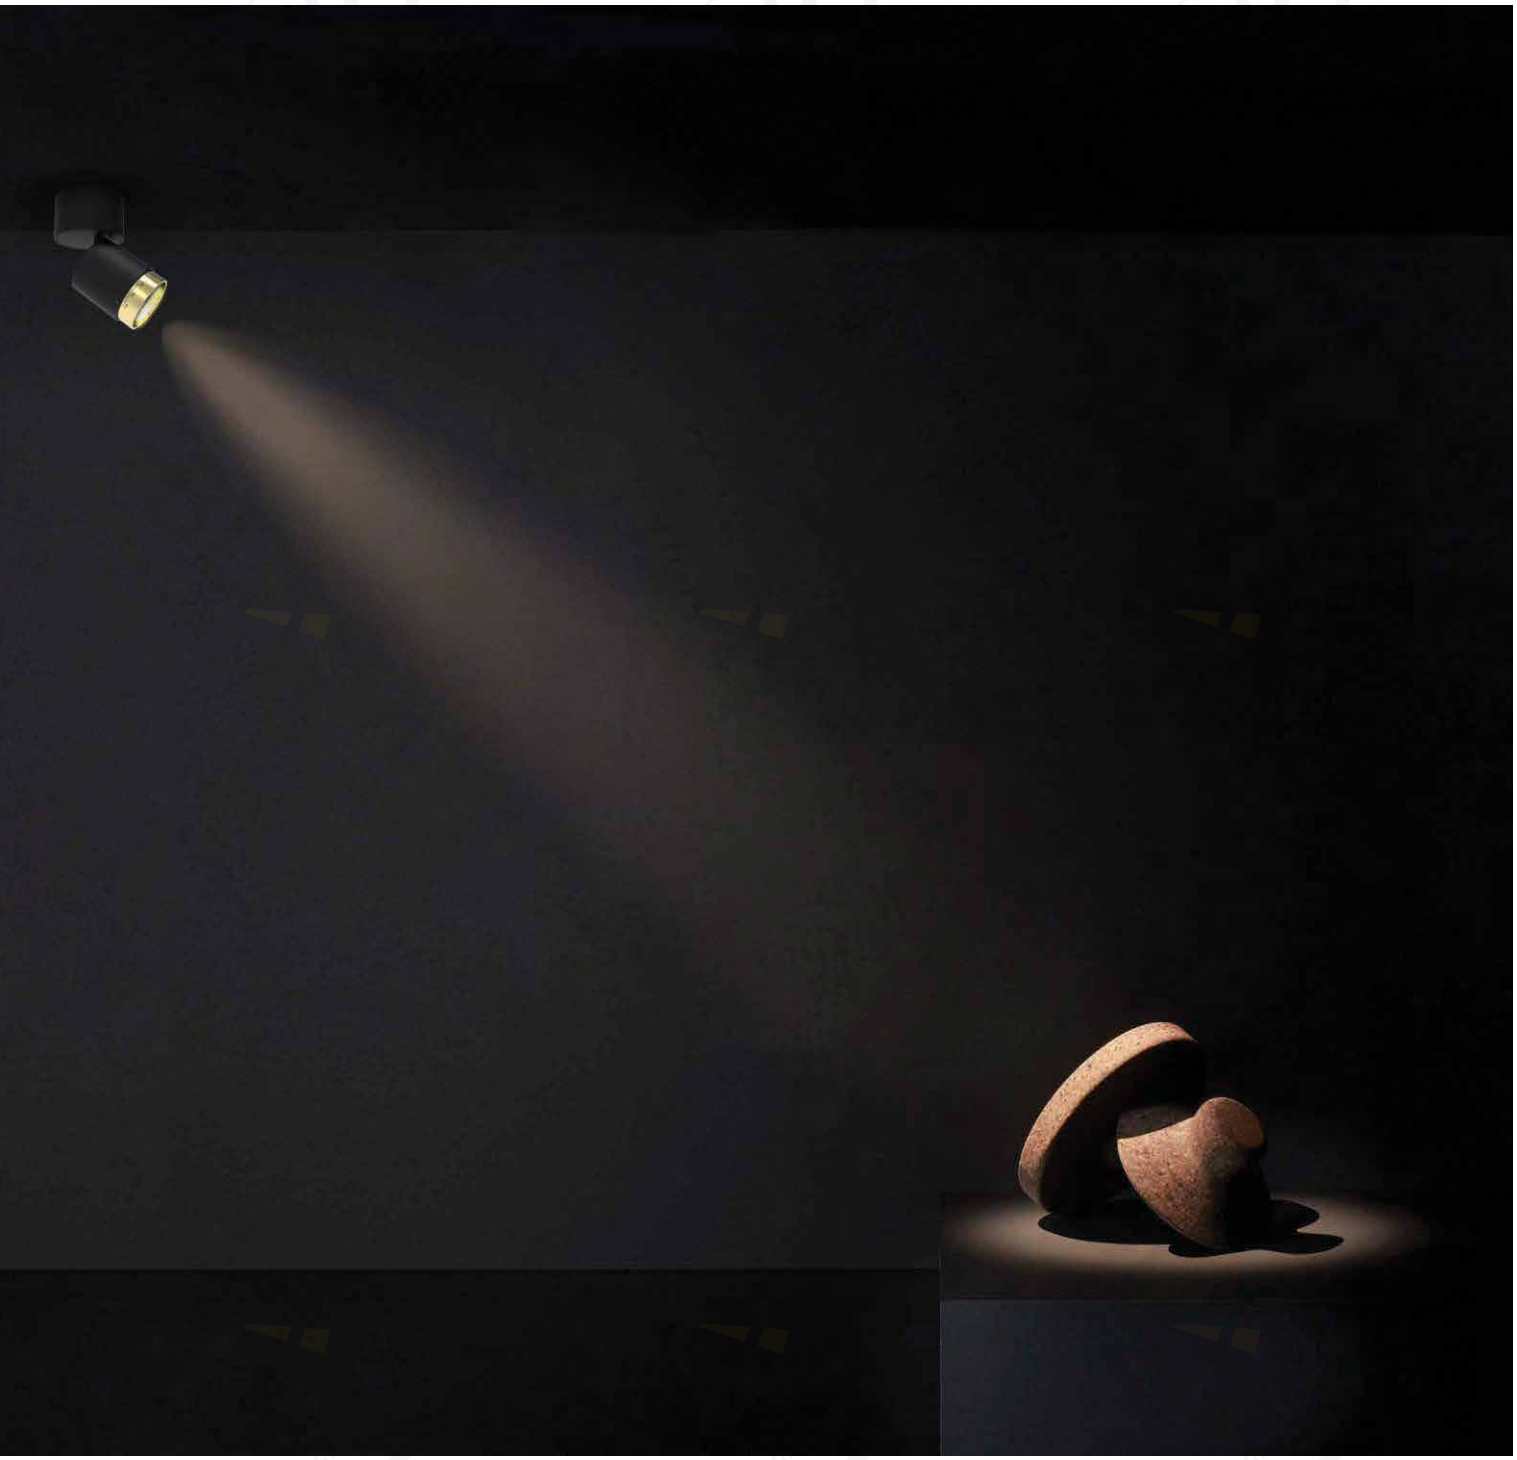

This projector incorporates an innovative adjustable system with double bifocal lenses, which allows the light beam opening angle to be controlled from 15 degrees to 36 degrees, while maintaining high levels of efficiency.

LED SURFACE DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90 / Full spectrum
AC220-240V 50/60Hz
5-year warranty

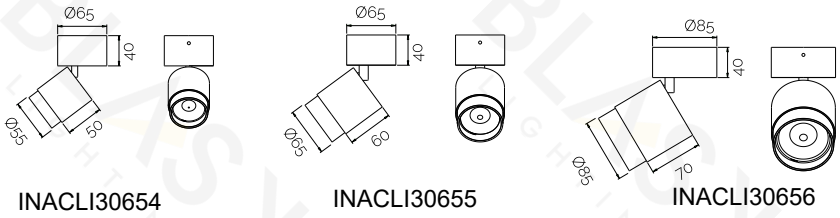

PRODUCT SPECIFICATIONS

Item No.	LED chip power	LED chip lumens	Light power	Light lumens	CCT	Beam angle
INACLI30654	5W	550 lm	5.8W	400 lm	3000K/4000K/6500K	15° - 36°
INACLI30655	10W	1100 lm	10.9W	800 lm	3000K/4000K/6500K	15° - 36°
INACLI30656	15W	1650 lm	16..8W	1200 lm	3000K/4000K/6500K	15° - 36°

PRAGMATIC · CONVINCING

Surface-mounted luminairesVery pragmatic considerations often lead to the use of surface-mounted downlights – for example when the space required for recessing conventional downlights is not available in the ceiling. The decision in favour of a lighting concept with surface-mounted downlights considerably reduces the installation complexity, for example in solid ceilings or in existing buildings.

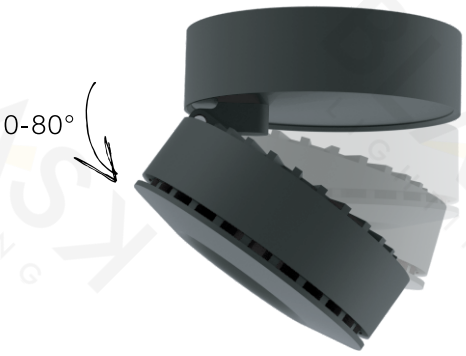

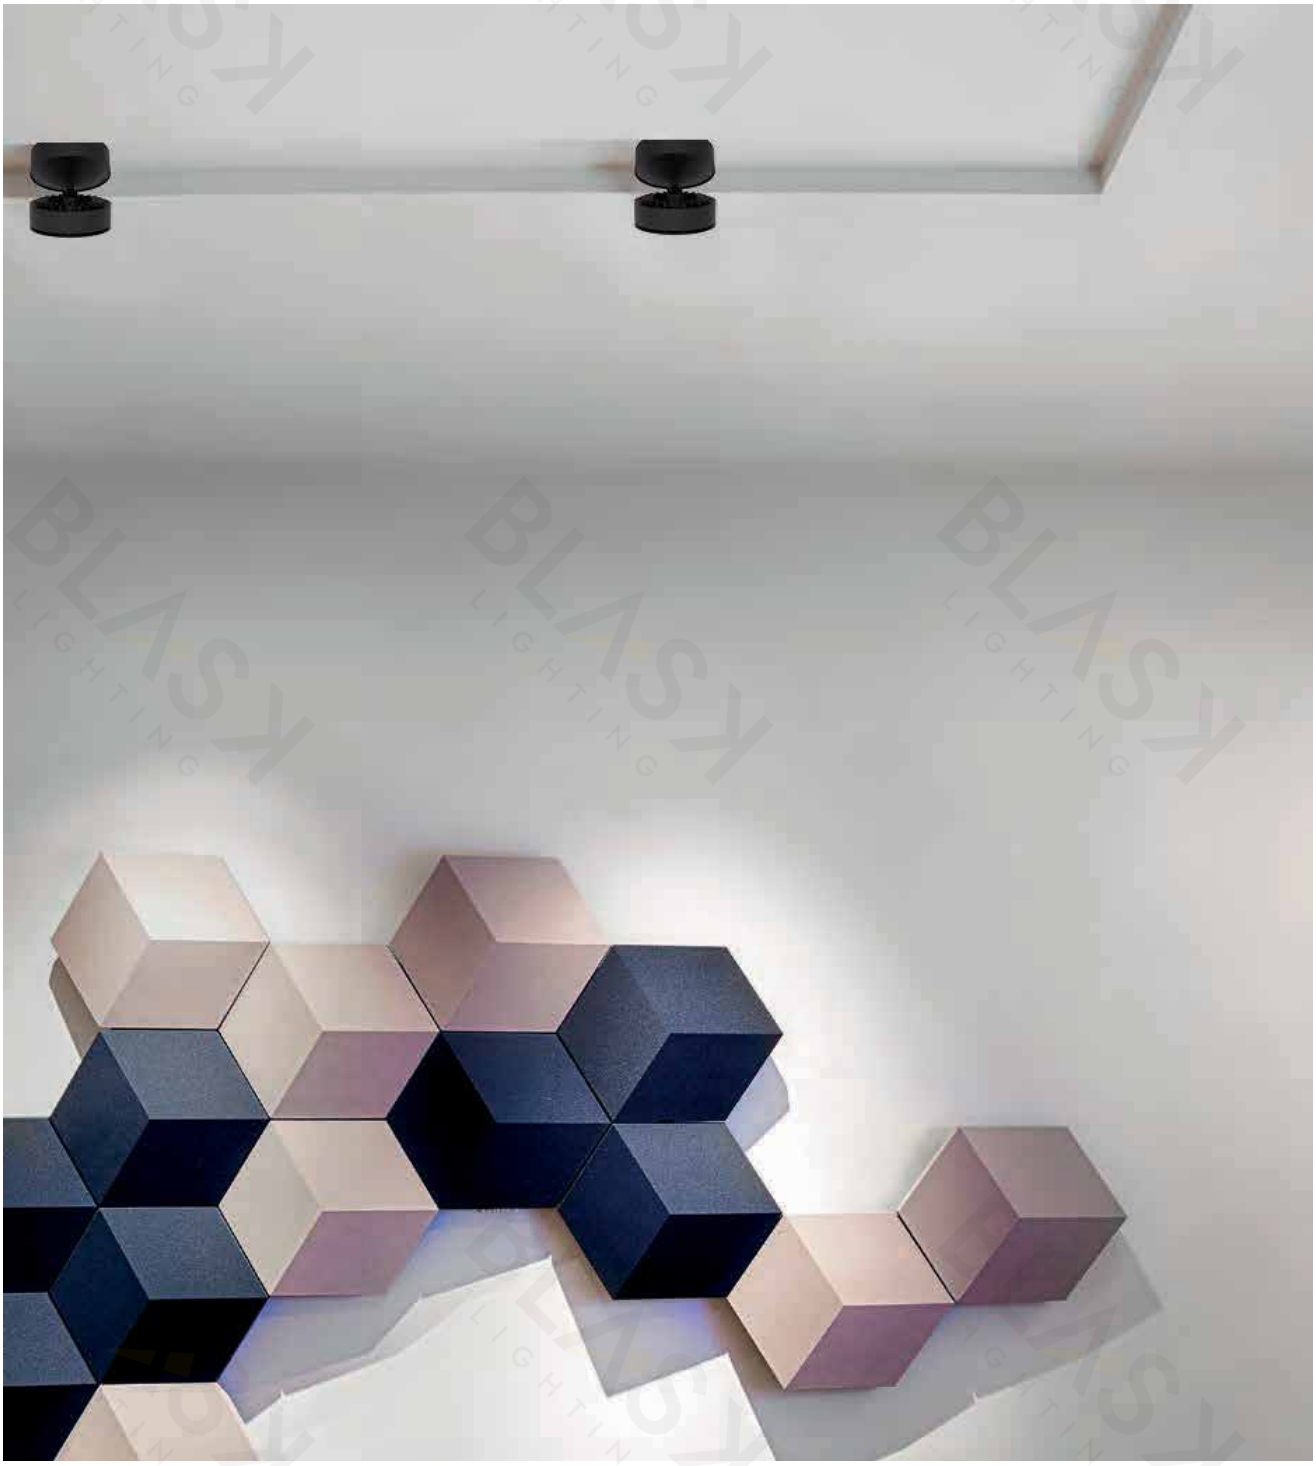

LED SURFACE DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>80
AC220-240V 50/60Hz
5-year warranty

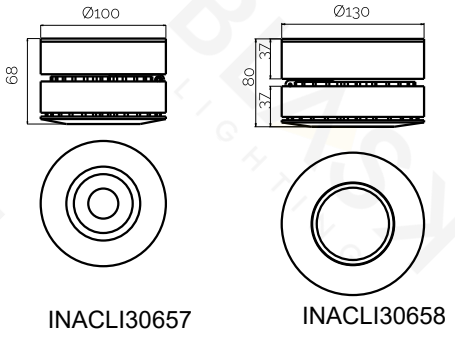

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30657	15W	1200 lm	3000K/4000K/6500K	36°
INACLI30658	25W	2000 lm	3000K/4000K/6500K	36°

BLASK
LIGHTING

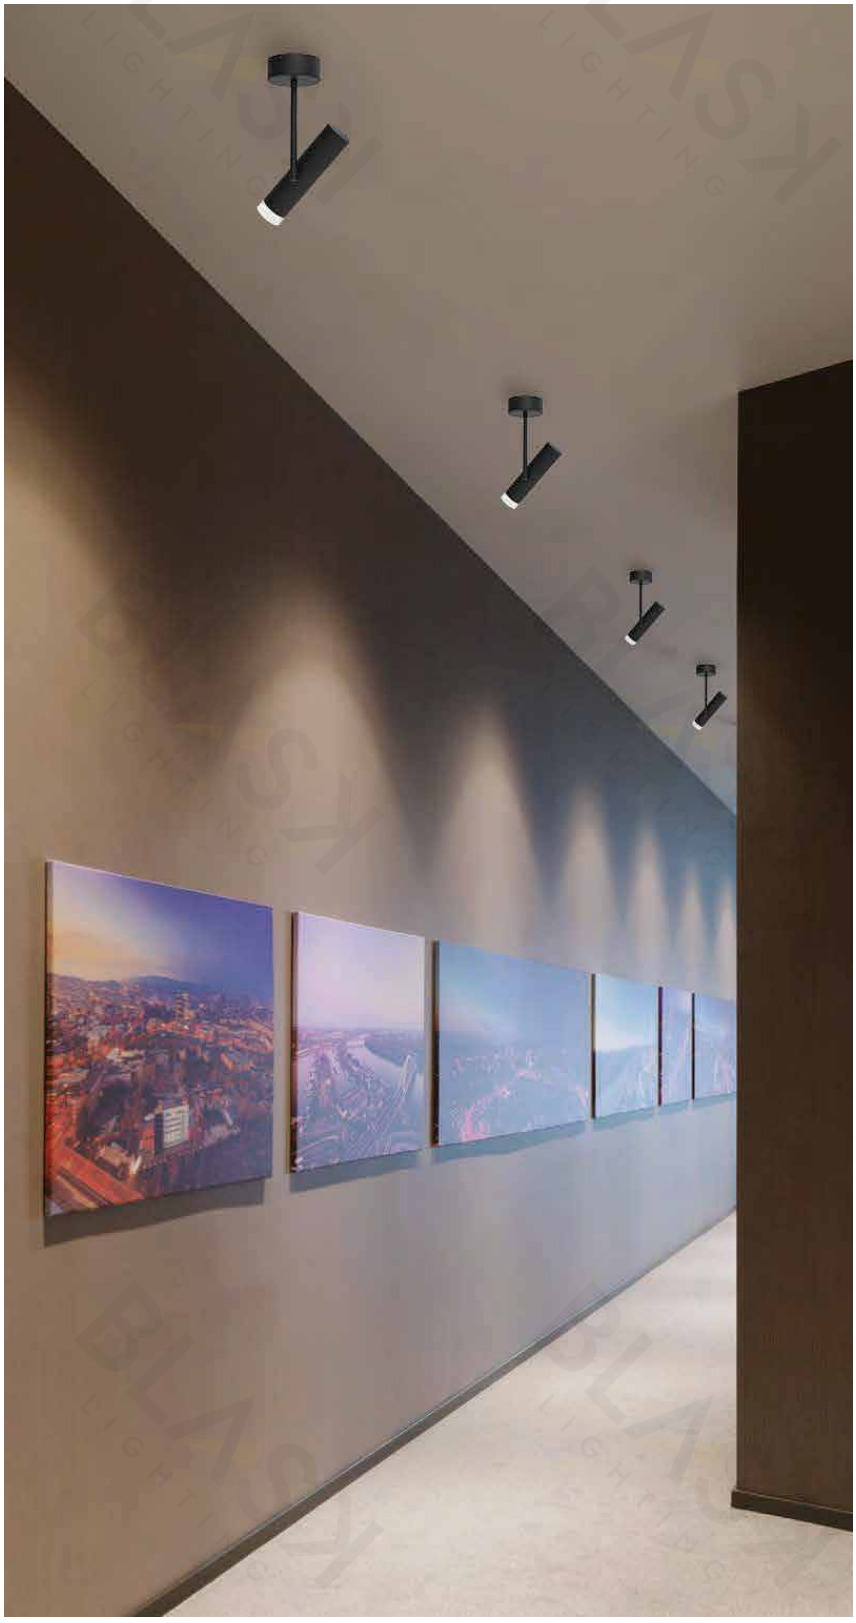

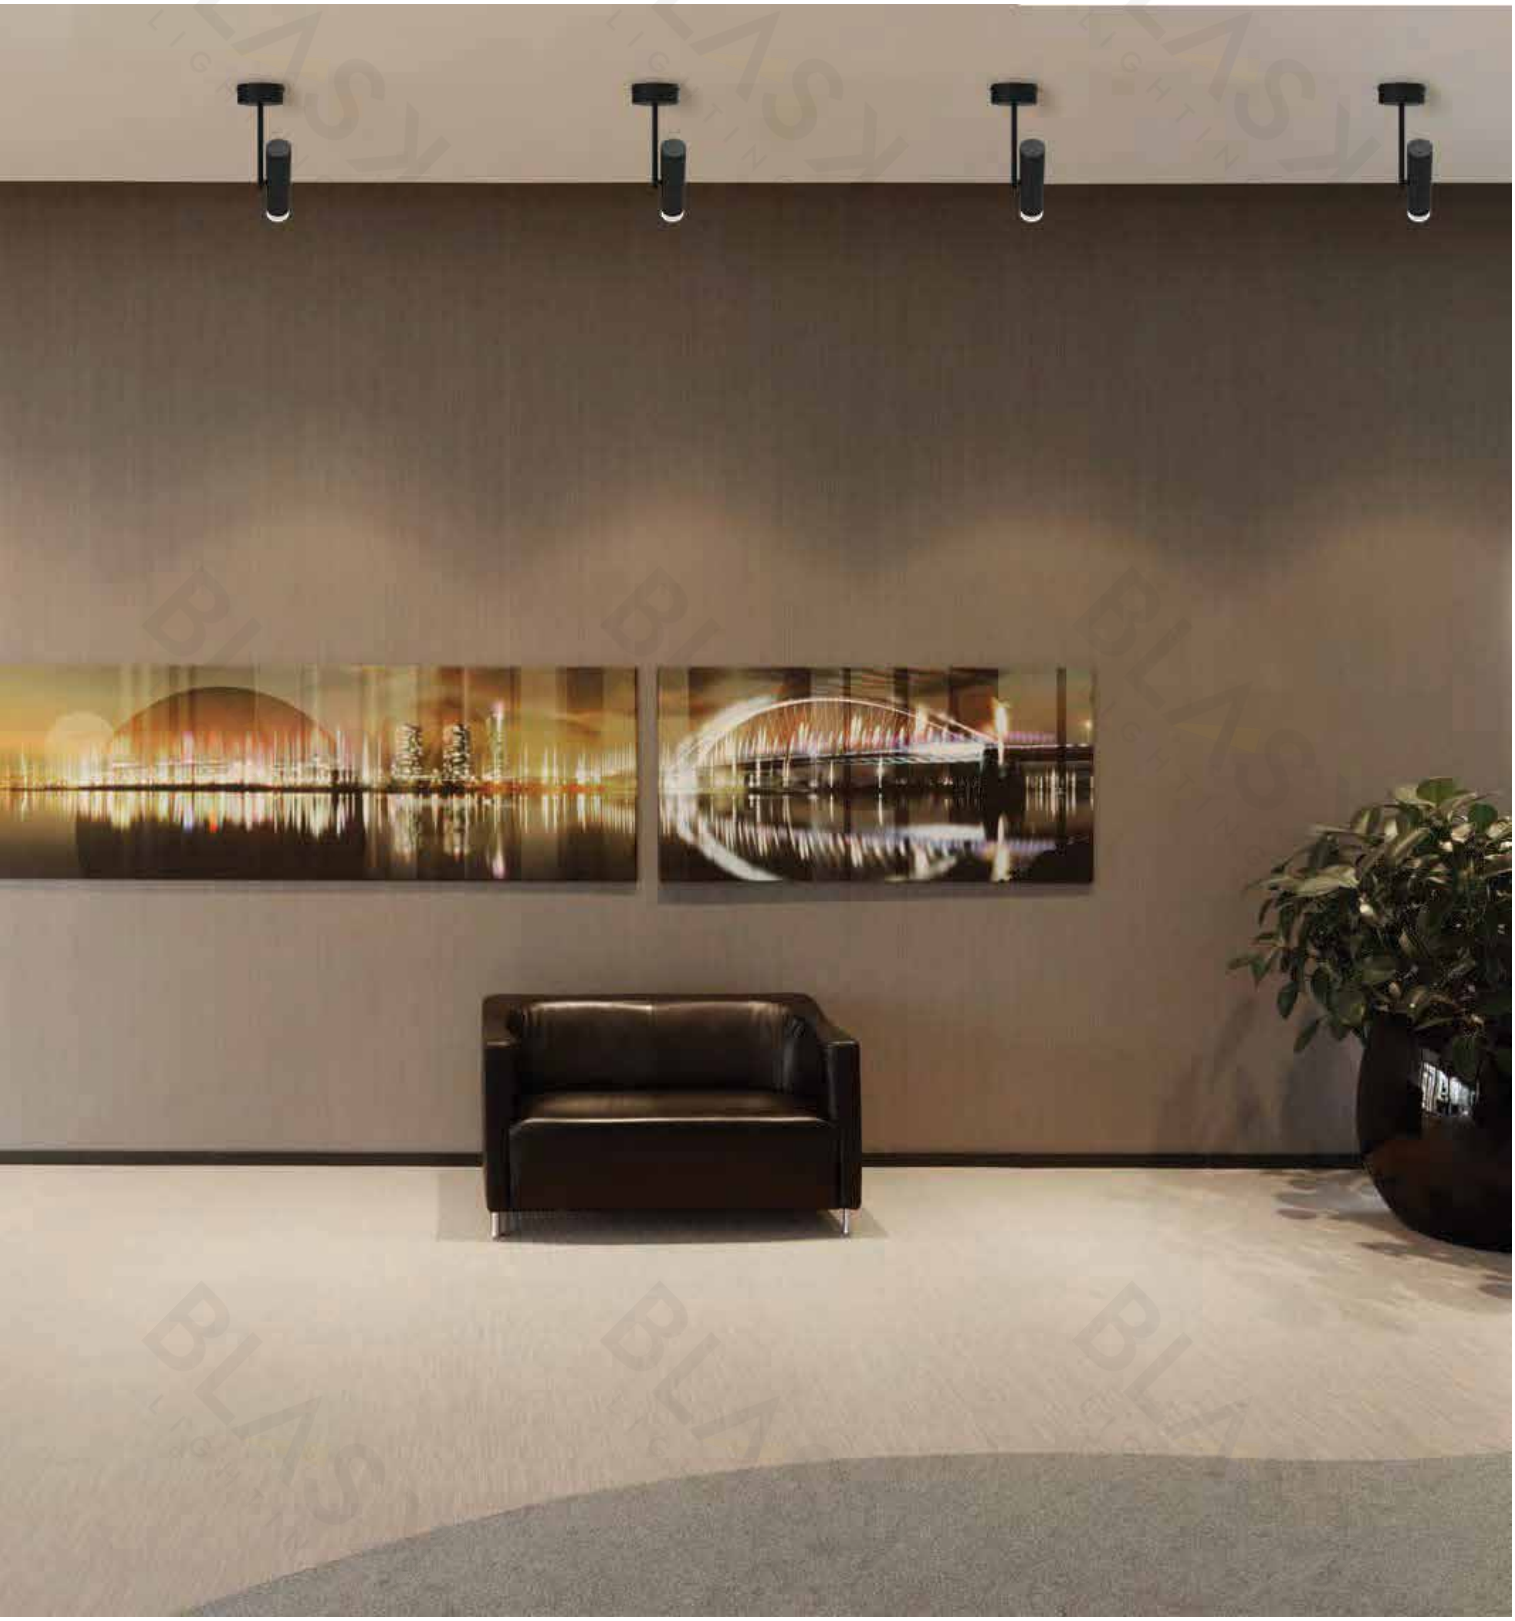

TWO TYPES LIGHT SOURCE

Gu10 bulb or COB chip optional

COB chip

Gu10 bulb

LED SURFACE DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>80
AC220-240V 50/60Hz
5-year warranty

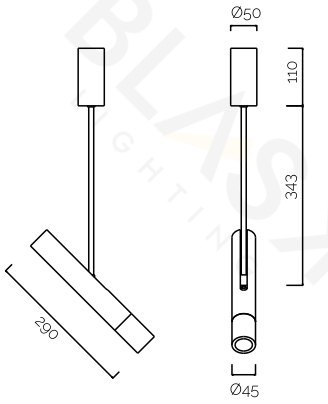

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30659	15W	1200 lm	3000K/4000K/6500K	23°

LED SURFACE DOWNLIGHT

PRODUCT FEATURES

Gu10 bulb or COB chip optional
Aluminum lamp body
IP20
CRI>80
AC220-240V 50/60Hz
5-year warranty



PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30660	12W	960 lm	3000K/4000K/6500K	38°
INACLI30661	N/A	N/A	3000K/4000K/6500K	N/A

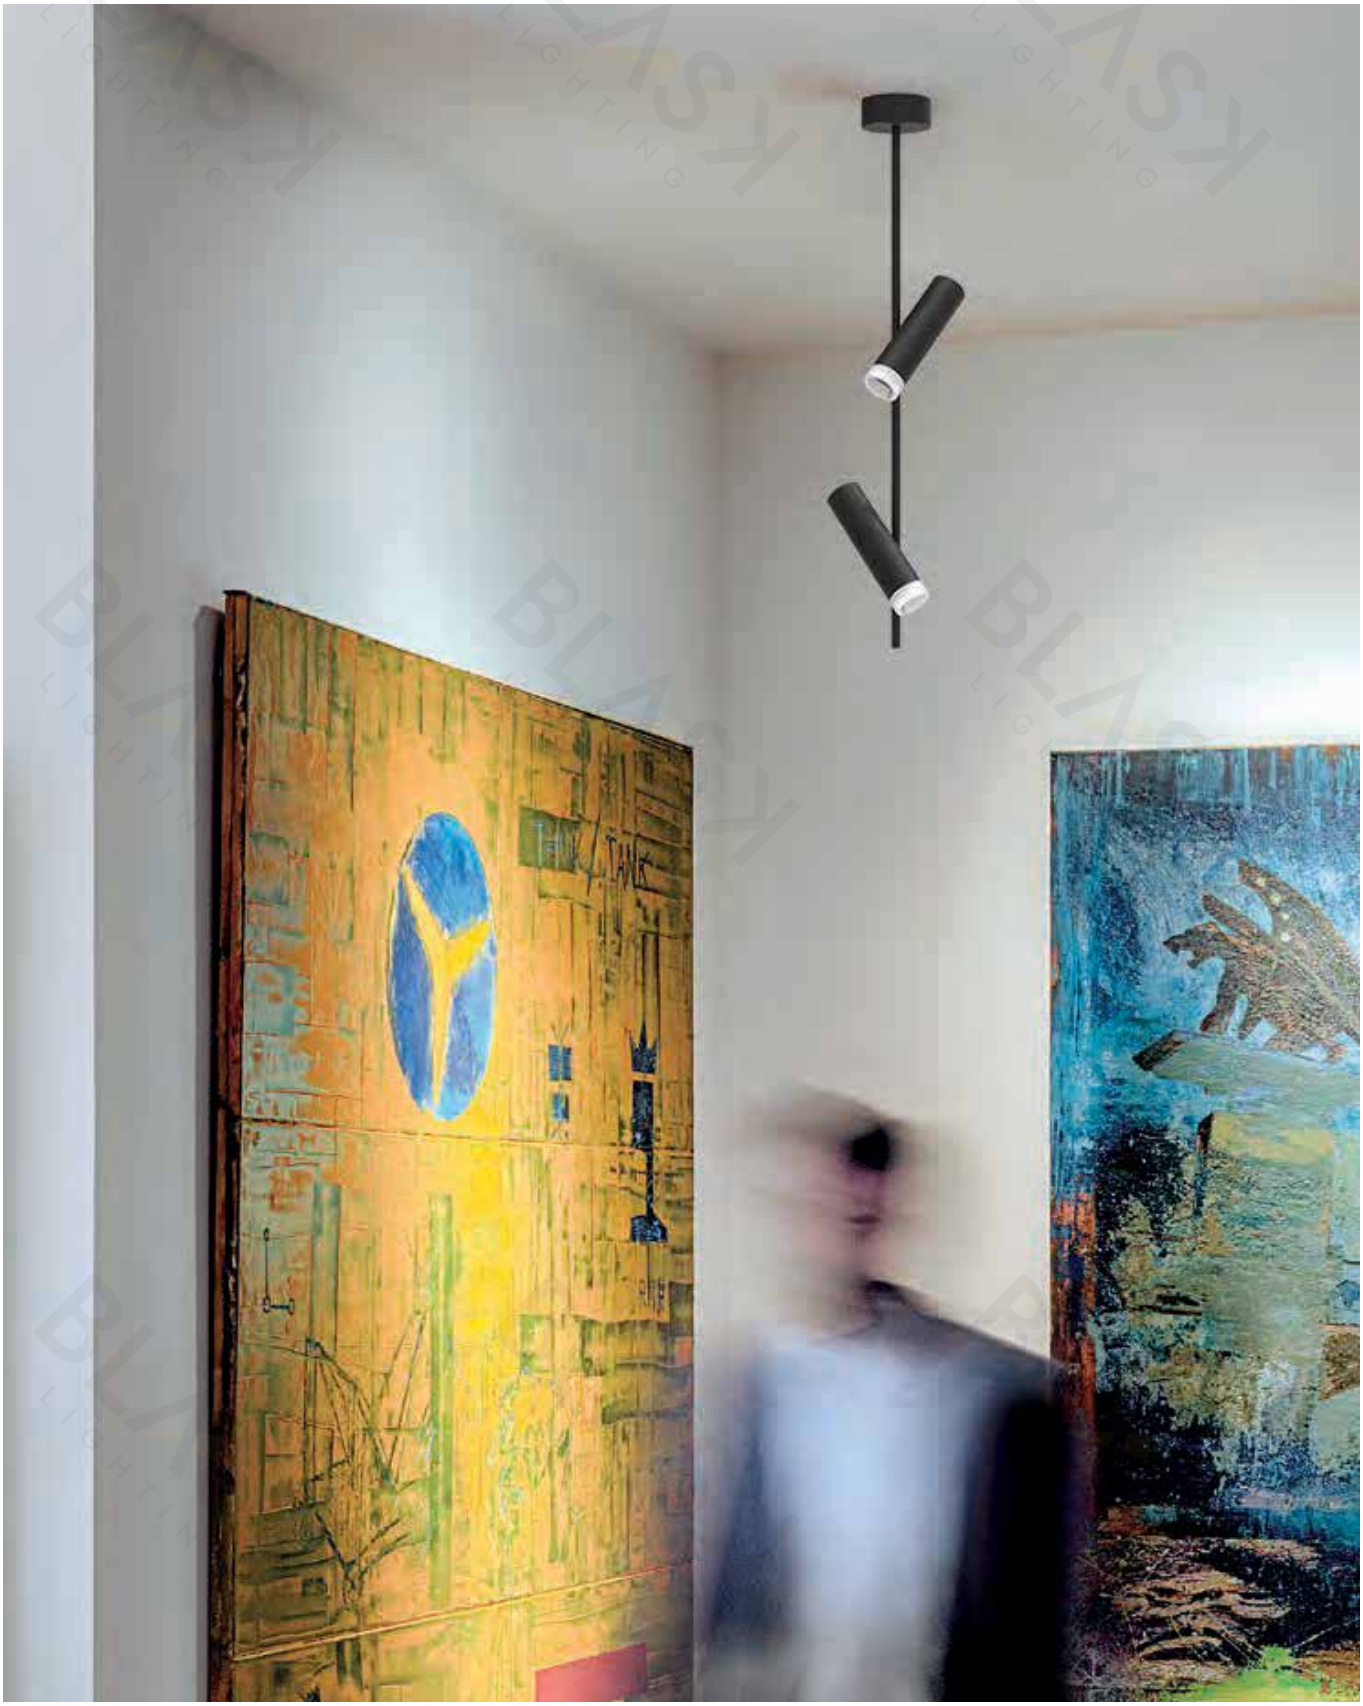

LED SURFACE DOWNLIGHT

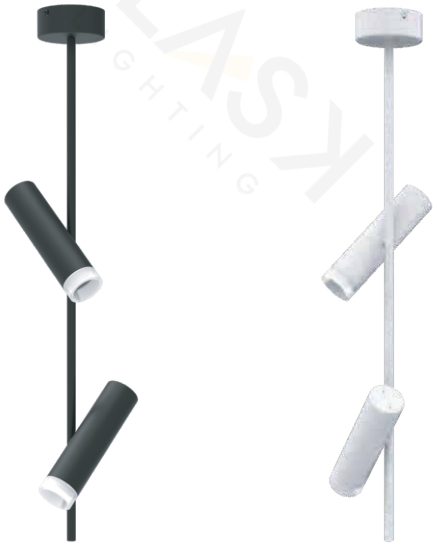

PRODUCT FEATURES

Gu10 bulb or COB chip optional
Aluminum lamp body
IP20
CRI>80
AC220-240V 50/60Hz
5-year warranty

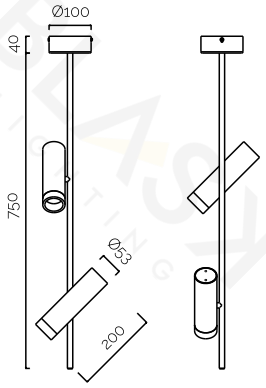

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30662	2*12W	1920 lm	3000K/4000K/6500K	38°
INACLI30663	N/A	N/A	3000K/4000K/6500K	N/A

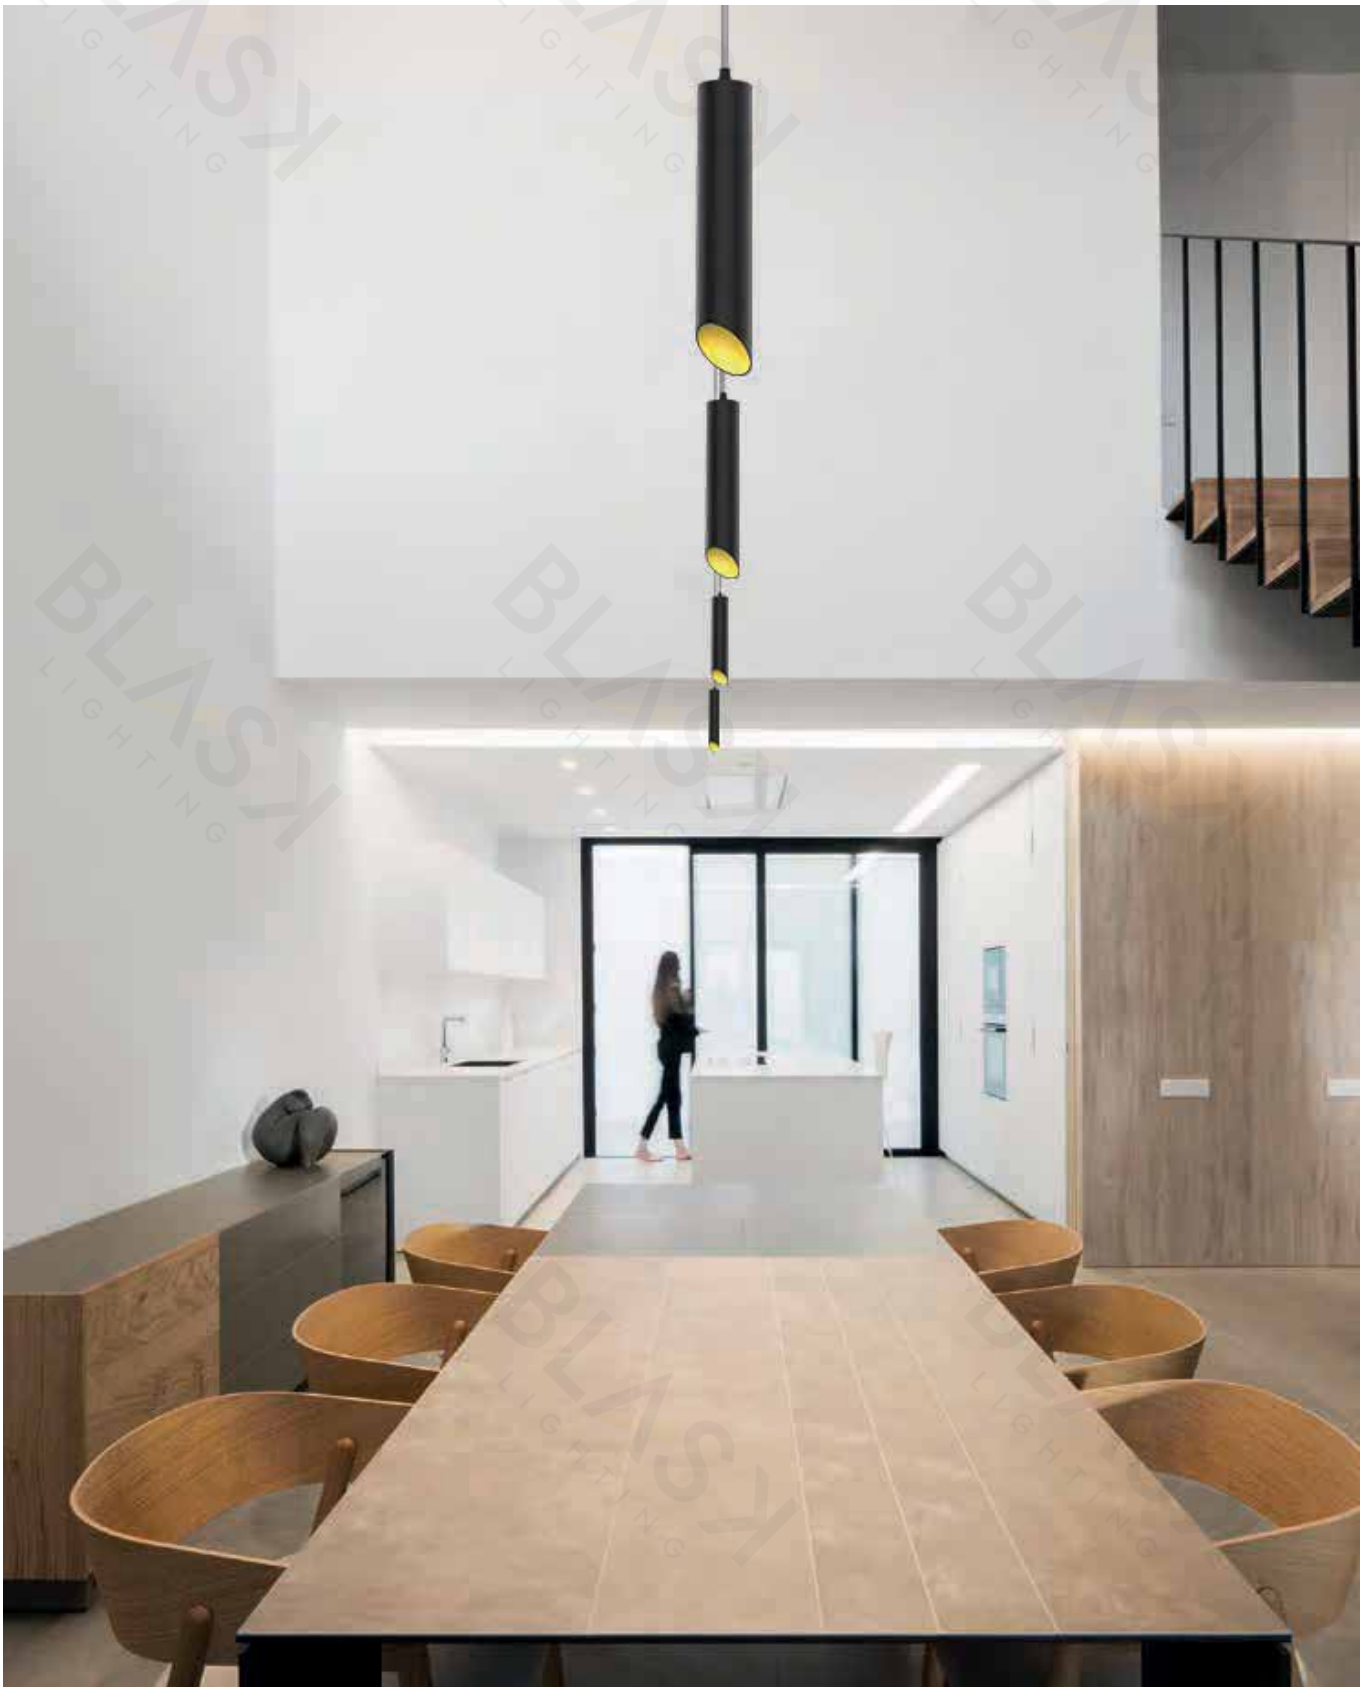

LED SURFACE DOWNLIGHT

PRODUCT FEATURES

Gu10 bulb or COB chip optional
Aluminum lamp body
IP20
CRI>80
AC220-240V 50/60Hz
5-year warranty

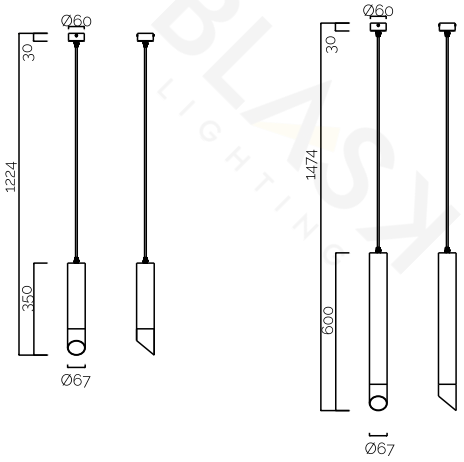

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle
INACLI30664	12W	960 lm	3000K/4000K/6500K	38°
INACLI30665	12W	960 lm	3000K/4000K/6500K	38°
INACLI30666	N/A	N/A	3000K/4000K/6500K	N/A
INACLI30667	N/A	N/A	3000K/4000K/6500K	N/A

LED SURFACE DOWNLIGHT

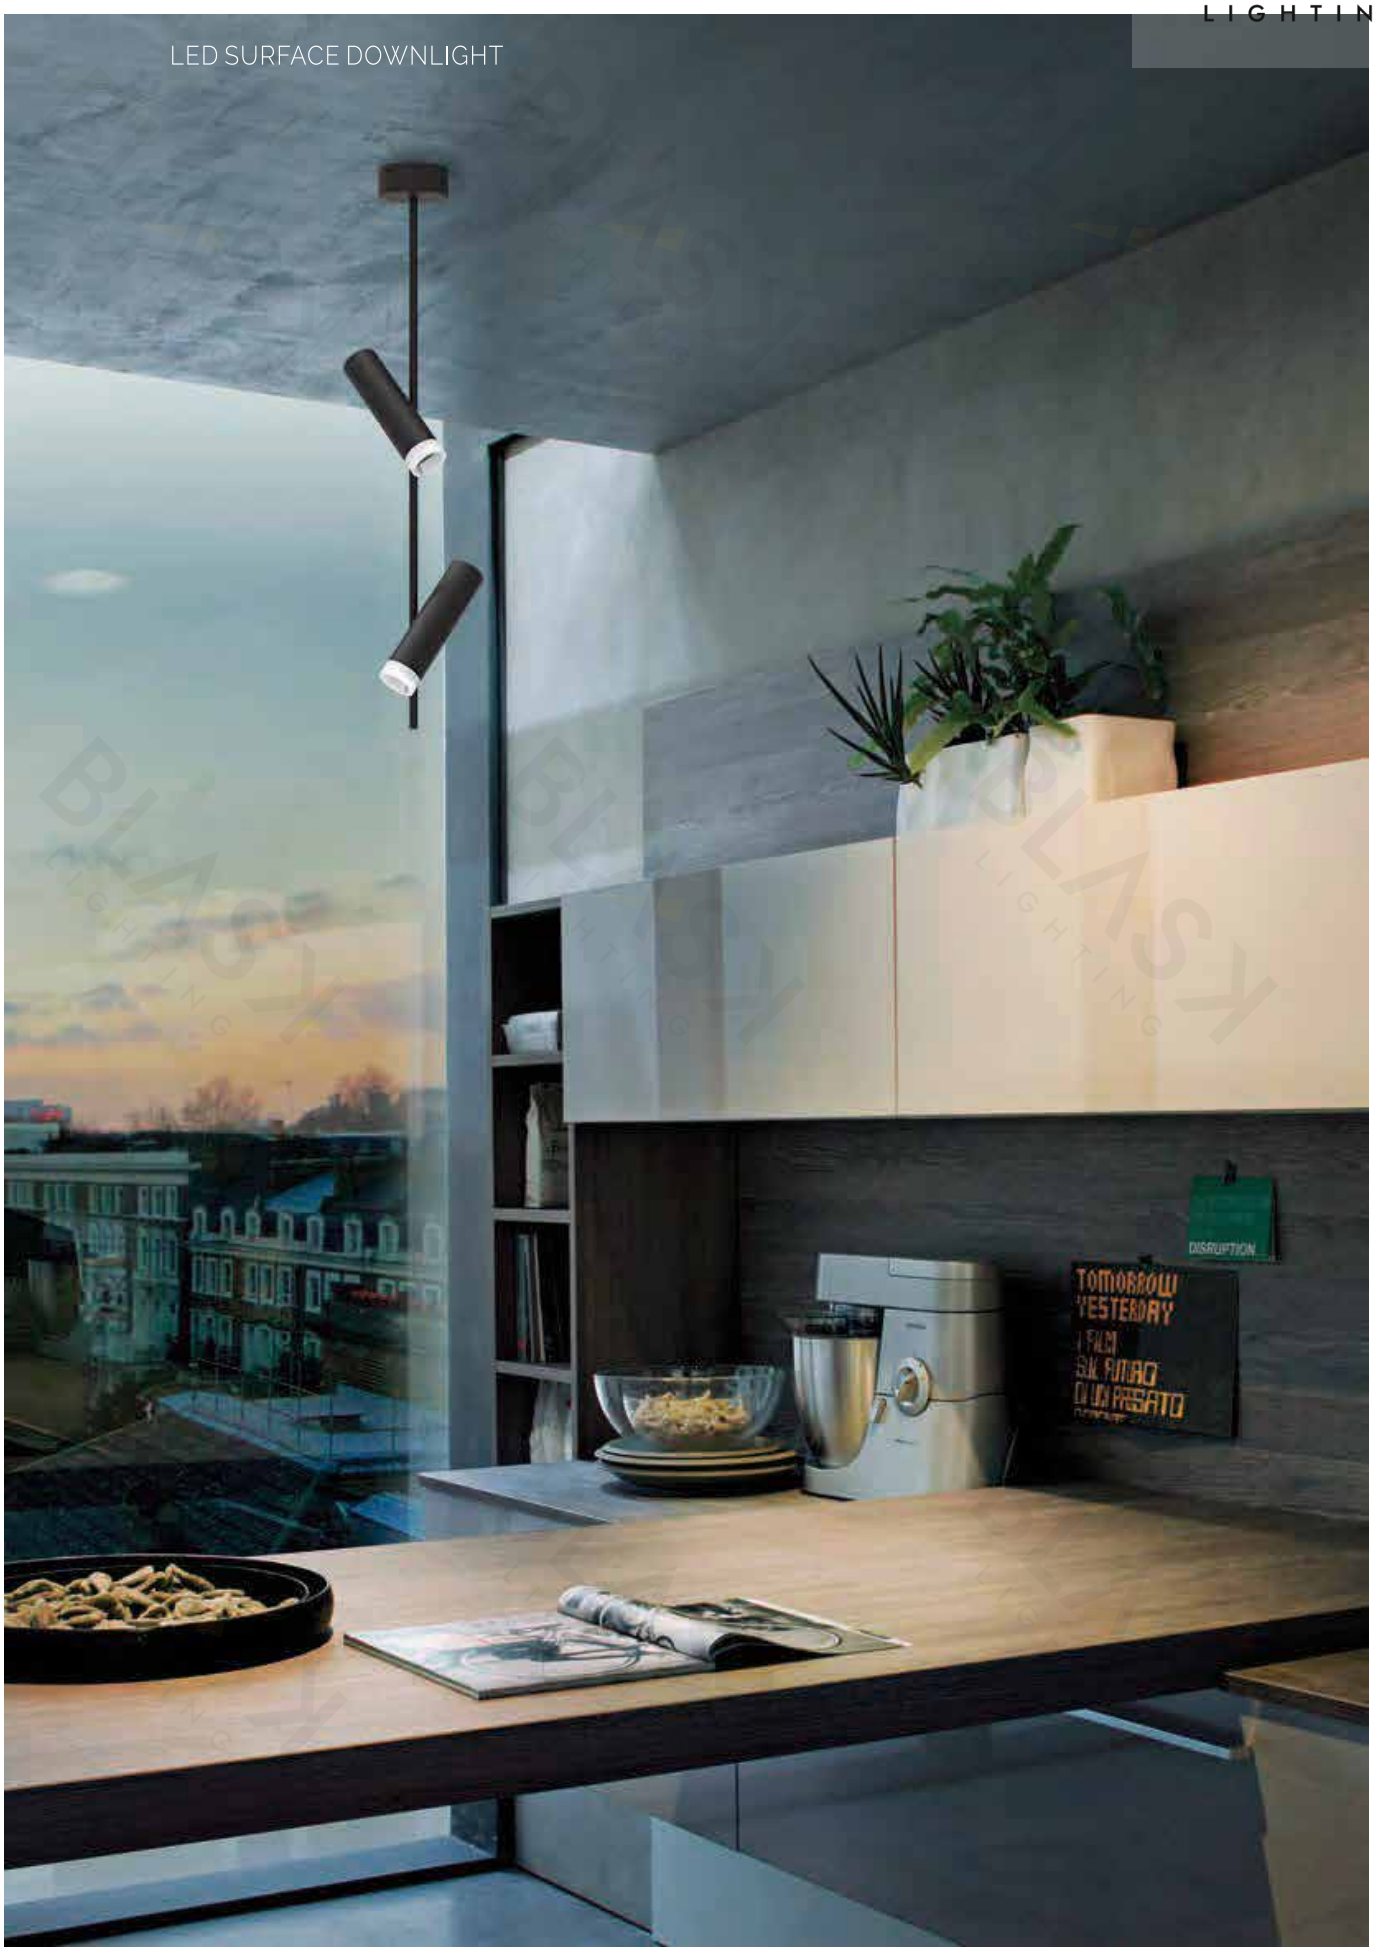

18
02

FROM CHAOS TO ORDER.

LED DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
UGR<10
AC220-240V 50/60Hz
5-year warranty

Lens

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle	Szie	Cut-out szie
INASL I30668	8W	560 lm	3000K/4000K/6500K	30° / 50°	Ø80*35	Ø75
INASL I30669	15W	1050 lm	3000K/4000K/6500K	30° / 50°	Ø128*35	Ø120
INASL I30670	20W	1400 lm	3000K/4000K/6500K	30° / 50°	Ø173*35	Ø165
INASL I30671	30W	2100 lm	3000K/4000K/6500K	30° / 50°	Ø218*35	Ø205

LED DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
Trimless installation
IP20
CRI>90
UGR<10
AC220-240V 50/60Hz
5-year warranty

Lens

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle	Szie	Cut-out szie
INASL I30672	7W	490 lm	3000K/4000K/6500K	24° / 60°	Ø113*35	Ø75
INASL I30673	12W	840 lm	3000K/4000K/6500K	24° / 60°	Ø128*35	Ø90
INASL I30674	18W	1260 lm	3000K/4000K/6500K	24° / 60°	Ø153*35	Ø115

LED DOWNLIGHT

PRODUCT FEATURES

Aluminum lamp body
IP20
CRI>90
UGR<10
AC220-240V 50/60Hz
5-year warranty

Lens

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle	Szie
INASL I30675	15W	1050 lm	3000K/4000K/6500K	30° / 50°	Ø119*45
INASL I30676	20W	1400 lm	3000K/4000K/6500K	30° / 50°	Ø164*45
INASL I30677	30W	2100 lm	3000K/4000K/6500K	30° / 50°	Ø209*45
INASL I30678	24W	1680 lm	3000K/4000K/6500K	24° / 60°	Ø255*45
INASL I30679	36W	2520 lm	3000K/4000K/6500K	24° / 60°	Ø355*46

ALL IN ONE

ALL IN ONE

ALL IN ONE

Light ring module combination



2 in 1



3 in 1

4 in 1



INASL I30680

Power	8W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	560LM
Beamangle	30° / 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Outside light module for recessed used only



INASL I30682

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	1050LM
Beamangle	30° / 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Outside light module for recessed used only



INASL I30681

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	1400LM
Beamangle	30° / 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Outside light module for recessed used only





INASL I30683

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	2100LM
Beamangle	30° / 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Outside light module for recessed used only



INASL I30684

Power	8W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	560LM
Beamangle	30° / 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only



INASL I30686

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	1050LM
Beamangle	30° / 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only



INASL I30685

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	1400LM
Beamangle	30° / 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only

INASL I30687

Material	PC
Color	White
Remark	Inside cover for recessed used only



INASL I30689

Material	PC
Color	White
Remark	Inside cover for recessed used only

INASL I30688

Material	PC
Color	White
Remark	Inside cover for recessed used only

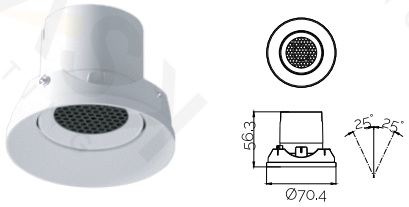

INASL I30690

Power	7W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	490LM
Beamangle	15˚ / 24˚ / 36˚
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only

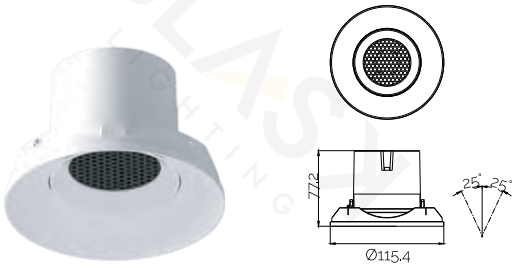

INASL I30692

Power	12W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	840LM
Beamangle	15˚ / 24˚ / 36˚
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only

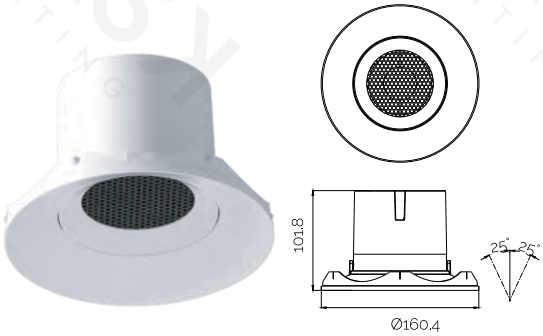

INASL I30691

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	1400LM
Beamangle	15˚ / 24˚ / 36˚
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only

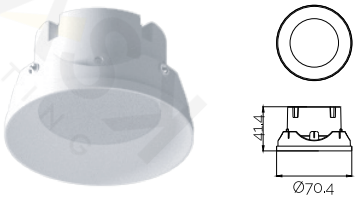

INASL I30693

Power	7W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	490LM
Beamangle	120°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only

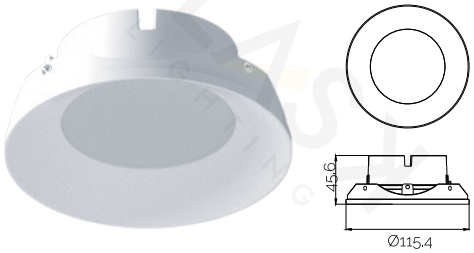

INASL I30695

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	700LM
Beamangle	120°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only



INASL I30694

Power	18W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	1260LM
Beamangle	120°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only



INASL I30696

Power	5W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	350LM
Beamangle	20° - 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only



INASL I30698

Power	8W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	560LM
Beamangle	20° - 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only



INASL I30697

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
lumen	1050LM
Beamangle	20° - 50°
CRI	>90
Material	Aluminum
Color	White
Remark	Inside light module for recessed used only

IP65

LED WATERPROOF SURFACE DOWNLIGHT

INDOOR & OUTDOOR

Product description

Black

Silver

White

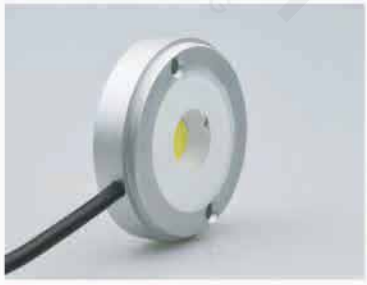

- Surface-mounted installation
- IP65
- 90°
- 3-years warranty

- Screw

- Expanded particles
  Expanded particles used in the cement wall mount.

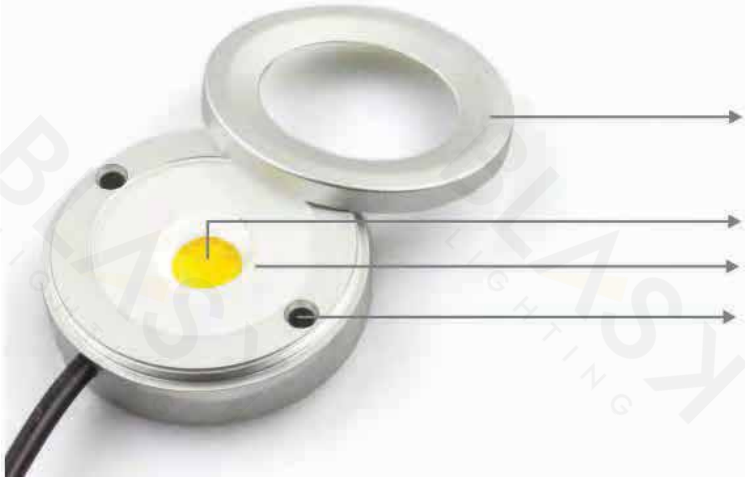

- Cover
- LED
- Tempered glass
- Screw holes

INASL I30699

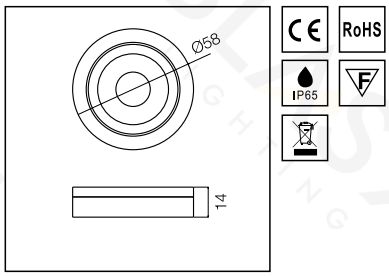

Power	3W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum
Color	Black / Silver / White
Life	30 000 H
Warranty	3 Years

Installation

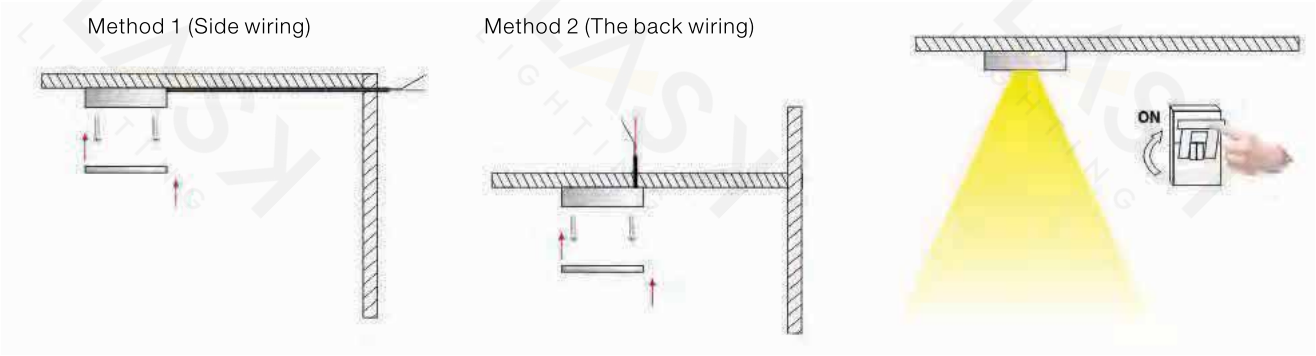

1.Wiring
2.The lamp mounted in the set position
3.Twist the top ring
4.Turn on the power

Installation Notes:
Current Affairs installing the necessary ground connection,in order to prevent leakage

ROTATABLE SURFACE DOWNLIGHT

ROTATABLE SURFACE DOWNLIGHT

FEATURE

Aluminum lamp body
Anti-glare design
IP20
CRI>90
AC220-240V 50/60Hz
5 years warranty



SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INACLI30700	6W	480 lm	White / Black	3000K / 4000K/6500K	38°

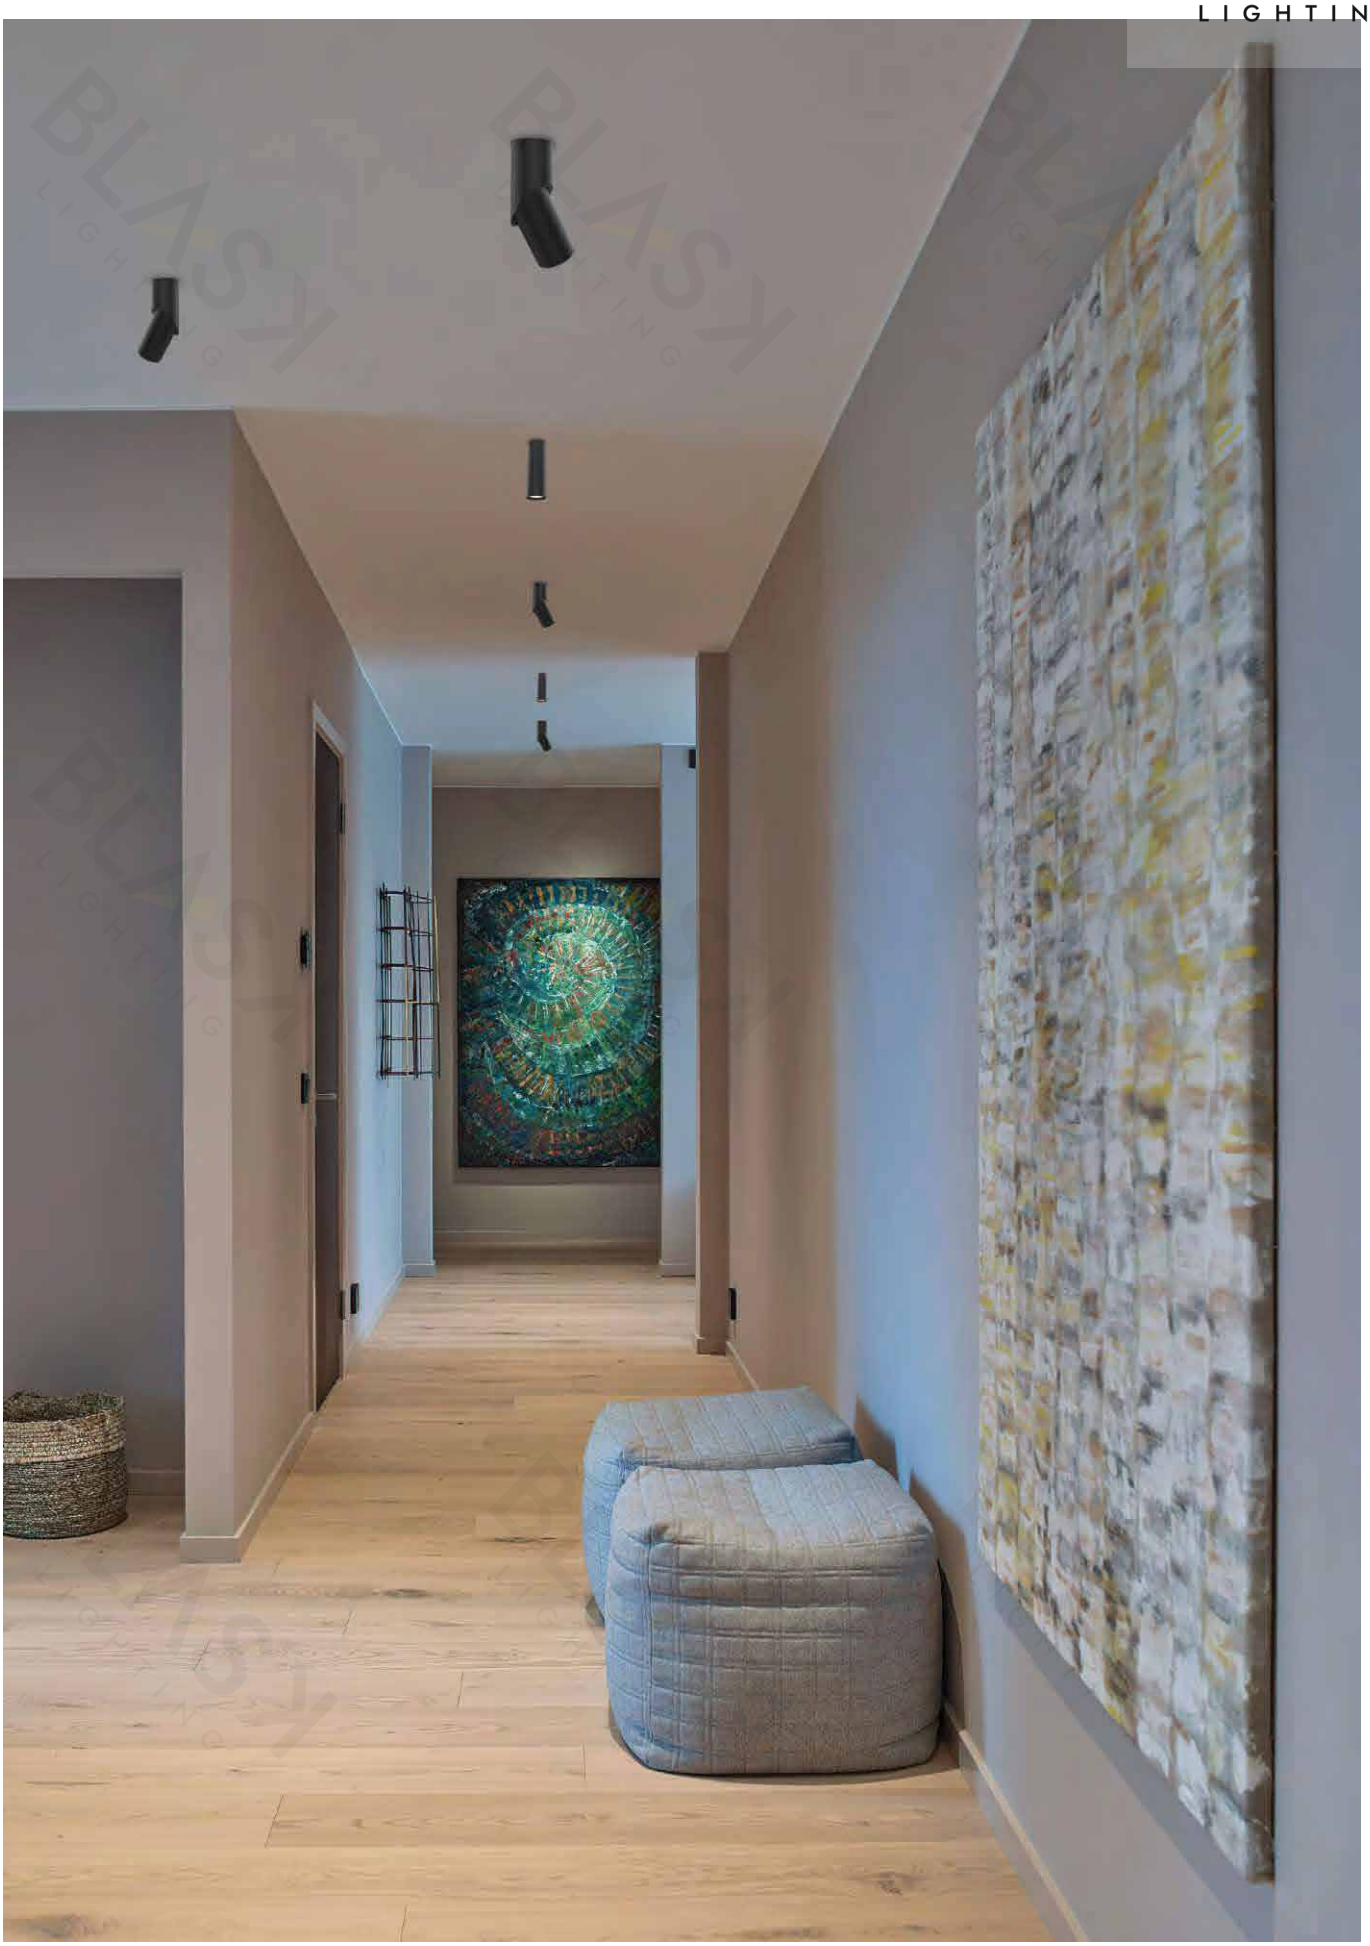

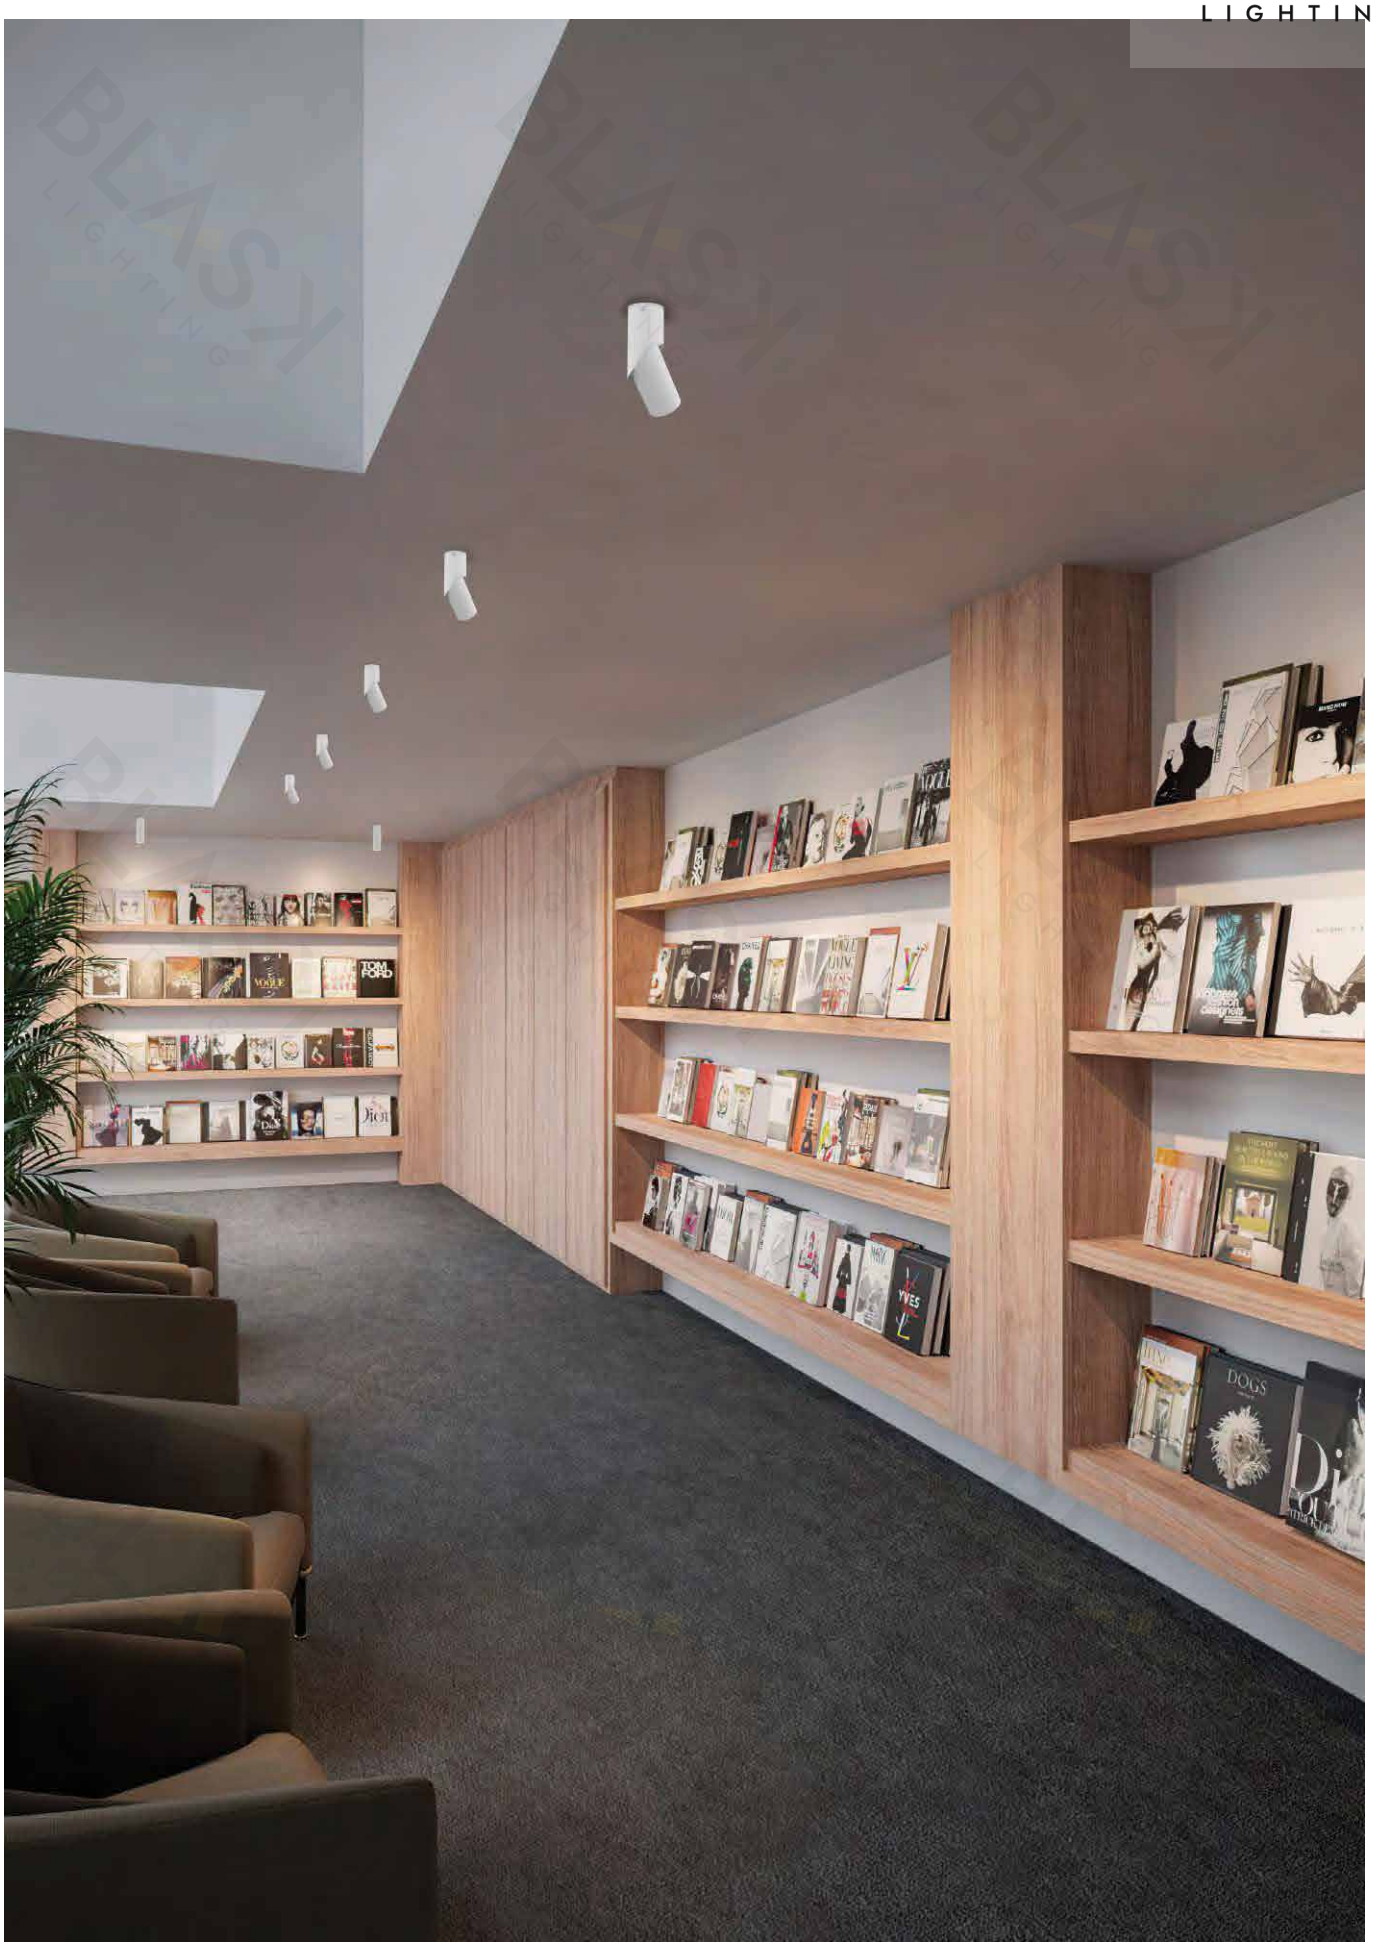
TOM FORD
YVES
DOGS

LED
Track Light

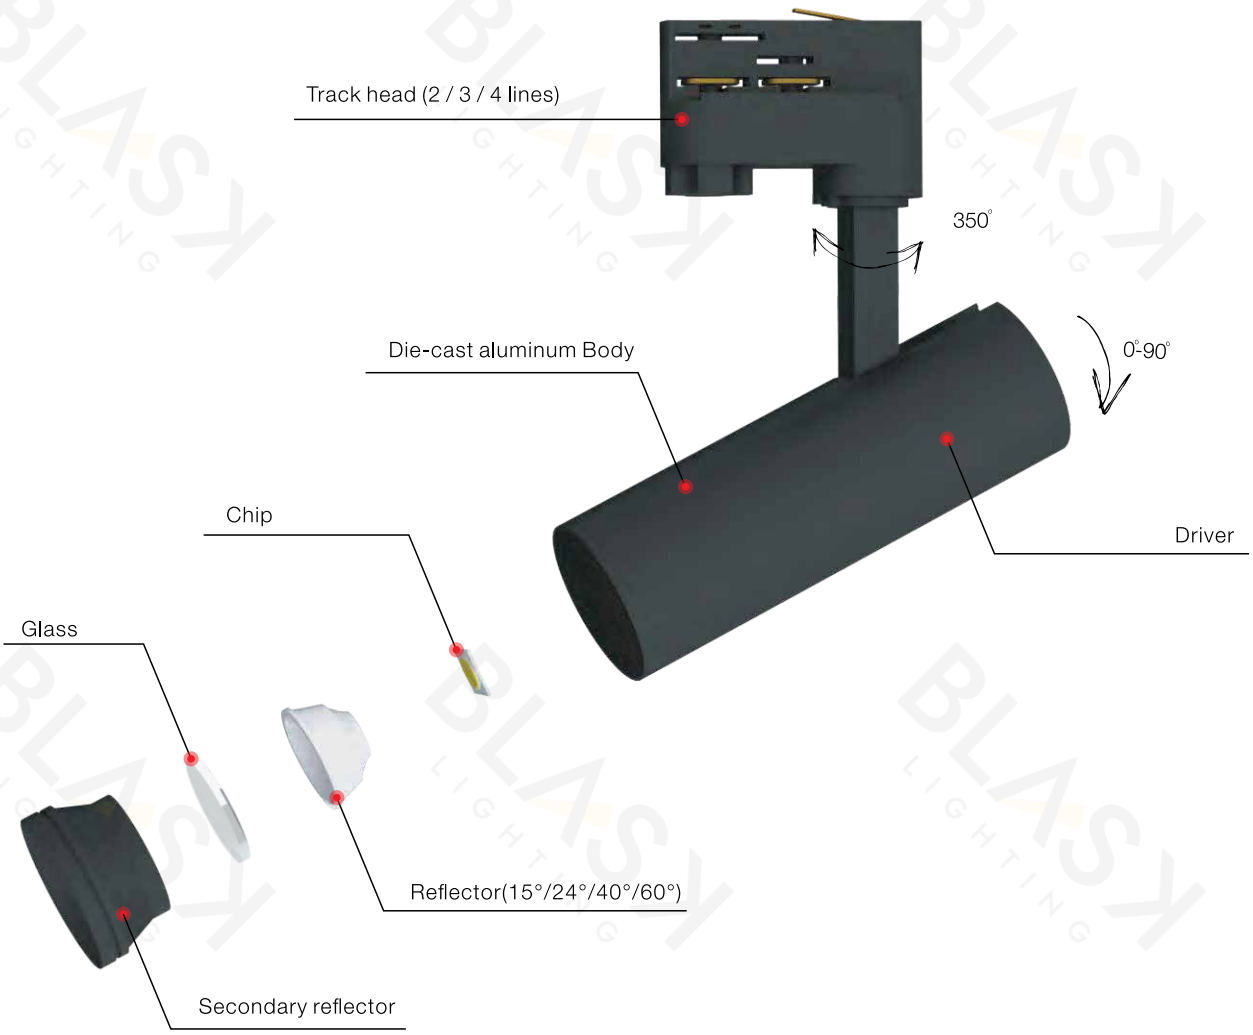

Description

The track light is made of die-cast aluminum. The surface is painted with white or black paint. The spotlight head can be rotated 350° horizontally and can be tilted vertically 90°. The light body is simple in appearance and the drive is integrated into the spotlight head; LED COB technology achieves maximum efficiency , With high color rendering and high energy efficiency, color temperature 3000 K, 4000K, 6500 K optional; CRI> 90; After 50,000 hours luminous flux> 70%. High-quality aluminum reflectors, reflectors with four different beam angles are available, can be installed and exchanged without tools, and the track heads are available in a variety of sizes to facilitate different scenarios. Protection class IP 20.

Glare-free due to recessed LED

INATLI30701

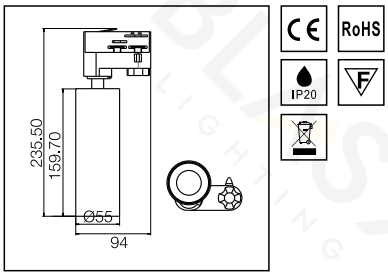

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240v 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	Black
Life	50 000 H
Warranty	5 Years

INATLI30702



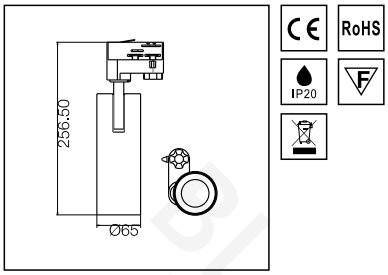

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240v 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	Black
Life	50 000 H
Warranty	5 Years

INATLI30703



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240v 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	50 000 H
Warranty	5 Years

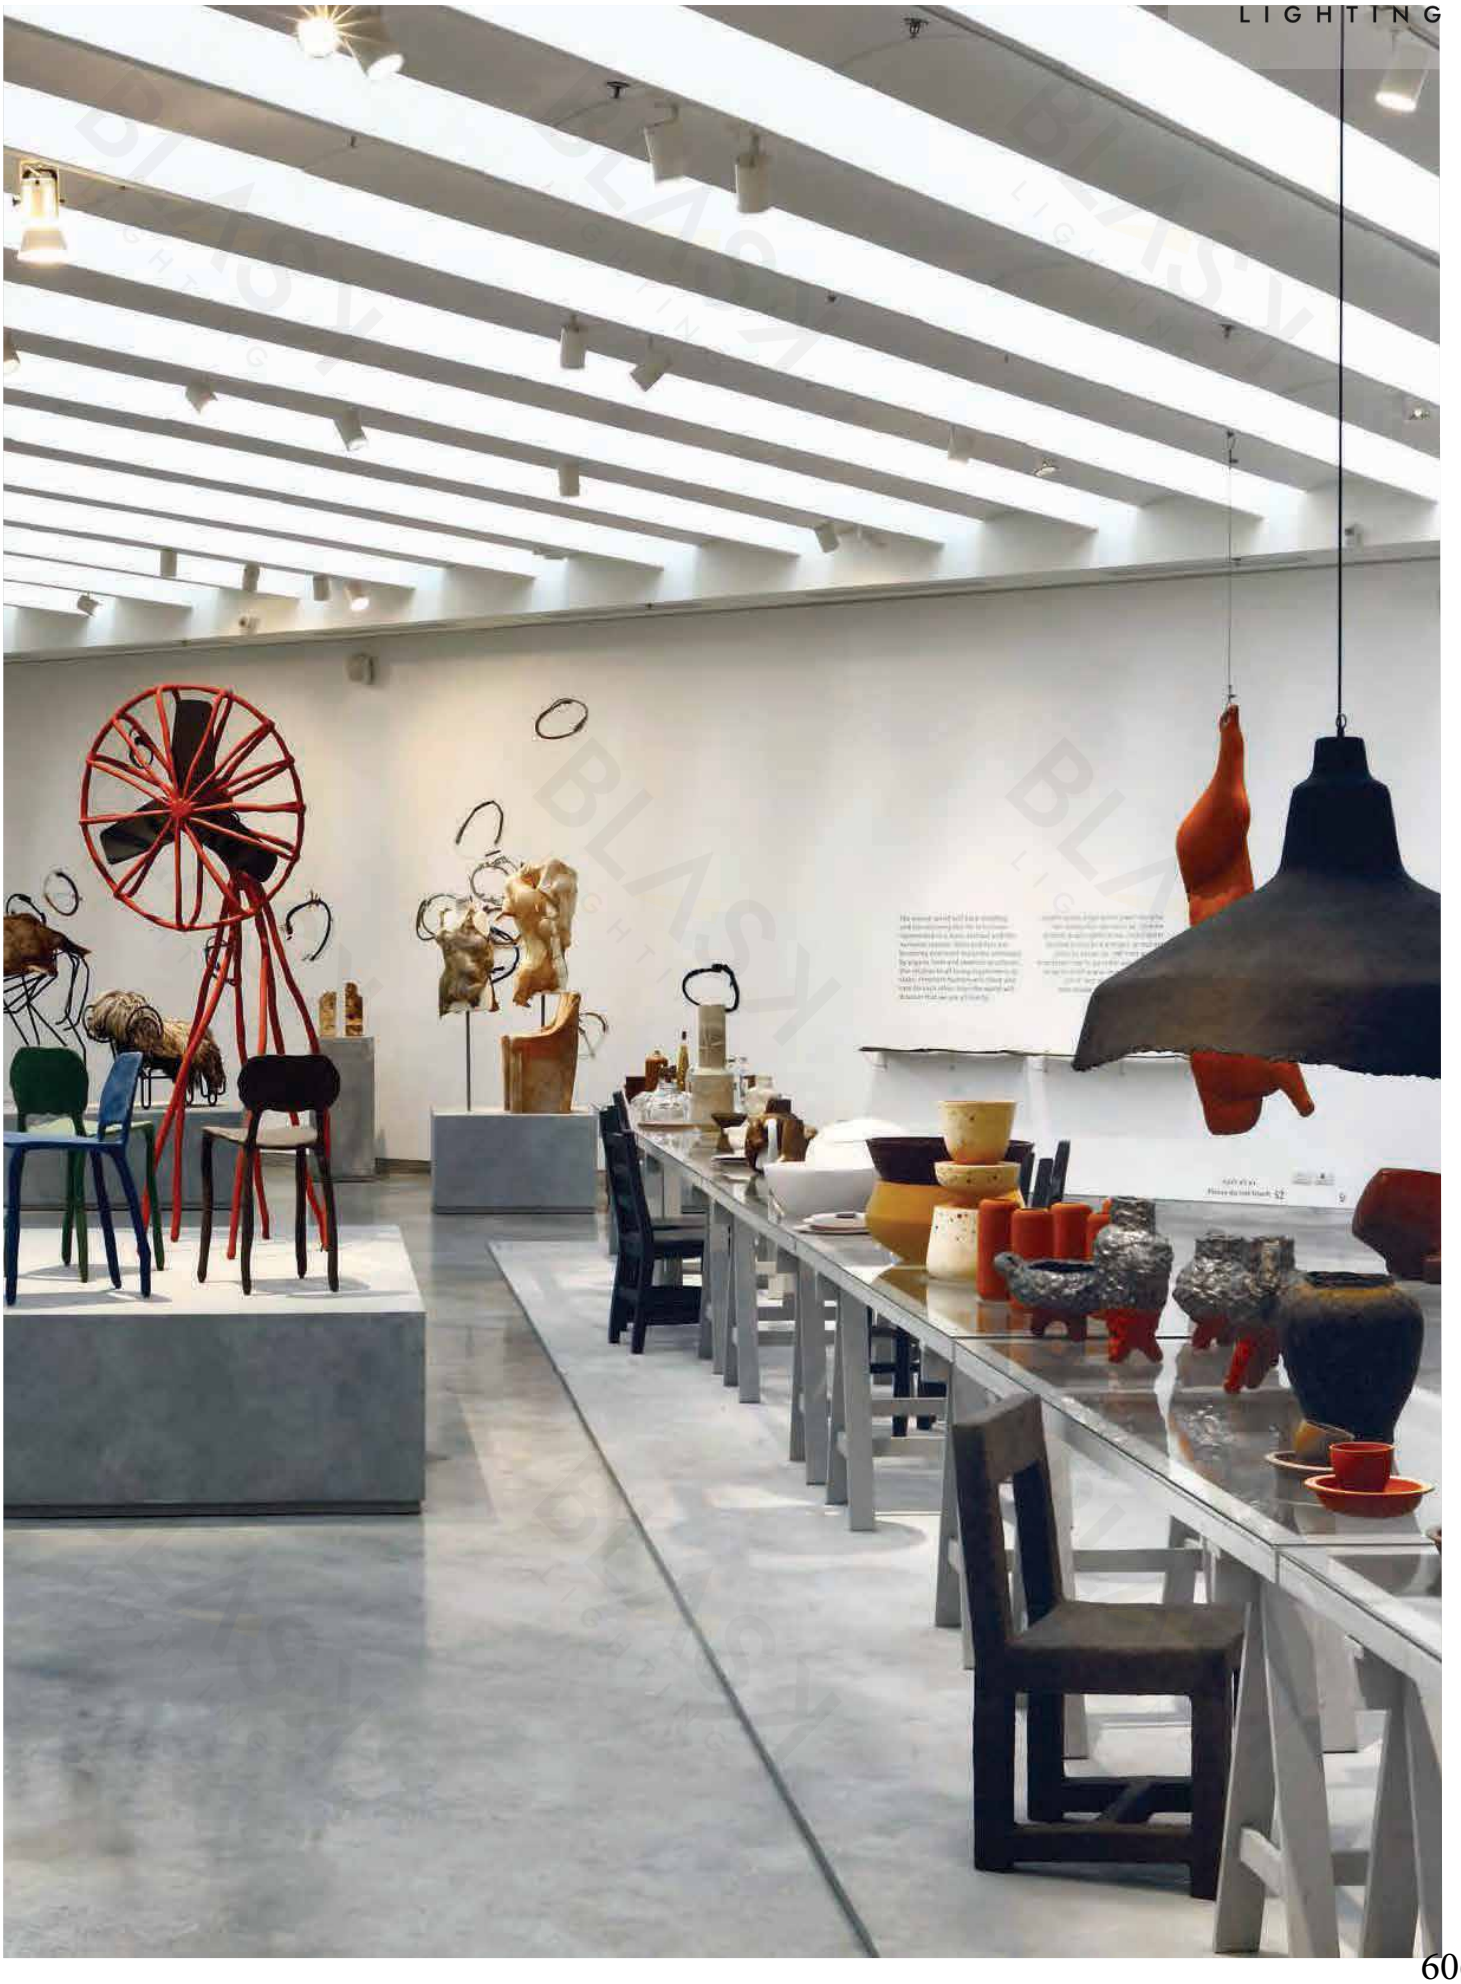

Product information

INACLI30704

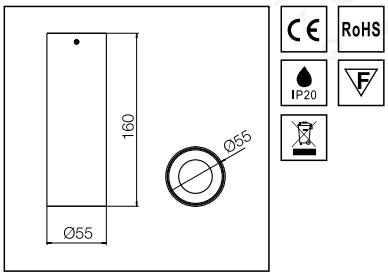

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240v 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	Black
Life	50 000 H
Warranty	5 Years

INACLI30705

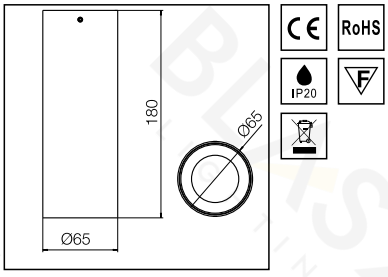

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240v 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	Black
Life	50 000 H
Warranty	5 Years

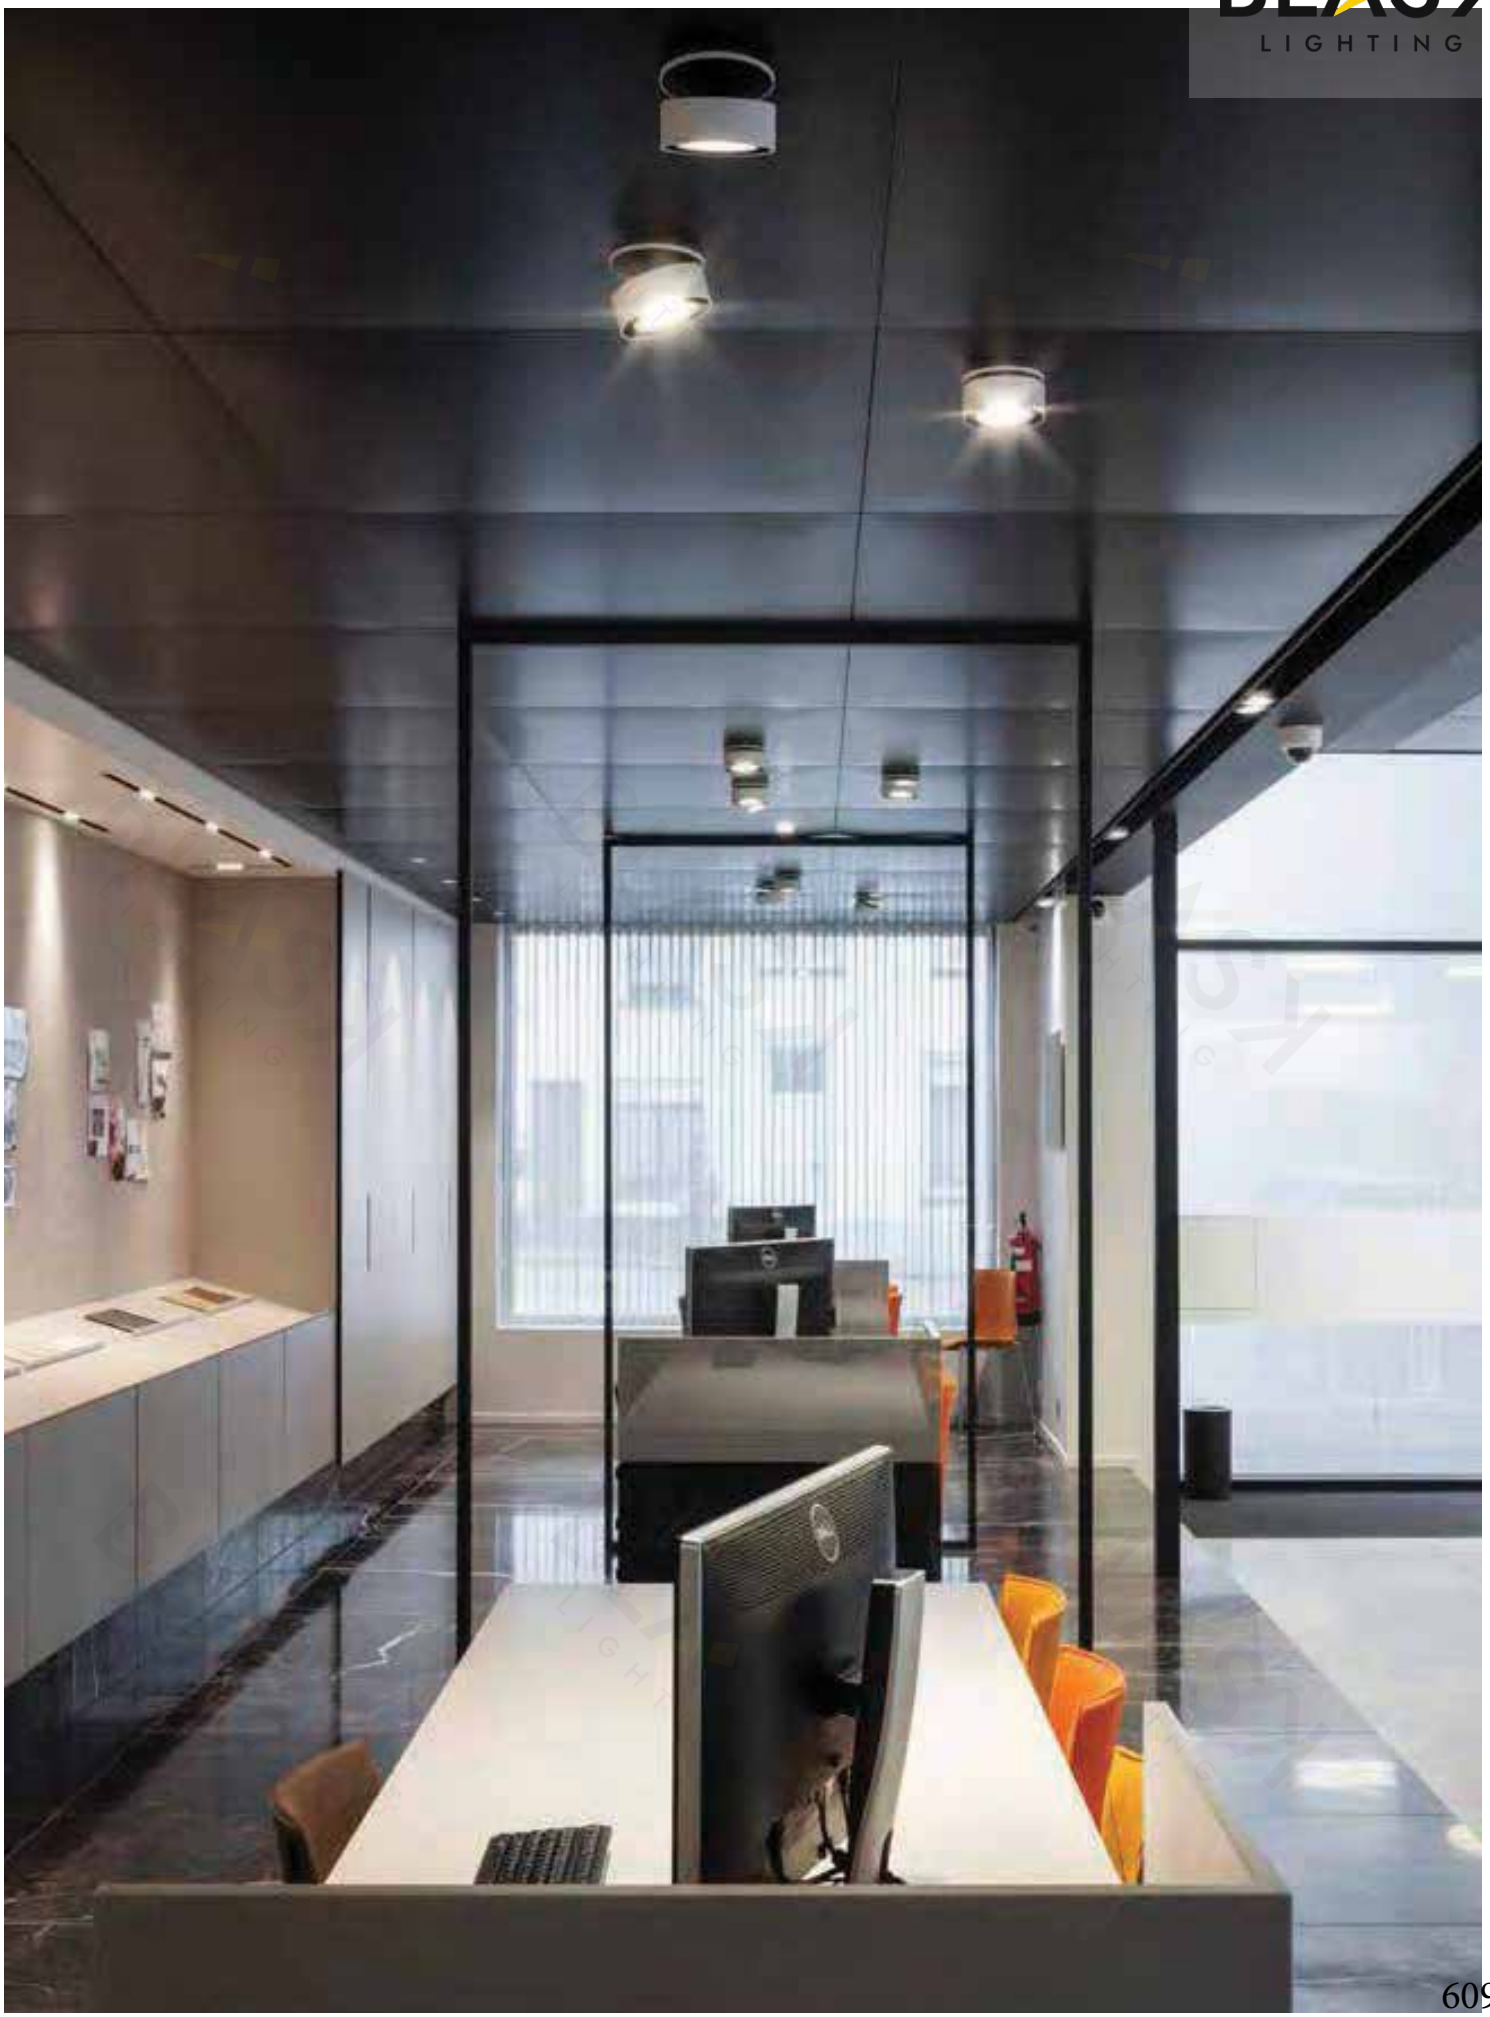

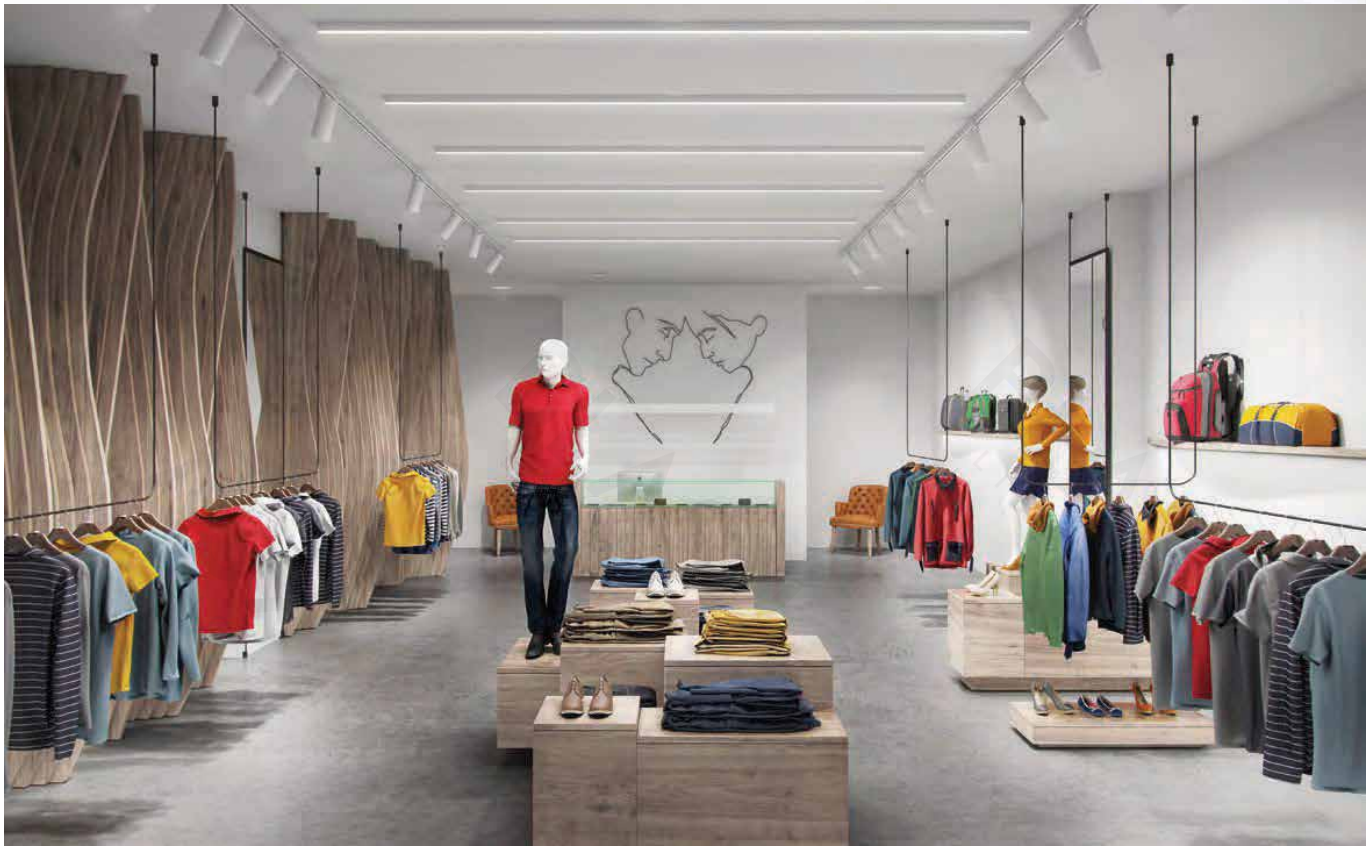

INATLI30706

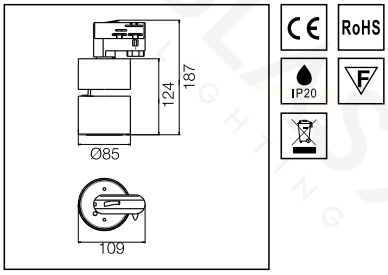

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INATLI30707

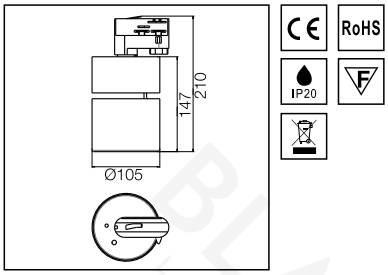

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INATLI30708

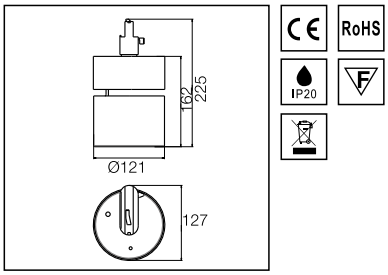

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INATLI30709

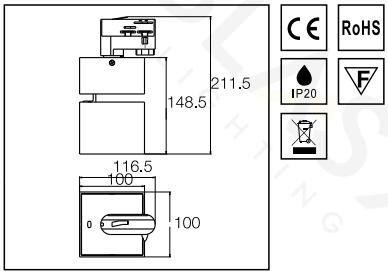

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INATLI30710

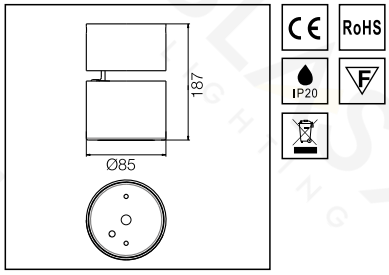

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INATLI30711

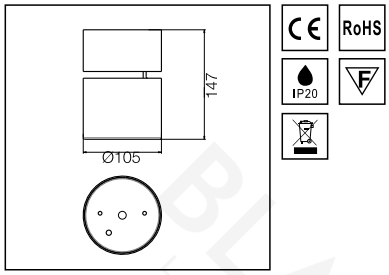

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INATLI30712

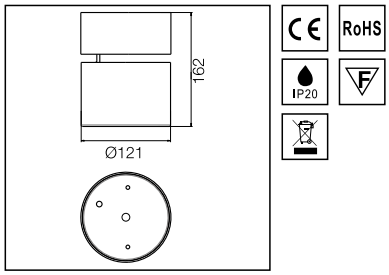

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INATLI30713

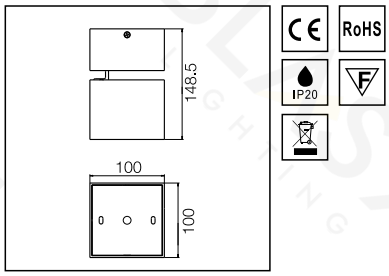

Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

Commercial Solution

Led surface mounted panel lights can be made in any shape or size to replace almost all existing applications.Using Semi-Conductor Light Source, No UV Rays.Extensive application, Simple, safe and convenient.Led surface mounted panel light can work perfect in low temperature.

INTEVISION Technology has own classic version of LED surface mounted panel light with round and square frame shape, and with 4-5 different power and size.

All INTEVISION's surface mounted panel lights are safety agency approved,With a CRI of up to 75. INTEVISION's products offer low-energy, low maintenance, low-heat, long life operation, and provide significant savings on electricity, maintenance and re-lamping costs.

APPLICATIONS:

Government and Office buildings
- Entries,lobbies,corridorsandhallways
- Conferencerooms

Shopping Malls and Retail Stores
- Open-trafficarea,entries,passageways,merchandise displays,showrooms,restrooms,foodserviceareas

Hospital and Health Care Facilities
- Entries,receptionarea,corridors,treatment rooms,doctors/nurses/techniciansoffices, foodserviceandrestrooms.

Theaters and Museum
- Lobbies,foodserviceareas,aisleways,restrooms

Hotels
- Lobbies,receptionareas,guestrooms,barand diningareas,meetingandexerciserooms

Commercia Solution

LED SURFACE MOUNTED PANEL LIGHT

Products exploded view

DRIVER TRIDONIC PHILIPS

TRIDONOC/PHILIPS driver
CE / RoHS
PF>0.9

Stainless steel Screws

Aluminum backplate

Back Board

Reflector paper

One Complete Piece

LGP

Grade A material

LED EPISTAR

EPISTAR SMD

Fine Quality Aluminum Heat Sink

Diffuser

Grade A Material

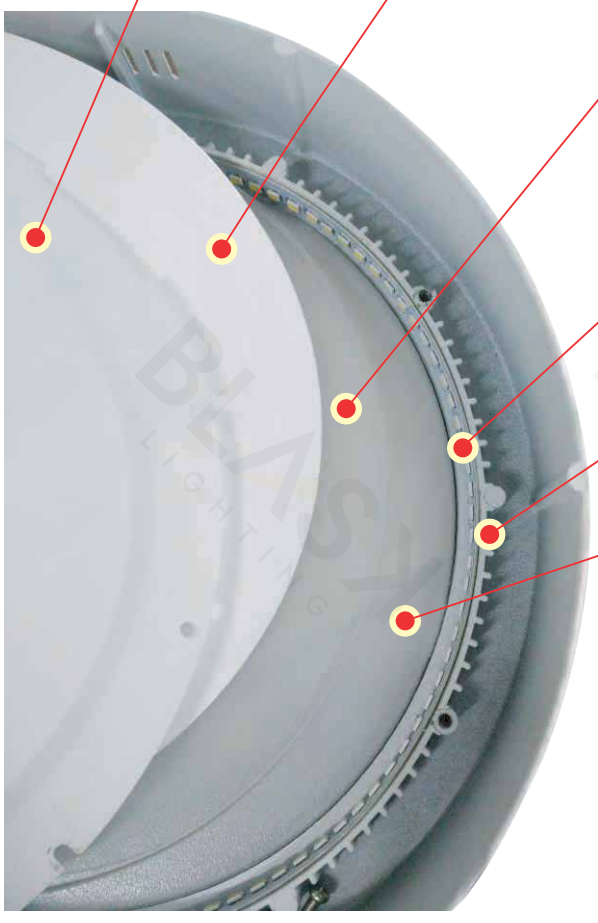

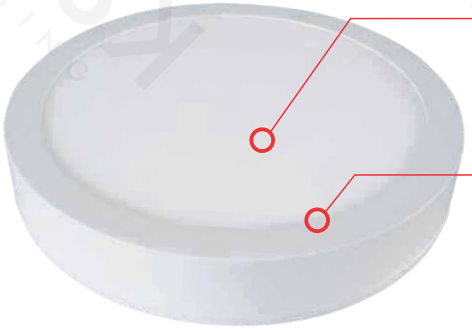

Hi-Bright

Grade"A" LGP + Diffuser High Luminous Output Rate

Frame Color

Perfect White Coating

- RAL9016 Mat White

INASLI30714
INASLI30715
INASLI30716



Power	15W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASLI30717
INASLI30718
INASLI30719



Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INASLI30720
INASLI30721
INASLI30722



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

Adjustable radar sensor switch

ON-OFF function

The products provide ON-OFF function for LED lighting, users can select the right function according to different applications.

With sufficient light,the lamp doesn't switch on.

Motion detected,the sensor switches on the lamp.

After hold time,the sensor switches off the lamp when no motion is detected.

Adjustable delay time: 18-120 seconds

Smart delay: switch after detecting the human body every activity will automatically trigger a cycle loop, and the last time the trigger timing delay

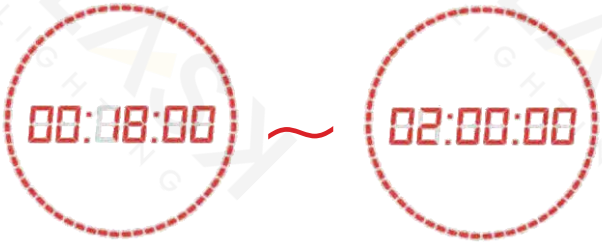

Induction distance: 8-10 m

Wide angle, no dead zone, can penetrate glass and thin wood, depending on the work rate, can penetrate the walls of different thicknesses, from the environment, temperature,dust, and other effects.

ON-OFF / 3-step dimming function
Controller insider (Driver built in)

Introduction

- Integration of microwave motion sensor, daylight sensor and LED power supply.
- Automatic switching and dimming based on motion and light level.
- constant current can be set via DIP switch.
- Compact size makes the drivers suitable to fix within most LED ceiling lights.
- Detection area, time delay and daylight threshold can be precisely set via DIP switch.

Sensor DIM LED drivers, originally pioneered by Merrytek, are innovative products integrated with HF motion detector, daylight sensor and LED power supply.

The products supply a simple energy-saving solution for LED ceiling lights. As all control parts are integrated in a same housing, it is very easy to assemble and save labor cost.

Compact size makes the drivers easy to be installed in luminaires and get more simple lighting structure.

Max.8M

Light Sensor

Hold Time
10s-30min

Mounting Height
6m Max.

Mounting Height
6m Max.

Automatic
Dimming

Optional Funciton

ON-OFF function

The products provide ON-OFF and dimming function for LED lighting, users can select the right function according to different applications.

With sufficient light,the lamp doesn't switch on.

Motion detected,the sensor switches on the lamp.

After hold time,the sensor switches off the lamp when no motion is detected.

3-step dimming function



With sufficient ambient light, the sensor does not switch on the lamp.



With insufficient ambient light, the sensor switches on the lamp when motion is detected.



After hold time, the sensor dims the lamp at a low light level if no new motion trigger.



After stand-by period, the sensor switches off the lamp if no motion is detected in its detection zone.

Detection Pattern

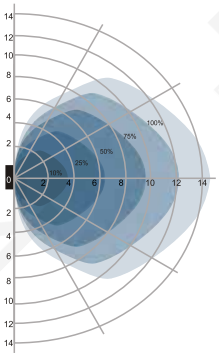

Wall mounting pattern (Unit: m)
Suggested installation height: 1-1.8m



Ceiling mounting pattern (Unit: m)
Suggested installation height: 2.5-6m

LED
Panel Light

DESCRIPTION

- Integration of multiple high brightness 4014 SMD LED light source, energy saving and high efficiency.
- Energy-saving: 90% better than incandescent, 60% better than fluorescent light.
- After professional process of LED packaging, sturdy and durable, LED lifespan up to 50000 hours.
- Friendly-environmental protection, without ultraviolet ray, infrared ray, heat radiation and mercury pollution.
- Using high quality diffuser, the LED light does not cause fading of the object due to irradiation.
- Soft light color, high luminous efficiency, light efficiency beyond the traditional fluorescent tube.
- High color rendering index, showing the most intuitive and clearest visual perception.
- With fast response and small glare, all output optical flux can be achieved at once.
- Solid light source, strong seismic resistance, easy for transportation and installation, high safety.
- The utility model has the advantages of strong light emitting direction, easy control of light, and effectively improving the efficiency of the lighting system.

Products exploded view

PHILIPS driver

TUV flicker free driver

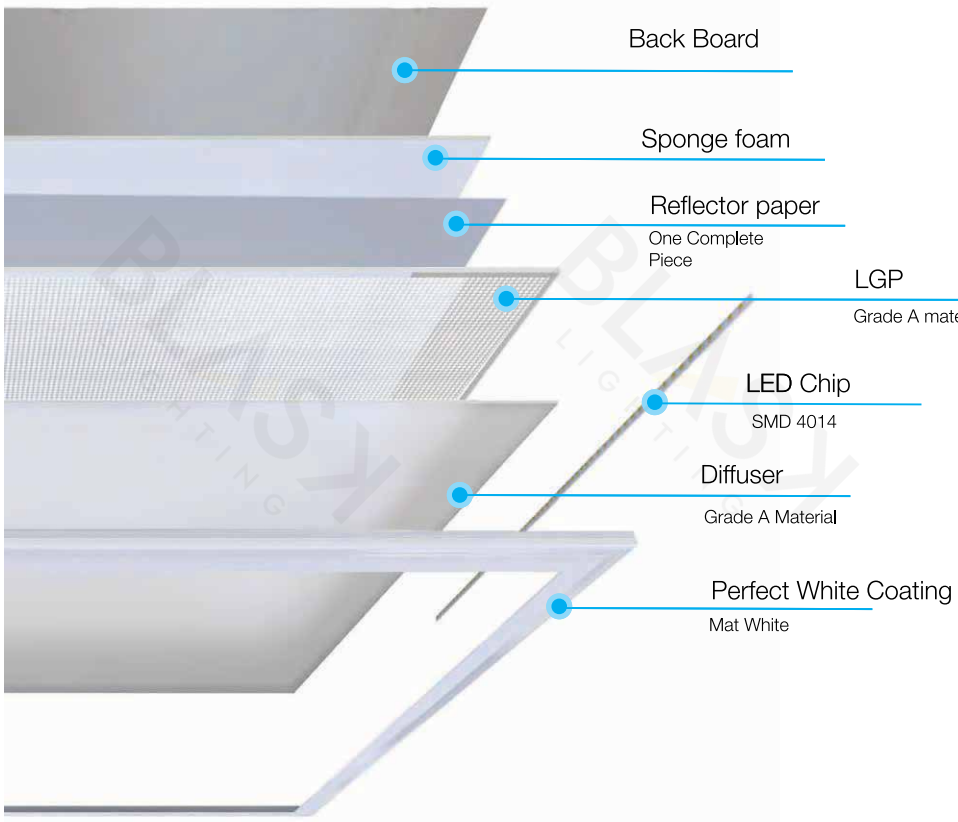

Back Board

Sponge foam

Reflector paper

One Complete Piece

LGP

Grade A material

LED Chip

SMD 4014

Diffuser

Grade A Material

Perfect White Coating

Mat White



New design
No screw backside

Ultra-thin border
Thickness of only 1cm

Perfect frame
white coating

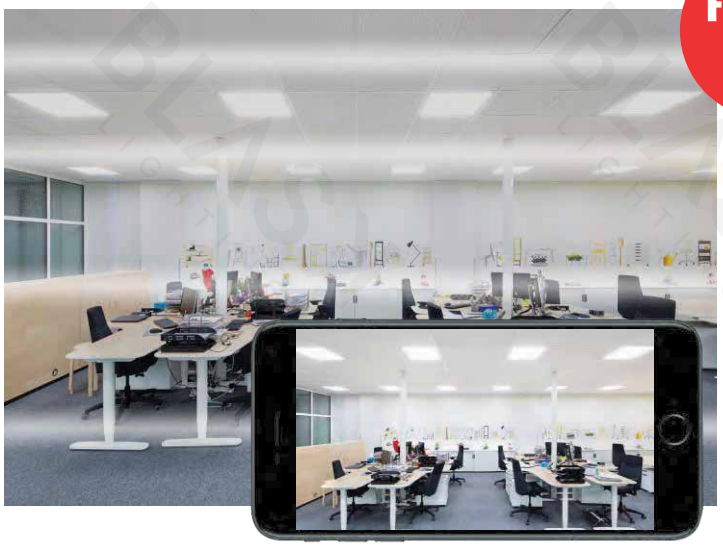

Flicker free

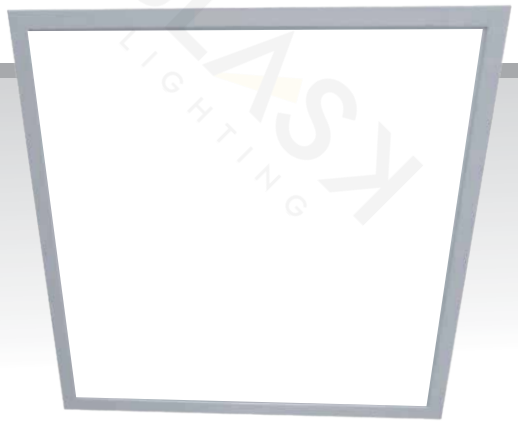

Ceiling
recessed

Features

Cost and time saving rapid
tool-free installation onto the ceiling
Highly efficient and glare free.
Soft light(lifetime: 50,000 hours
at 70% luminous flux remaining)
and consistent colour (Ra >80)
SMD4014 led chip with
TUV led driver
Dimming options are available

Materials/Finish
Body: Aluminium with white painted
LGP: Acrylic
Diffuser: PC

Installation/Mounting
Tool-free mounting
Fix the lighting fixture into ceiling
Suitable for stable ceiling.

Specification
Classic design surface mounted LED panel light,
luminaire body in aluminium with one pieces
Acrylic light guide plate(LGP) and one piece PC diffuser.
not dazzling&soft light.Rapid tool-free mounting,
Suitable for stable ceiling.
SMD4014 led chips with TUV driver
Choice of 3 light colours: 3000K,4200K,6500K

Correct installation

The table shows the correct
installation distances for
uniform lighting on the ceiling.

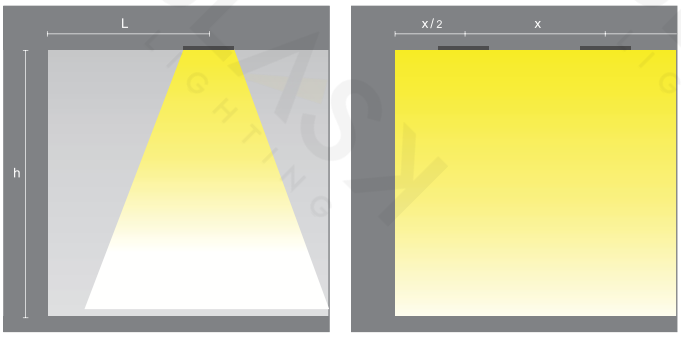

INAPOLI30723



Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	900 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INAPOLI30724



Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INAPOLI30725



Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INAPOLI30726



Power	60W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	5400 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

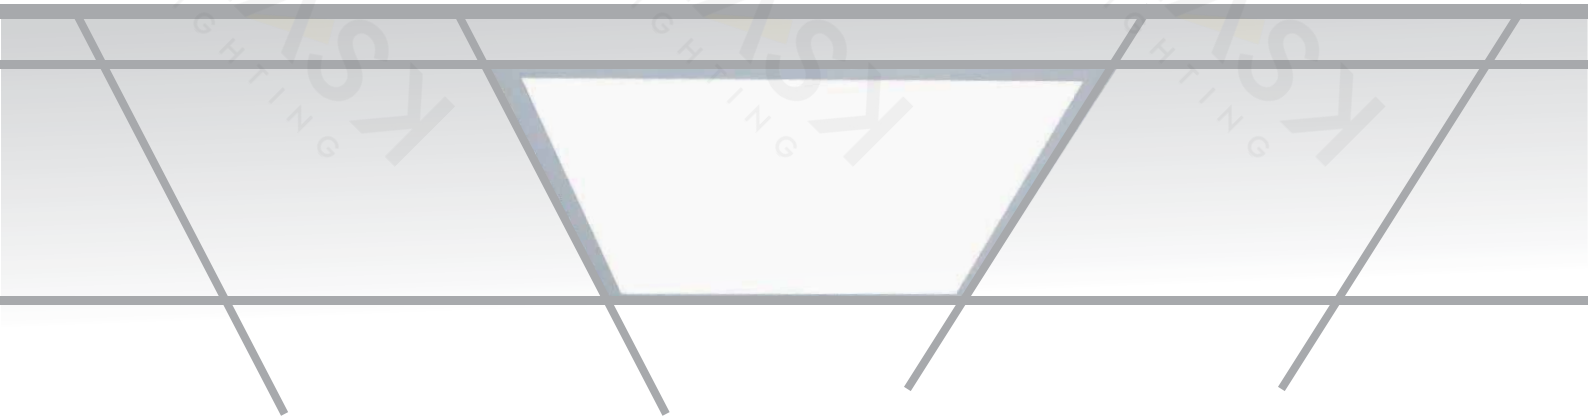

Ceiling recessed

Features

Cost and time saving rapid tool-free installation onto the ceiling
Highly efficient and glare free.
Soft light(lifetime: 50,000 hours at 70% luminous flux remaining) and consistent colour (Ra >80)
SMD4014 led chip with TUV led driver
Dimming options are available

Materials/Finish
Body: Aluminium with white painted
LGP: Acrylic
Diffuser: PC

Installation/Mounting
Tool-free mounting
Fix the lighting fixture into ceiling
Suitable for stable ceiling.

Specification
Classic design surface mounted LED panel light, luminaire body in aluminium with one pieces Acrylic light guide plate(LGP) and one piece PC diffuser. not dazzling&soft light.Rapid tool-free mounting, Suitable for stable ceiling.
SMD4014 led chips with TUV driver
Choice of 3 light colours: 3000K,4200K,6500K





Correct installation

The table shows the correct installation distances for uniform lighting on the ceiling.

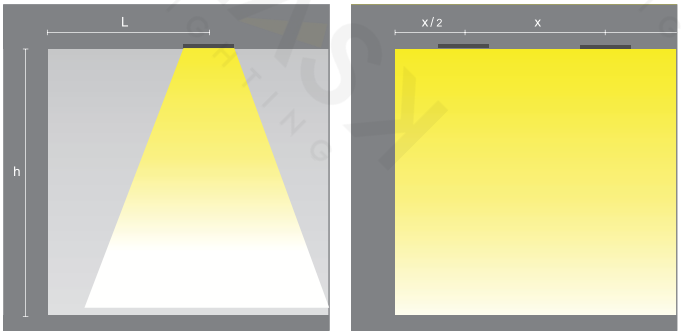

INAPOLI30727



Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	900 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INAPOLI30728





Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INAPOLI30729



Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3600 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

INAPOLI30730



Power	60W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	5400 lm
CRI	>80
Material	Aluminum
Color	White
Life	30 000 H
Warranty	3 Years

LED Emergency Lighting

LED Emergency Lighting

Functional emergency lighting is more than just a must required by law. The qual-ity of the luminaires and of the emergency power supply system reflects the operator's responsibility towards the building, the people using it and towards the environment. Emergency and emergency sign luminaires of the emergency lighting product range cannot fail to impress in everyday life, too – on account of their unobtrusive design and their capability of blending into the interior. emergency lighting attaches great importance to technical quality criteria such as maximum energy efficiency and convenient maintenance also when it comes to emergency lighting. Based on many years of experience with LED, emergency lighting incorporates state-of-the-art, extremely durable LED technology. The built-in Maintenance function ensures constant luminous flux for more than 50 000 hours.

0890

Optional:

Recessed accessories

Features

IP20

- Safety indication with LED lamp.
- PC and ABS lamp body.
- Transparent PMMA screens
  with pictograms for signalling (with customizable serigraphy) .
- Indication visible from
  a distance of 25 m in conformity .
- Ceiling-mounted, wall-mounted and cantilever.
- Built-in emergency power aggregate/battery and charger.
  180 minutes emergency operation.
- Permanent operation (always-on).
- Optional:manual test function or auto test function

Applications

LED Emergency Vehicle Lighting can be applied in different installation modes.

ceiling-mounted

wall-mounted

Recessed

Signalling



SA emergency operation

The system is always on to show directions and emergency exits.

INAELI30731

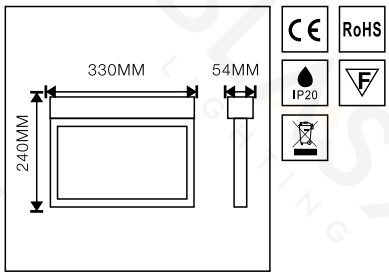

Power	3.5W
CCT	6500K
Voltage	AC220-240V 50/60Hz
Battery type	Ni-MH
Output Lumens	220 lm
CRI	>80
Material	ABS+PC
Color	White
Warranty	3 Years
Full emergency	3 hours
Remark	Manual test function

INAELI30732

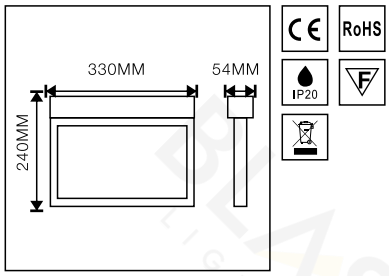

Power	3.5W
CCT	6500K
Voltage	AC220-240V 50/60Hz
Battery type	Ni-MH
Output Lumens	220 lm
CRI	>80
Material	ABS+PC
Color	White
Warranty	3 Years
Full emergency	3 hours
Remark	Auto test function

INAELI30733

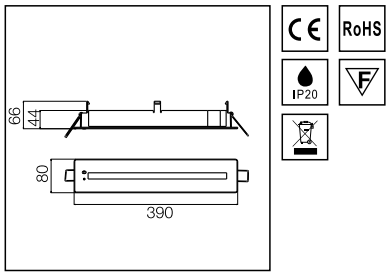

Material	PC
Color	White
Remark	Recessed accessories

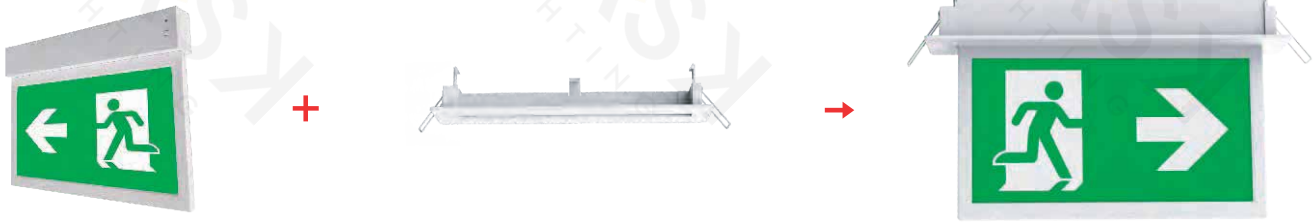

Type L

Type R

Type DOL

Type DOR

Type UPR

Type UPL

Type AS

An emergency lighting luminaire is required in these locations.

- every exit to be used in case of an emergency
- stairs in order to make sure that every step is directly lit
- other differences in level
- prescribed emergency exits and signs
- any change of direction
- any crossroads of corridors
- on the outside and in the proximity of the final exits
- every first aid station
- fire fighting equipment and fire alarms

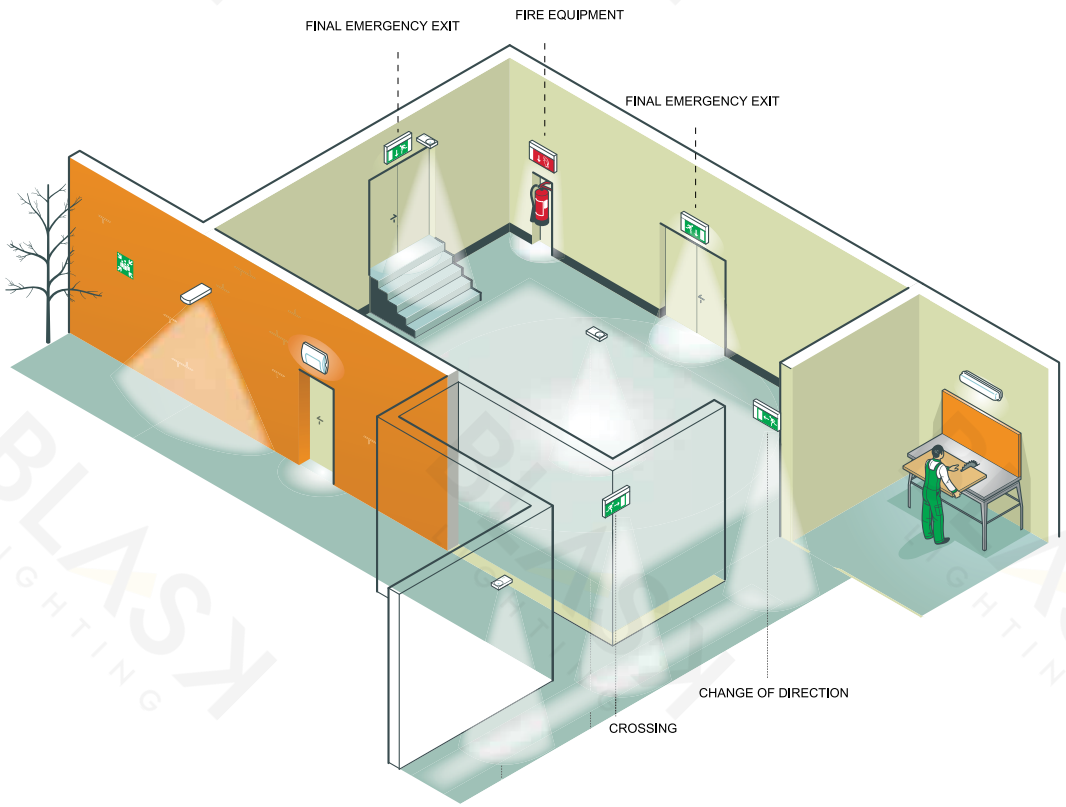

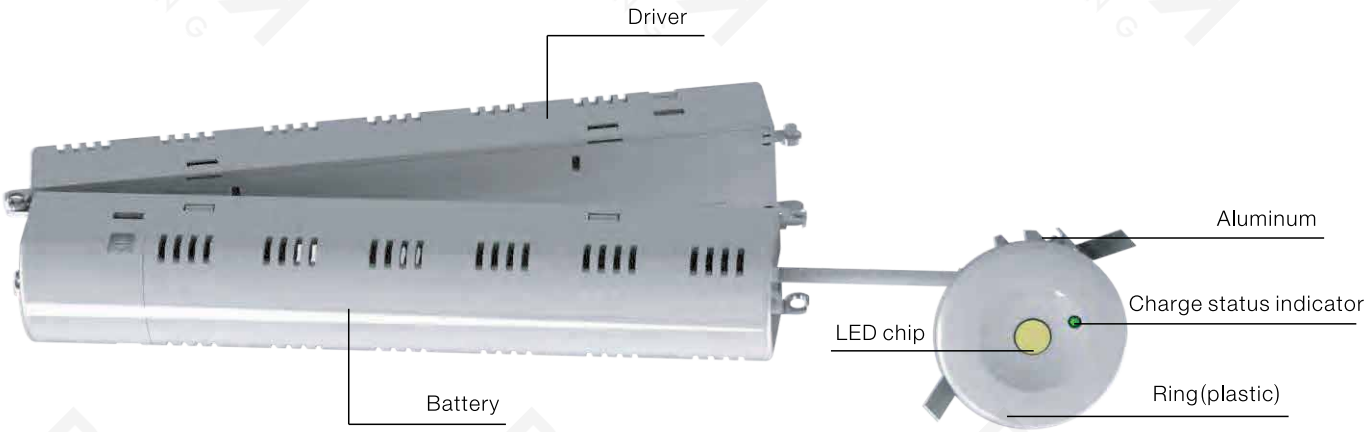

Type of protection: IP 20
Protection class: II
For escape route illumination
Ring: plastic. Extremely inconspicuous when installed in the ceiling
Automatic self test in all standard versions.
Very long LED rated life thanks to large cooling element
Easy to install
Operating mode: non-maintained power mode (BS)
Ballast emergency: EB
Available colour: white

Installation

Standard installation diagram

Planning guide: Escape route illumination in accordance with EN 1838

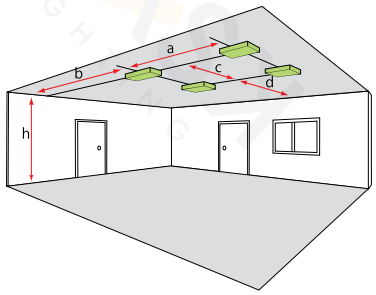

E = 1 lx along the centre line

Spacing table

Luminaire flux
Emergency: 80 lm
The following values are indicated in m

h	a	b	c	d
2,5	7,4	2,8	3,8	1,6
3,0	7,6	3,2	4,2	1,8
3,5	7,9	3,5	4,6	1,8
4,0	8,6	3,8	4,9	1,9

Product information

INAELI30734

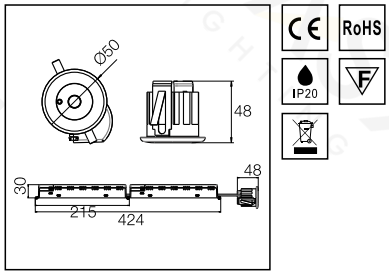

CE RoHS IP20

Power	3W
CCT	6500K
Voltage	AC220-240V 50/60Hz
Battery type	Ni-MH
Output Lumens	240 lm
CRI	>80
Material	PC
Color	White
Warranty	3 Years
Full emergency	3 hours
Remark	Manual test function

205
LAVAGEM
FOTOGRAFIA

INASL I30735

INASLI30736

Optional:

Surface mounted accessories

Features

IP20

- Type of protection: IP 20
- Protection class: II
- For escape route illumination
- Ring: plastic.
- Installed :recessed or surface
- Beam angle:120°
- Easy to install
- Available colour: white
- Auto test function

Energy saving

Item No.	INASL I30735	INASLI30736
Power	1*3W	2*3W
CCT	6500K	6500K
Voltage	AC220-240V 50/60Hz	AC220-240V 50/60Hz
Battery type	Ni-MH	Ni-MH
CRI	240 lm	480 lm
Output Lumens	>80	>80
Material	PC	PC
Color	White	White
Warranty	3 Years	3 Years
Full emergency	3 hours	3 hours
Remark	Auto test function	Auto test function



Cut-out:Ø114



Cut-out:Ø114



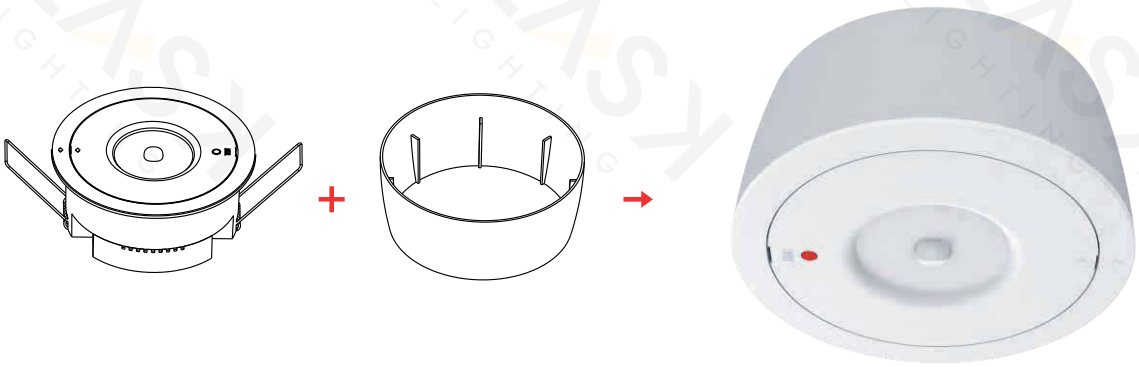

Installation

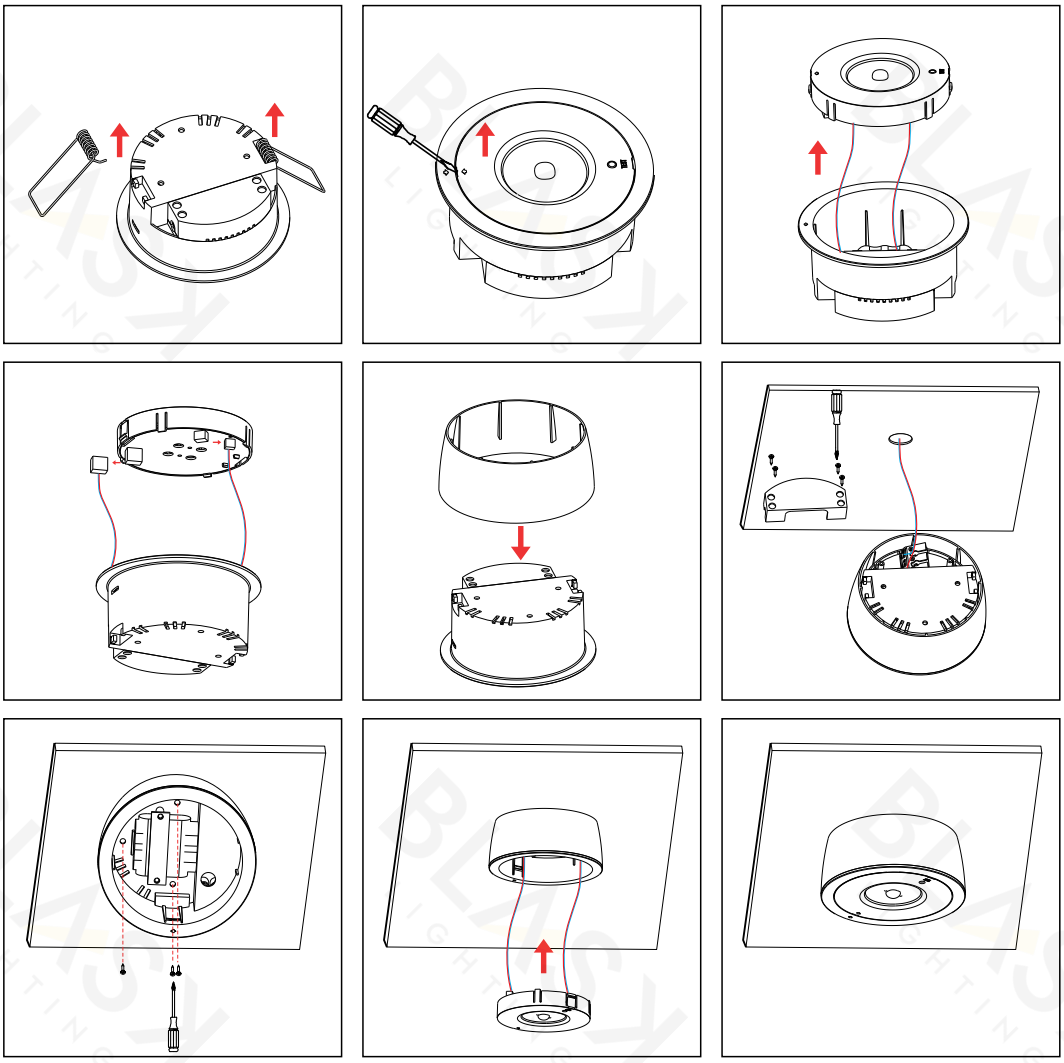

LED Lamp Automatic Emergency Device

Strong over charge and discharge ability
Good discharge current characteristics
Good storage characteristics
Long cycle life
No leakage and no explosion under standard operating condition

IP30

Product information

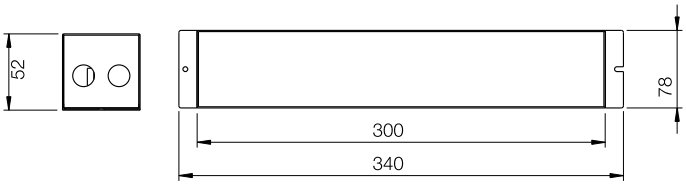

Wiring schematic

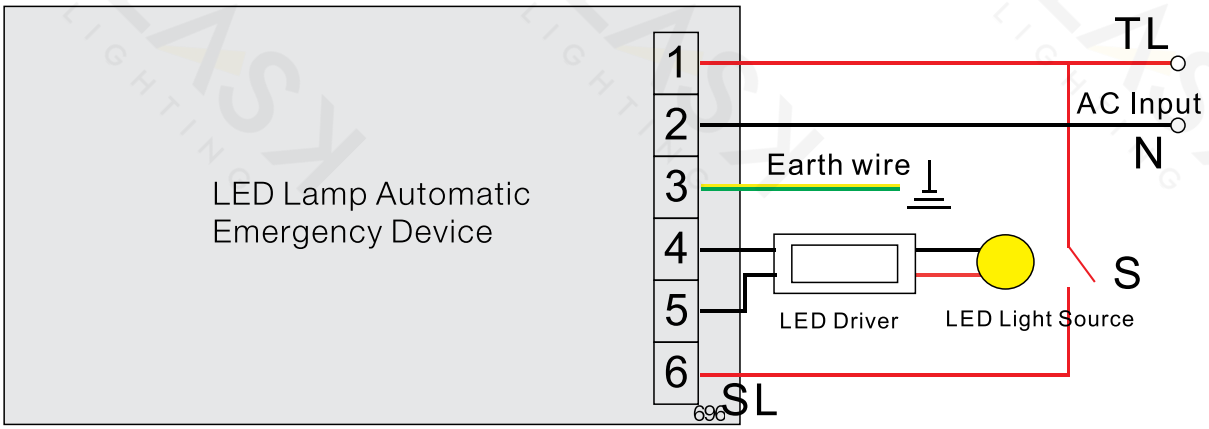

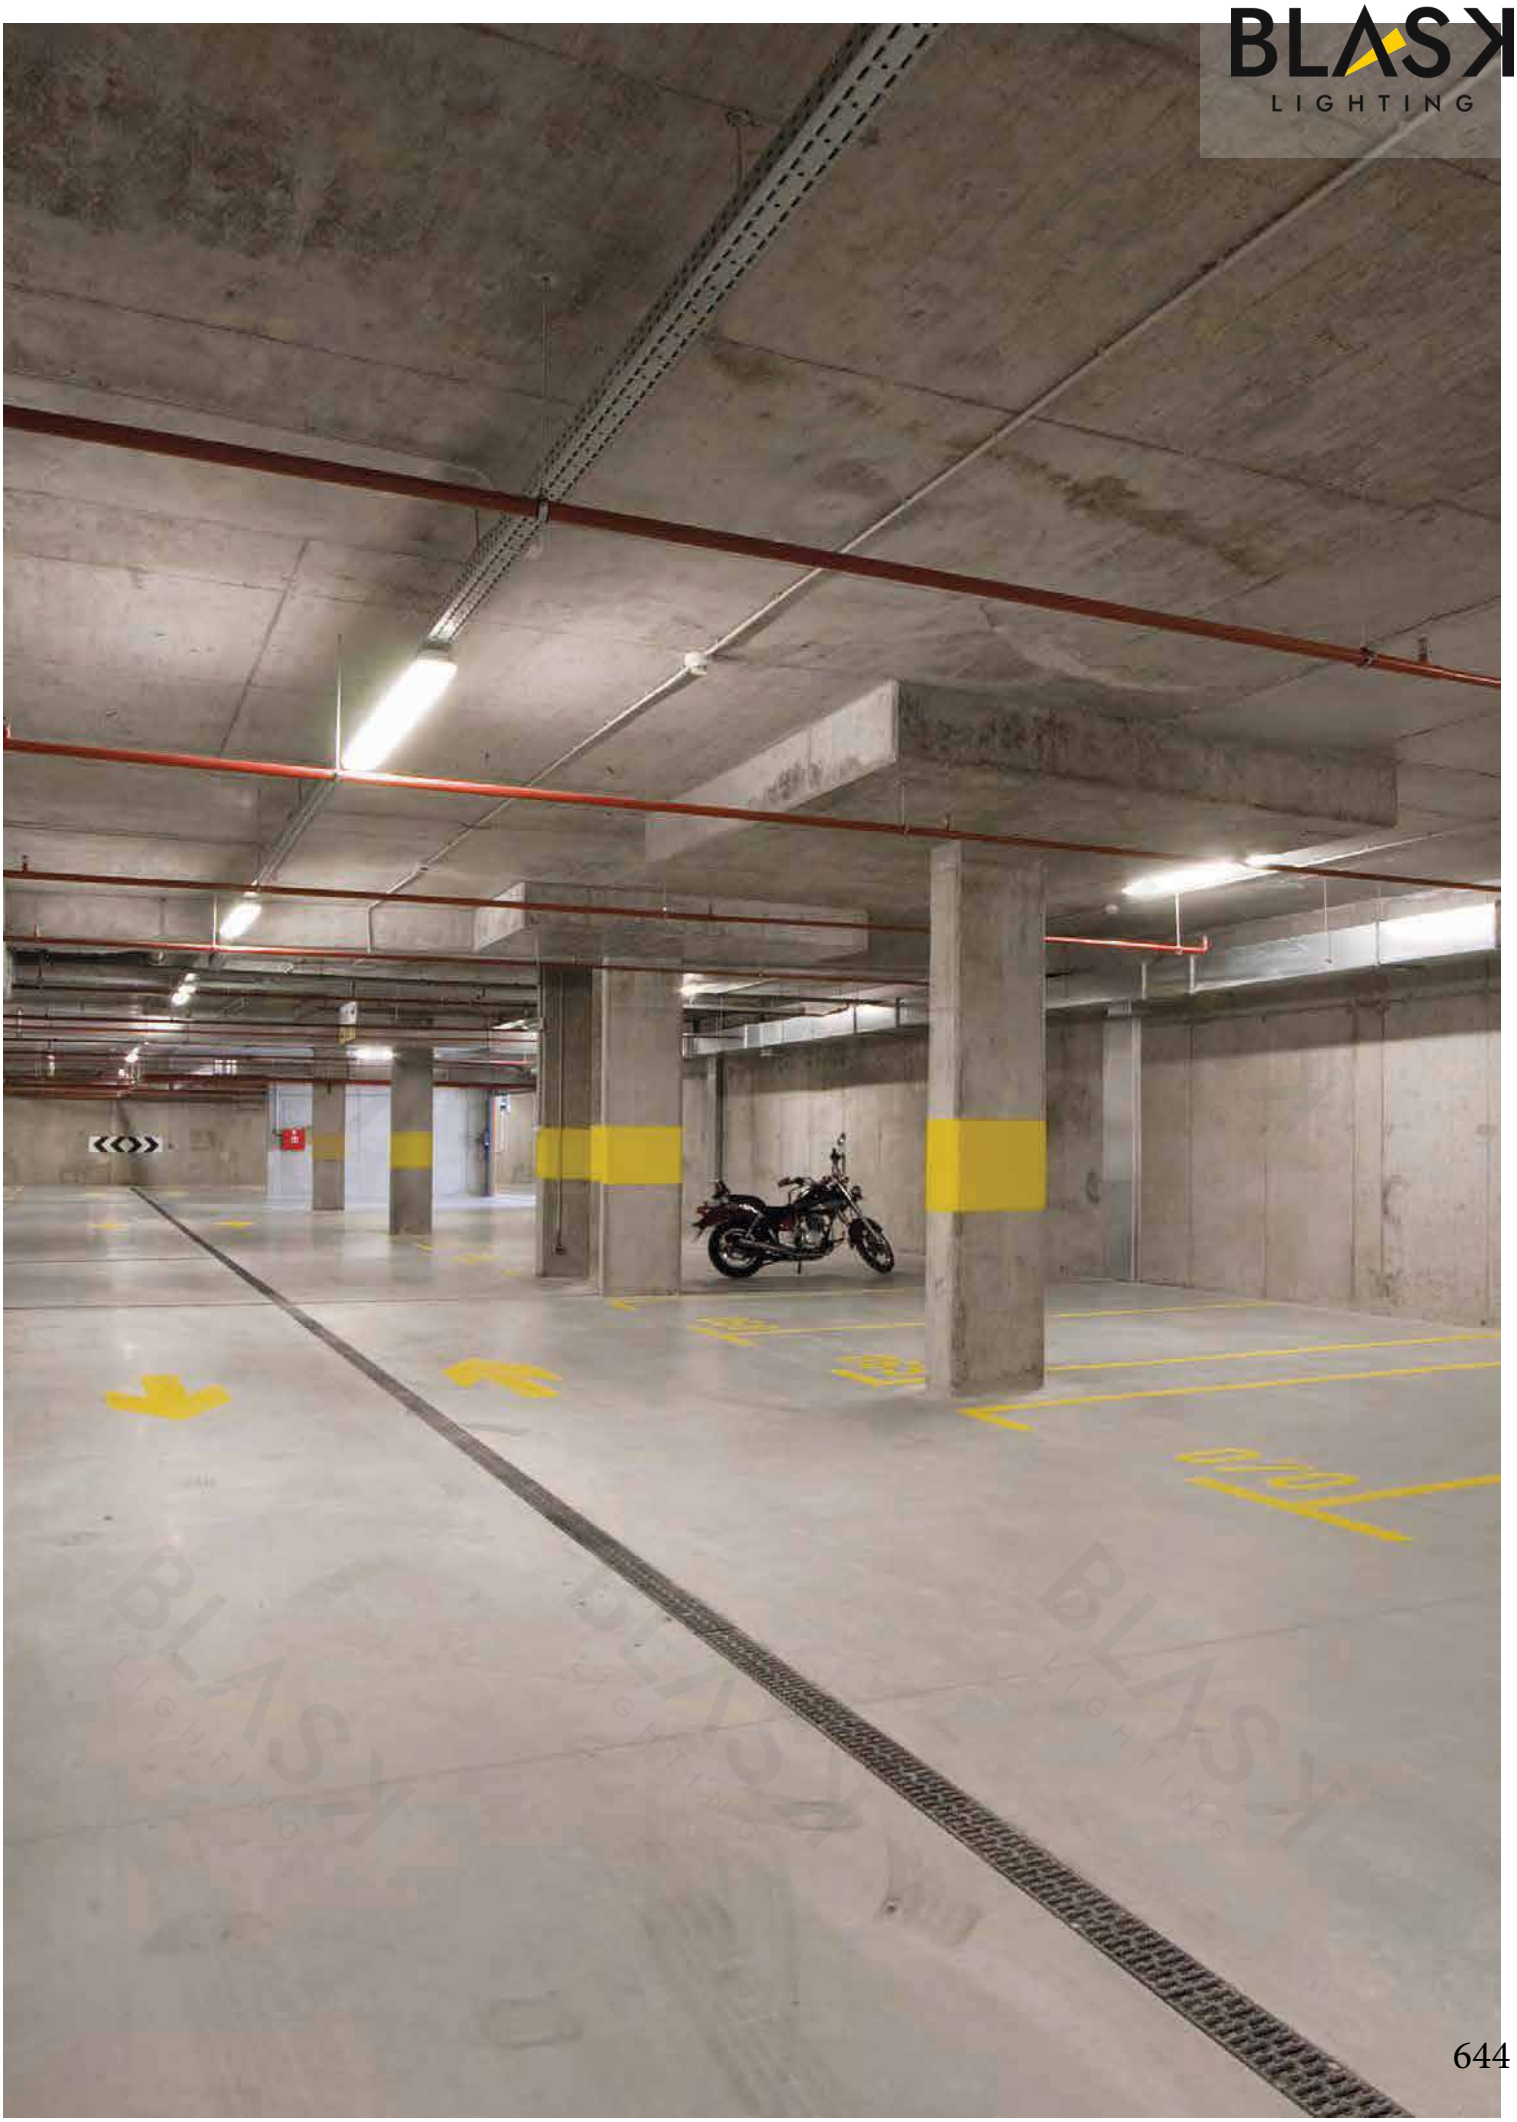

Features

Easy installation with fast connection design
Shorten the installation process and save labor cost.
Highly efficient and glare free.
Substitute for fluorescent waterproof lighting fixtures
(lifetime: 50,000 hours
at 70% luminous flux remaining)
and consistent colour (Ra ⩾75)
Epistar SMD2835 led chips
IP rate: IP65

Materials/Finish
Body: PC or ABC material
Cover:PC material
Reflector:Aluminum material
Clips:Stainless steel material

Installation/Mounting
Tool-free Installation
Fix the lighting fixture onto the ceiling directly.

Specification
The Epistar SMD2835 chips enable a solid-state lighting solution that is more efficient,
more reliable and longer-lasting than ever before possible.Stable luminous efficacy and CCT thanks to high efficiency of radiating.
Body and diffuser could meet IK08 and 850 degree glow wire test requirement.
Lightweight body material,corrosion resistant,
Waterproof and dustproof.
It could be fitted with the Microwave sensor,
Fitted with the emergency battery to meet requirement.
Suitable for supermarket,underground parking, warehouse
Function well in the waterproof and dustproof,
Suitable for outdoor and wet locations lighting applications.
Choice of 3 light colours: 3000K,4200K,6500K

Products exploded view

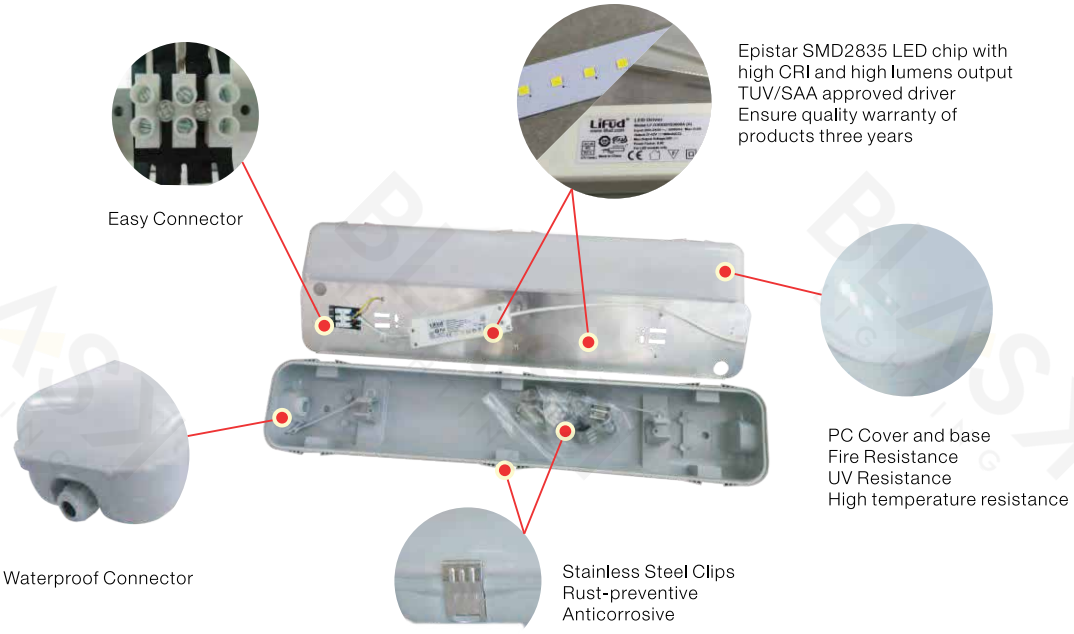

INACWLI30737

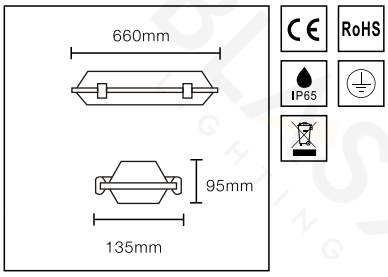

Power	24W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1950 lm
CRI	>80
Material	Aluminum
Color	Grey
Life	30 000 H
Warranty	3 Years

INACWLI30738

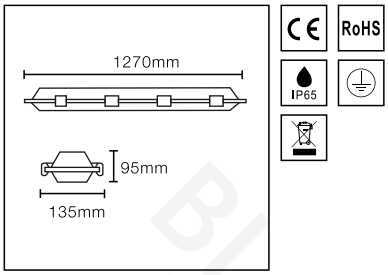

Power	48W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3850 lm
CRI	>80
Material	Aluminum
Color	Grey
Life	30 000 H
Warranty	3 Years

INACWLI30739

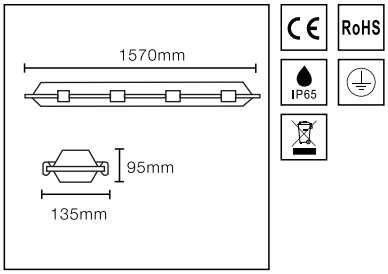

Power	60W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4970 lm
CRI	>80
Material	Aluminum
Color	Grey
Life	30 000 H
Warranty	3 Years

Application of rendering

INAHLI30740



Power	100W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	9000 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INAHLI30741



Power	200W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	18000 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

BLASK
LIGHTING

Ground surface

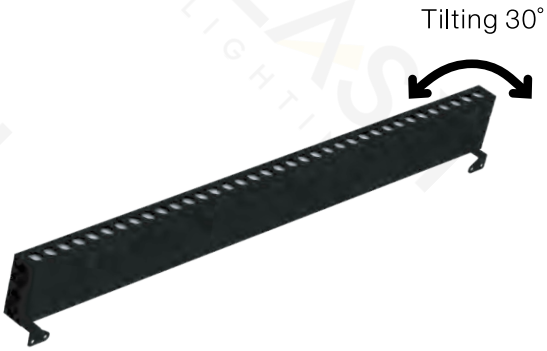

Wall surface

Diverse beam angles(15°,20°,30°,45°,60°,20x40°,30x45°,10x60°)offer various.
Flexible space coordination
Stable tilting structure enables flexible aiming for various performance.

Operating voltage:DC24V / AC220-240V 50/60Hz

Installation



continuously installed to create continuous uninterrupted wall wash effect.

DC24V Single color

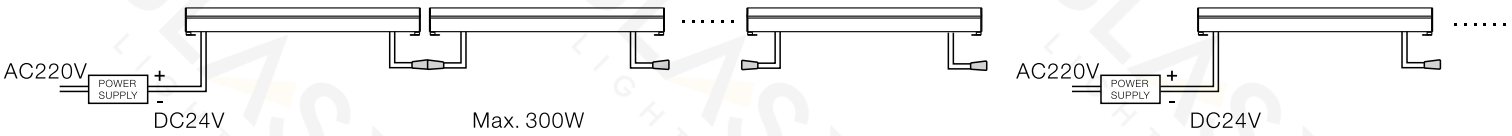

Product information

INFCLO30742

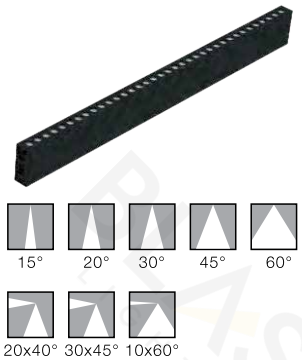

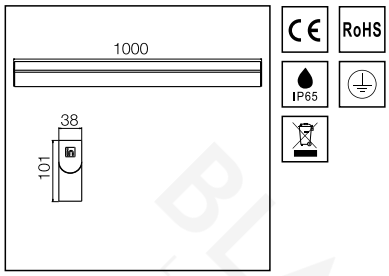

Power	24W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1680 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30743

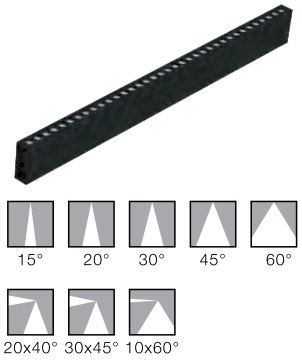

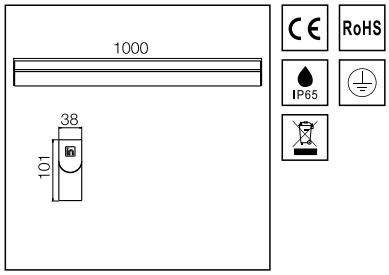

Power	36W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	2520 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30744

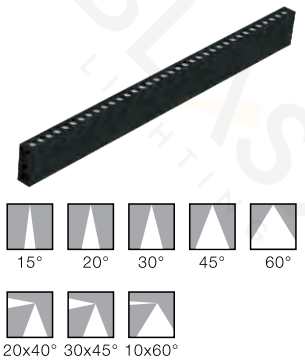

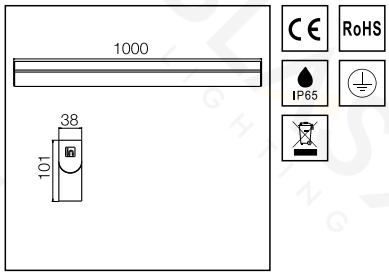

Power	48W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	3360 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

AC220V single color

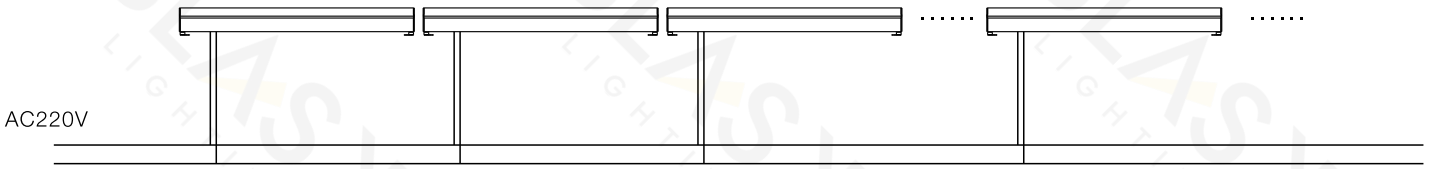

Product information

INFCLO30745





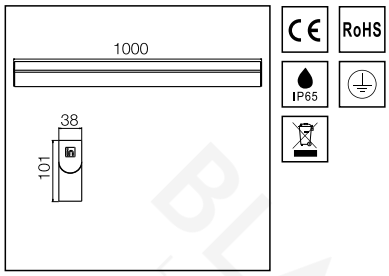

Power	24W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50-60Hz
Output Lumens	1680 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30746





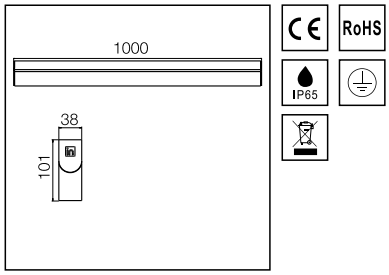

Power	36W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50-60Hz
Output Lumens	2520 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30747



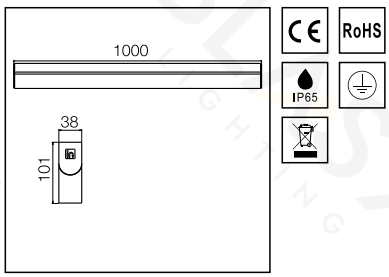

Power	48W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50-60Hz
Output Lumens	3360 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

DC24V RGB

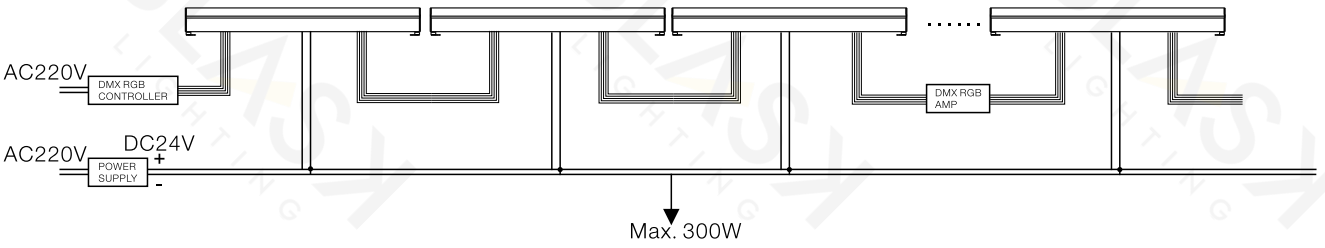

Product information

INFCLO30748

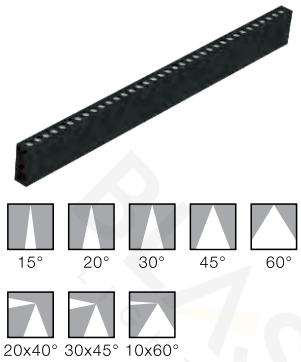

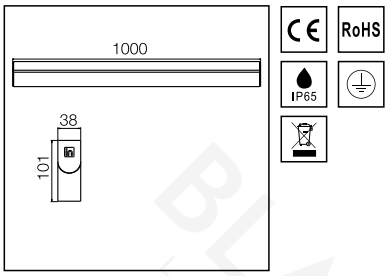

Power	36W
CCT	RGB
Voltage	DC24V
Output Lumens	2520 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30749



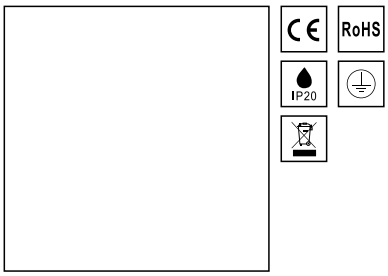

Remark	DMX effect for controlling lights,Enhanced signal

INFCLO30750

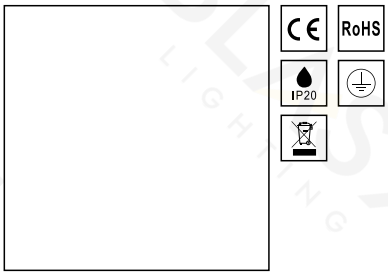

Remark	DMX effect for controlling lights

INFCLO30751

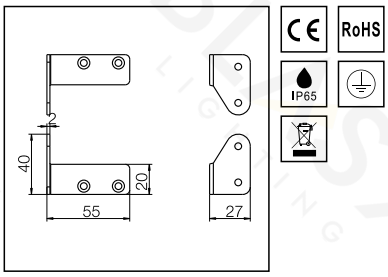

Material	Aluminum
Color	Black

INFCLO30752

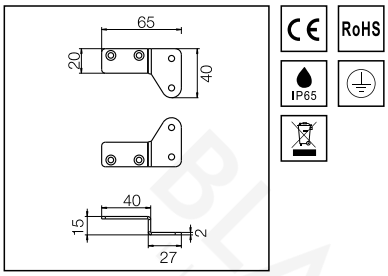

Material	Aluminum
Color	Black

BLASK
LIGHTING
GALERIJA EMPORIUM
GALERIJA EMPORIUM
BIENVENUTI
BIENVENIDA
DOBRODOŠLI
WELCOME
WILLKOMMEN

Linear wall wash lighting plays a complementary role in overall outdoor lighting design.

Diverse beam angles(15°,20°,30°,45°,60°,20x40°,30x45°,10x60°)offer various.
Flexible space coordination
Stable tilting structure enables flexible aiming for various performance.

Operating voltage:DC24V

Installation

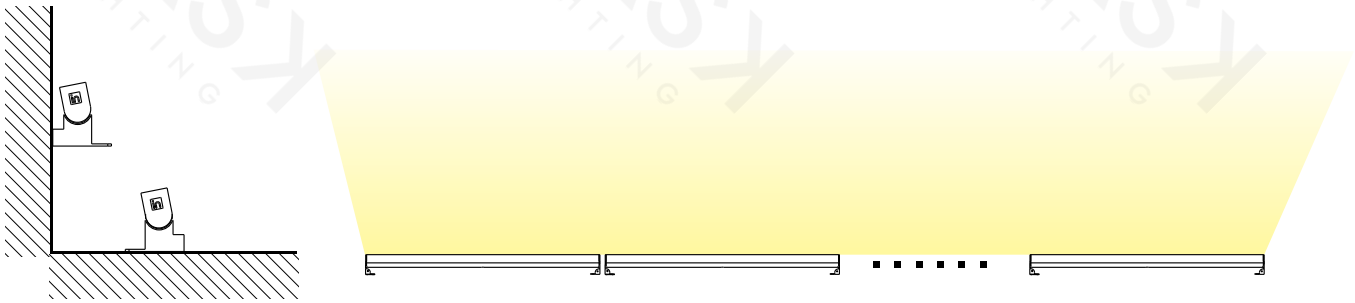

continuously installed to create continuous uninterrupted wall wash effect.

Installation effect

Continuous installation

Intermittent installation

DC24V Single color

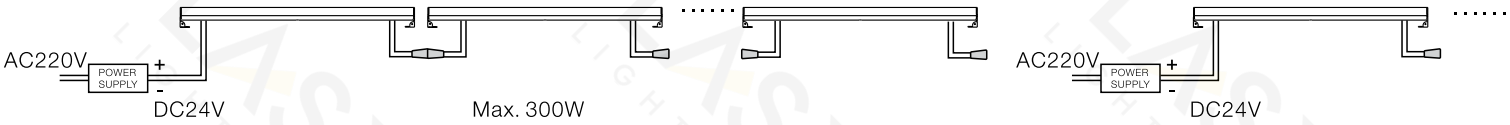

Product information

INFCLO30753

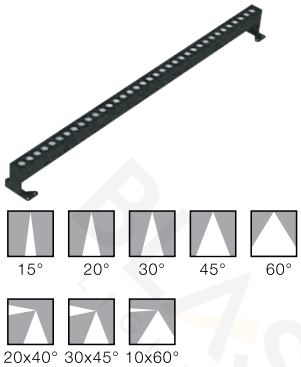

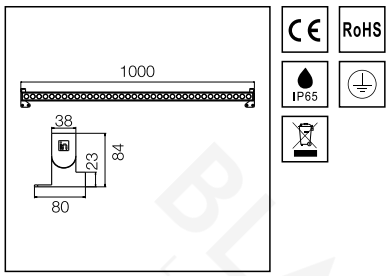

Power	24W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1680 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30754

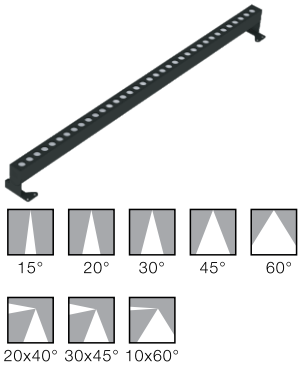

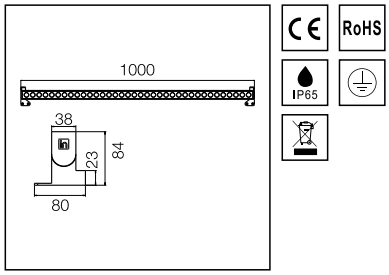

Power	36W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	2520 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30755

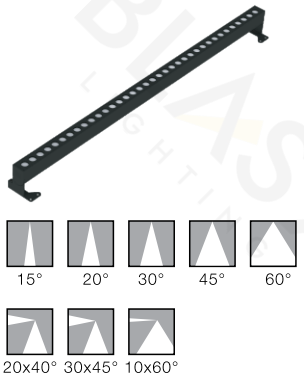

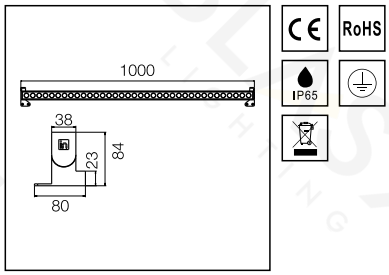

Power	48W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

DC24V RGB

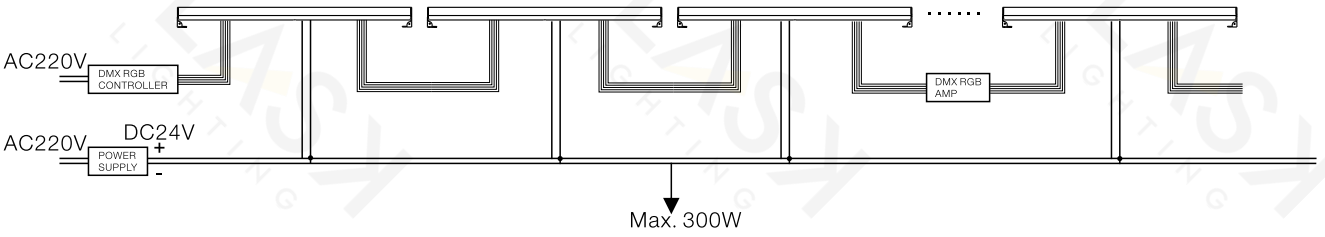

Product information

INFCLO30756

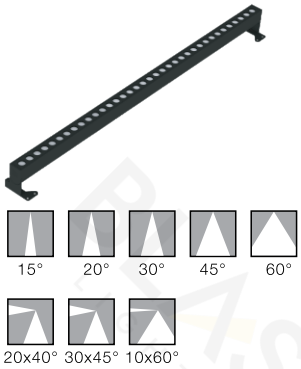



CE RoHS IP65

Power	36W
CCT	RGB
Voltage	DC24V
Output Lumens	2520 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30757

CE RoHS IP20

Remark	DMX effect for controlling lights

INFCLO30758

CE RoHS IP20

Remark	DMX effect for controlling lights,Enhanced signal

Diverse beam angles(20°,30°,45°,60°,25x45°,120°)offer various.
Flexible space coordination.Remote power supplies.
Stable tilting structure enables flexible aiming for various performance.

Operating voltage:DC24V

Installation

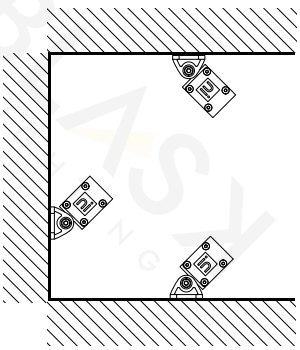

(120°) (20°,30°,45°,60°,25x45°) (120°)

INFCLO30759

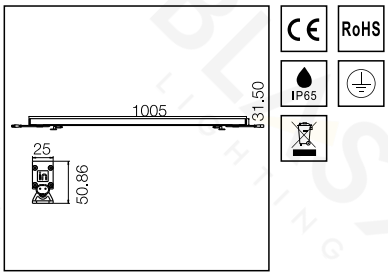

Power	15W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30760

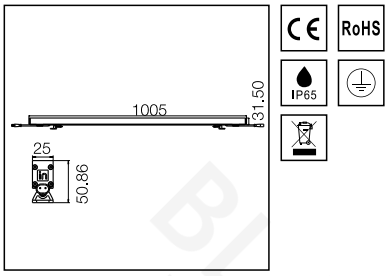

Power	15W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30761

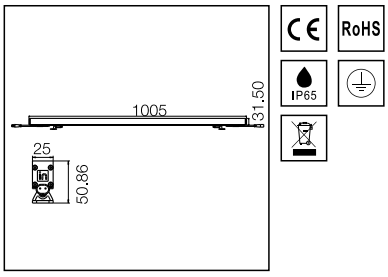

Power	18W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1440 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30762

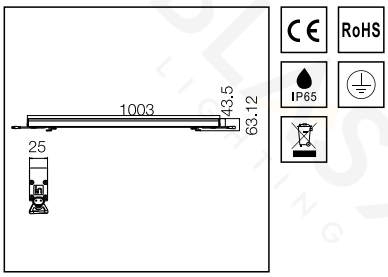

Power	15W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+PC
Color	Black
Life	30 000 H
Warranty	3 Years

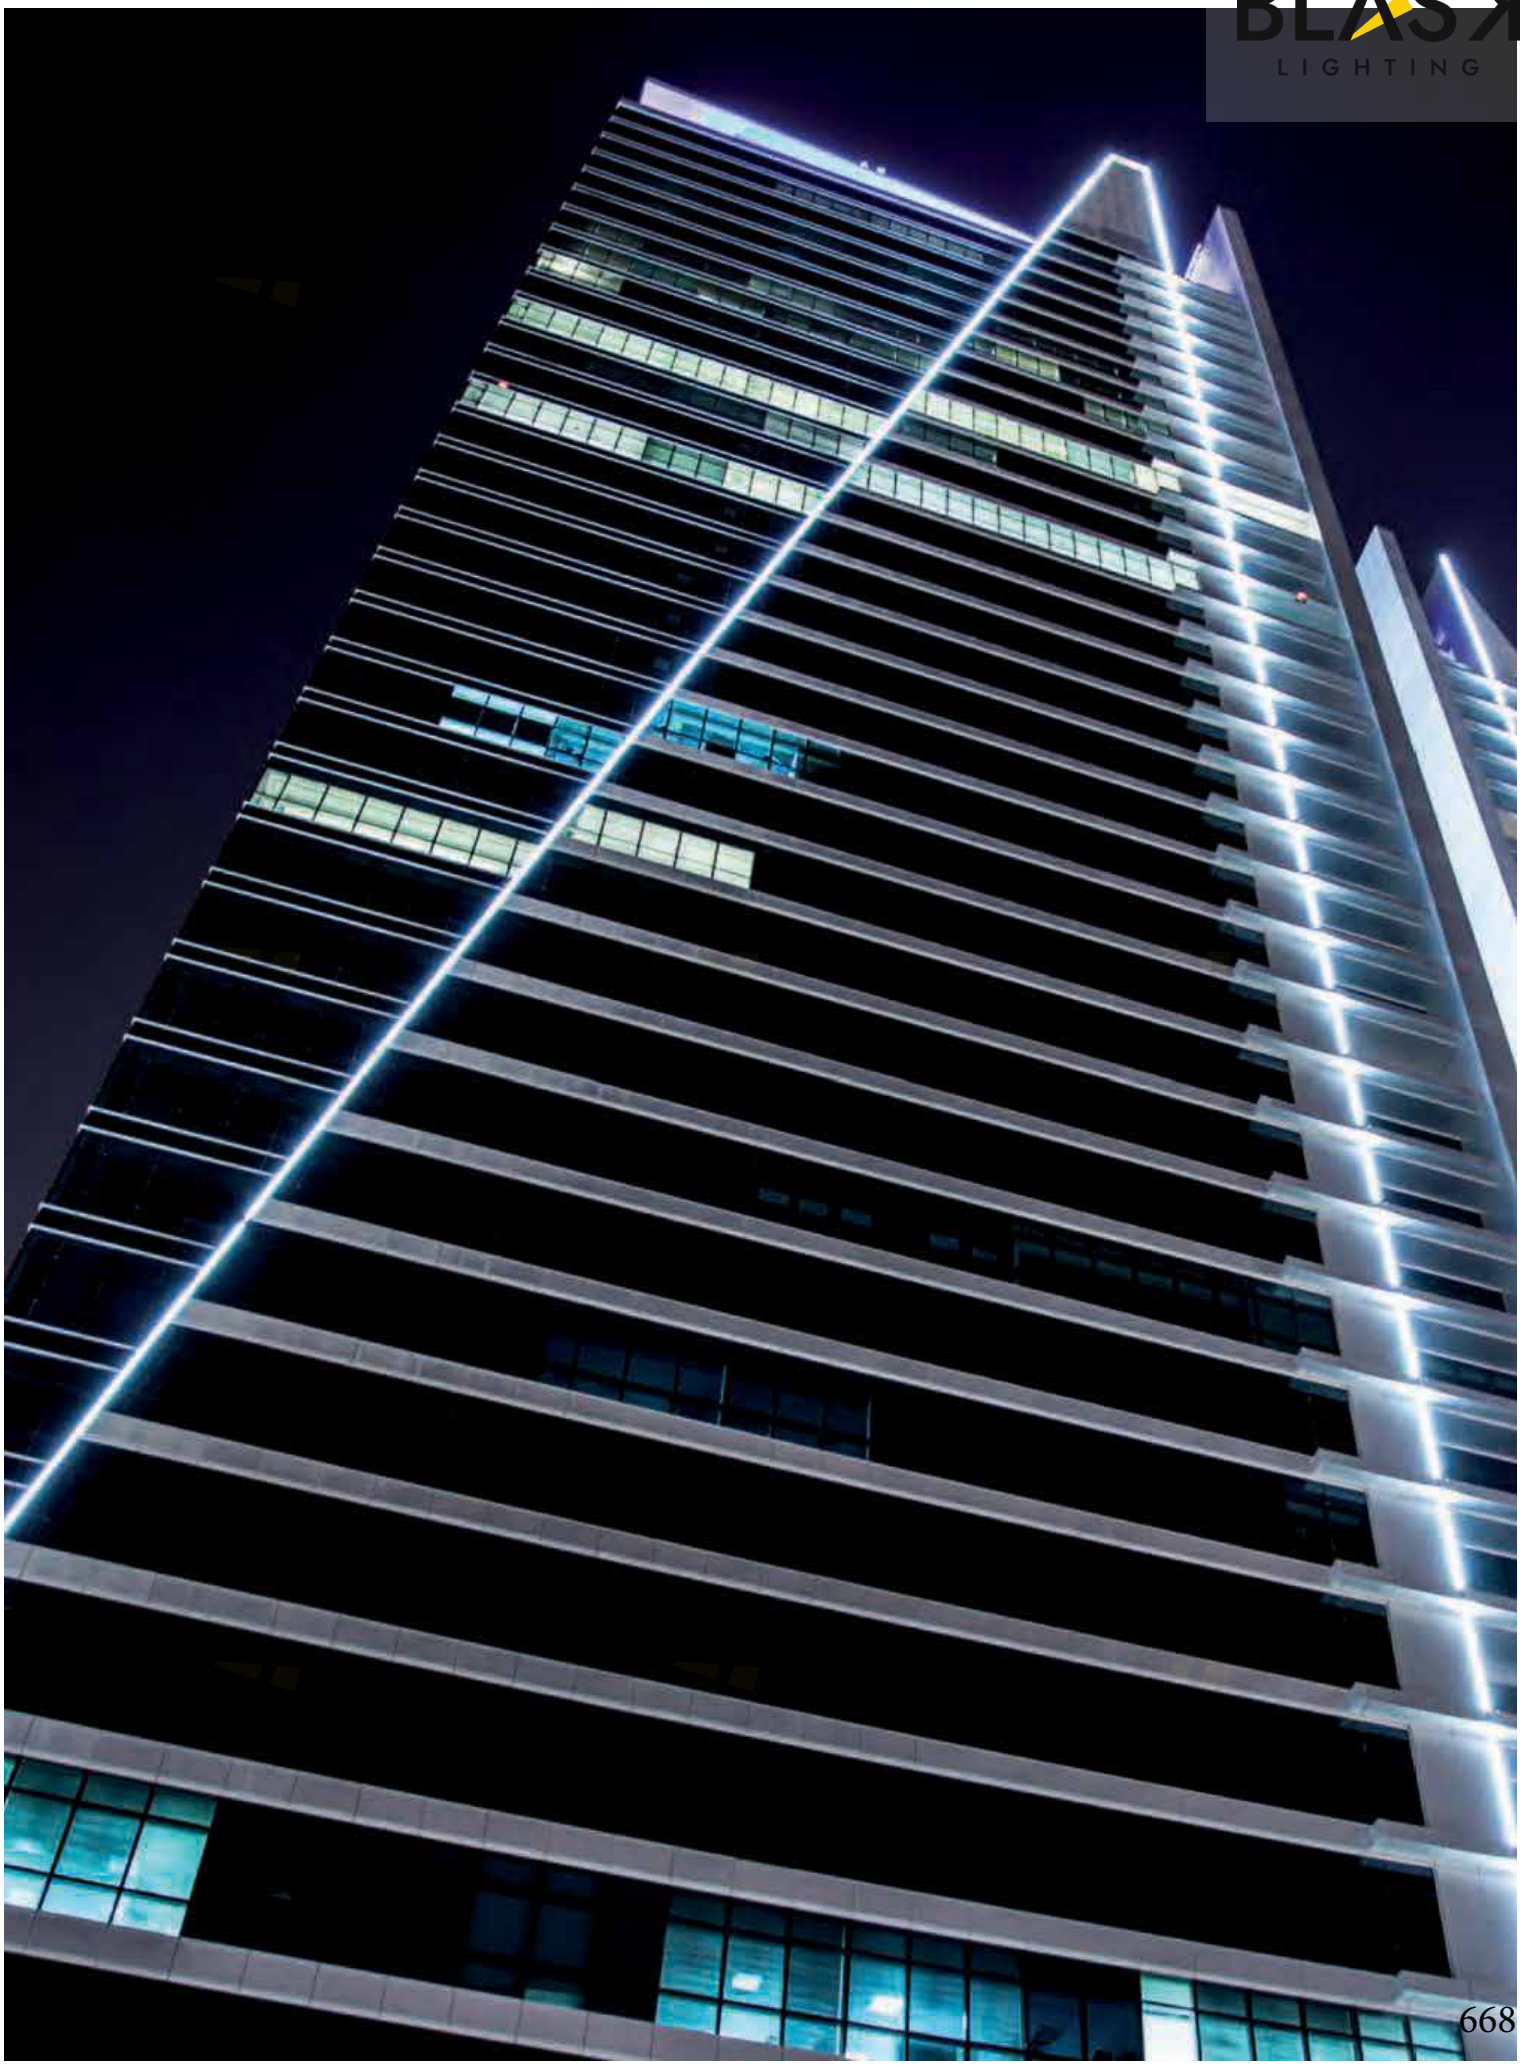

Diverse beam angles(120°)offer various.
Flexible space coordination.Remote power supplies.

Operating voltage:DC24V

IP65

Installation





(120°)

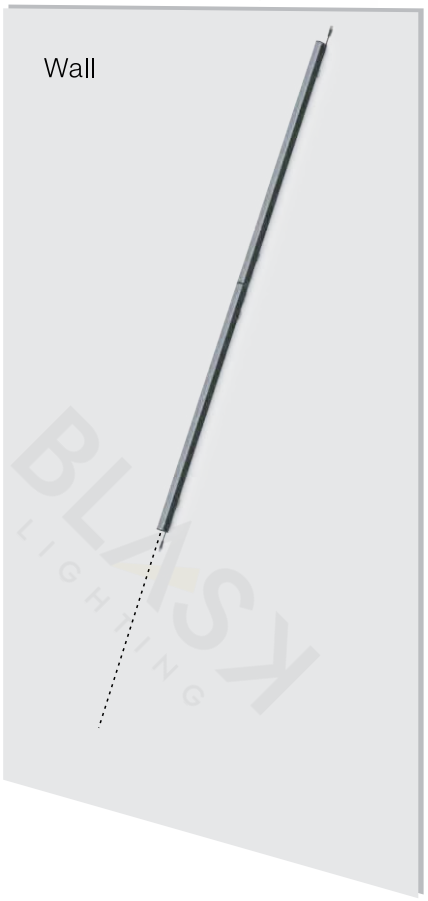

Product information

INFCLO30763

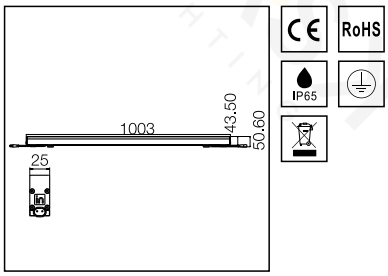

Power	15W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+PC
Color	Black
Life	30 000 H
Warranty	3 Years

HIMMELSTREPPE

Diverse beam angles(20°,30°,45°,60°,25x45°,120°)offer various.
Flexible space coordination.Remote power supplies.

Operating voltage:DC24V

IP65

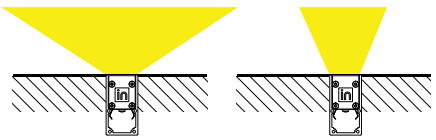

(120°) (20°,30°,45°,60°,25x45°)

Installation



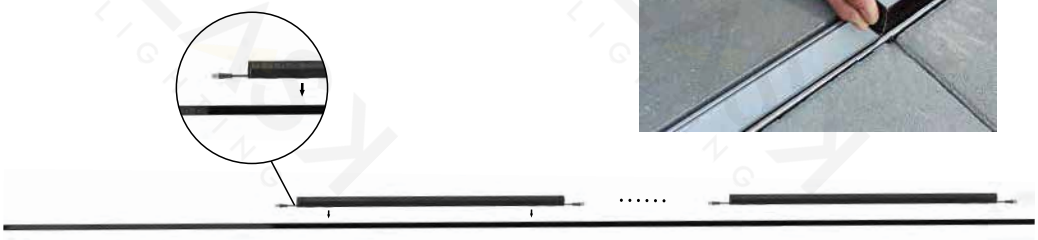

BURBERRY
10
10
10

INFLO30764



Power	15W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFLO30765





Power	15W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFLO30766



Material	Aluminum
Color	Black

INFLO30767



Material	Aluminum
Color	Black

INFLO30768



Material	Aluminum
Color	Black

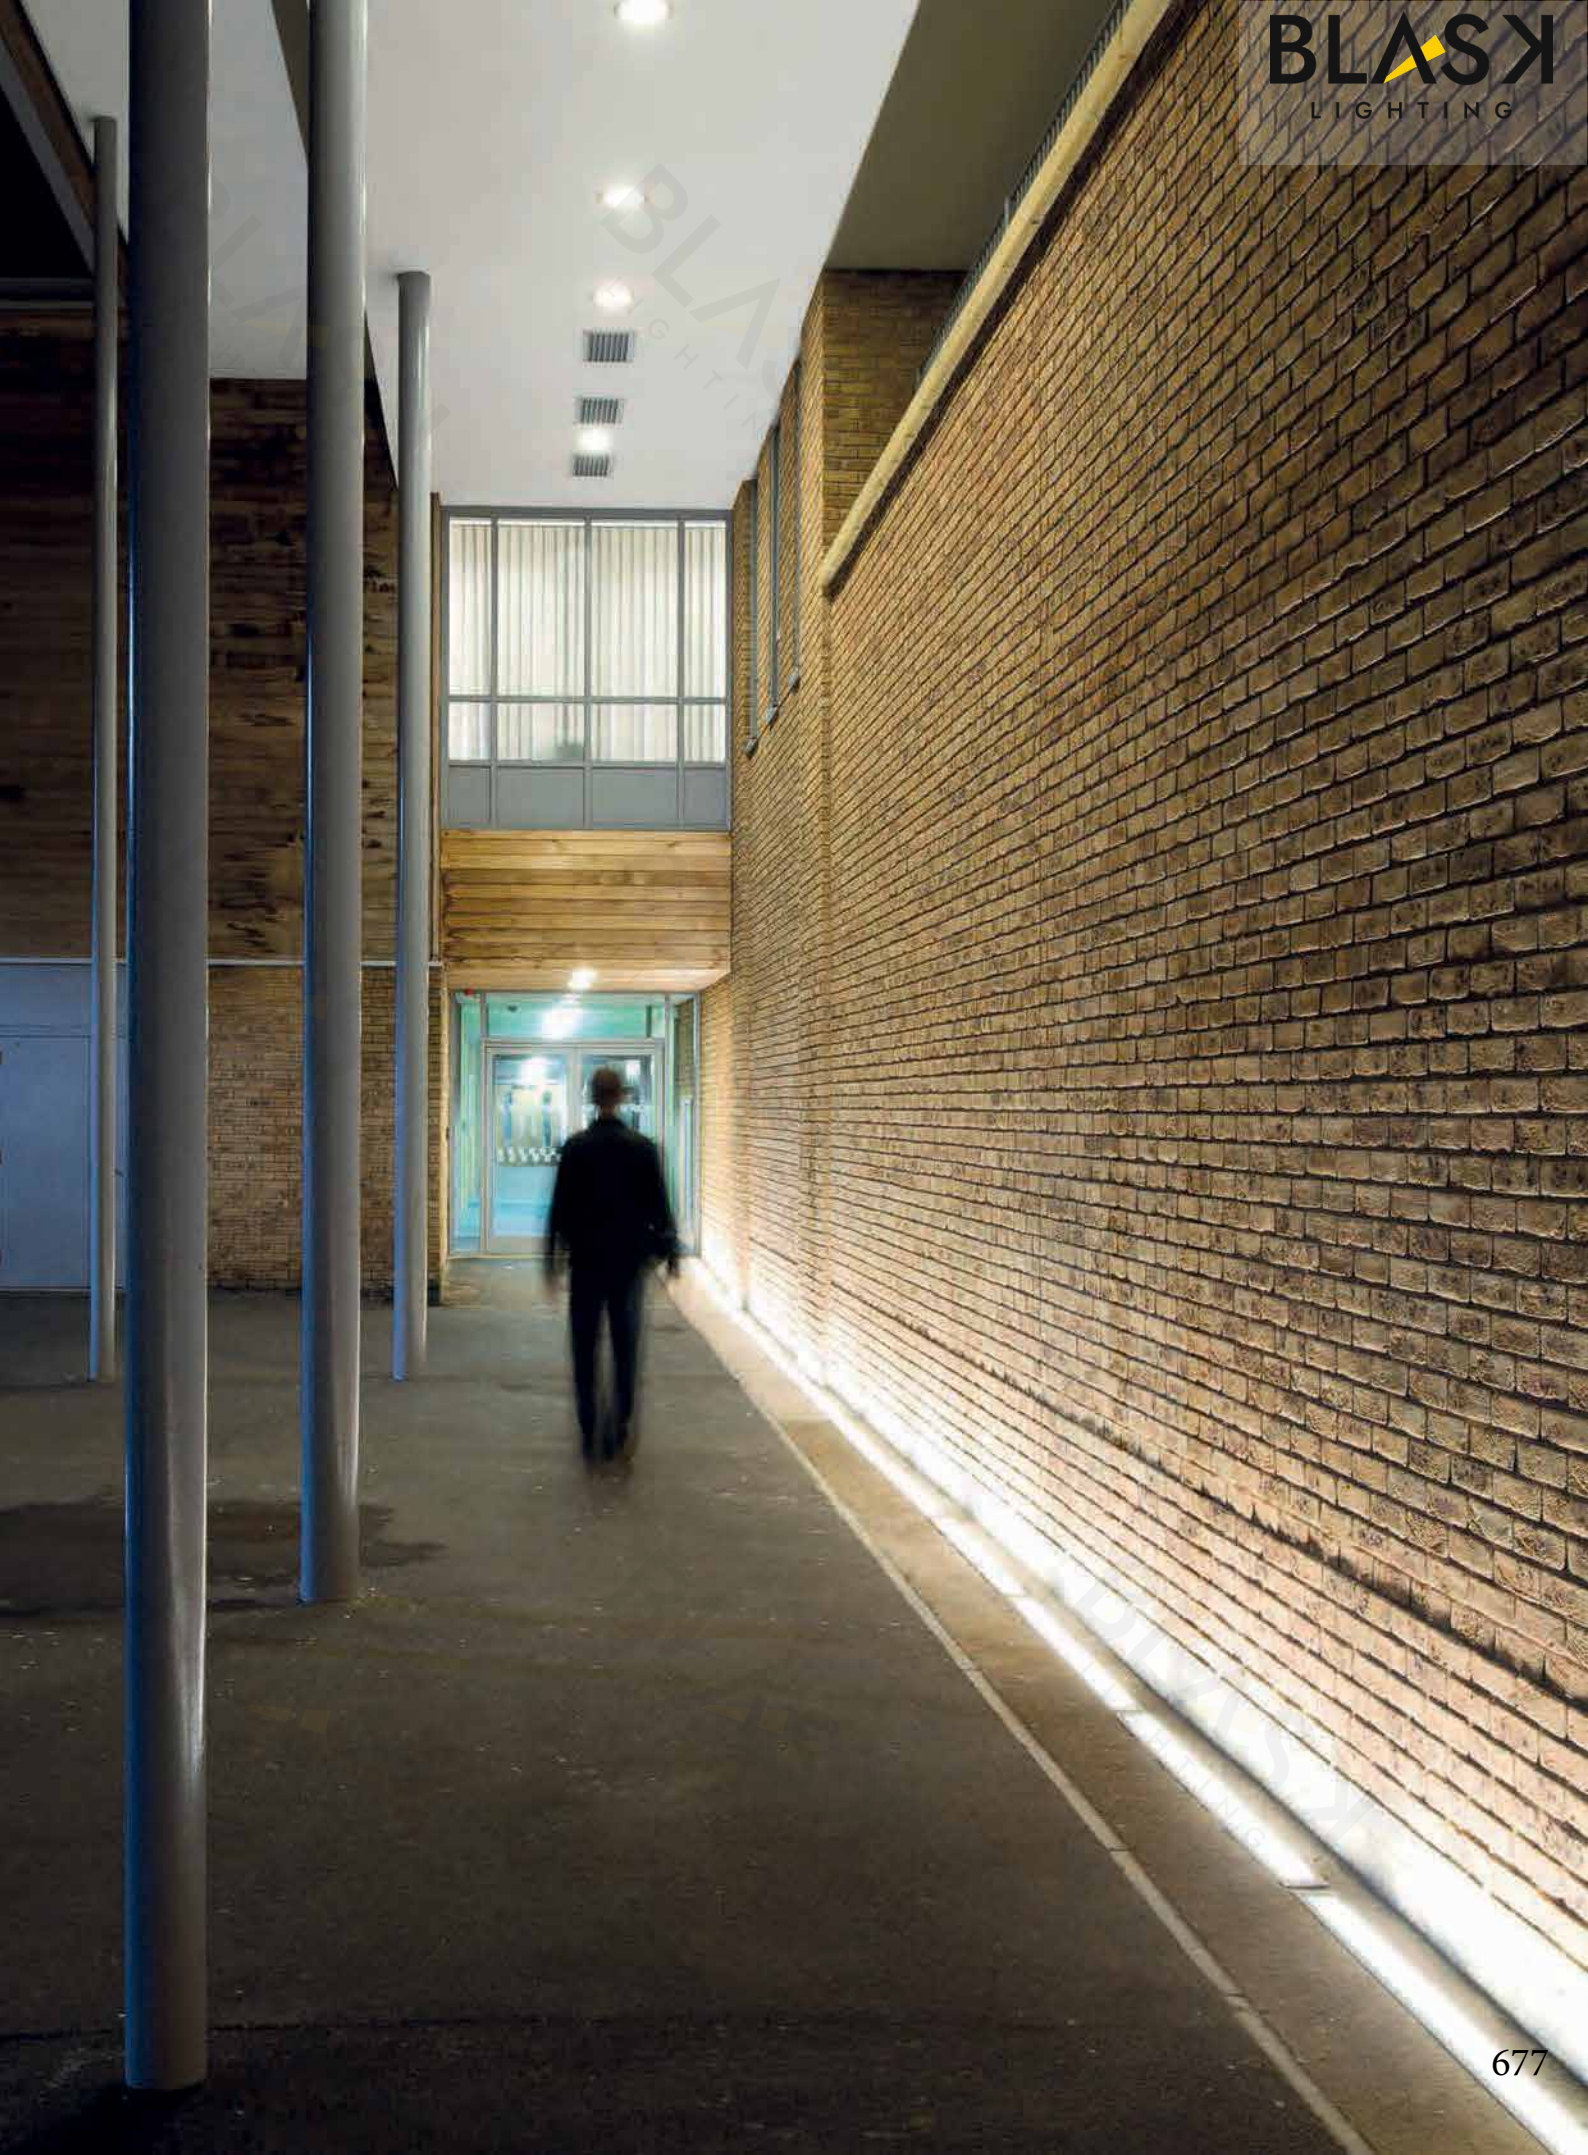

EXTERIOR FLOOR RECESSED

This is a linear waterproof led lights. It can be mounted on the floor or wall, with IP67, its small size of only 35 mm or 40 mm wide and 63 mm, can adapt to a variety of spaces. It is simple to install, fast and has a wide range of accessories to create a variety of shapes, making it a benchmark in the relevant market.

The light body use high strength casting aluminum, Lamp is sealed by reinforced glass, rubber ring, silica gel and silicone to make it waterproof toughened transparent glass, high temperature resisting,easy for lights penetration, transmittance as high as 92%,impact resistance, resistance to friction,Lamps can bear more than 1000KG of gravity.

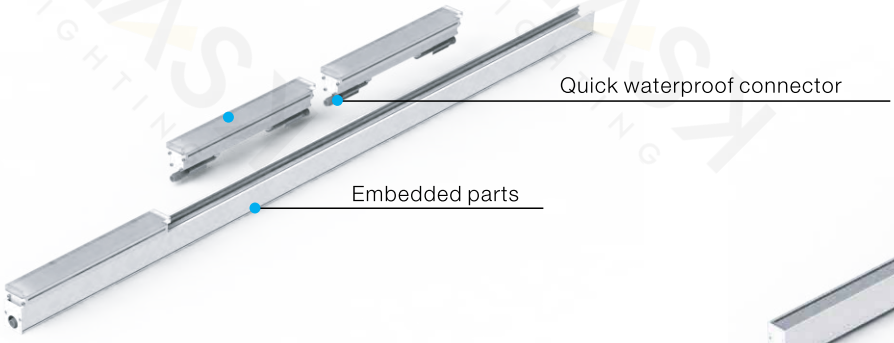

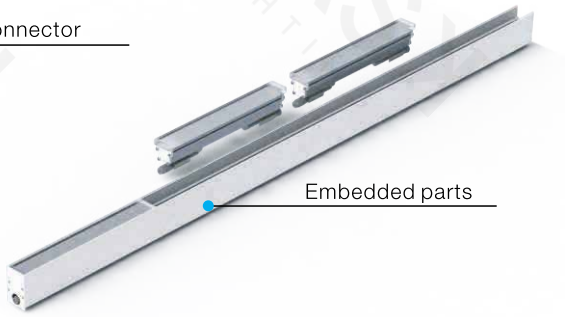

Two kinds of embedded parts installation renderings





Quick waterproof connector

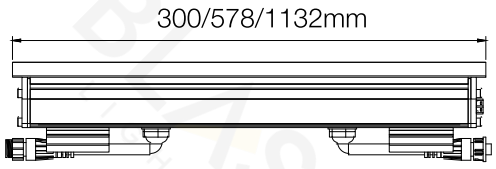



Installation

1.MASONRY CUTTING / CUTTING MASONRY

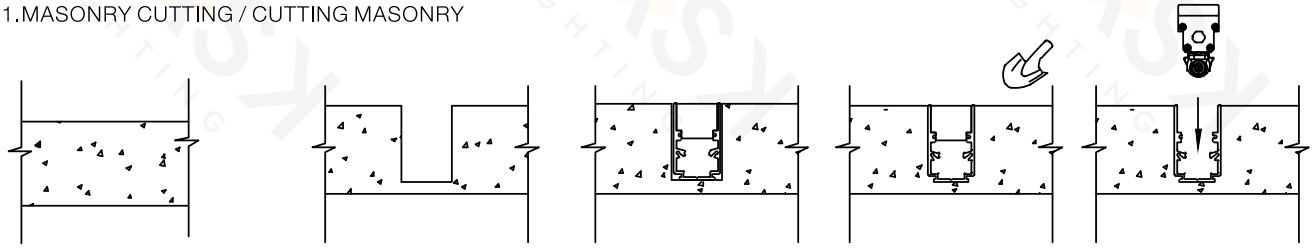

2.POURED CONCRETE / THROWN IN CEMENT

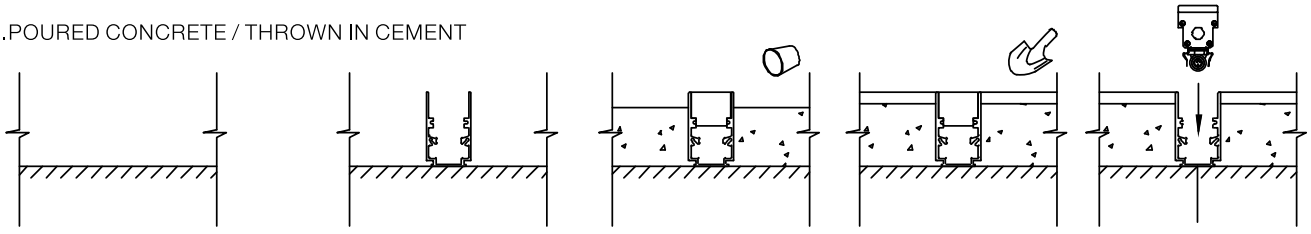

3.SURFACE MOUNTED ON THE GROUND OR WALL

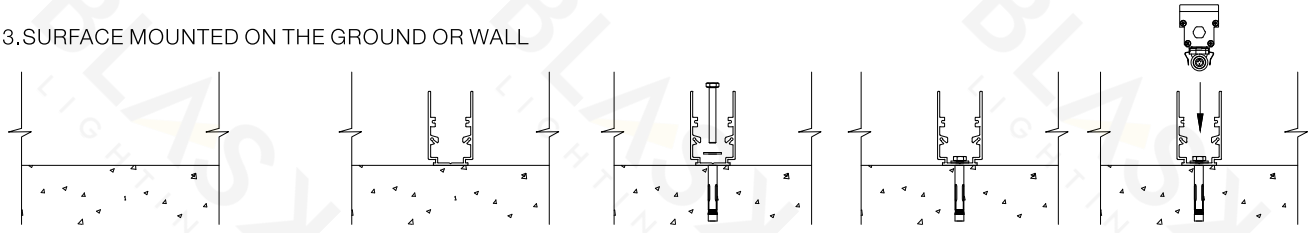

⚠WARNING

To do the construction of groundwater infiltration, can not let it soak in the water

Embedded parts installation

Optional accessories package

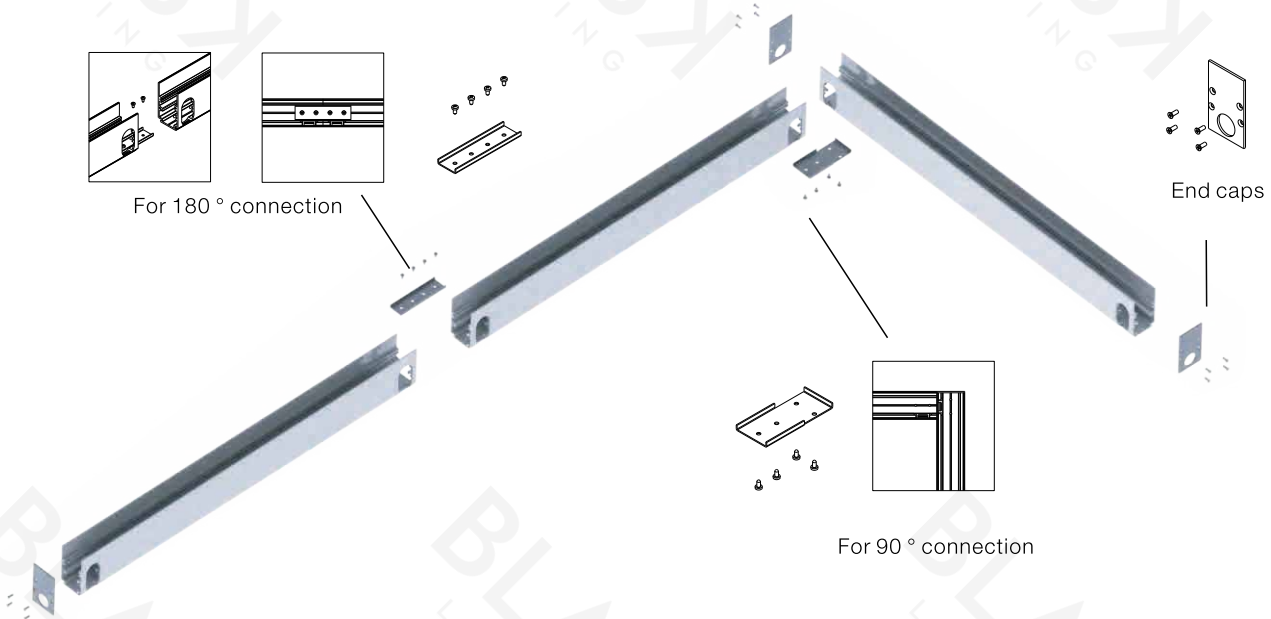

Monochrome installation diagram (wiring)

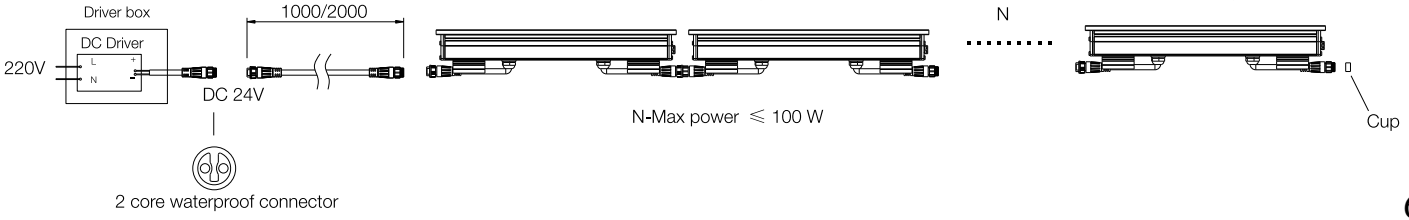

INWLO30769



120°



Power	7.5W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	600 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INWLO30770

120°



Power	15W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INWLO30771

120°



Power	30W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INFLO30772

Material	Aluminum
Color	Grey

INFLO30773

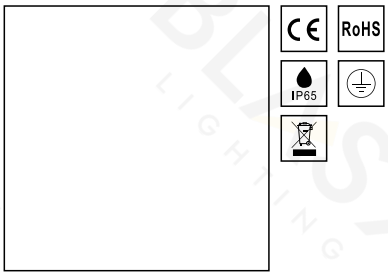

Material	Aluminum
Color	Grey

INFLO30774

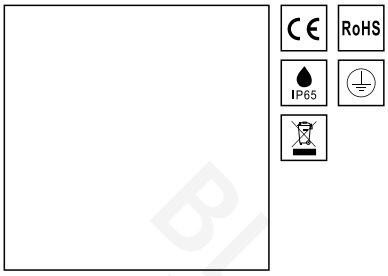

Material	Aluminum
Color	Grey

INFLO30775

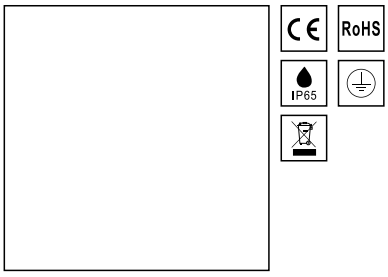

Material	Aluminum
Color	Grey

INFLO30776

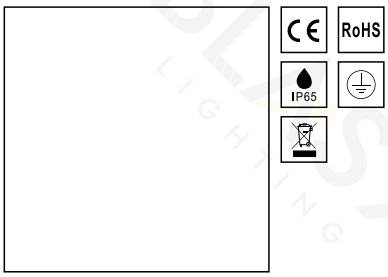

Material	Aluminum
Color	Grey

INFLO30777

Material	Aluminum
Color	Grey

INFLO30778

Power	20W/35W/60W/100W
Material	PC
Color	Black

INFLO30779

Material	PC
Color	Black

INFLO30780



Material	PC
Color	Black

INFCLO30781



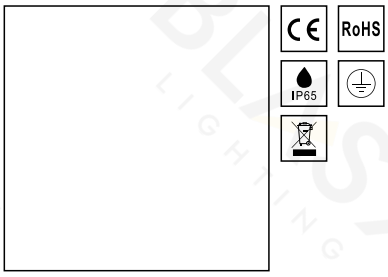

Power	7.5W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	600 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INFCLO30782

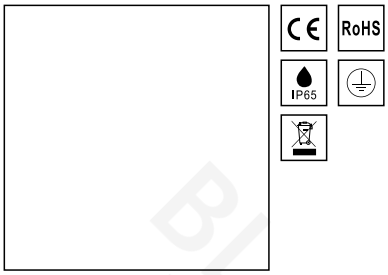

Power	15W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INFCLO30783

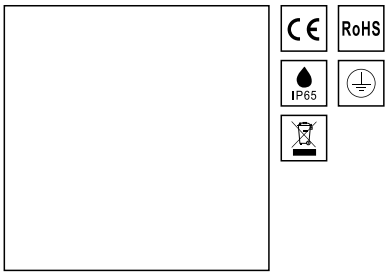

Power	30W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INFCLO30784

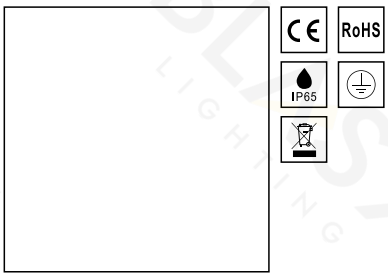

Material	Iron
Color	Chrome

INFCLO30785

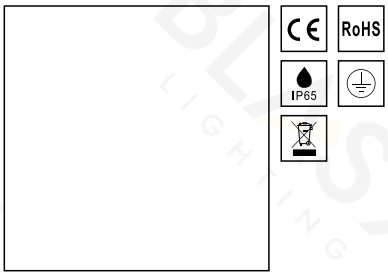

Material	Aluminum
Color	Grey

INFCLO30786

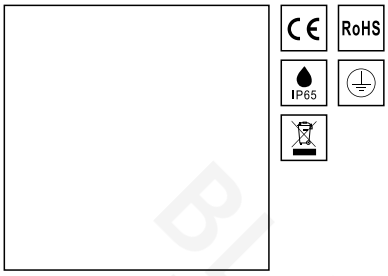

Material	Aluminum
Color	Grey

INGLO30787

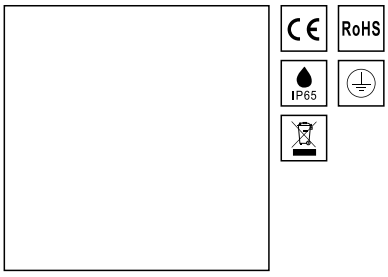

Material	Aluminum
Color	Grey

Can be used as

Step light and wall light

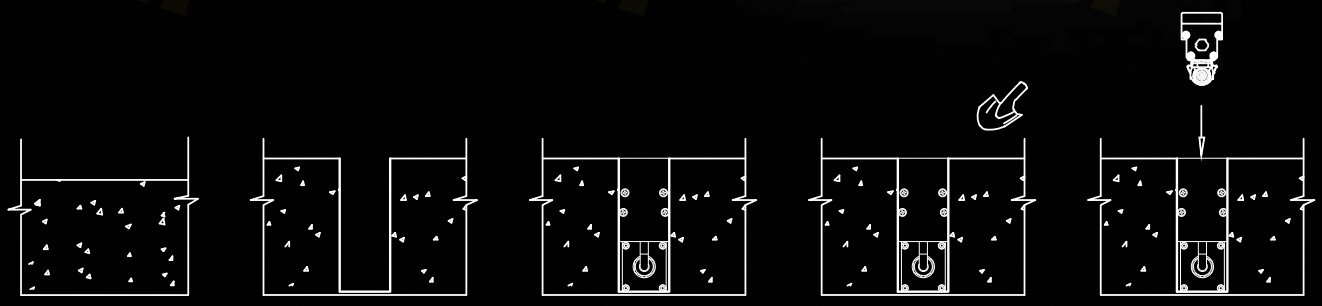

BLASK
LIGHTING

Daytime:

AUTO SOLAR CHARGING

LED SOLAR GARDEN LIGHT

PRODUCT FEATURES

- solar charger
- intelligent light-operated
- no cost for electricity
- IP65 Waterproof and dustproof
- wireless
- infrared sensor
- power-saving mode
- one-click management

Nighttime:
AUTO SWITCHED

LED SOLAR GARDEN LIGHT
BATTERY MANAGEMENT

- waterproof anti-electricity sun protection
- over-voltage protection
- over-charged protection
- over discharege protection
- over current protection
- shot circuit protection
- temperature protection
- reverse battery protection

PRODUCT DETAILS

High brightness SMD LED

3000K / 4000K / 6000K adjustable

Polycrystalline Silicon Solar Panel

High efficiency in energy transformation,
high speed in charging

Light sensor

When the sun's rays are below a critical value,
the lights are automatically turned on

Infrared human body sensor

Sensing area:180°
Sensing ditance between 5-8 meters

One-click management

On/off function
Switch color temperature function

OPERATING MODE

Daytime:

Auto switched,solar charging,**lights off**

Nighttime:

Auto switched,lights on.
Prower-saving mode:**light 50%.**
(When sensing no one is there or
15 seconds after no people existed.)

Nighttime:

Auto switched,lights on.
High power mode:**light 100%.**
(When sensing people come or
people have always existed.)

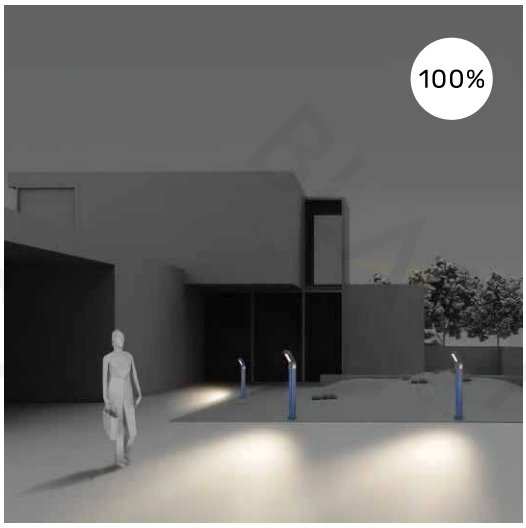

sensung area:180°
sensing distance :between 5-8 meters

LED SOLAR GARDEN LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP65
Color temp: 3000K/4000K/6000K
(it will be control 3 color temp)
Solar panels: 5V/1.5W(Polysilicon)
Lithium battery: 3.7V/2200mAh
Charging time:4-6hours
Working hours: 12 hours
Light control + human body sensing
Whthout remote control

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle	Size
INGLO30788	1.2W	96 lm	3000K/4000K/6000K	120°	100*238*160mm

LED SOLAR GARDEN LIGHT

PRODUCT FEATURES

Aluminum lamp body
IP65
Color temp：3000K/4000K/6000K
(it will be control 3 color temp)
light strip：0.3W / Blue
Solar panels：5V/1.5W(Polysilicon)
Lithium battery：3.7V/2200mAh
Charging time:4-6hours
Working hours：12 hours
Light control + human body sensing
Whthout remote control

PRODUCT SPECIFICATIONS

Item No.	Power	Lumens	CCT	Beam angle	Size
INGLO30789	1.2W	96 lm	3000K/4000K/6000K	120°	100*240*800mm

BLASK LIGHTING

Garden Light

INGLO30790



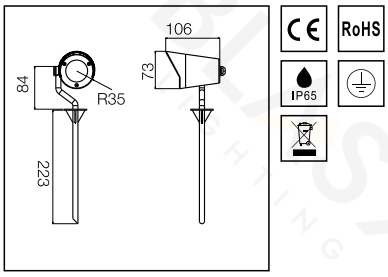

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30791



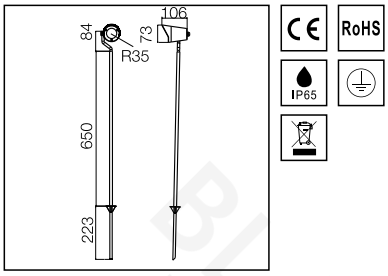

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

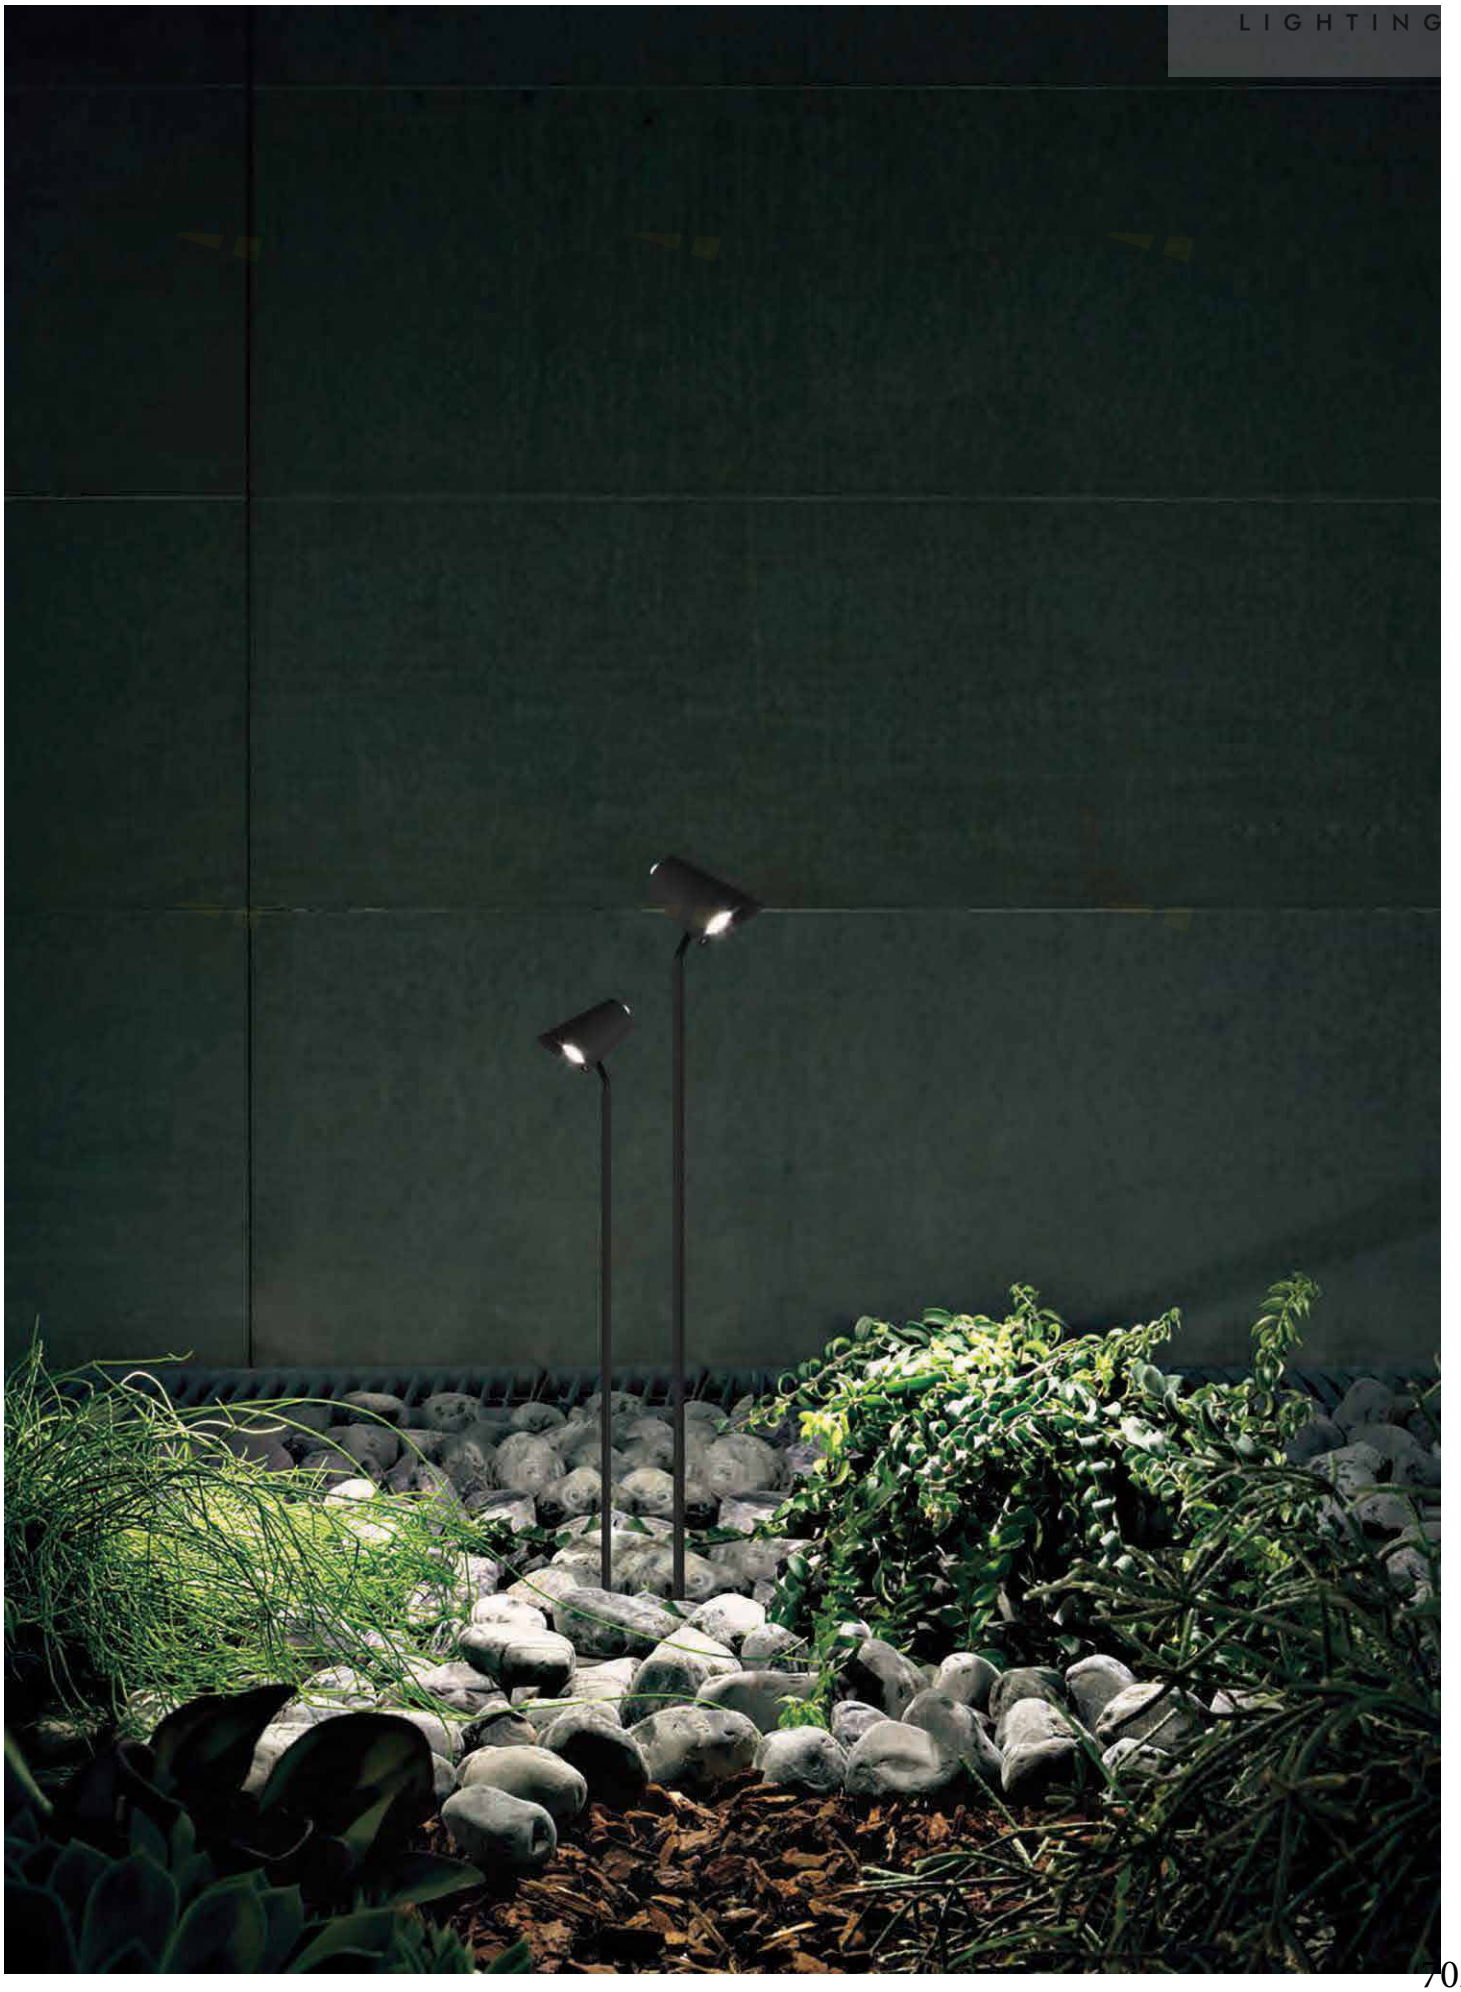

BLASK LIGHTING

The garden has become an essential place of living and is consequently gettin our undivided attention.Rightly so, as there is nothing more soothing to the senses than our own piece of verdure. To enjoy your private outdoor bliss , well-conceived lighting definitely adds to the atmosphere. As part of its new exterior collection, garden Light again combines functionality with ambience and innovation.

Outdoor Lighting Garden Light

0500

BLASK LIGHTING

RoHS compliant

IP65

In modern living the garden area is playing an increasingly important role, as is garden lighting. In the summer we take to the patio, balcony or garden to relax, to barbecue or to party. Garden lighting is an important decorative element and also provides orientation, safety and security. Garden lighting makes sense not only in the summer but also in the winter. As the evenings draw in it offers greater security, and the garden, patio or balcony are not forgotten during the cold winter months but remain part of family life.

With the rapid change in LED technology, INTEVISION Technology introduces its next generation of COB LED garden light. In this release, we have expanded the line to include a 3W,5W,10W,20W,30W,40W Retrofit Module as a family series products. The new high-performance COB garden light series are designed to meet the specific needs of garden lighting,plant lighting,and building etc.,

All INTEVISION's COB garden light are safety agency approved,With a CRI of up to 80. INTEVISION's COB garden light offer low-energy, low maintenance, low-heat, long life operation, and provide significant savings on electricity, maintenance and re-lamping costs.

APPLICATIONS:

- Outdoor lighting.
- Hotel garden.
- Private garden light.
- Park.
- Public garden

Body Color

TÜV Rheinland®
Certification

Spike

Base

Surface mounted base

INGLO30792





Power	3W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30793





Power	3W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30794





Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30795





Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30796

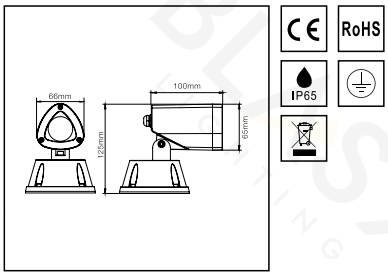

Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30797

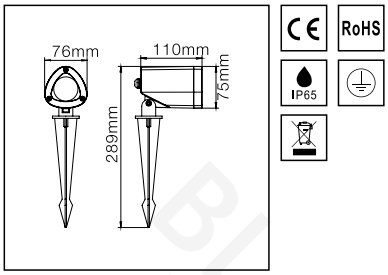

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30798

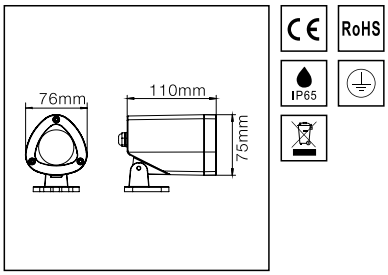

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30799

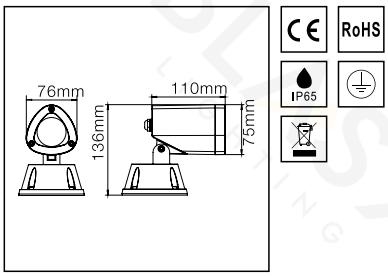

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30800

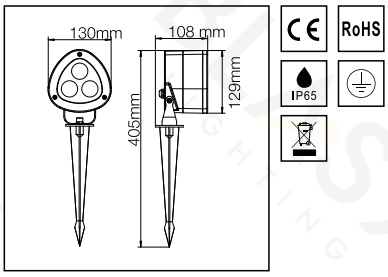

Power	20W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30801

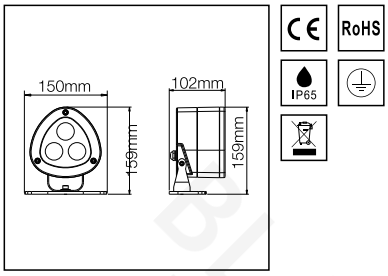

Power	20W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30802

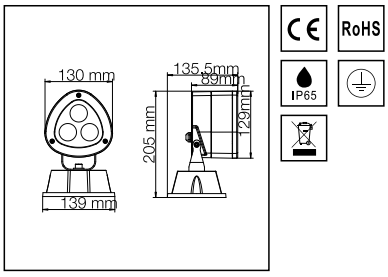

Power	20W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30803

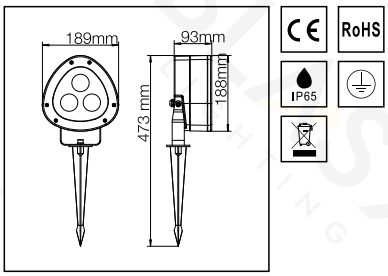

Power	30W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30804

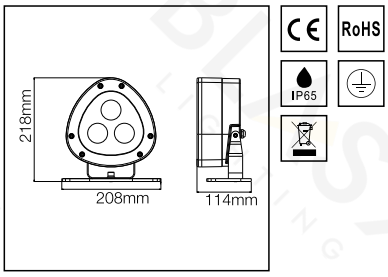

Power	30W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30805

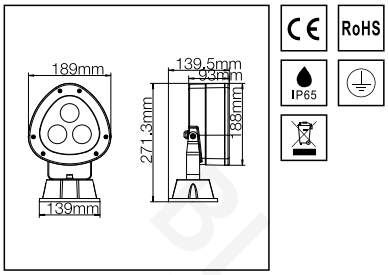

Power	30W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30806

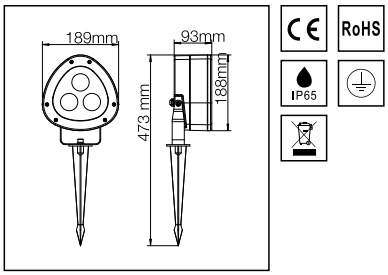

Power	40W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30807

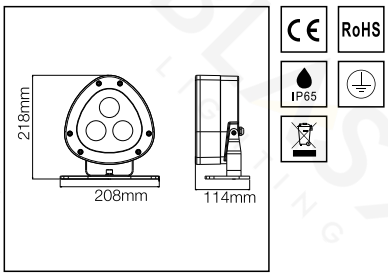

Power	40W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30808

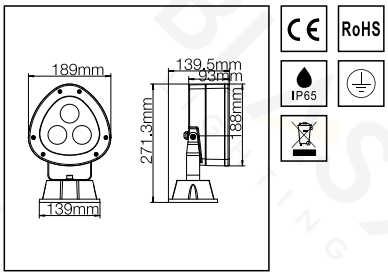

Power	40W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

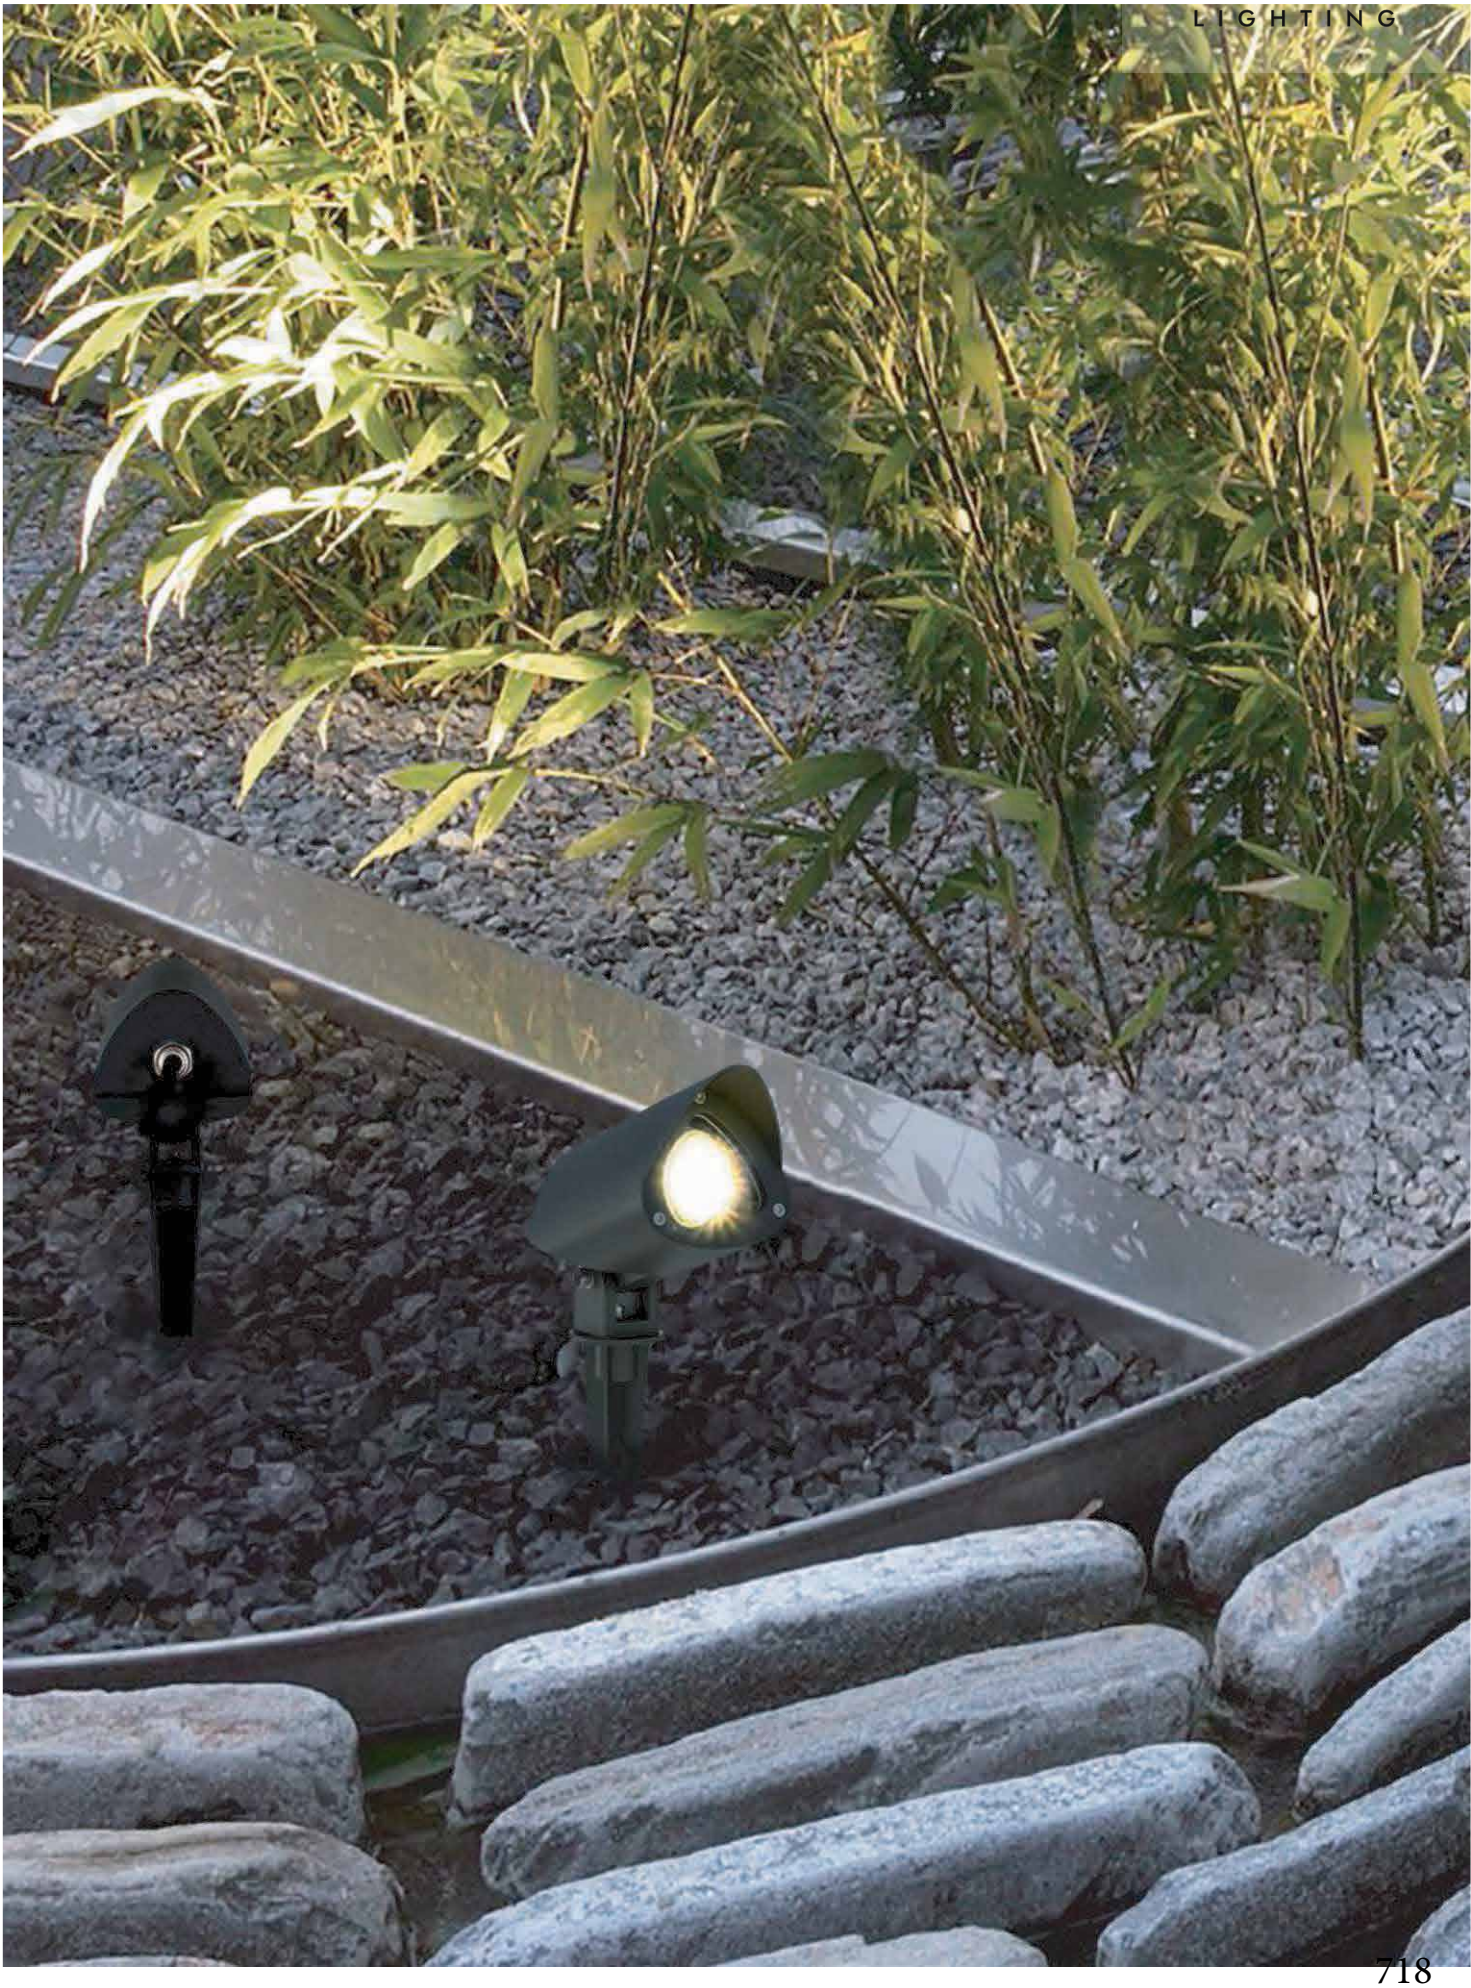

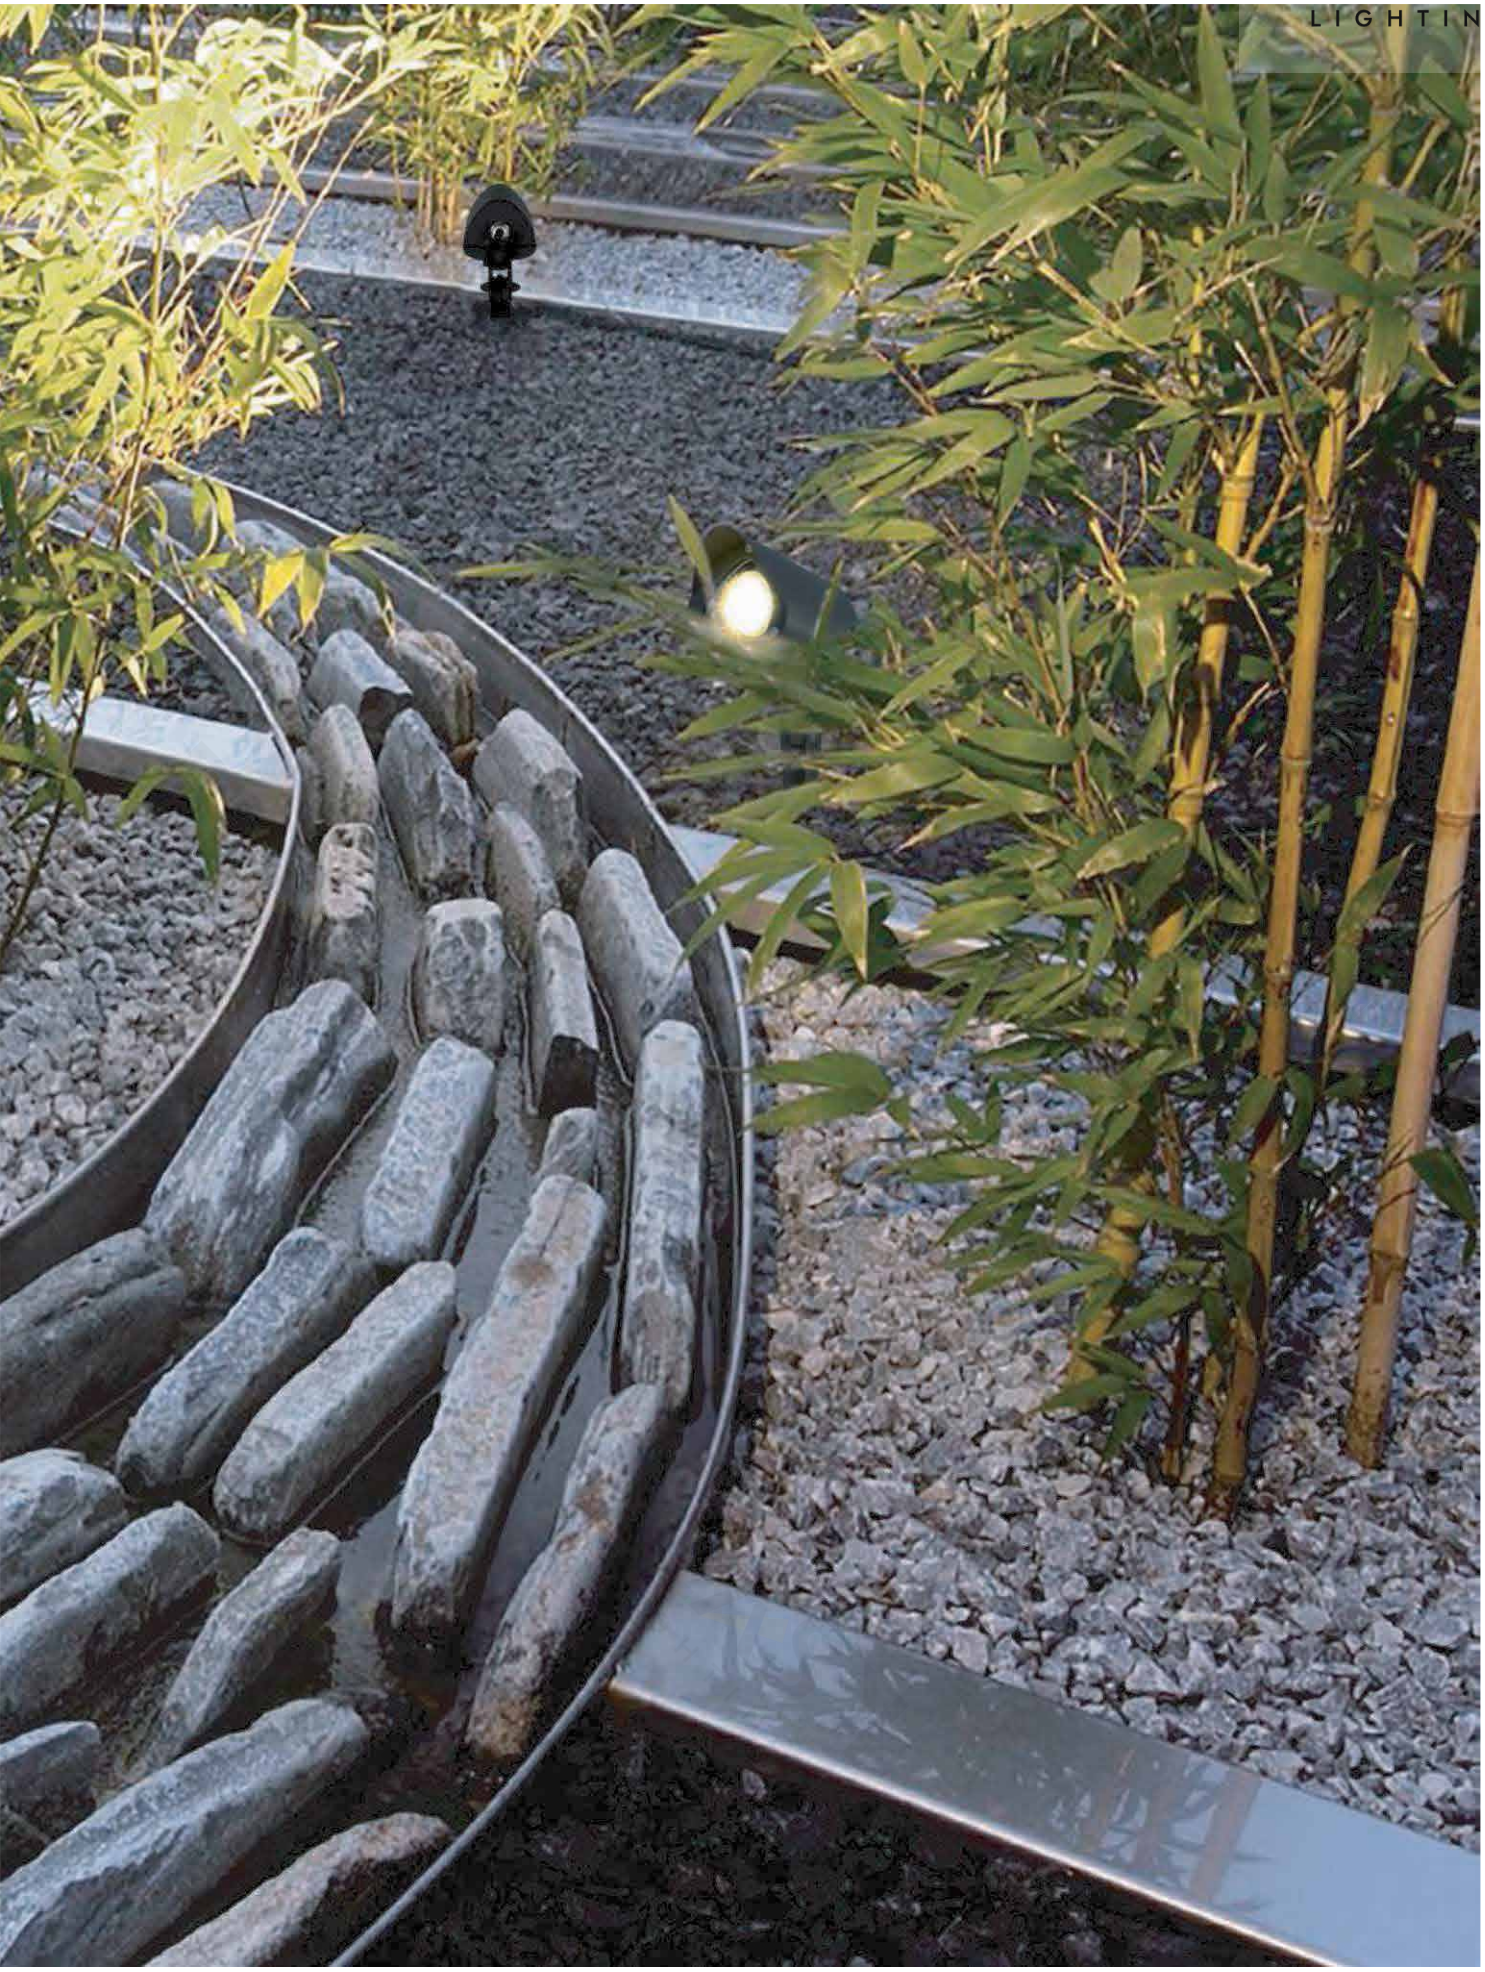

INGLO30809

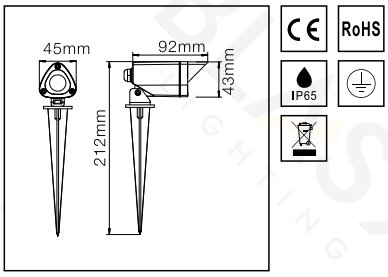

Power	3W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30810

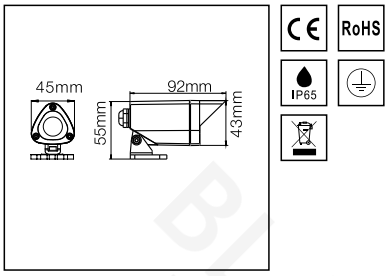

Power	3W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30811

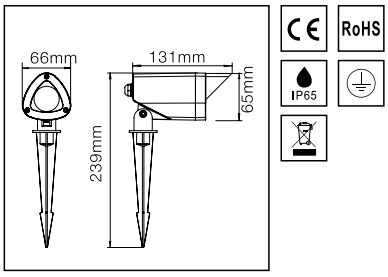

Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30812

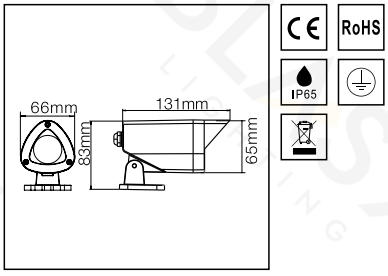

Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30813

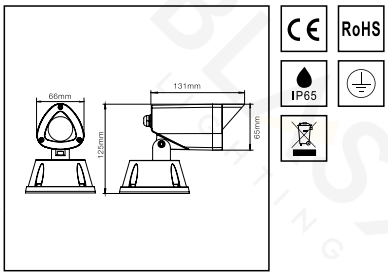

Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30814

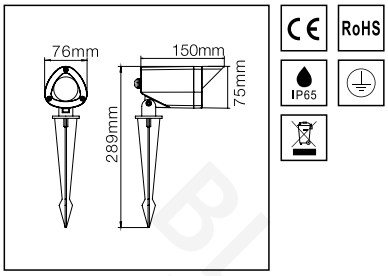

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30815

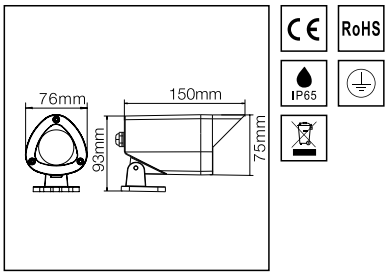

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30816

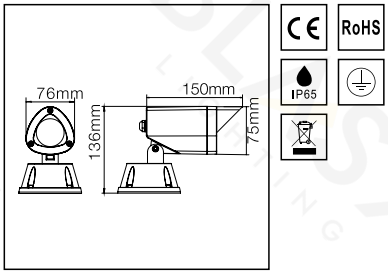

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30817

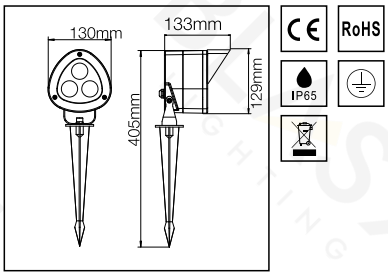

Power	20W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30818

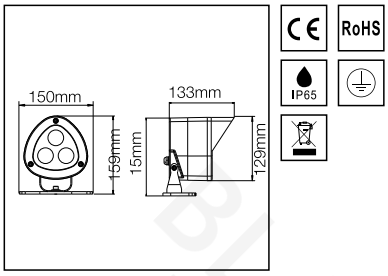

Power	20W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30819

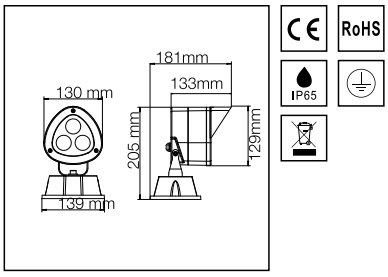

Power	20W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30820

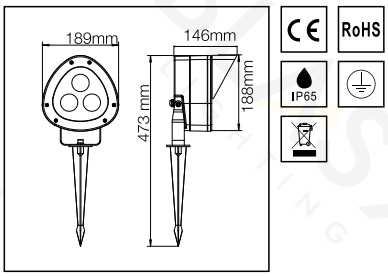

Power	30W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30821





Power	30W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30822





Power	30W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30823





Power	40W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30824





Power	40W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

INGLO30825

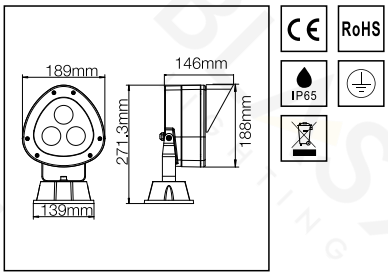

Power	40W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey/Bronze
Life	30 000 H
Warranty	3 Years

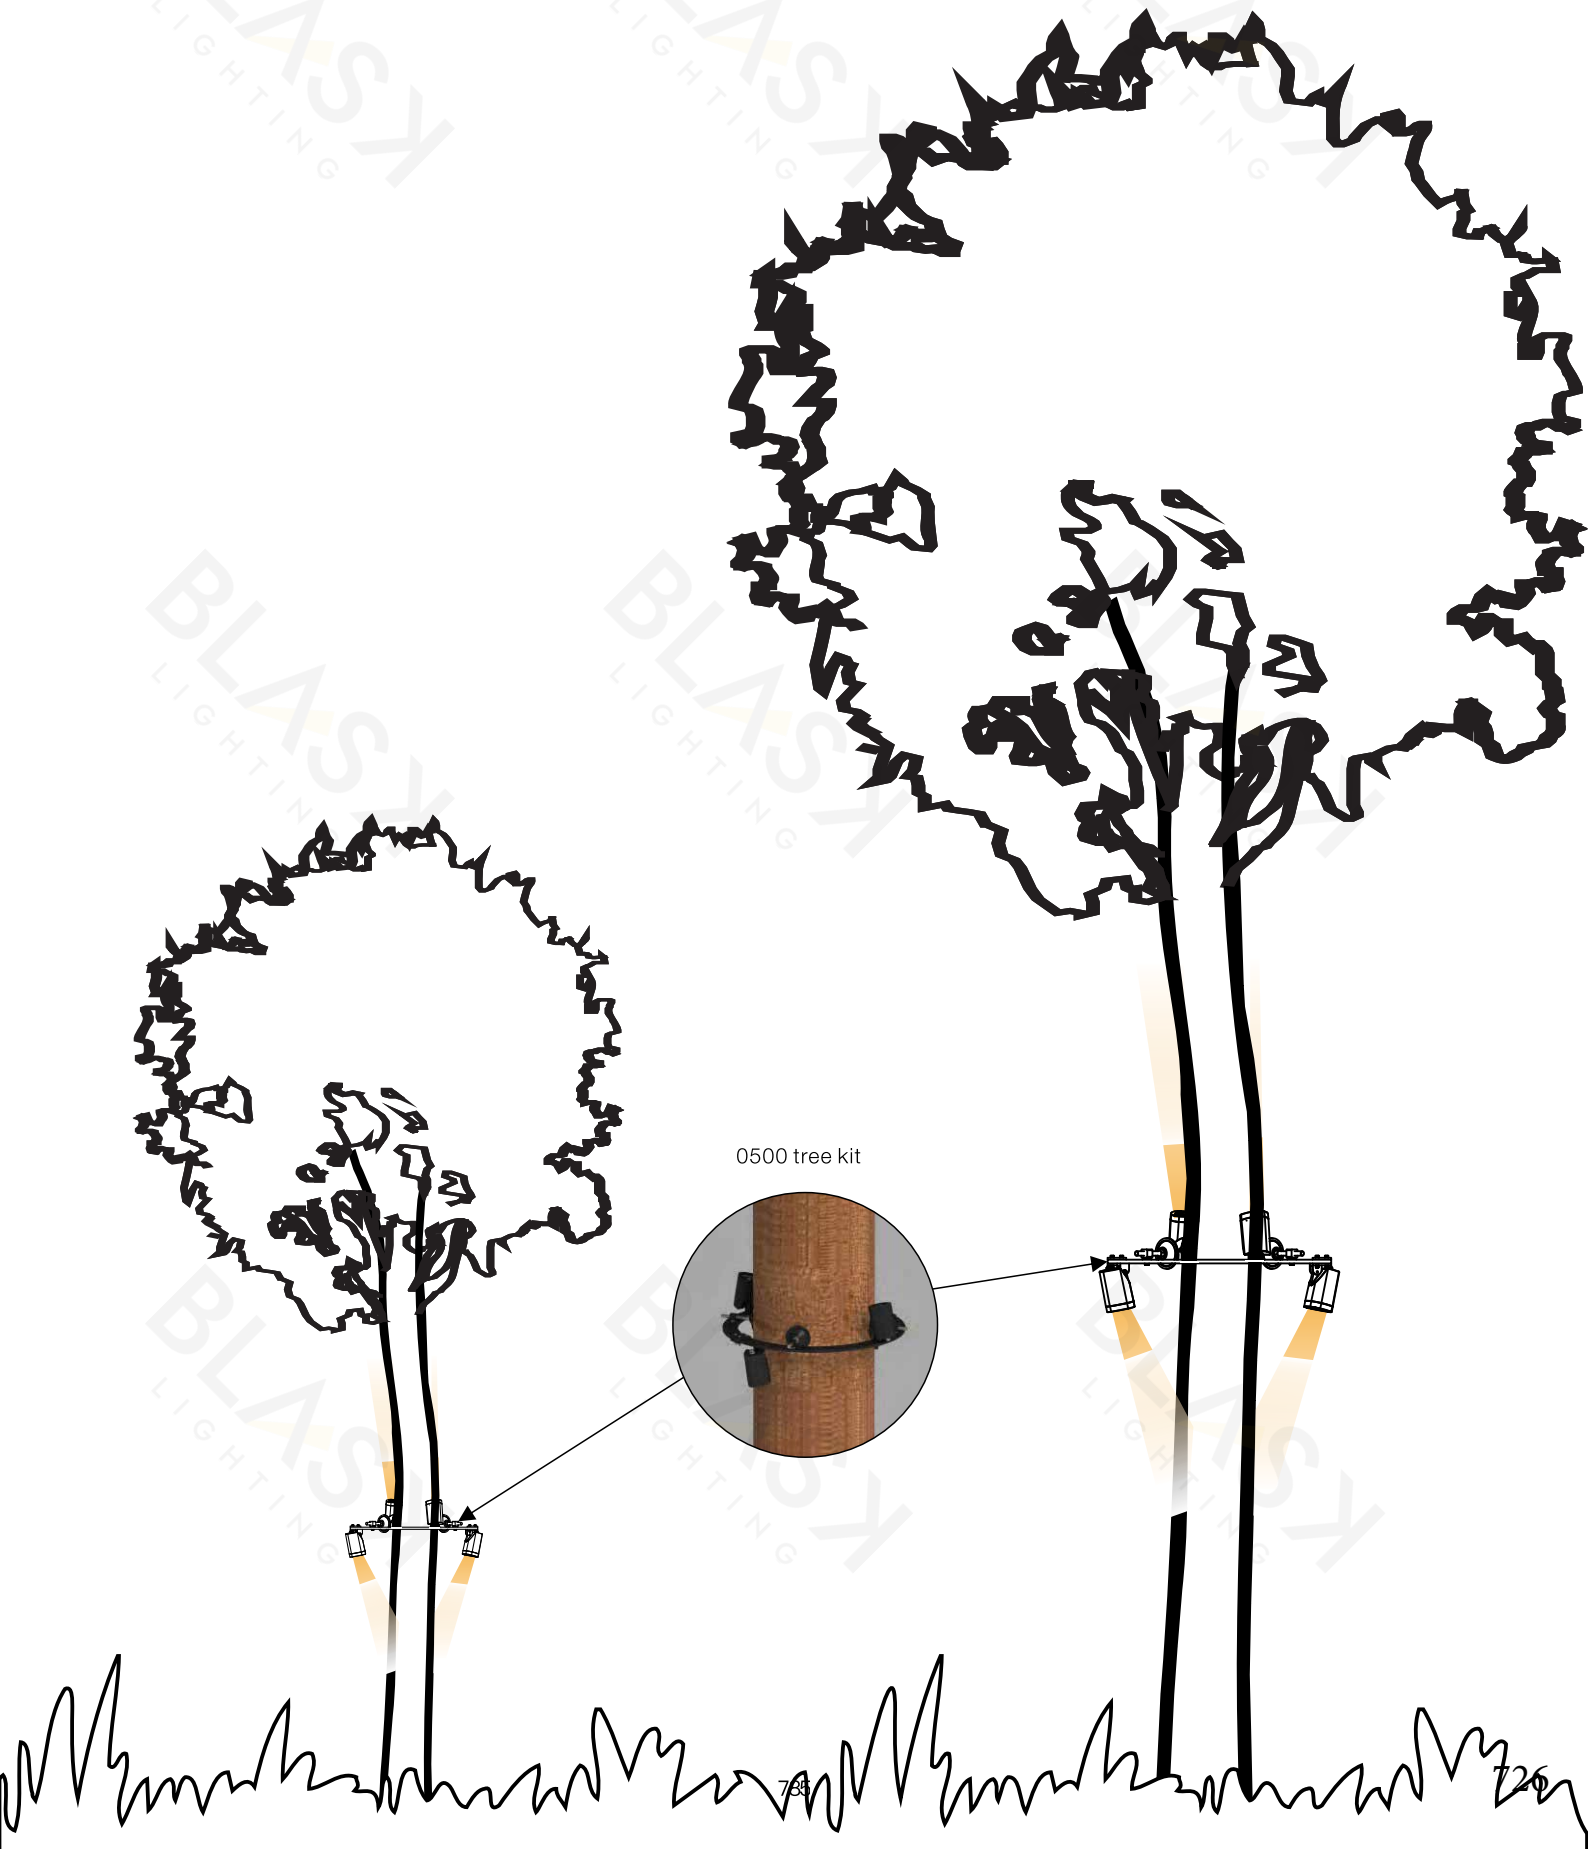
0500 tree kit

Outdoor Wall Mounted

It can be used in a host of applications. Whether you want to illuminate your indoor space, light up your garden or the front of your house, these lights will provide effective coverage of large areas you want to illuminate.

1
2
3
4
5

BLASK LIGHTING

BLASK LIGHTING

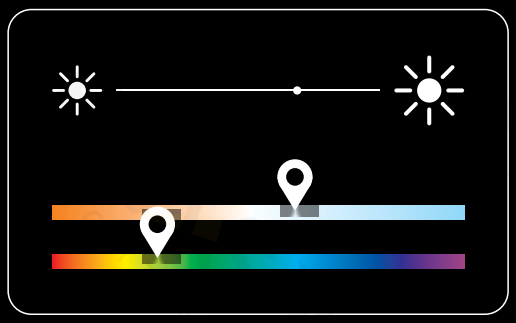

PERSONAL
WIRELESS
LIGHTING

INGLO30826



Power	4x3W
CCT	RGBW
Voltage	AC100-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

+

+

Size:34*30*21.5cm

INGLO30827



Power	10x3W
CCT	RGBW
Voltage	AC100-240V 50/60Hz
Output Lumens	600 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

+

+

Size:63*32*21.5cm

GREEN ASIA

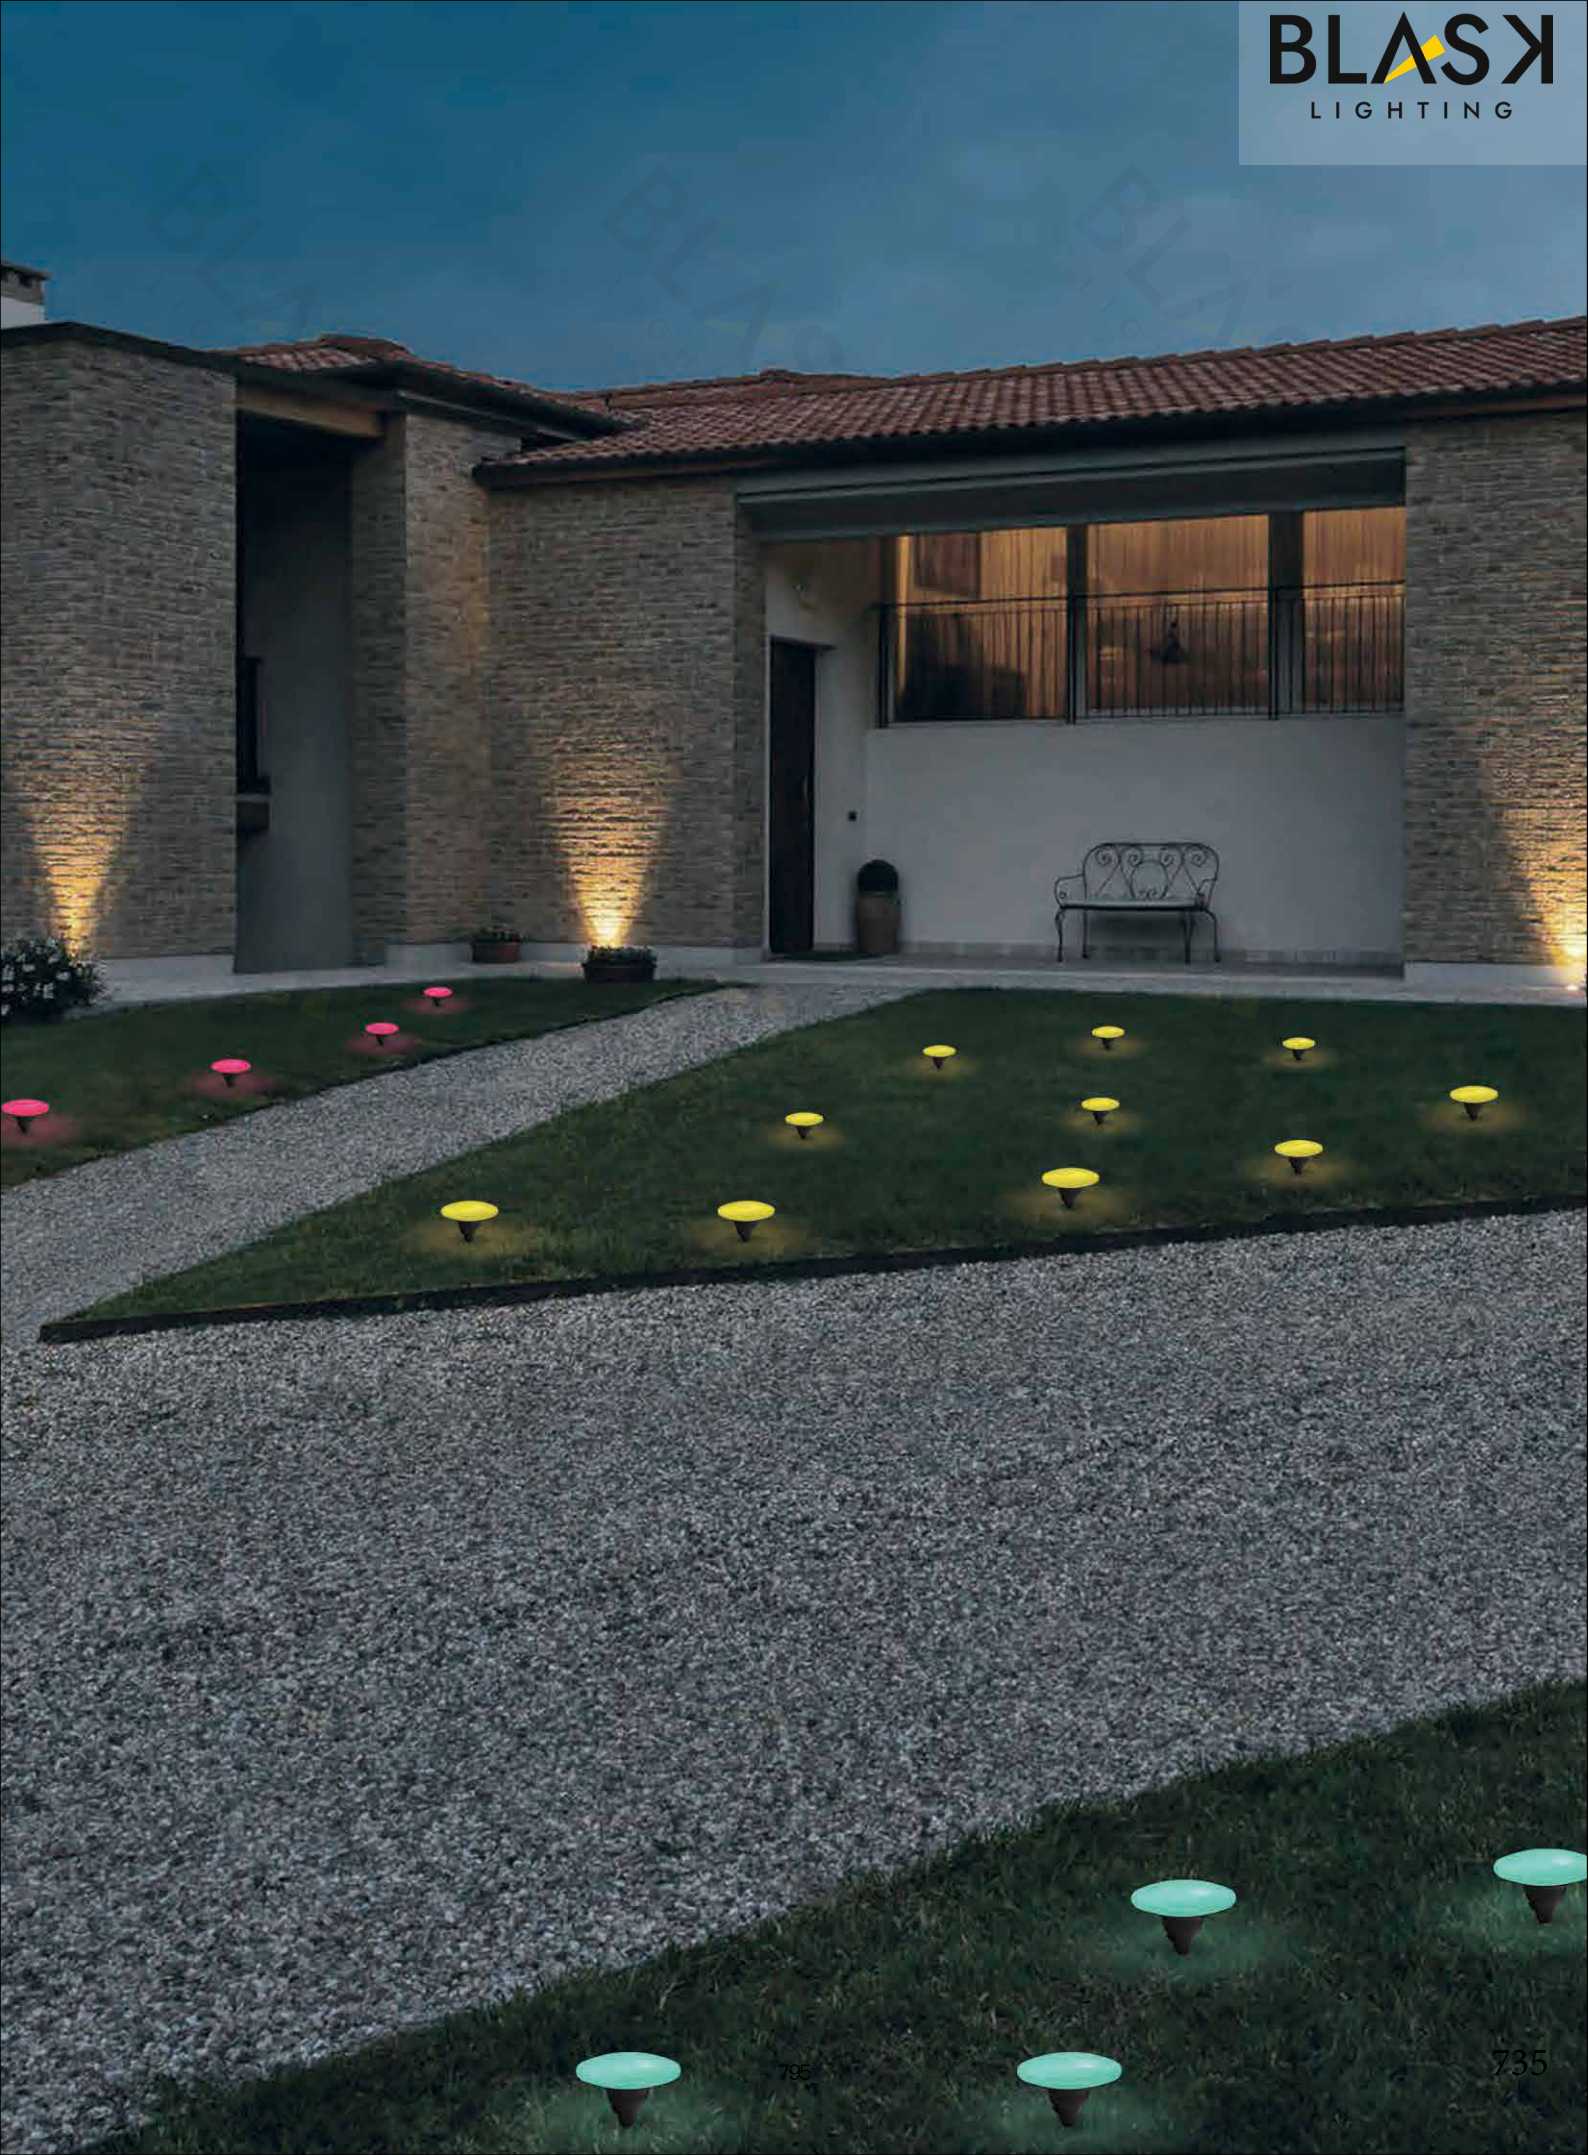

High power garden light Can be used as Flood light

It can be used in a host of applications. Whether you want to illuminate your indoor space, light up your garden or the front of your house, these lights will provide effective coverage of large areas you want to illuminate.

Product information

INGLO30828

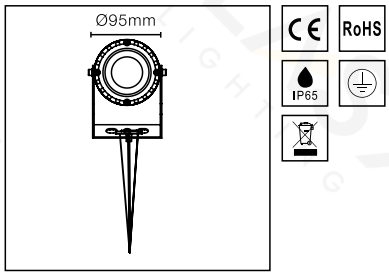

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30829

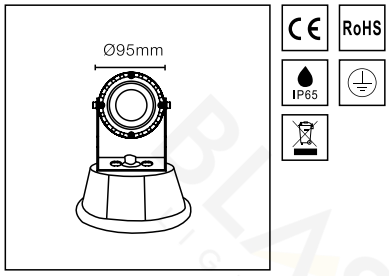

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30830

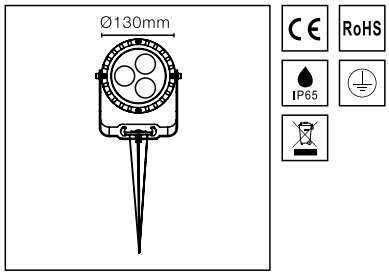

Power	20W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30831

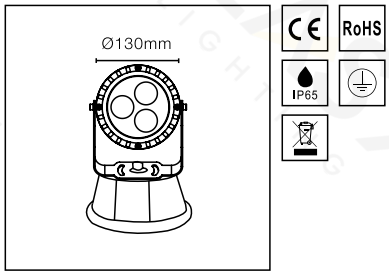

Power	20W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30832

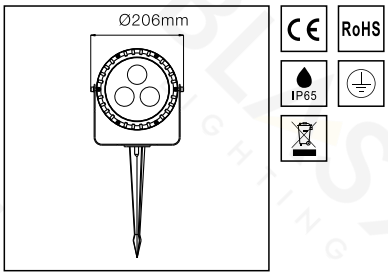

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30833

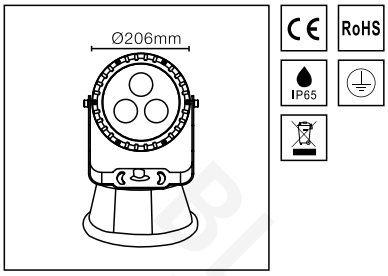

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

Exploded structural view

Optical reflectors

By simply installing these reflectors you can vary the light cone angle without having to change the luminaire.
The product without reflector has a spot optic.
For more fl exible lighting, install different optical reflectors on the same luminaire.



S - Spot
BA *from 15° to 24°*



M - Medium
BA from 24° to 60°



F - Flood
BA *>60°*

Product information

INGLO30834



Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	350 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30835





Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	350 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30836





Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	350 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30837



Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	350 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

Product information

INGLO30838



Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30839



Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30840



Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30841



Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

Product information

INGLO30842



Power	15W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1050 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30843



Power	15W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1050 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30844



Power	15W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1050 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30845



Power	15W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	1050 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30846

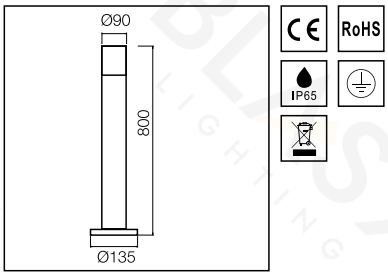

Power	4W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	320 lm
CRI	>80
Material	Aluminum
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INGLO30847

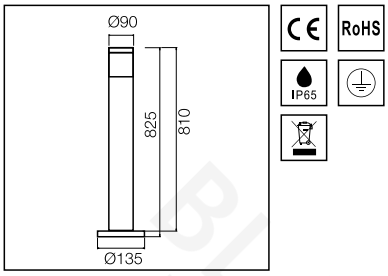

Power	8W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	640 lm
CRI	>80
Material	Aluminum
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

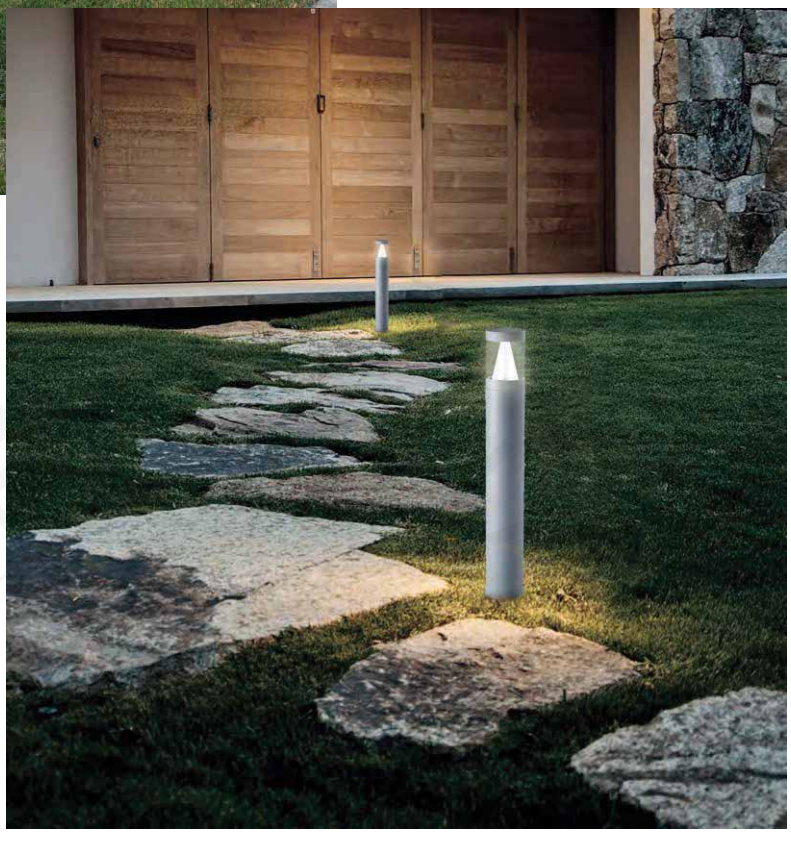

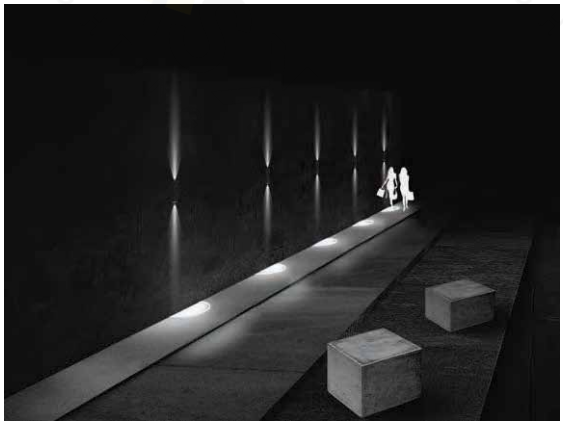

Ultra-narrow beam angle gives a strong visual effect and is an essential lighting tool for outdoor construction

Correct installation

The table shows the correct installation distances for uniform lighting on the wall.

Beam Angle

7°

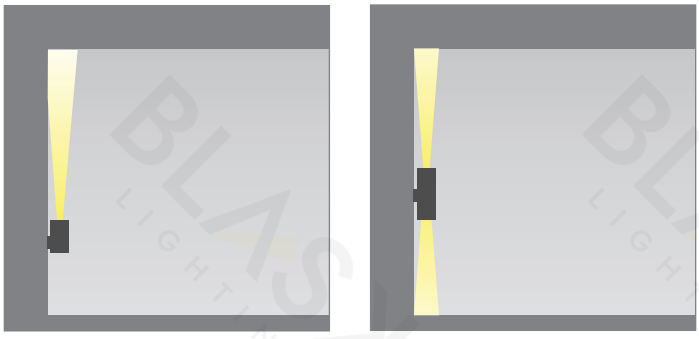

INWLO30848

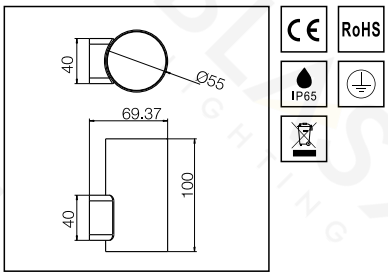

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50-60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INWLO30849

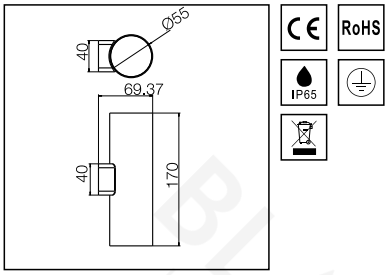

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50-60Hz
Output Lumens	1400 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

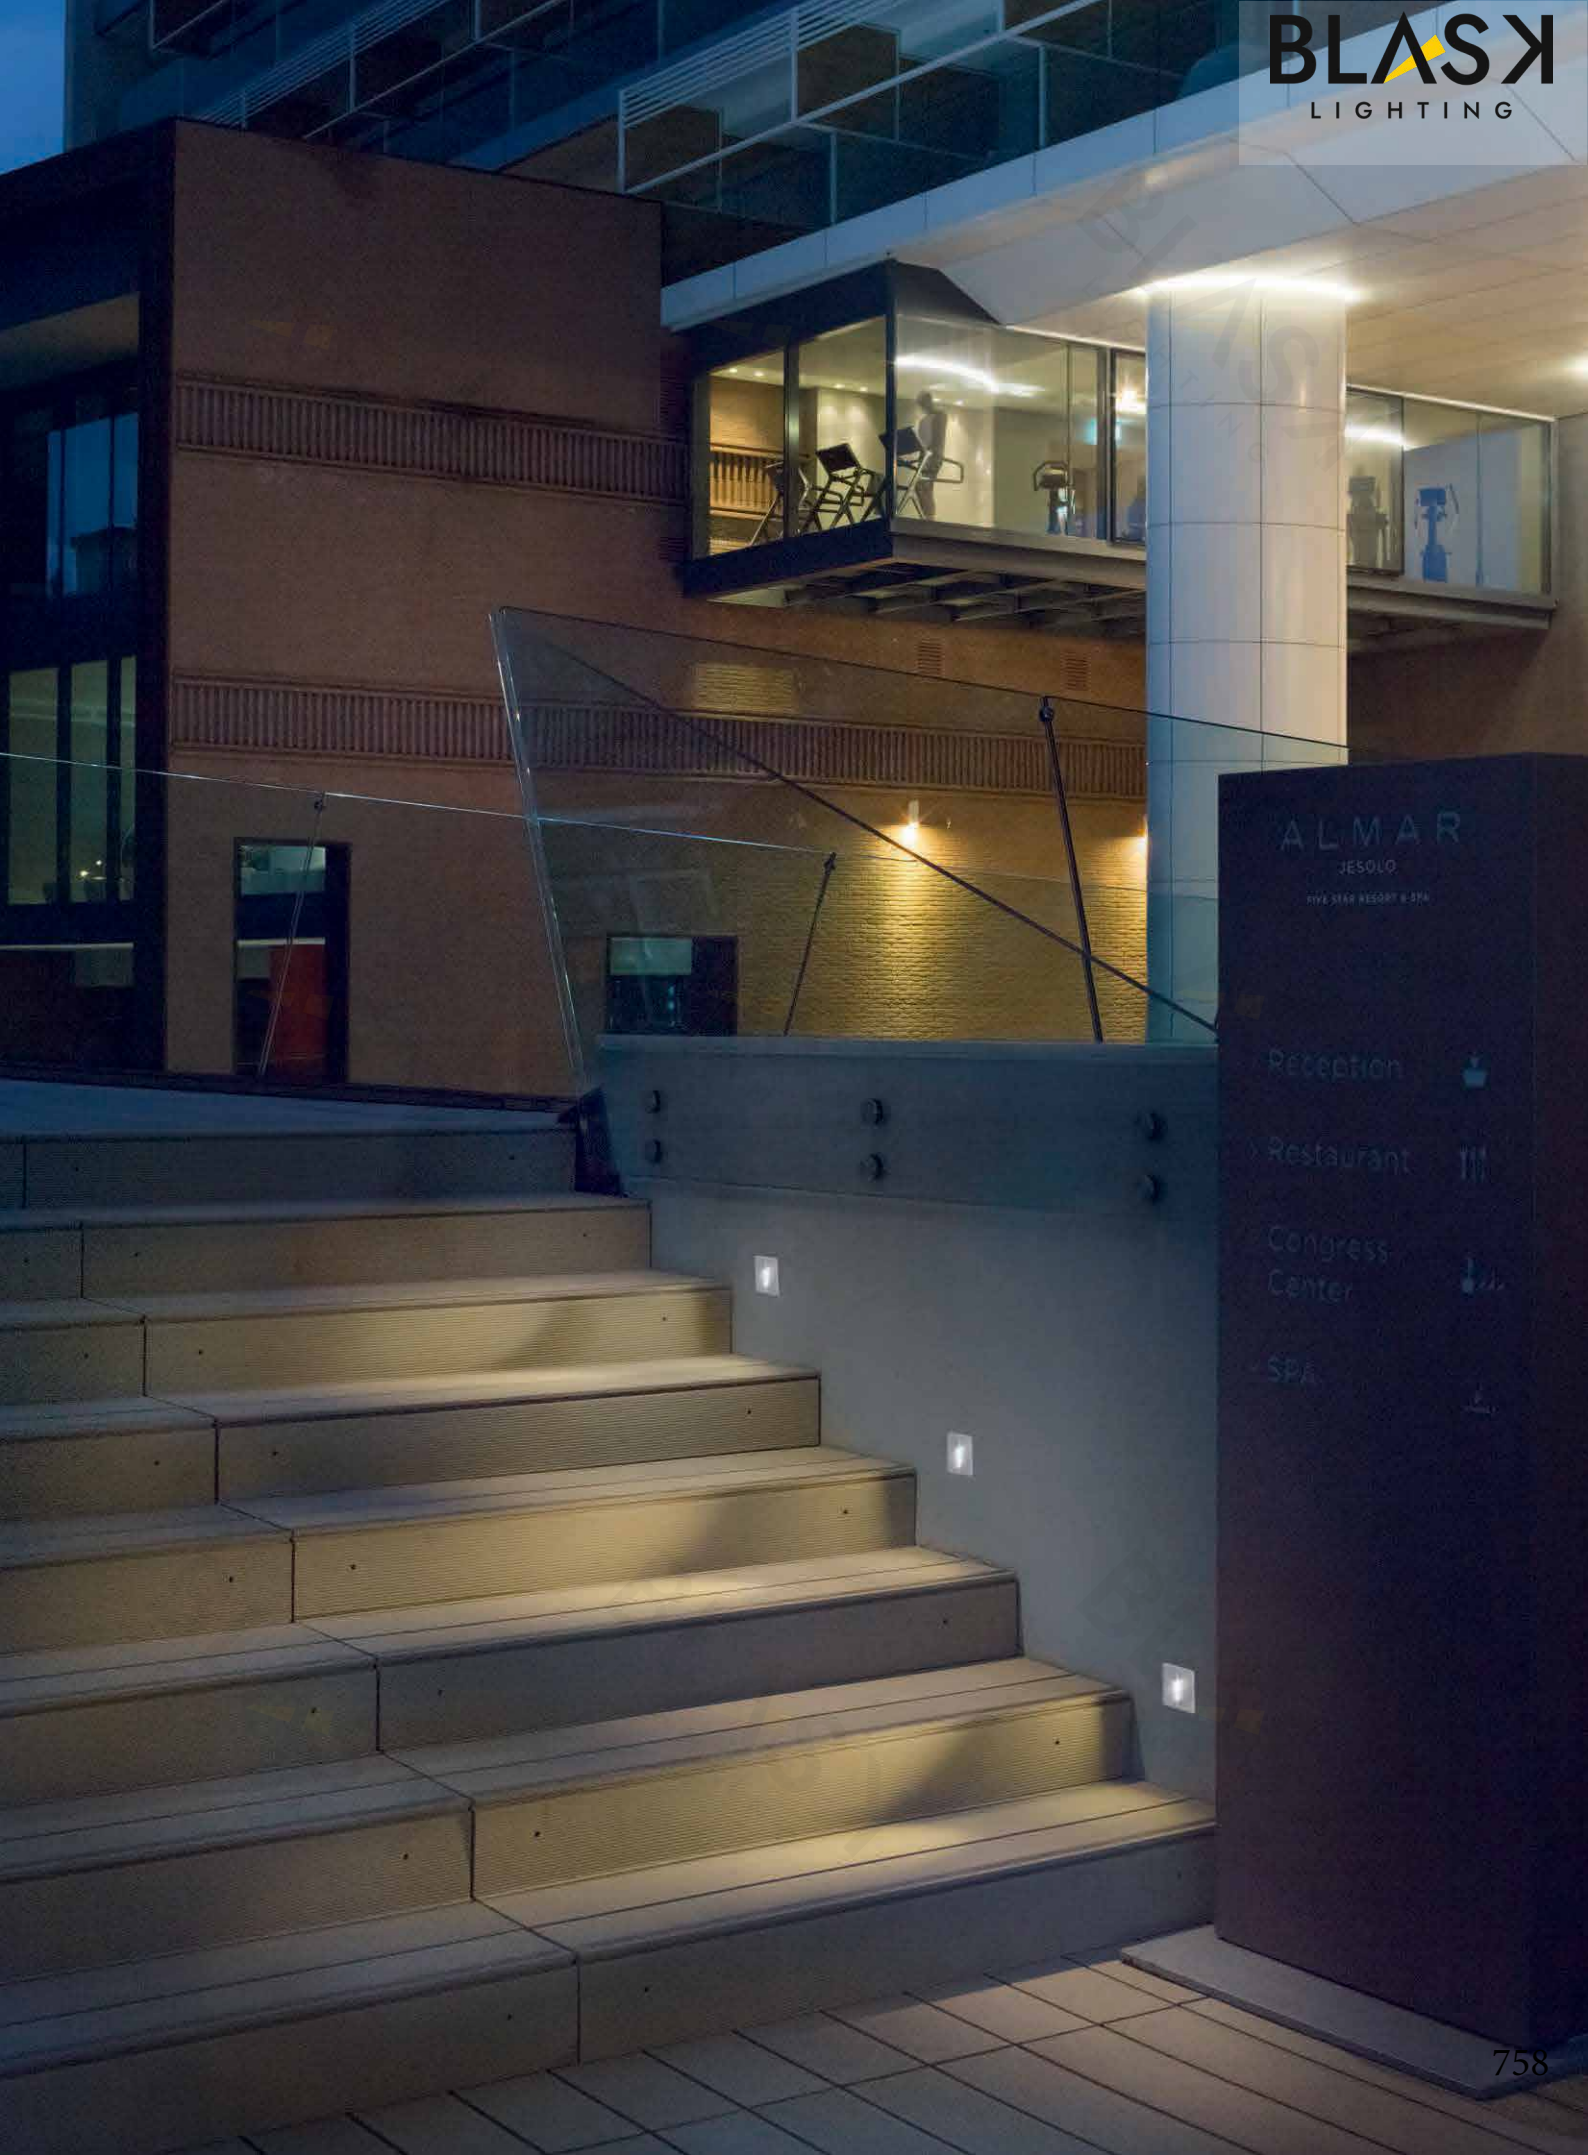
ALMAR
JESOLO
Reception
Restaurant
Congress
Center
SPA

Dimmable

Lighting of indoor and outdoor areas perimeter and passages of buildings, whether pedestrian or ocarrable, is possible thanks to recessed devices conspecifiche optics.

In addition to a complete aesthetic integration in the structure, these luminaires have in fact a symmetrical light emission but inclined towards the ground: the light is distributed in order to gradually fade away from the source and does not concentrate near the luminaire. The resulting effect is that of an illumination that reaches a greater distance along the floor, allowing a wider view of the environment and therefore a better orientation.

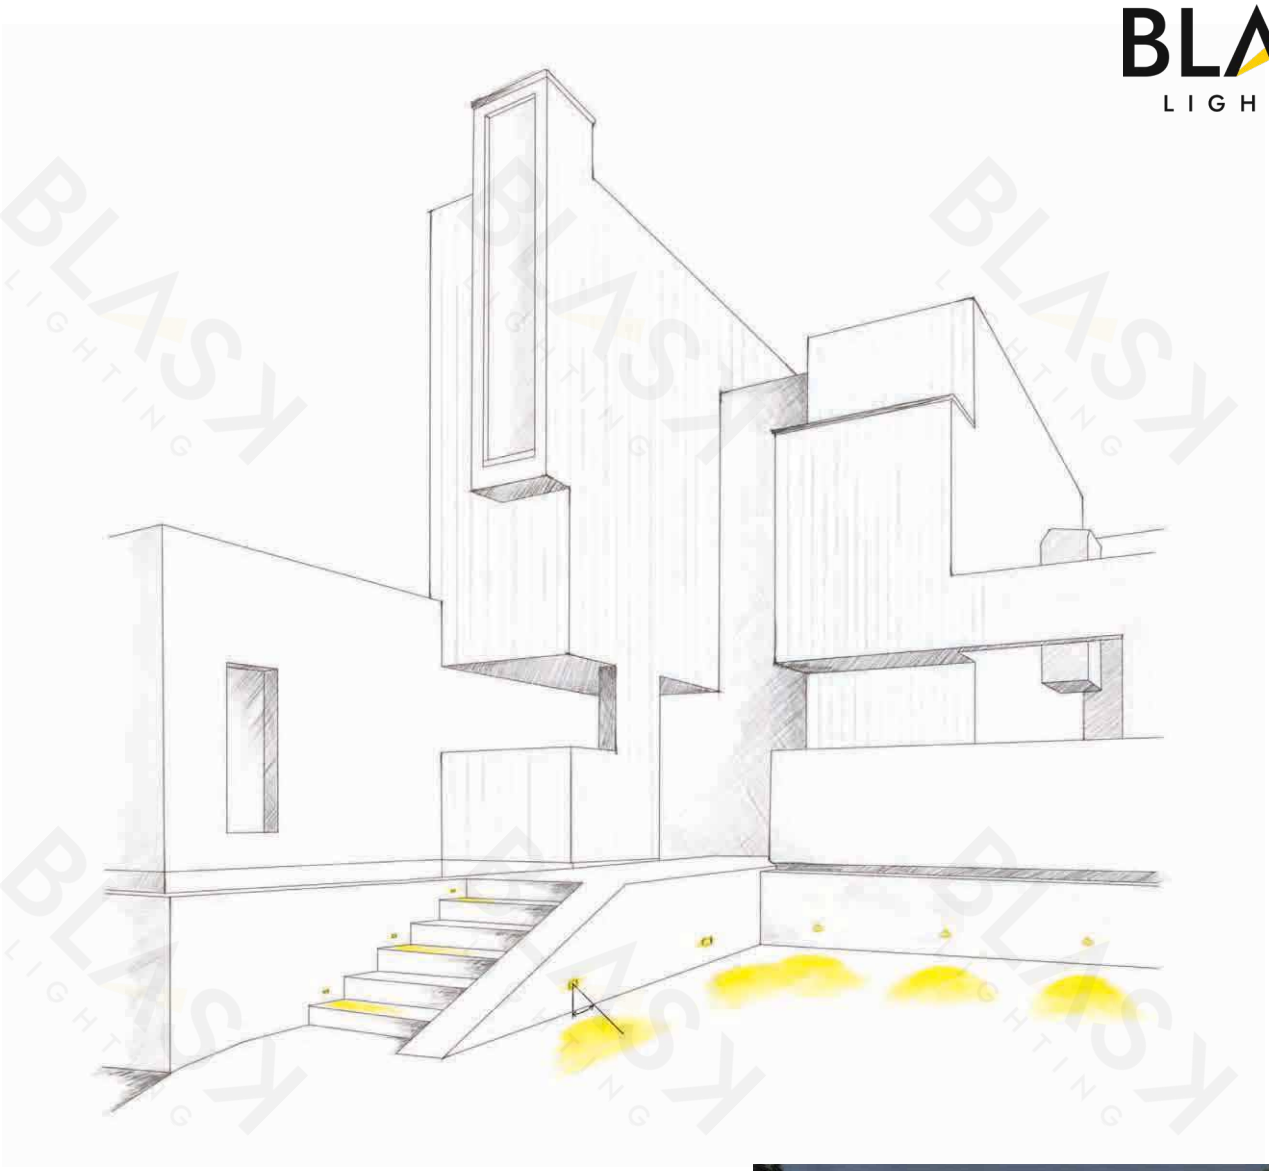

The asymmetric optic, with LED back, projects a bright drop to the ground,acting as a decorative element without dazzling. Small, built-in therefore integrated, it adapts to structures of any type and small size, even near aquatic environments, such as wooden piers.

Soft light , slots designed to uniformly illuminate a path in a comfortable and non-invasive way for pedestrians

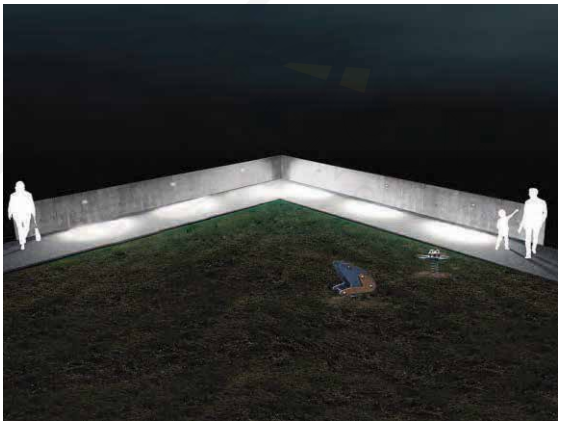

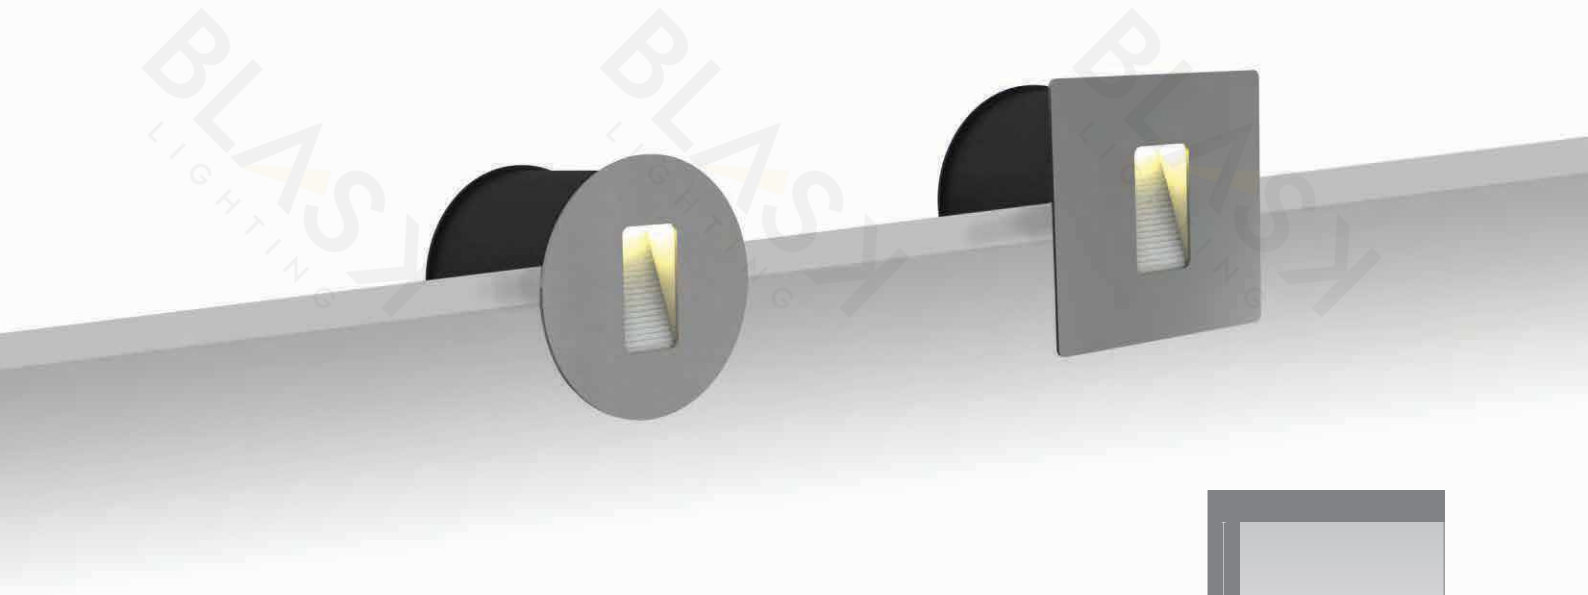



Product information

INWLO30850

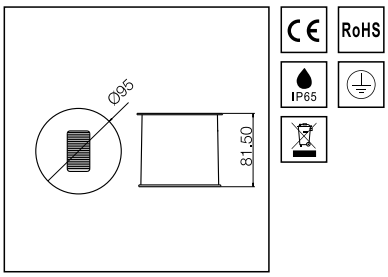

Power	3W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INWLO30851

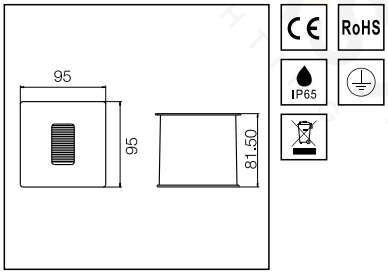

Power	3W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

SAA Certification

IP54

Body Color

EXTERIOR WALL SURFACE

Upgrade your facade with soft lighting elements or by using a parabolic and far-reaching lighting pattern. A remarkable feature in the wall surface range is the combination of LED with a lens, fusing architectural light effects and energy efficiency, offering new possibilities in exterior lighting.

Body Color

Features

Cost and time saving rapid tool-free installation.
Highly efficient and glare free.
Substitute for Halogen outdoor wall light with passive cooling technology (lifetime: 50,000 hours at 70% luminous flux remaining) and consistent colour (Ra ⩾80)
IP rate: IP54

Materials/Finish
Body: Aluminium
Reflectors: High grade anodised aluminium.
Anti Harm cover:Aluminium bezel with a sealed 3mm clear toughened glass diffuser .

Installation/Mounting
Tool-free Installation
Fix the lighting fixture onto the wall directly.

Specification
A exquisite&stylish, LED outdoor wall light, luminaire body in pure aluminium with High grade anodised aluminium reflector, not dazzling&soft light. Rapid tool-free installation.CREE COB led chips with TUV/SAA driver
Stable luminous efficacy and CCT thanks to high efficiency of radiator
Choice of 3 light colours: 3000K,4200K,6500K

Correct installation

The table shows the correct installation distances for uniform lighting on the wall.

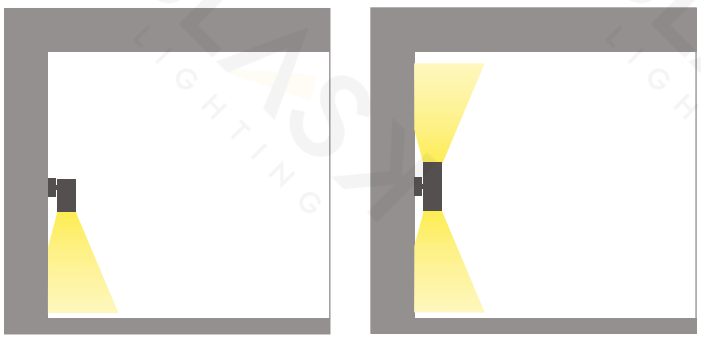

INWLO30852

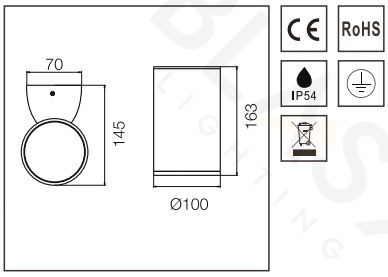

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INWLO30853

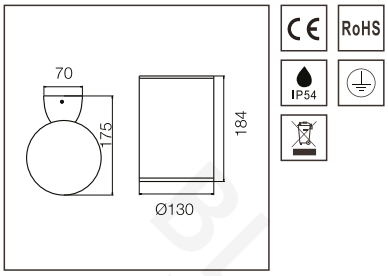

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INWLO30854

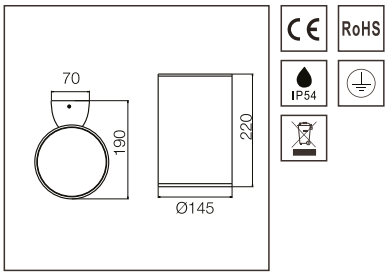

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INWLO30855

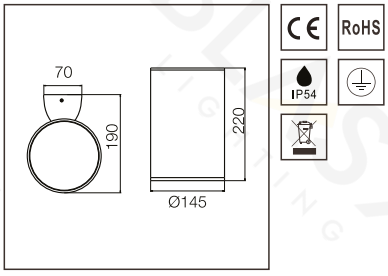

Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INWLO30856

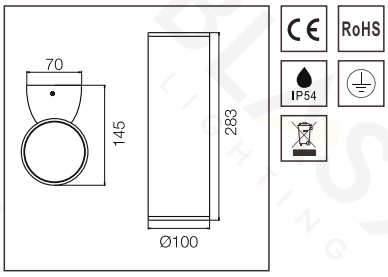

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INWLO30857

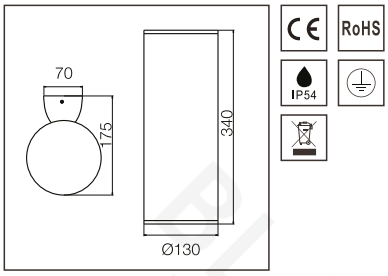

Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

Body Color

Features

Cost and time saving rapid tool-free installation.
Highly efficient and glare free.
Substitute for Halogen outdoor wall light with passive cooling technology (lifetime: 50,000 hours at 70% luminous flux remaining) and consistent colour (Ra ⩾80)
IP rate: IP54

Materials/Finish
Body: Aluminium
Reflectors: High grade anodised aluminium.
Anti Harm cover:Aluminium bezel with a sealed 3mm clear toughened glass diffuser .

Installation/Mounting
Tool-free Installation
Fix the lighting fixture onto the wall directly.

Specification
A exquisite&stylish, LED outdoor wall light, luminaire body in pure aluminium with High grade anodised aluminium reflector, not dazzling&soft light. Rapid tool-free installation.CREE COB led chips with TUV/SAA driver
Stable luminous efficacy and CCT thanks to high efficiency of radiator
Choice of 3 light colours: 3000K,4200K,6500K

Correct installation

The table shows the correct installation distances for uniform lighting on the ceiling.

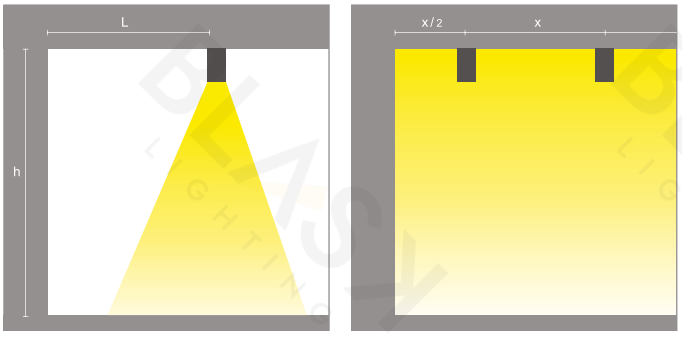

x max (m)	L (m)	h (m)
1,5	1	2,7
2	1	3

INCLO30858

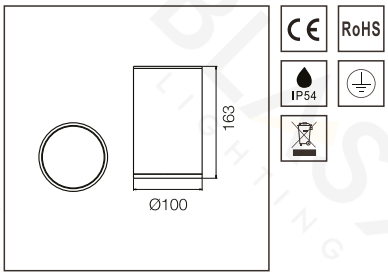

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INCLO30859

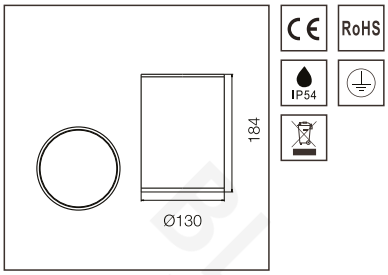

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INCLO30860

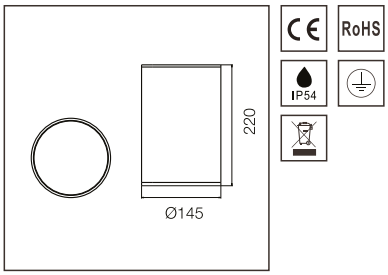

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INCLO30861

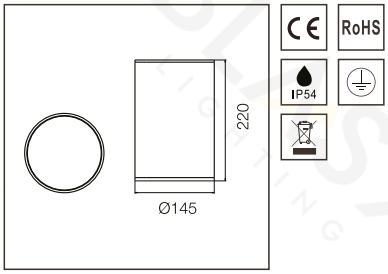

Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

Garden Solution

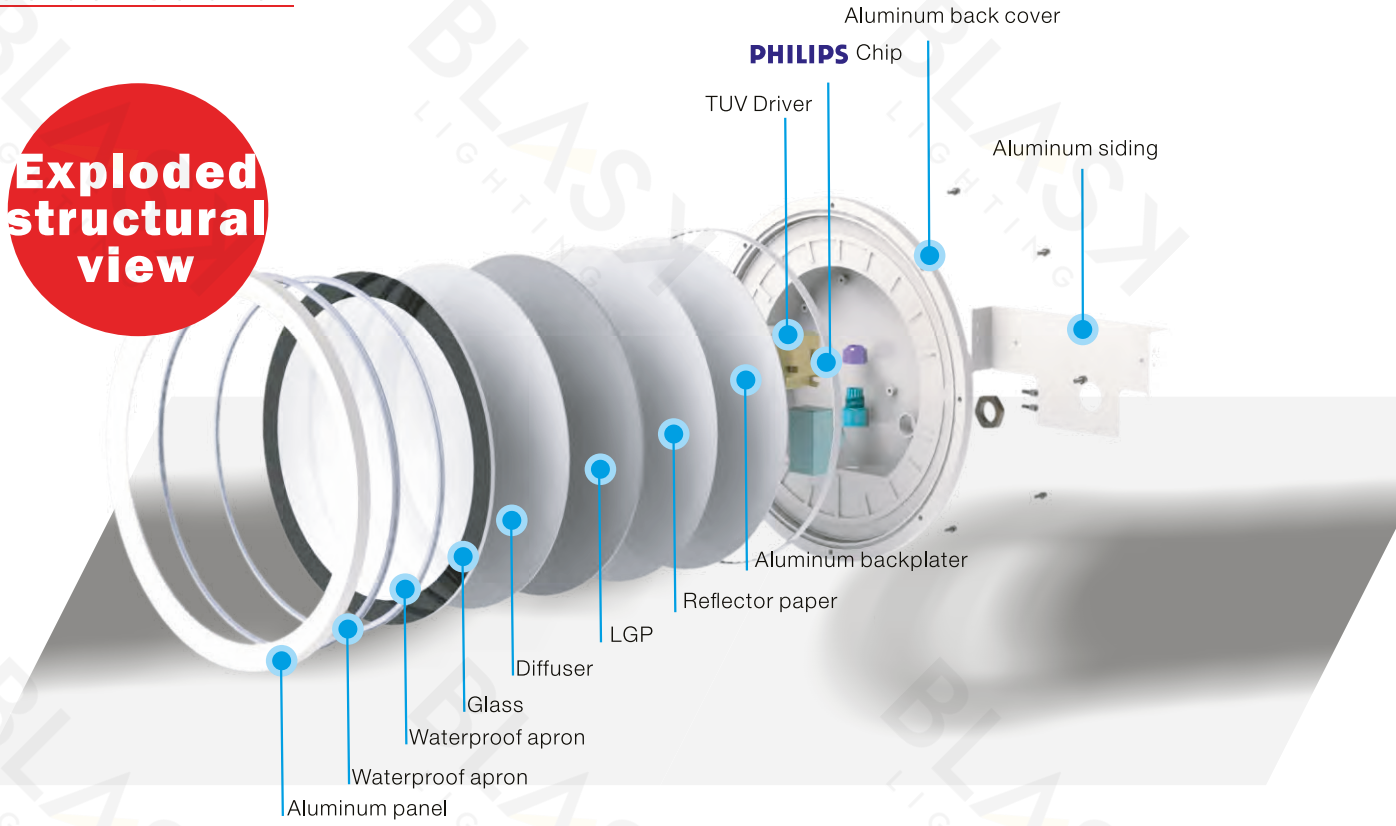

ON-OFF function

The products provide ON-OFF function for LED lighting, users can select the right function according to different applications.

With sufficient light,the lamp doesn't switch on.

Motion detected,the sensor switches on the lamp.

After hold time,the sensor switches off the lamp when no motion is detected.

Adjustable delay time: 18-120 seconds

Smart delay: switch after detecting the human body every activity will automatically trigger a cycle loop, and the last time the trigger timing delay

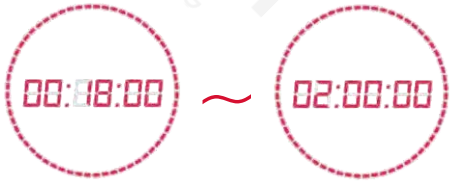

Induction distance: 8-10 m

Wide angle, no dead zone, can penetrate glass and thin wood, depending on the work rate, can penetrate the wall of different thicknesses, from the environment, temperature,dust, and other effects.

INWLO30862

120°

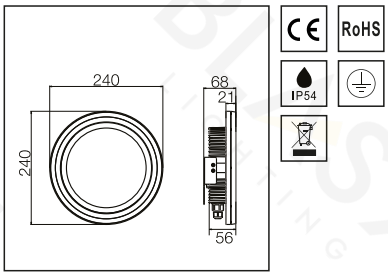

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	White/Grey
Life	30 000 H
Warranty	3 Years

INWLO30863

120°

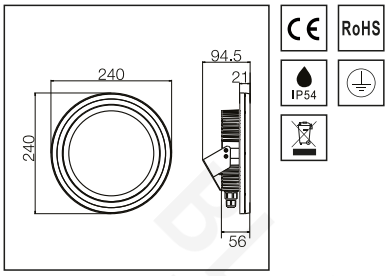

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	White/Grey
Life	30 000 H
Warranty	3 Years

120° **LED 3000K**



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
111.3°			
1.5	88	291	439
2	50	164	585
4	12	41	1170
4.5	10	32	1316
6	6	18	1755

120° **LED 4000K**

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
30.2°			
1.5	258	381	81
2	145	214	108
4	36	54	216
4.5	29	42	242
6	16	24	323

3.3W 270lm Ra:83

120° **LED 6500K**

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
30.8°			
1.5	307	470	83
2	173	264	110
4	43	66	220
4.5	34	52	248
6	19	29	330

3.5W 339lm Ra:81

INWLO30864

120°

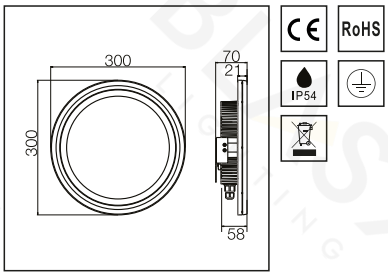

Power	35W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2800 lm
CRI	>80
Material	Aluminum+Glass
Color	White/Grey
Life	30 000 H
Warranty	3 Years

INWLO30865

120°

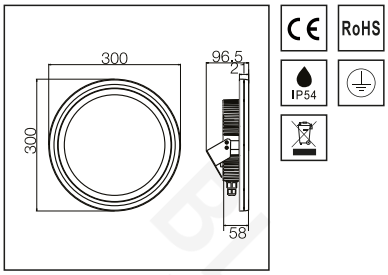

Power	35W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2800 lm
CRI	>80
Material	Aluminum+Glass
Color	White/Grey
Life	30 000 H
Warranty	3 Years

120°

LED 3000K

CODE:AA8888888

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
111.3°			
1.5	88	291	439
2	50	164	585
4	12	41	1170
4.5	10	32	1316
6	6	18	1755

120°

LED 4000K

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
30.2°			
1.5	258	381	81
2	145	214	108
4	36	54	216
4.5	29	42	242
6	16	24	323

3.3W 2701lm Ra:83

120°

LED 6500K



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
110.2°			
1.5	123	396	430
2	69	222	473
4	17	56	1146
4.5	14	44	1289
6	8	25	1719

28.9W 2264lm Ra:80

INWLO30866

120°

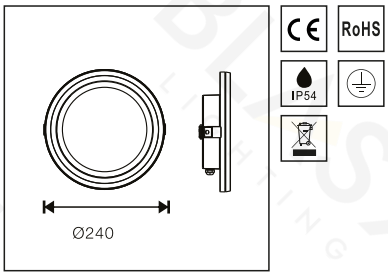

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	White/Grey
Life	30 000 H
Warranty	3 Years

INWLO30867

120°

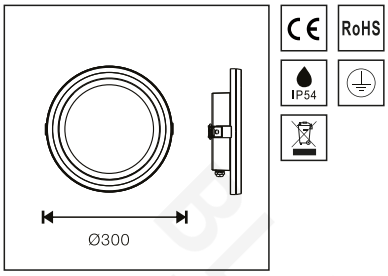

Power	35W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2800 lm
CRI	>80
Material	Aluminum+Glass
Color	White/Grey
Life	30 000 H
Warranty	3 Years

INCLO30868

120°

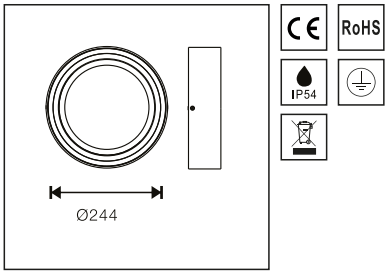

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	White/Grey
Life	30 000 H
Warranty	3 Years

INCLO30869

120°

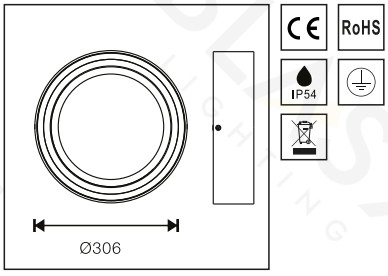

Power	35W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2800 lm
CRI	>80
Material	Aluminum+Glass
Color	White/Grey
Life	30 000 H
Warranty	3 Years

INWLO30870

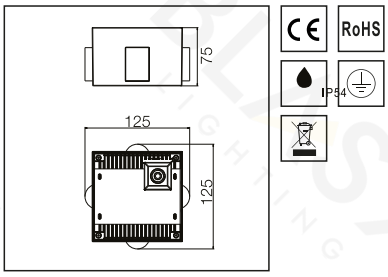

Power	15W
CCT	3000K 4000K 6500K RGBW
Voltage	AC220-240V 50/60Hz
Output Lumens	900 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INWLO30871

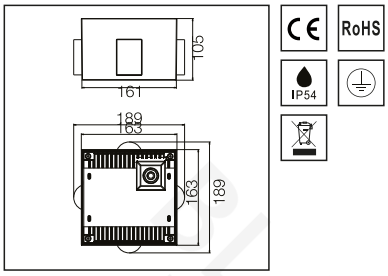

Power	20W
CCT	3000K 4000K 6500K RGBW
Voltage	AC220-240V 50/60Hz
Output Lumens	1200 lm
CRI	>80
Material	Aluminum+Glass
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

Building lighting

The special lighting required by historic buildings, emphasizing that their characteristics are in full compliance with all architectural standards, highlighting the external façade, enhancing the decorative and aesthetic aspects, or enhancing the interior design to make it easier to use and suitable for activities performed there , Including in security. For these reasons, the lighting of historical buildings needs to be properly balanced in terms of aesthetics and functionality: Only a skilled relationship between the designer and the lighting system manufacturer can produce the right solution.

Continuous installation

Intermittent installation

OFFICE
RENT
АРЕНДА
ОФИСОВ
3 3
2 6
10

Flexible and adaptable

Application:
INDOOR/OUTDOOR

- Facades
- Architectural lighting
- Wall washing
- Uplighting
- Large areas
- Lighting effects
- Indirect lighting
- Exhibition areas

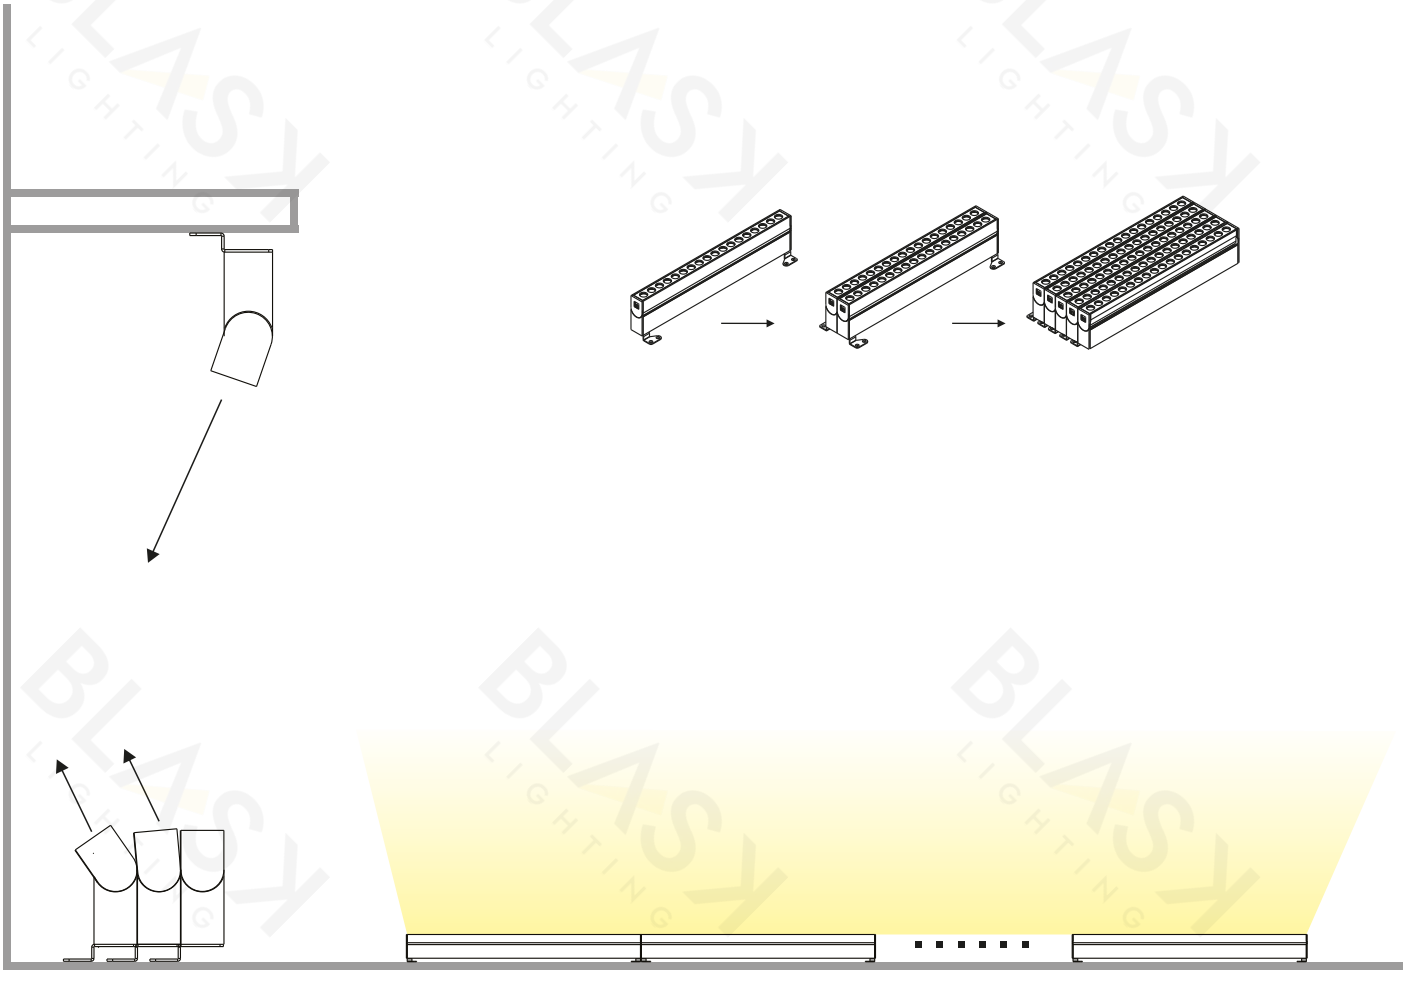

continuously installed to create continuous uninterrupted wall wash effect.

INFCLO30872





Power	50W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50-60Hz
Output Lumens	4000 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30873





Power	100W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50-60Hz
Output Lumens	8000 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30874





Power	150W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50-60Hz
Output Lumens	12000 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

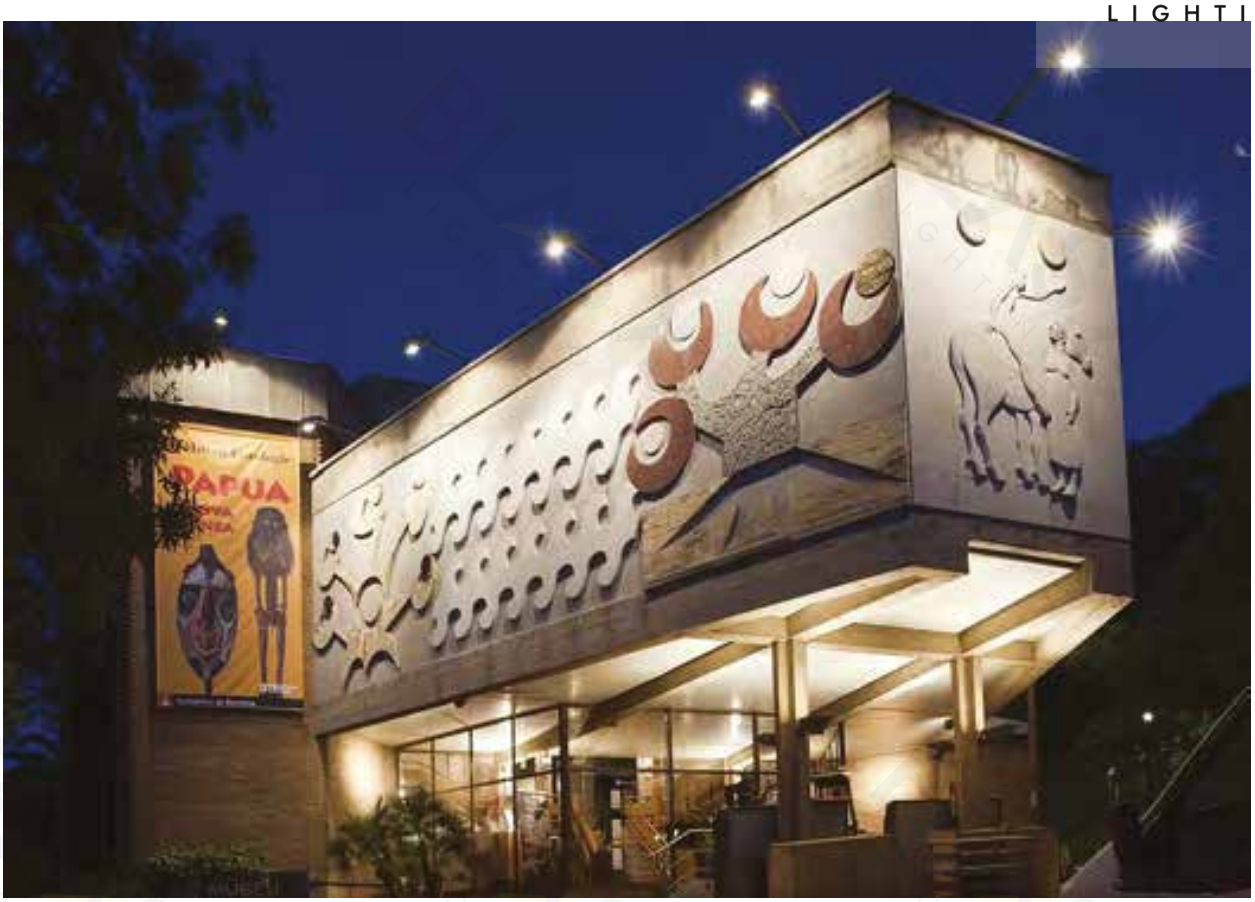

FEATURE

Efficient aluminum heat dissipation,
good heat dissipation effect, long service life of lamps
High temperature resistant tempered glass, surface powder
baking process, excellent corrosion resistance
Built-in respirator, effectively avoid condensation,
improve IP protection performance
Protection grade up to IP66, without fear of harsh outdoor environment

APPLICATIONS

The mall
Exhibition hall
Parking lot
Playground
Stadium
Billboard
Park
Sculpture

Flood light

FEATURE

Efficient aluminum heat dissipation,
good heat dissipation effect, long service life of lamps
High temperature resistant tempered glass, surface powder
baking process, excellent corrosion resistance
Built-in respirator, effectively avoid condensation,
improve IP protection performance
Protection grade up to IP66, without fear of harsh outdoor environment
CRI>80
System light output efficiency:83 lm/W
AC200-240V 50/60Hz
2 years warranty

INSTALLATION

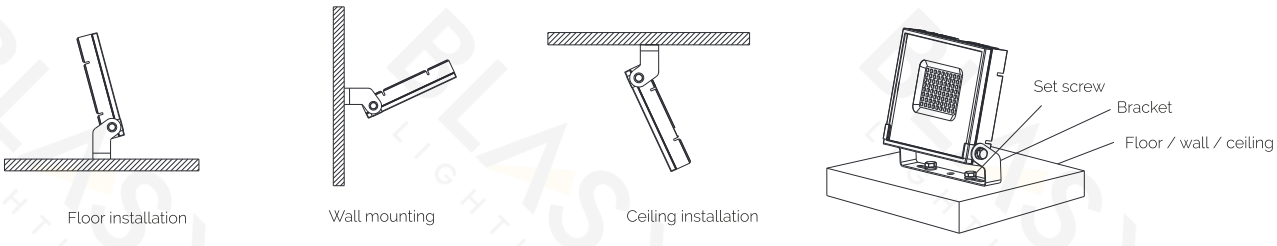

SPECIFICATION

Item No.	Power	Lumens	Color	CCT	Beam Angle
INFCLO30875	30W	2500 lm	Black	3000K / 4000K/6500K	120°
INFCLO30876	50W	4200 lm	Black	3000K / 4000K/6500K	120°
INFCLO30877	100W	9000 lm	Black	3000K / 4000K/6500K	120°
INFCLO30878	150W	14000 lm	Black	3000K / 4000K/6500K	120°
INFCLO30879	200W	18000 lm	Black	3000K / 4000K/6500K	120°



INFCLO30875



INFCLO30876



INFCLO30877



INFCLO30878



INFCLO30879

SPECIAL CHARACTERISTICS

- IP66
- Class I
- RoHS Certification
- CE Certification
- High-power LEDs / chip-on-Board LED
- Efficient Spherolit techno-logy
- Adjustable angle
- Different light colors
- Excellent thermal manage-ment
- EMC-optimised
- Various housing colors
- Various construction sizes

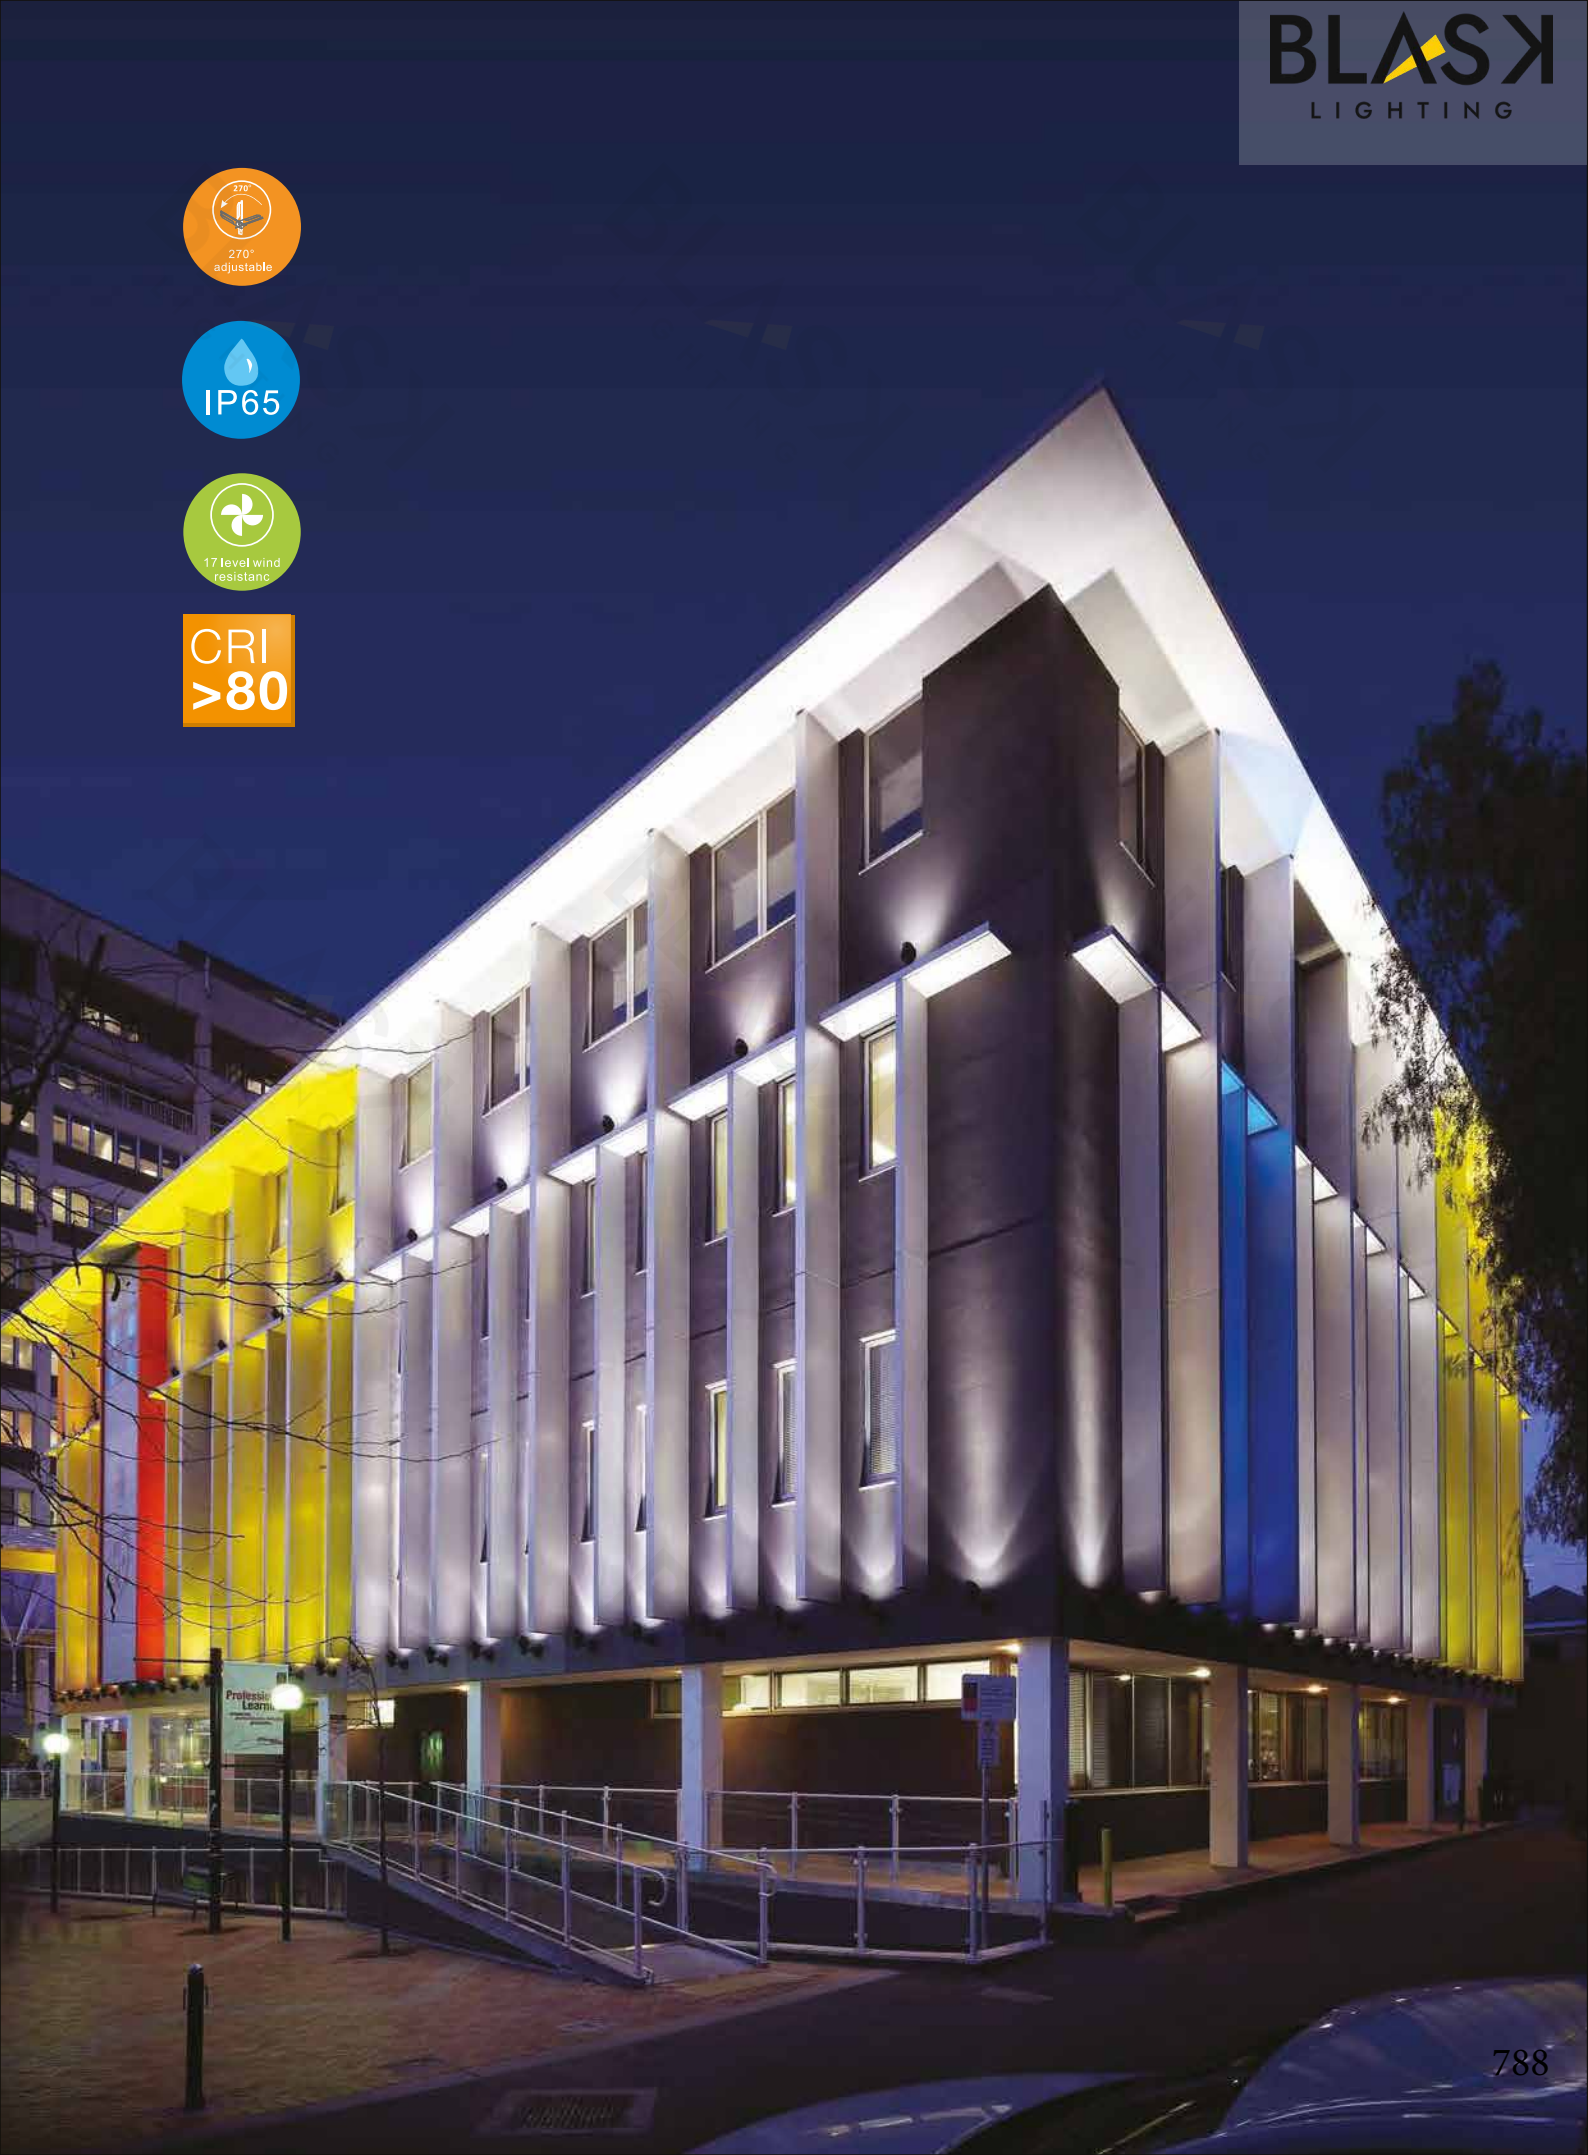
BLASK
LIGHTING
270°
adjustable
IP65
17 level wind
resistanc
CRI
>80

Garden Solution

Body Color

An exploded view of the internal structure

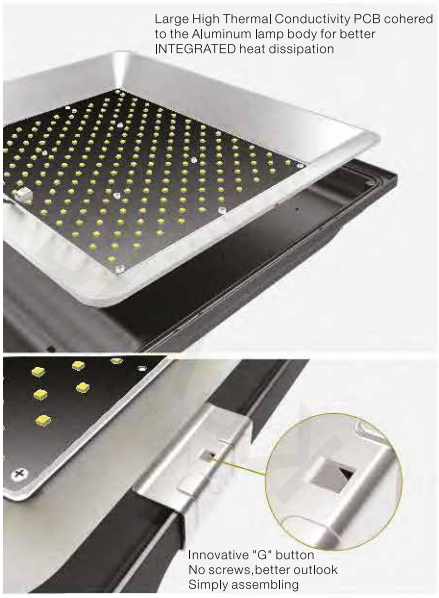

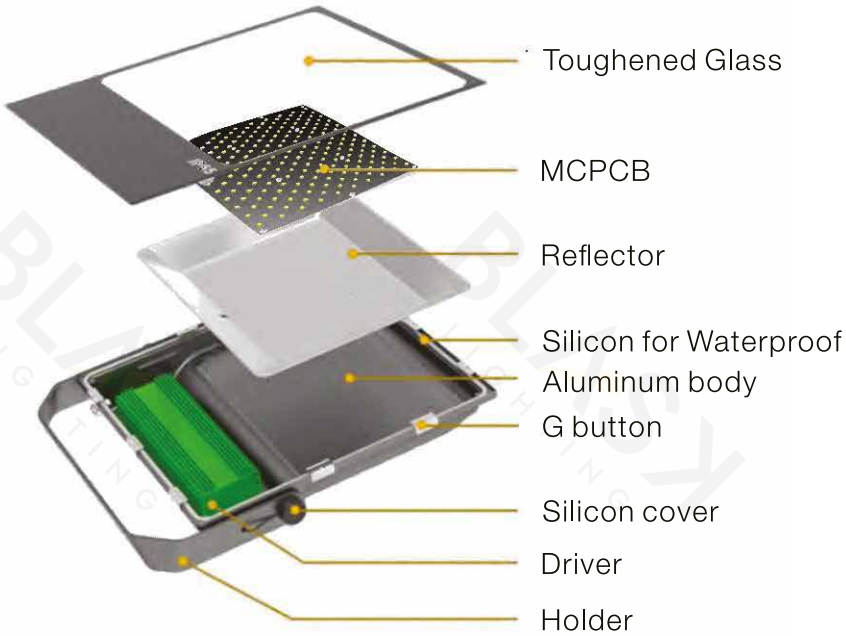

Product information

INFCLO30880



CE RoHS IP65

Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	900 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30881



CE RoHS IP65

Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30882



CE RoHS IP65

Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2700 lm
CRI	>80
Material	Aluminum
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INFCLO30883



CE RoHS IP65

Power	50W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4500 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

Product information

INFCLO30884



Power	70W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	6300 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30885



Power	100W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	9000 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30886



Power	150W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	13500 lm
CRI	>80
Material	Aluminum
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INFCLO30887



Power	200W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	18000 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

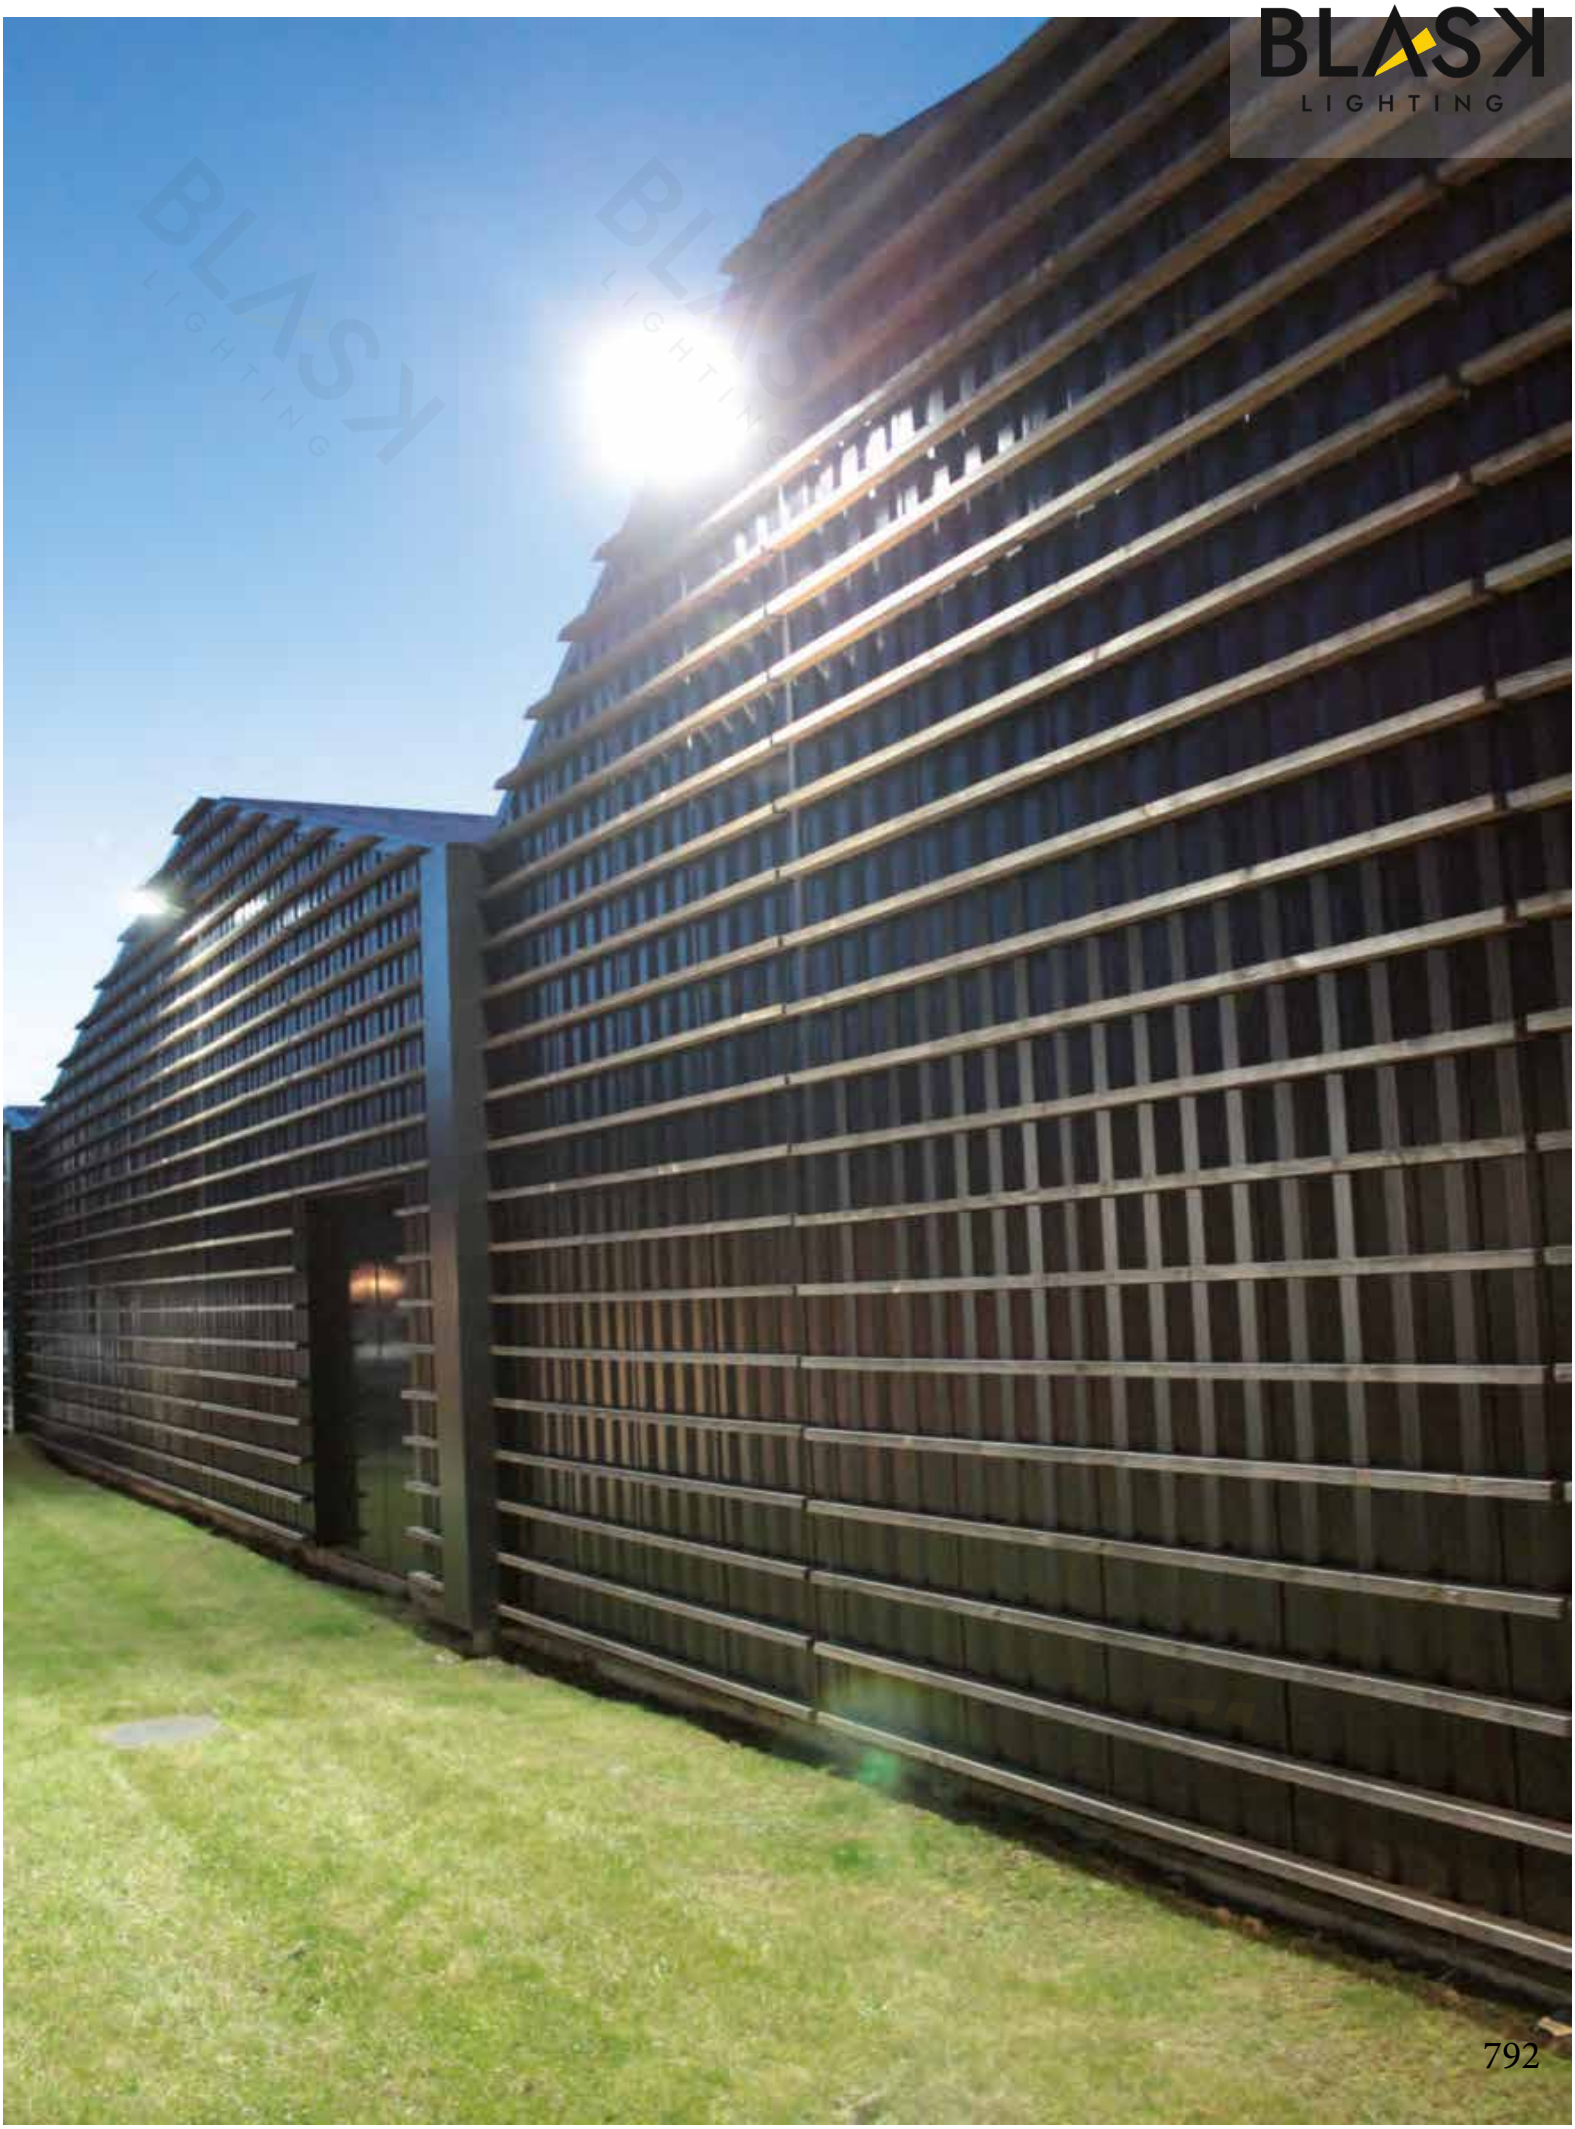

Product information

INFCLO30888



Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	900 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30889



Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30890



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2700 lm
CRI	>80
Material	Aluminum
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INFCLO30891



Power	50W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4500 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

Product information

INFCLO30892

120°



Power	70W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	6300 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30893

120°



Power	100W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	9000 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30894

120°



Power	150W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	13500 lm
CRI	>80
Material	Aluminum
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INFCLO30895

120°



Power	200W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	18000 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

Garden Solution

Riveting fin heat pipe cooling technology

The heat generated by the light source quickly and efficiently transferred to the large fin heat sink module by 6mm heat pipes, dissipated rapidly reduce the temperature of the light source and extend lamp life.

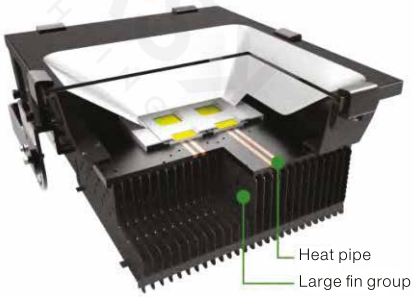

Fin innovation, leading the new cooling concept

The introduction of new technology and innovative lightweight fin assembly firmly to extend the minimum weight for maximum heat dissipation area, and is tightly integrated with robust high-pressure cast aluminum shell molding, the entire lamp



Buckle FIN technology

Each piece fin remain equal spacing and snap fit, form a whole, effectively enhance fin firmness with minimum weight for maximum heat dissipation area.



HDT Technology

4 * Ø6mm copper heat pipes directly with the efficient heat bonding distance, the heat generated by the light source quickly on large-area conductive fin heat sink module, heat pipe performance will play the most, greatly improve the thermal effects



Heat pipe thermal efficiency

The use of heat pipe heat transfer principle and rapid cooling medium heat transfer properties, quickly transfer the heat to the heat source, the heat capacity than any known metal.



3D stereoscopic cooling

Each of the parallel fins are distributed relatively hollow holes, about transparent convection duct and cooling fins form three-dimensional space, to maximize the distribution of heat.

Slotting Process

Fin assembly and cooling plate tightly mated to minimize thermal resistance without plating, beautiful environment.

Superior performance and efficient protection

Protection class IP65

Using special waterproof connector and silicone ring seal technology, protection class IP65, satisfy the requirements of a variety of outdoor harsh environments.

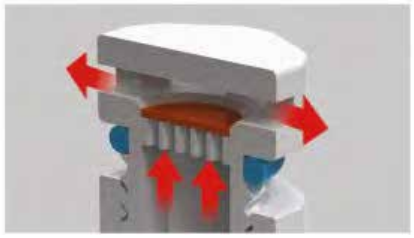

Respirator design

Lamps balance inside and outside air pressure difference, water mist cleared the same time, to avoid condensation, greatly reducing product failure due to corrosion caused by salt, extend the service life and trouble-free maintenance.

Large angle adjustment

Screw lock attached mounting, multiple stents adjustment point, at least adjustable 180 °, a light irradiation angle freely changed

High purity aluminum reflector

With 99.8% purity aluminum fabrication, oxidation, anti-color, reflective effect.

Glass panel

4mm glass panel, high-intensity light source is protected, and the light transmission rate of 93%.

Stainless steel parts

Chemical solution resistance of air, water and acid, alkali, salt corrosion, suitable for use in harsh environments and long-term.

Product information

INFCLO30896

120°



Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	900 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30897

120°



Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1800 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30898

120°



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2700 lm
CRI	>80
Material	Aluminum
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INFCLO30899

120°



Power	50W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4500 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

Product information

INFCLO30900



Power	70W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	6300 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30901



Power	100W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	9000 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

INFCLO30902



Power	150W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	13500 lm
CRI	>80
Material	Aluminum
Color	Black/Grey
Life	30 000 H
Warranty	3 Years

INFCLO30903



Power	200W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	18000 lm
CRI	>80
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years

Perfect Diamond light effect

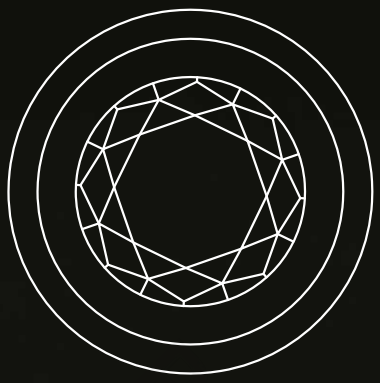

INULO30904

120°

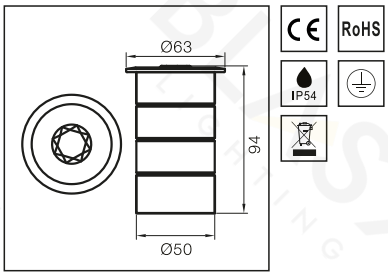

Power	3W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	210 lm
CRI	>80
Material	Aluminum
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30905

120°

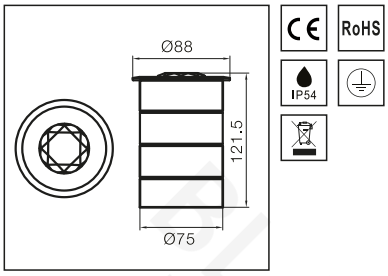

Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	350 lm
CRI	>80
Material	Aluminum
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30906

120°

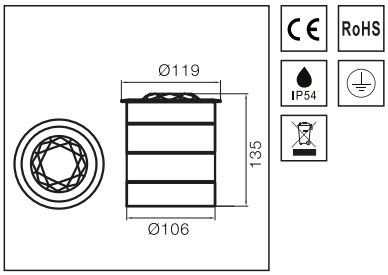

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30907

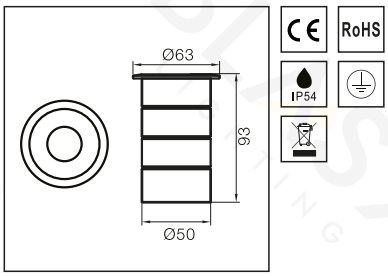

Power	3W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	210 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30908

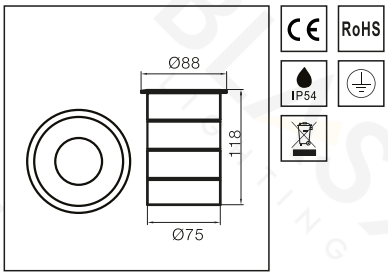

Power	5W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	350 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30909

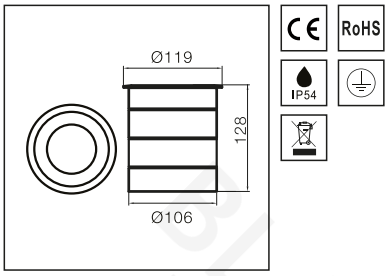

Power	10W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	700 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

EXTERIOR FLOOR RECESSED

Floor recessed luminaires guarantee a subtle, discrete and powerful light effect. Embedded in a well-planned lighting study, in-ground luminaires are perfect to highlight both buildings, art or natural elements such as trees, hedges or ponds. The new collection offers a variety of lighting options, angles and effects.

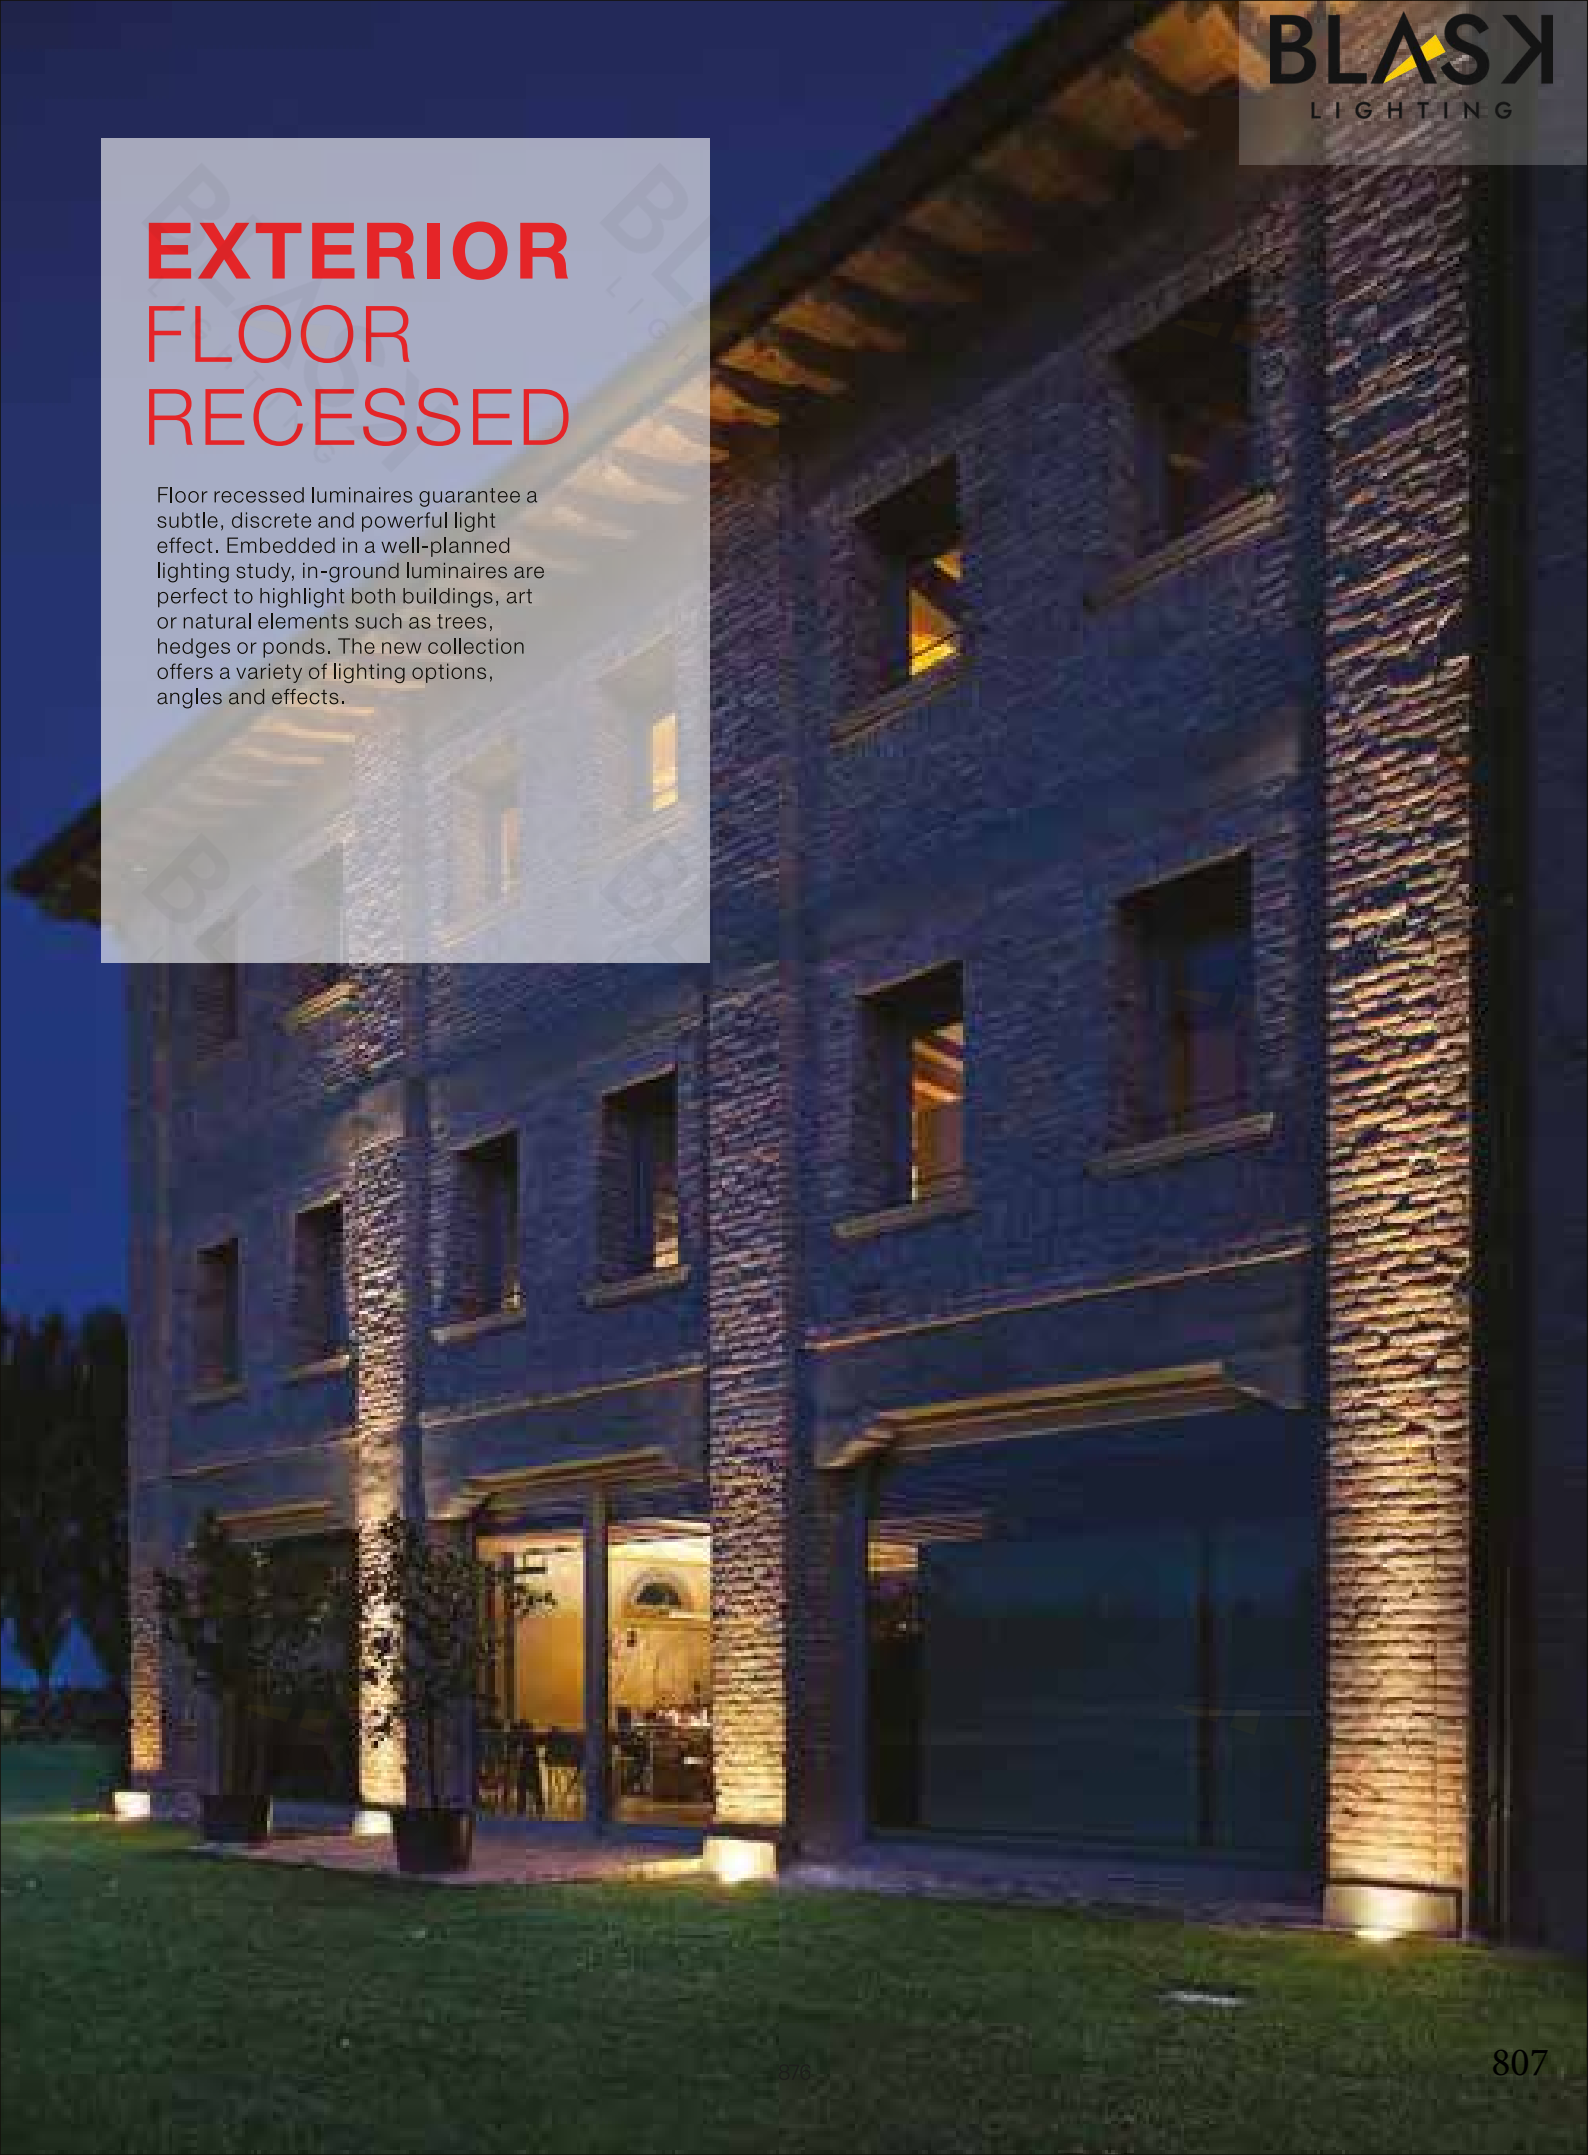

Lamps can bear more than
1000KG

Integrated high-power
LED

IP67

SUPER WATERPROOF

Lamp is sealed by reinforced glass, rubber ring,
silica gel and silicone to make it waterproof toughened
transparent glass, high temperature resisting,
easy for lights penetration, transmittance as high as 92%.

Product information

INULO30910

120°



Power	10W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	800 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30911



120°



Power	20W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	1600 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30912

120°



Power	30W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	2400 lm
CRI	>80
Material	Aluminum
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30913

120°



Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum
Color	Chrome
Life	30 000 H
Warranty	3 Years

Product information

INULO30914

Power	50W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4000 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

HIGH SPECIFICATION

Product information

INULO30915

120°



Power	40W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	3200 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

INULO30916

120°



Power	50W
CCT	3000K 4000K 6500K
Voltage	AC220-240V 50/60Hz
Output Lumens	4000 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

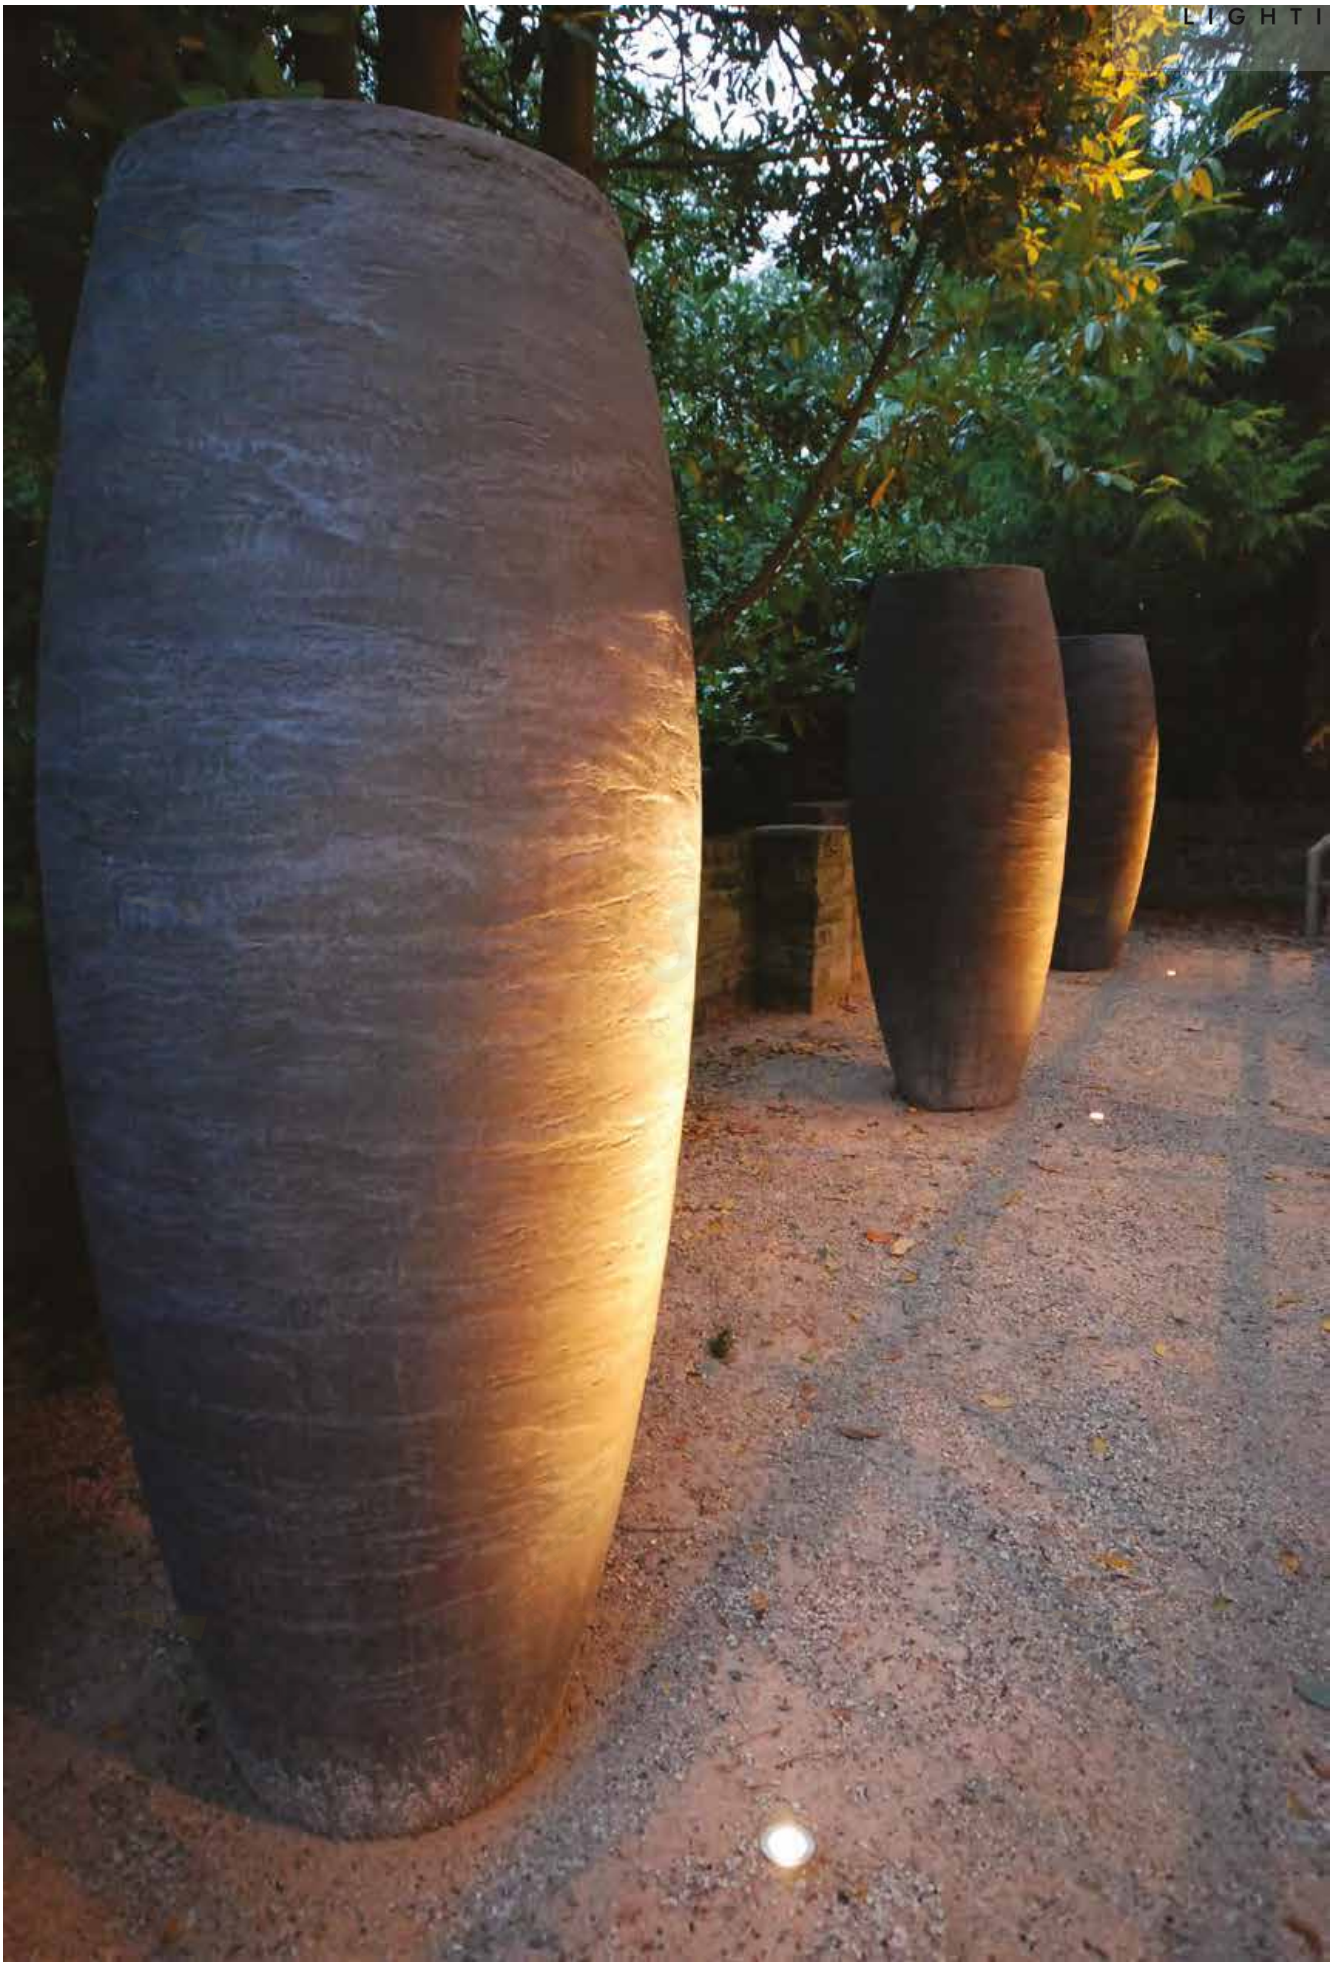

Features

Cost and time saving rapid tool-free installation.
Highly efficient and glare free.
substitute for Halogen underground light (lifetime: 50,000 hours
at 70% luminous flux remaining
and consistent colour) (Ra ⩾75)
Epistar COB chips with waterproof led driver
IP rate:IP67

Materials/Finish
Body: Aluminium
Reflectors: high grade anodised aluminium.
Anti Harm cover: Stainless Steel bezel with a sealed 8-10mm clear toughened glass diffuser

Installation/Mounting
Tool-free Installation
Fix the lighting fixture into the holes in grassland or ground

Specification
The Epistar COB LED chips enable a solid-state lighting solution that is more efficient, more reliable and longer-lasting than ever before possible.Constructed from high-quality aluminum lamp body and stainless steel frame that can withstand outdoor conditions.
Designed for humid outdoor environments and has undergone rigorous tests to ensure its water resistance. Stable luminous efficacy and CCT thanks to high efficiency of radiator.
Choice of 3 light colours: 3000K,4200K,6500K

Signalling

Designed to be sturdy and inexpensive to run, these luminaires mark indoor and outdoor routes and areas, guaranteeing maximum safety and minimum visual impact.



Floor washers

The luminaires, positioned on walls individually or “in a line”, light the floor evenly and without glare.



Product information

INULO30917

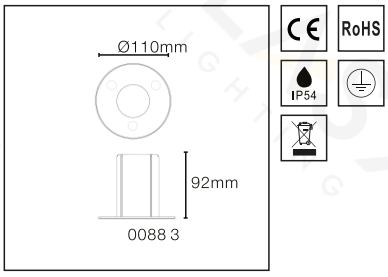

Power	3W
CCT	3000K 4000K 6500K RGB
Voltage	AC220-240V 50/60Hz
Output Lumens	240 lm
CRI	>80
Material	Aluminum+Glass
Color	Chrome
Life	30 000 H
Warranty	3 Years

LED Lighting
GUIDE TO SYMBOLS

EN 60.598 Class 1 – fittings comply with class 1 (I) earthed electrical requirements i.e. functional insulation in all parts and earth termination.

Class 2 – fittings comply with class 2 (II) double insulated electrical requirements i.e. complete insulation in all parts without earth termination. In the event of an electrical fault, no dangerous voltage can reach touchable metal parts.

Suitable for mounting in or on furniture made or semi-incombustible or normally combustible materials such as wood.

Passes the 650° glow wire test in accordance with IEC 695-2-1.

Horizontal rotation

Electronic transformer

HID lamp requires an external ignitor

Ceiling cut-out – round

Trailing edge dimmable (capacitive)

Ingress protection

European Norms Electrical Certification

Suitable for Healthcare applications

Suitable for Retail and Display applications

Treat lamp as small chemical waste

Allowed lamp operating positions

Class 3 – fittings comply with class 3 (III) triple insulated electrical requirements i.e. designed to connect to an external low voltage supply which is the same as the internal operating voltage requirement. In the event of an electrical fault, no dangerous voltage can develop. Inflammability of surface protection EN 60.598

Fittings made for mounting in or on furniture made of materials of unknown properties.

Safety isolating transformer

Vertical tilt

Electronic ballast/gear

Minimum distance in metres permitted from lighted object

Ceiling cut-out – square

Leading edge dimmable (inductive)

Impact protection

Suitable for Office applications

Suitable for Education applications

Suitable for Exterior applications

Open packaging and read instructions

Universal burning position

Vertical burning position

Lamp can be operated in luminaires without a protective shield

Lamp emits a high level of UV radiation

Cool beam reflector

Protection against water contact

External ignitor

Lamp should not be operated when the outer bulb is broken

Do not hold the lamp glass when installing or removing

Do not touch lamp with bare fingers when replacing lamp

Read instructions before use

Lamp complies with legal standards

Bowl Mirror lamps

RoHS compliant

Warranty logo, please refer to intro pages for full details

RAL reference

Horizontal burning position

Incandescent Candle and Ball: Base up not allowed

Lamp should be operated only in a luminaire provided with a protective shield

Reduced UV emissions

Not dimmable

Internal ignitor

Ballast is required

Be aware of high temperatures when replacing lamp

Switch off power supply before replacing lamp

Energy saving

Lamp complies with legal standards

Grüne Punkt

Luminaire can be looped

WEE compliant

Ball resistant luminaire