


ARCH.

LIGHT

VOL IX

BLASK
LIGHTING

WWW.BLASKLIGHTING.COM

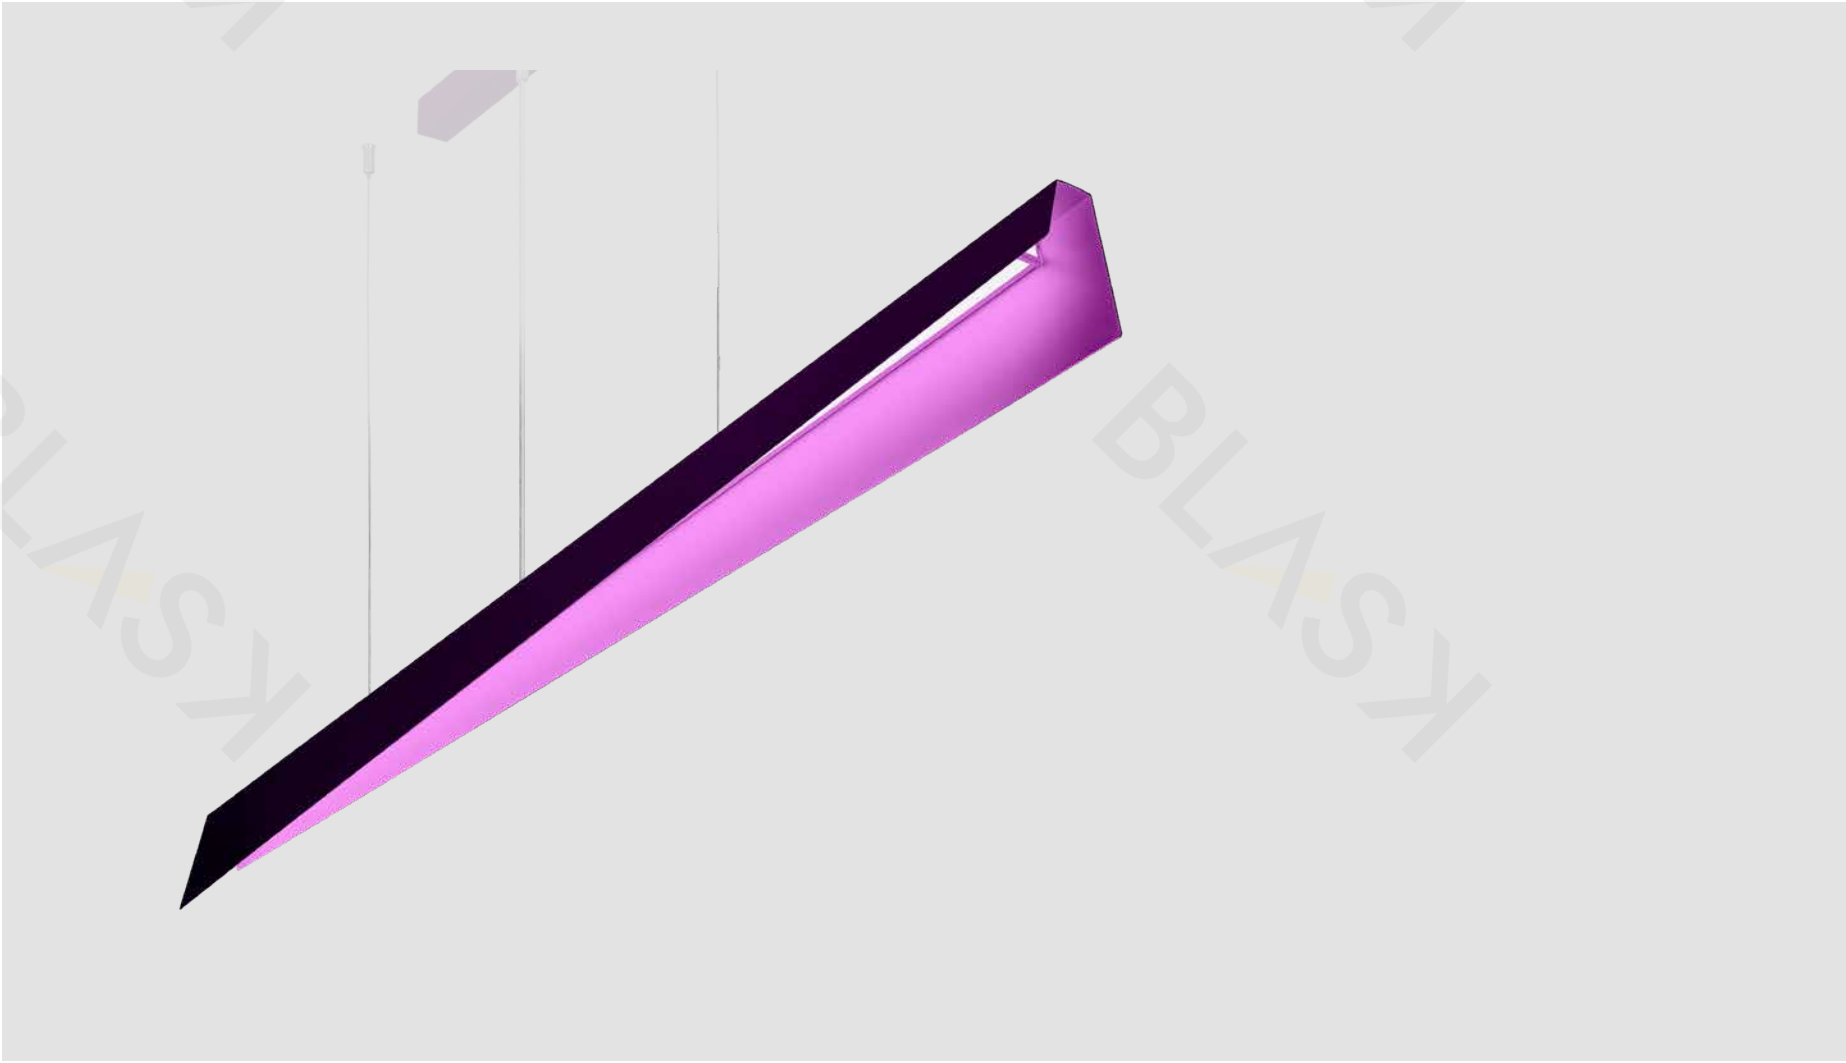

MSGISL10001

Suspended version


Light source:	LED module
Rated power [W]:	18 - 64
Luminous flux [lm]:	1100 - 5400
Colour temperature [K]:	2700, 3000, 4000
Mounting method:	suspended
Body material:	steel
Body colour:	any from the RAL palette
Dimensions [mm]:	1230/701/80, 1230/1261/80, 1230/1541/80

MSGIWL10002

XS wall lamp

Light source:	LED module
Rated power [W]:	2
Luminous flux [lm]:	59 - 100
Colour temperature [K]:	2700, 3000, 4000
Mounting method:	surface-mounted, wall-mounted
Body material:	steel
Body colour:	any from the RAL palette
Dimensions [mm]:	200/130/140



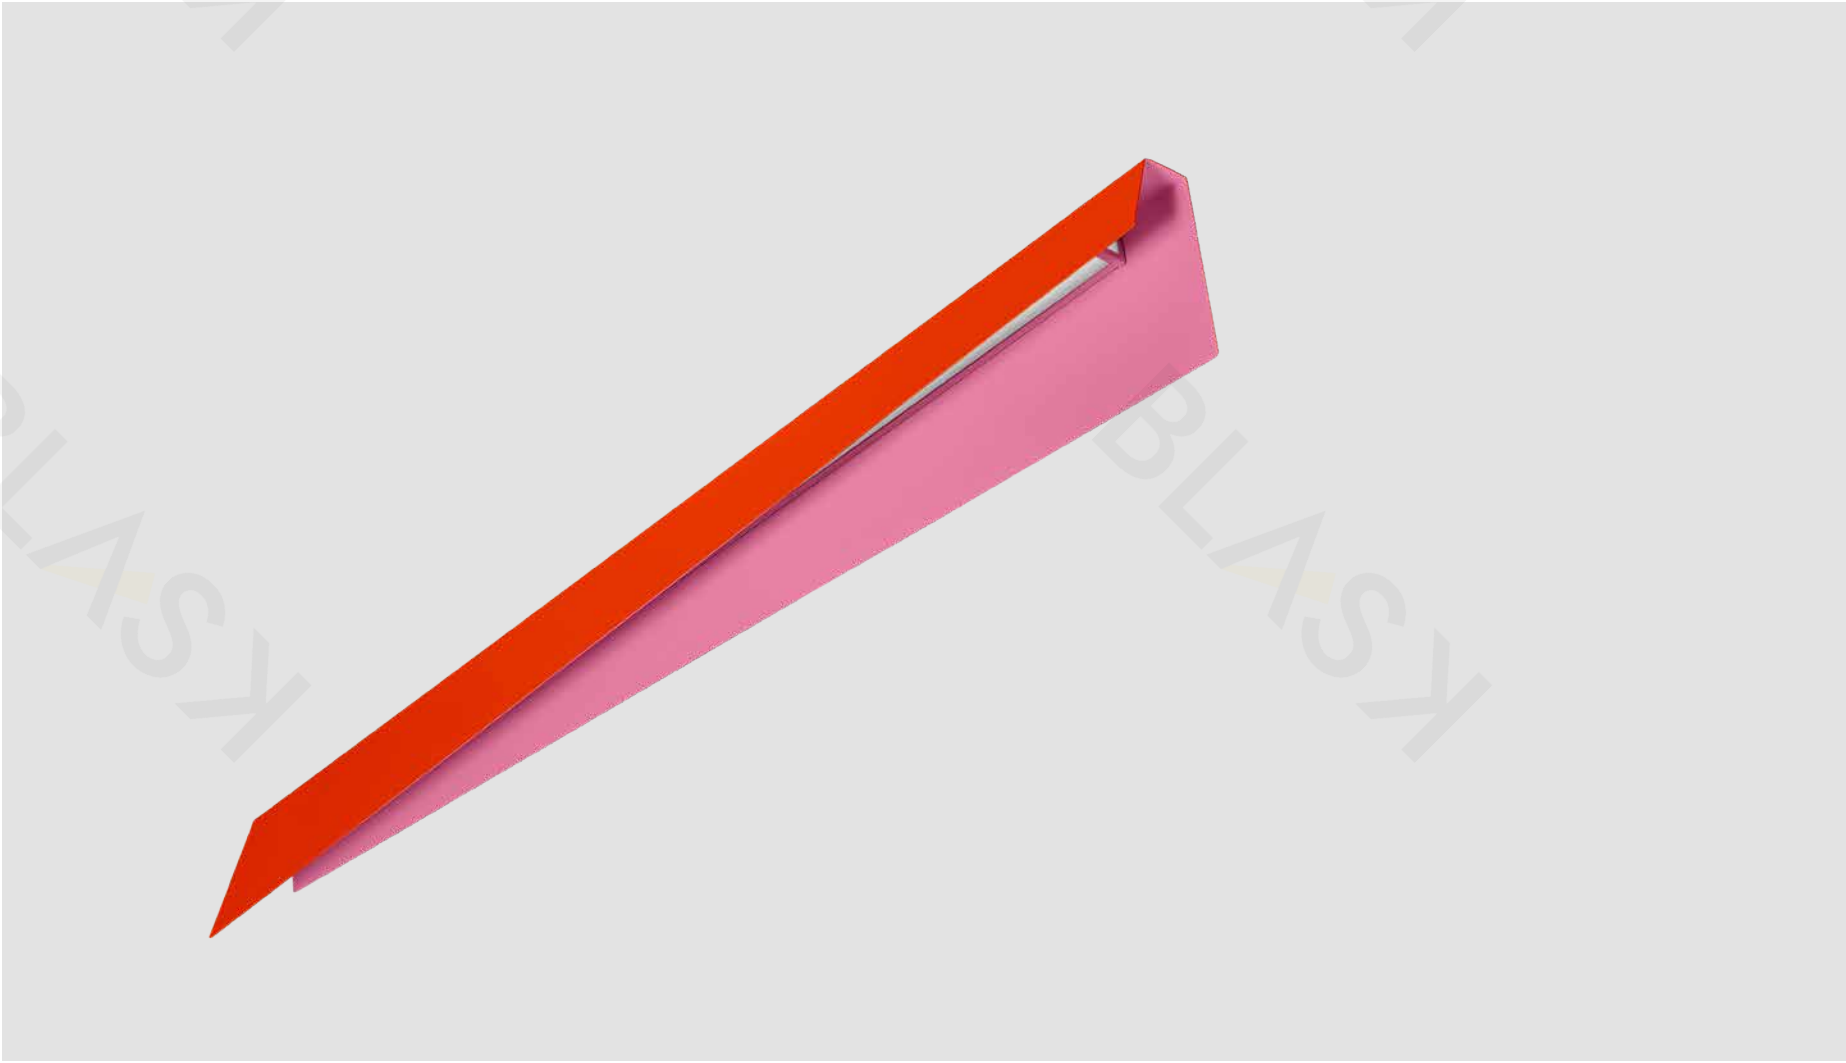

MSGIWL10003

Wall lamp

Light source:	LED module
Rated power [W]:	18 - 64
Luminous flux [lm]:	1100 - 5700
Colour temperature [K]:	2700, 3000, 4000
Mounting method:	surface-mounted, wall-mounted
Body material:	steel
Body colour:	any from the RAL palette
Dimensions [mm]:	128/701/106, 128/1261/106, 128/1541/70

MSGIFL10004

Free-standing version

Light source:	LED module
Rated power [W]:	23 - 44
Luminous flux [lm]:	1400 - 4500
Colour temperature [K]:	2700, 3000, 4000
Mounting method:	free standing
Body material:	steel
Body colour:	any from the RAL palette
Dimensions [mm]:	280/1246, 300/1807

