

ARCH.

LIGHT

VOL V

Mini Spotlight



SMALL

Embedded Mini Spotlight
Small opening and high power






Flexible adjustment of irradiation angle and more powerful function

STRETCHABLE ZOOM SPOTLIGHT


Small Cutout Retractable Spotlight

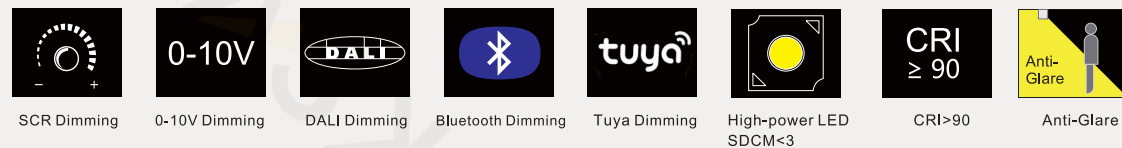



JHLSLI11001

Power	MAX 3W			
Voltage	3V			
Current	700mA			
Angle	15°	24°	36°	50°
Lumen	156LM	165LM	173LM	142LM
CRI	90			
IP	20			
Installation	Embedded			





JHLSLI11004

Power	MAX 3W			
Voltage	3V			
Current	700mA			
Angle	15°	24°	36°	50°
Lumen	156LM	165LM	173LM	142LM
CRI	90			
IP	20			
Installation	Embedded			




BLASX
LIGHTING

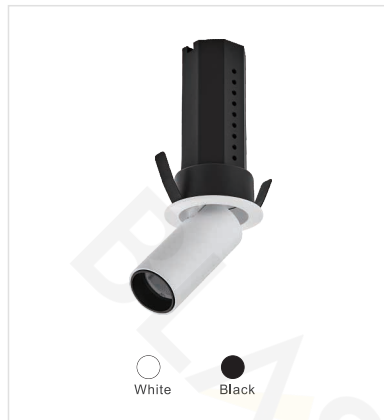


JHLSLI11002

Power	MAX 6W			
Voltage	36V			
Current	150mA			
Angle	18°	24°	36°	50°
Lumen	485LM	516LM	552LM	543LM
CRI	90			
IP	20			
Installation	Embedded			



JHLSLI11005

Power	MAX 6W			
Voltage	36V			
Current	150mA			
Angle	18°	24°	36°	50°
Lumen	485LM	516LM	552LM	543LM
CRI	90			
IP	20			
Installation	Embedded			





PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




JHLSLI11003

Power	MAX 8W			
Voltage	36V			
Current	200mA			
Angle	18°	24°	36°	50°
Lumen	760LM	776LM	779LM	721LM
CRI	90			
IP	20			
Installation	Embedded			

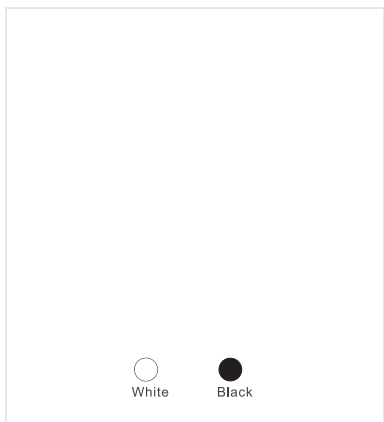

JHLSLI11006

Power	MAX 8W			
Voltage	36V			
Current	200mA			
Angle	18°	24°	36°	50°
Lumen	760LM	776LM	779LM	721LM
CRI	90			
IP	20			
Installation	Embedded			



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Deep Focal Length Anti-Glare Trim Design $UGR < 9$

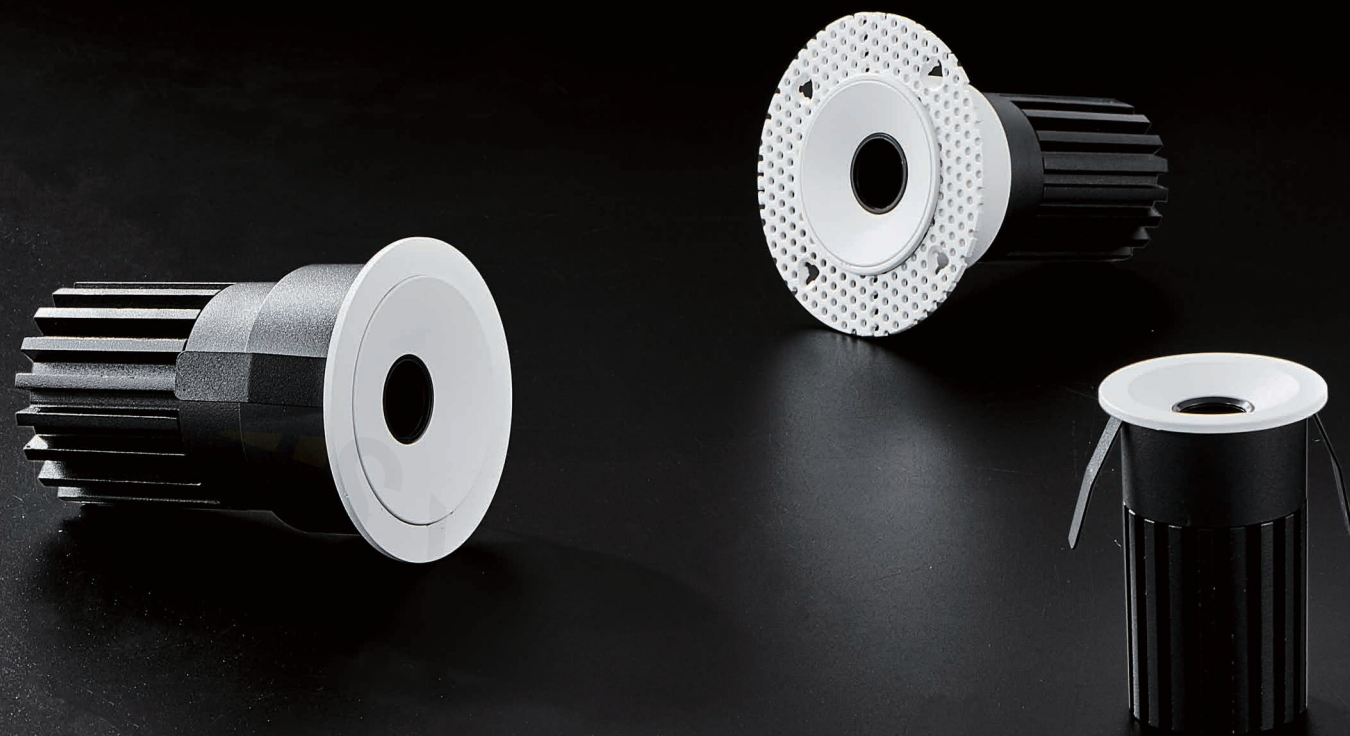

Best Solution to see Light from NoWhere

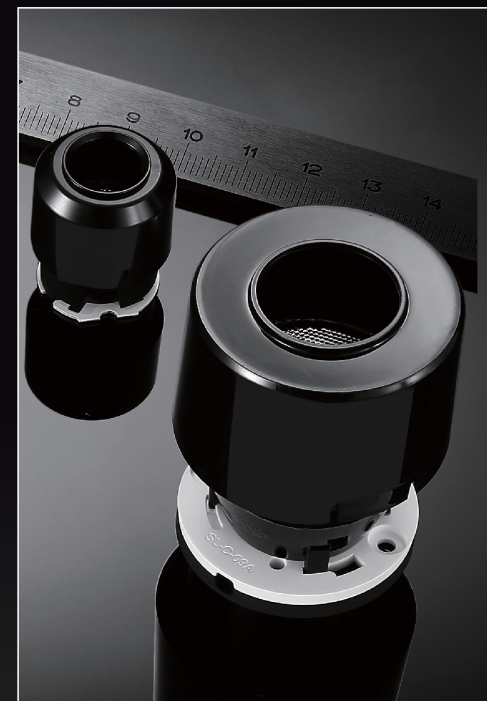

0-10V



tuya



CRI
 ≥ 90






JHLSLI11007

Power	MAX 3W
Voltage	AC 220~240V
Current	700mA
Angle	24° 36°
Lumen	135LM 150LM
CRI	90
IP	20
Installation	Embedded



bridgelux LUMINUS CREE OSRAM

2700K / 3000K / 3500K / 4000K / 5000K




JHLSLI11008

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	24° 36°
Lumen	365LM 400LM
CRI	90
IP	20
Installation	Embedded



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




JHLSLI11009

Power	MAX 10W
Voltage	AC 220~240V
Current	250mA
Angle	24° 36°
Lumen	455LM 513LM
CRI	90
IP	20
Installation	Embedded



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




JHLSLI11010

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	24° 36°
Lumen	365LM 400LM
CRI	90
IP	20
Installation	Embedded



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




JHLSLI11011

Power	MAX 10W
Voltage	AC 220~240V
Current	250mA
Angle	24° 36°
Lumen	455LM 513LM
CRI	90
IP	20
Installation	Embedded





PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




Angle



Mini small hole spotlights

Small lamp body with high power suitable for low and low ceiling suspension



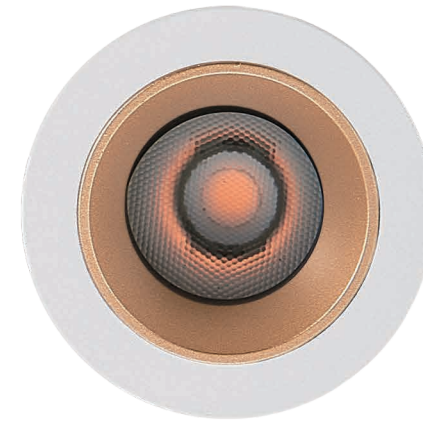

SMALL OPENING

Mix and match the fashion atmosphere to Stella
Their color confrontation and collision can
attack the front line of style
express the meaning
that is difficult to express



JHLSLI11012


Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	20°	30°	40°	50°
Lumen	576LM	632LM	635LM	592LM
CRI	90			
IP	20			
Installation	Embedded			



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



JHLSLI11013


Power	MAX 8W			
Voltage	36V			
Current	200mA			
Angle	18°	24°	36°	50°
Lumen	627LM	704LM	632LM	616LM
CRI	90			
IP	20			
Installation	Embedded			



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



JHLSLI11014



Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	18°	24°	36°	50°
Lumen	780LM	881LM	793LM	772LM
CRI	90			
IP	20			
Installation	Embedded			



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

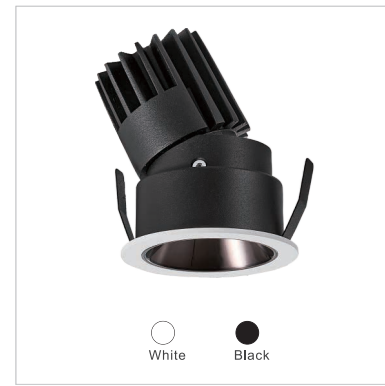

JHLSLI11015



Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	18°	24°	36°	50°
Lumen	623LM	709LM	645LM	616LM
CRI	90			
IP	20			
Installation	Embedded			



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

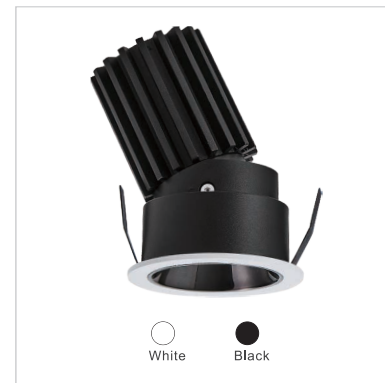

JHLSLI11016


Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	18°	24°	36°	50°
Lumen	924LM	1056LM	984LM	923LM
CRI	90			
IP	20			
Installation	Embedded			







Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K




Angle





JHLSLI11017

Power	MAX 8W			
Voltage	36V			
Current	200mA			
Angle	18°	24°	36°	50°
Lumen	627LM	704LM	632LM	616LM
CRI	90			
IP	20			
Installation	Embedded			



90°

355°



White
Black







Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

Angle



JHLSLI11018

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	18°	24°	36°	50°
Lumen	780LM	881LM	793LM	772LM
CRI	90			
IP	20			
Installation	Embedded			



90°

355°







White
Black



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

Angle



JHLSLI11019

Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	18°	24°	36°	50°
Lumen	623LM	709LM	645LM	616LM
CRI	90			
IP	20			
Installation	Embedded			




90°

355°



White
Black







Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

Angle



JHLSLI11020

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	18°	24°	36°	50°
Lumen	924LM	1056LM	984LM	923LM
CRI	90			
IP	20			
Installation	Embedded			



90°


355°



White
Black







Reflector





PHILIPS LUMINUS CITIZEN CREE® bridgelux®

2700K / 3000K / 3500K / 4000K / 5000K

Angle



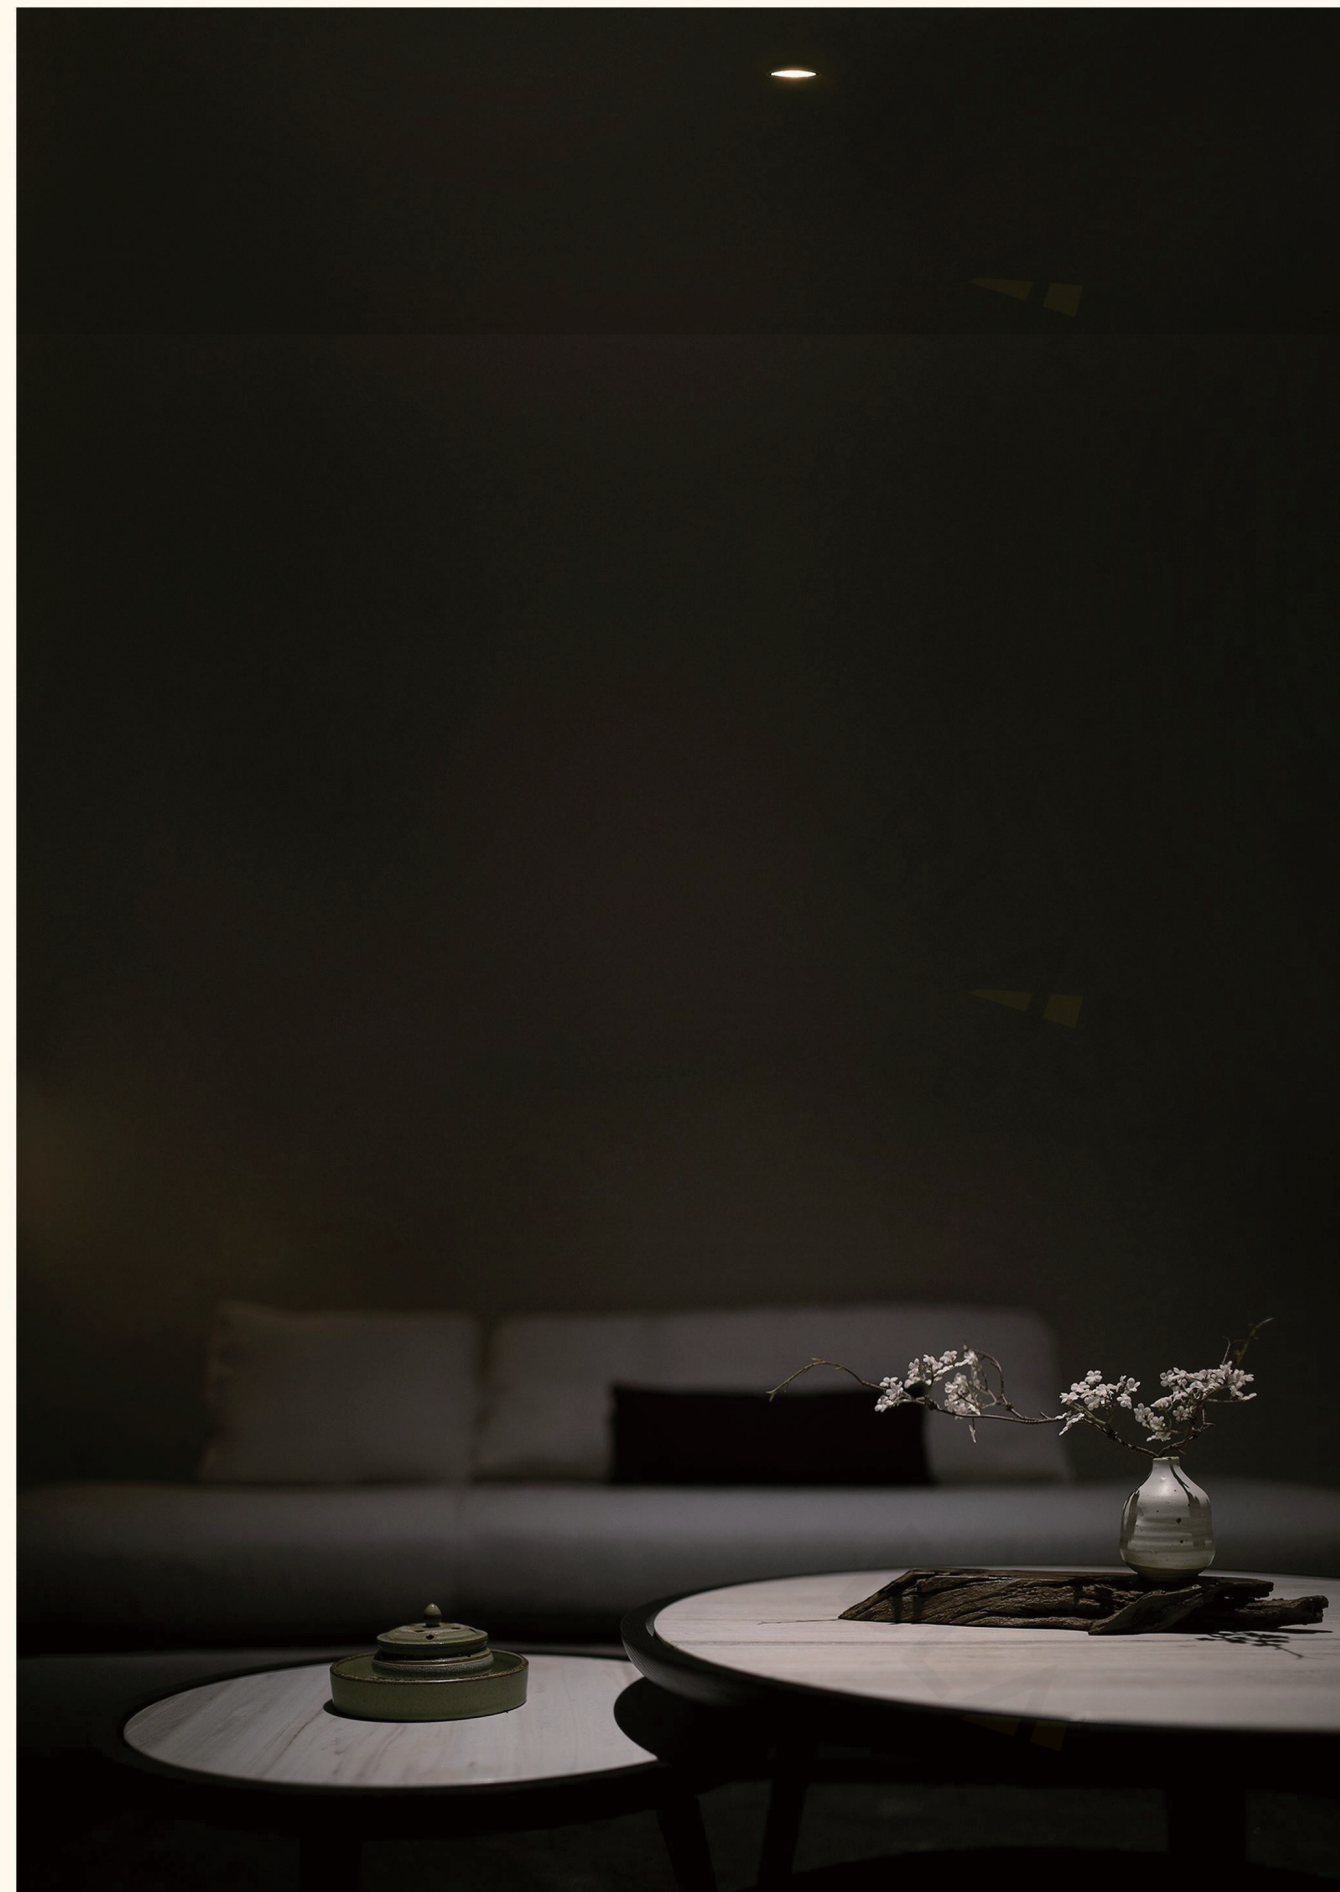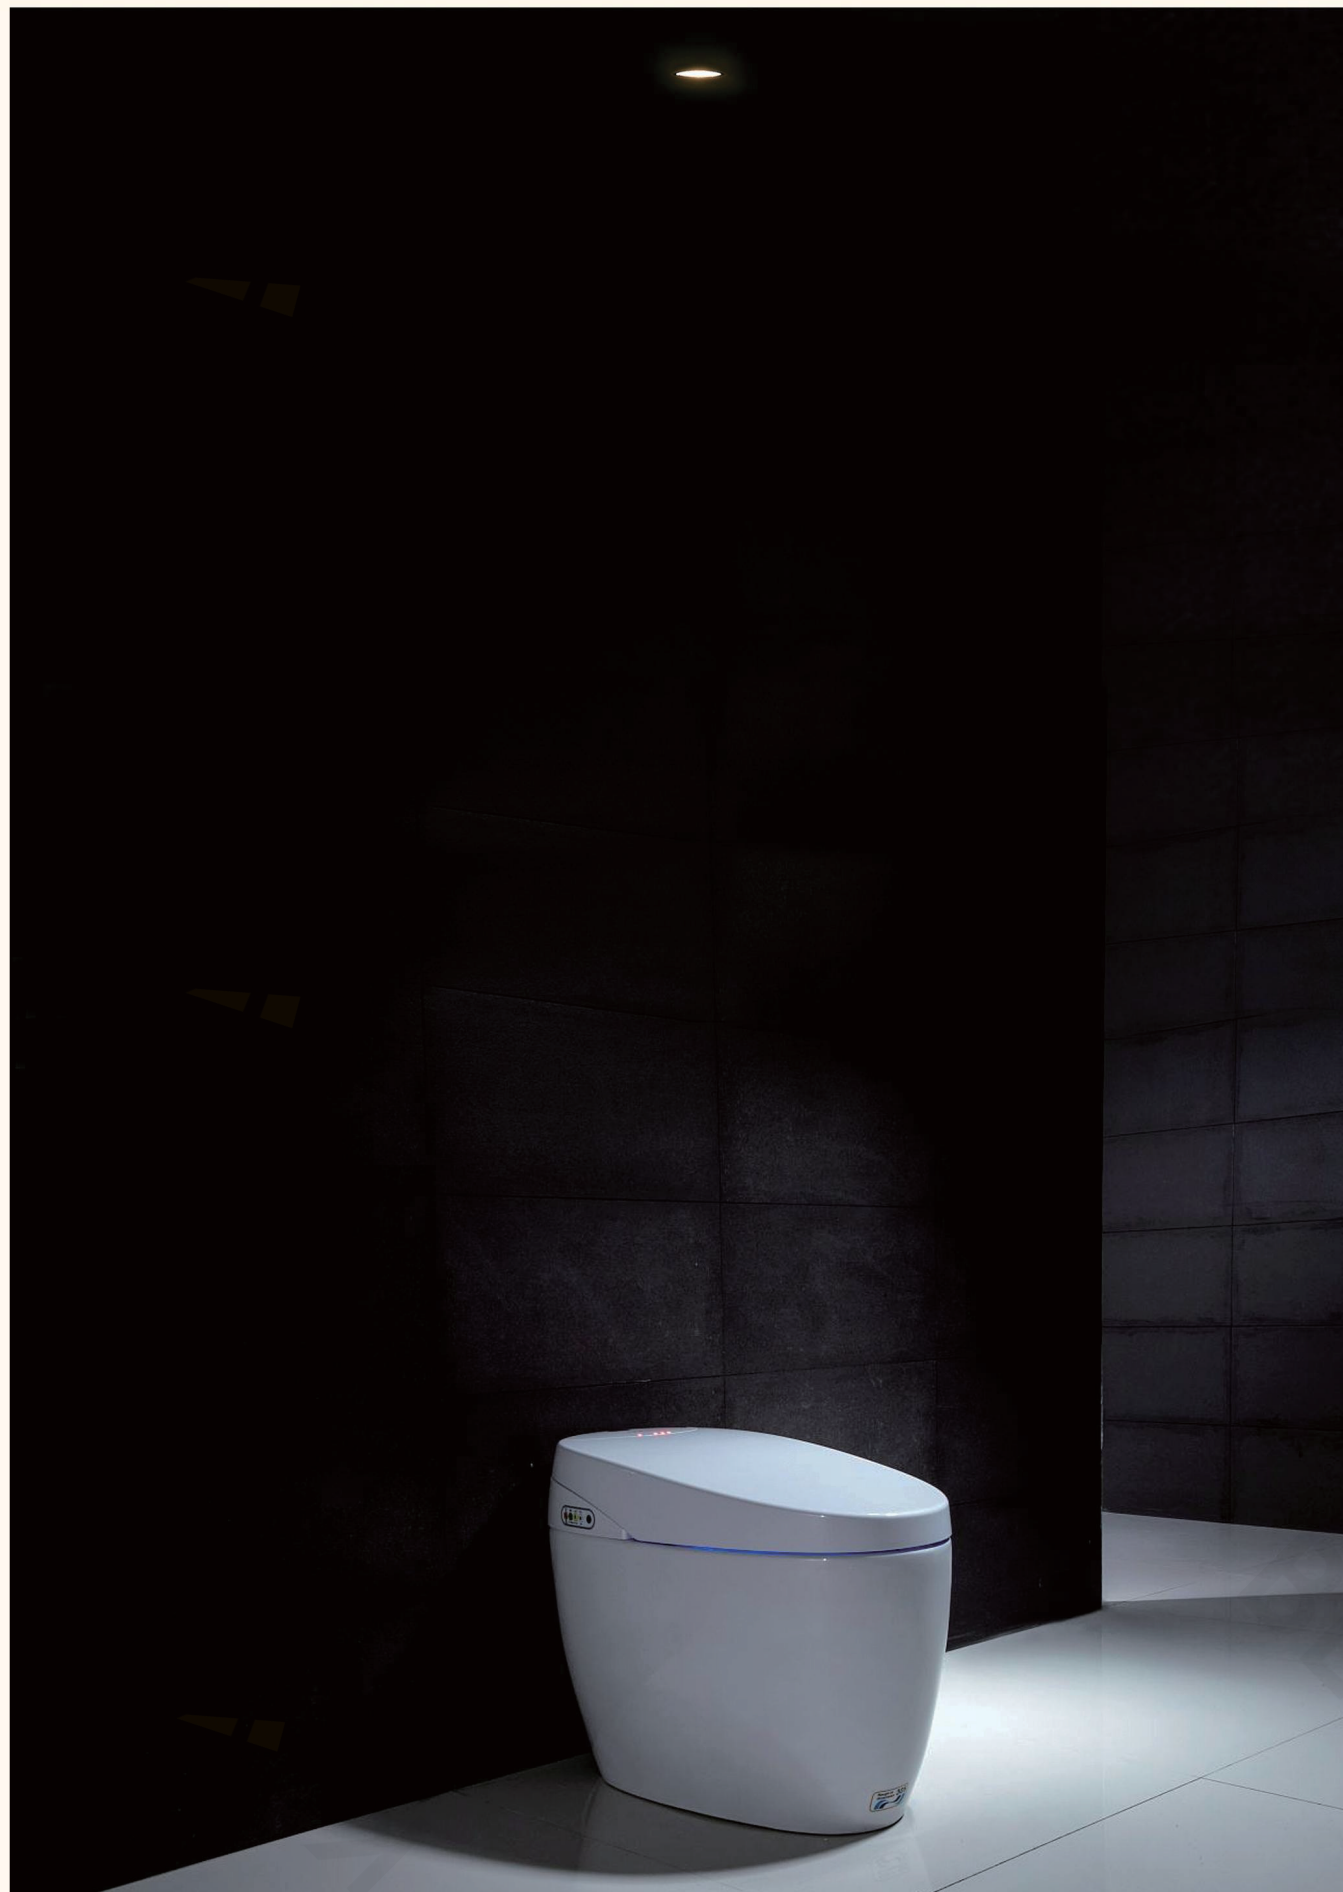




Different optical accessories present different optical effects

SMALL HOLE SPOTLIGHTS




SCR Dimming


0-10V Dimming


DALI Dimming


Bluetooth Dimming


Tuya Dimming


High-power LED
SDGM<3



CRI>90


Anti-Glare




JHLSLI11021

Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	18°	24°	36°	50°
Lumen	623LM	709LM	645LM	616LM
CRI	90			
IP	20			
Installation	Embedded			




JHLSLI11022

Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	18°	24°	36°	50°
Lumen	623LM	709LM	645LM	616LM
CRI	90			
IP	20			
Installation	Embedded			



JHLSLI11023





Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	18°	24°	36°	50°
Lumen	924LM	1056LM	984LM	923LM
CRI	90			
IP	20			
Installation	Embedded			




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



Angle






- 
SCR Dimming
- 
0-10V Dimming
- 
DALI Dimming
- 
Bluetooth Dimming
- 
Tuya Dimming
- 
High-power LED
SDCM<3
- 
CRI>90
- 
Anti-Glare



JHLSLI11024

Power	MAX 3W
Voltage	3V
Current	700mA
Angle	24°
Lumen	136LM
CRI	90/98
IP	20
Installation	Embedded



bridgelux


LUMINUS

CREE

OSRAM


2700K / 3000K / 3500K / 4000K / 5000K

Angle



JHLSLI11025

Power	MAX 3W
Voltage	3V
Current	700mA
Angle	24°
Lumen	152LM
CRI	90
IP	20
Installation	Embedded



bridgelux


LUMINUS

CREE

OSRAM

2700K / 3000K / 3500K / 4000K / 5000K

Angle






- 
SCR Dimming
- 
0-10V Dimming
- 
DALI Dimming
- 
Bluetooth Dimming
- 
Tuya Dimming
- 
High-power LED
SDCM<3
- 
CRI>90
- 
Anti-Glare






JHLSLI11026

Power	MAX 3W		
Voltage	3V		
Current	700mA		
Angle	15°	24°	36°
Lumen	180LM	195LM	205LM
CRI	90		
IP	20		
Installation	Embedded		




LUMINUS CREE bridgelux OSRAM
2700K / 3000K / 3500K / 4000K / 5000K

Angle



JHLSLI11027

Power	MAX 3W		
Voltage	3V		
Current	700mA		
Angle	15°	24°	36°
Lumen	180LM	195LM	205LM
CRI	90		
IP	20		
Installation	Embedded		



LUMINUS CREE bridgelux OSRAM
2700K / 3000K / 3500K / 4000K / 5000K

Angle

