

# OUTDOOR

# LIGHT

VOL VII

**BLASK**  
LIGHTING

[WWW.BLASKLIGHTING.COM](http://WWW.BLASKLIGHTING.COM)





- Beam angle RL60°
- CRI 70
- Voltage 85V-265V
- CCT 2700K-6500K
- Chip size SMD3030
- Size 690x90x530mm

| Model             | Power | Chip qty |
|-------------------|-------|----------|
| <b>KAOGL68000</b> | 30W   | 112pcs   |
| <b>KAOGL68001</b> | 50W   | 112pcs   |
| <b>KAOGL68002</b> | 60W   | 112pcs   |
| <b>KAOGL68003</b> | 80W   | 112pcs   |





- Beam angle RL60°
- CRI 70
- Voltage 85V-265V
- CCT 2700K-6500K
- Chip size SMD3030
- Size 690x90x530mm

| Model             | Power | Chip qty |
|-------------------|-------|----------|
| <b>KAOGL68004</b> | 30W   | 112pcs   |
| <b>KAOGL68005</b> | 50W   | 112pcs   |
| <b>KAOGL68006</b> | 60W   | 112pcs   |
| <b>KAOGL68007</b> | 80W   | 112pcs   |







- Beam angle RL60°
- CRI 70
- Voltage 85V-265V
- CCT 2700K-6500K
- Chip size SMD3030
- Size 690x90x530mm

| Model             | Power | Chip qty |
|-------------------|-------|----------|
| <b>KAOGL68008</b> | 30W   | 112pcs   |
| <b>KAOGL68009</b> | 50W   | 112pcs   |
| <b>KAOGL68010</b> | 60W   | 112pcs   |
| <b>KAOGL68011</b> | 80W   | 112pcs   |








- Beam angle RL60°
- CRI 70
- Voltage 85V-265V
- CCT 2700K-6500K
- Chip size SMD3030
- Size 690x90x530mm

| Model             | Power | Chip qty |
|-------------------|-------|----------|
| <b>KAOGL68012</b> | 60W   | 224pcs   |
| <b>KAOGL68013</b> | 100W  | 224pcs   |
| <b>KAOGL68014</b> | 120W  | 224pcs   |
| <b>KAOGL68015</b> | 160W  | 224pcs   |

IP  
65

MW  
MEAN WELL  
PHILIPS  
LUMILED

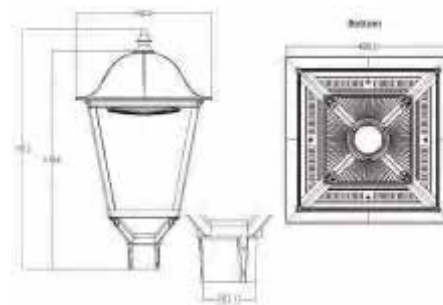


Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



IK08





LED

| Model       | Power | Size          | Chip qty | Chip Size | Lumen   | Voltage    | Beam Angle | CCT        | CRI |
|-------------|-------|---------------|----------|-----------|---------|------------|------------|------------|-----|
| KAOG L68016 | 80W   | 400x400x600mm | 140      | SMD 3030  | 10400lm | AC100-265V | 120°       | 2800-6500K | ≥80 |

BLASK  
MEAN WELL LIGHTING  
PHILIPS  
LUMILED

IP  
65

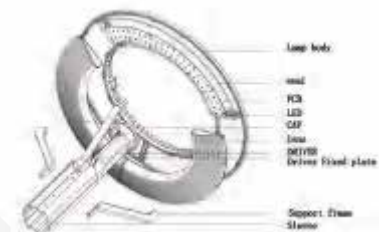

Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



IK08



LED

| Model       | Power | Size       | Chip qty | Chip Size | Lumen   | Voltage    | Beam Angle | CCT        | CRI |
|-------------|-------|------------|----------|-----------|---------|------------|------------|------------|-----|
| KAOG L68017 | 100W  | Ø600x370mm | 168      | SMD 3030  | 13000lm | AC100-265V | 120°       | 2800-6500K | ≥80 |



IP65

CE

IK08

LED

| Model             | Power | Size      | Chip qty | Chip size   | Lumen    | Voltage   | Beam Angle   | CCT        | CRI |
|-------------------|-------|-----------|----------|-------------|----------|-----------|--------------|------------|-----|
| <b>KAOGL68018</b> | 100W  | 420x547mm | 192pcs   | PHILIPS3030 | 15,000lm | AC85-265V | 60°/90°/120° | 2700-6500K | >70 |
| <b>KAOGL68019</b> | 100W  | 420x551mm | 192pcs   | PHILIPS3030 | 15,000lm | AC85-265V | 60°/90°/120° | 2700-6500K | >70 |
| <b>KAOGL68020</b> | 100W  | 420x578mm | 192pcs   | PHILIPS3030 | 15,000lm | AC85-265V | 60°/90°/120° | 2700-6500K | >70 |



IP65

CE

IK08


LED

| Model             | Power | Size       | Chip qty | Chip size | Lumen   | Voltage   | Beam Angle | CCT        | CRI |
|-------------------|-------|------------|----------|-----------|---------|-----------|------------|------------|-----|
| <b>KAOGL68021</b> | 60W   | Ø520x278mm | 70pcs    | SMD3030   | 7,800lm | AC85-265V | 120°       | 2700-6500K | >80 |

IP  
65

MW  
MEAN WELL

PHILIPS  
LUMILED



Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



CE




IK08



LED

| Model      | Power | Size      | Chip qty | Chip Size | Lumen  | Voltage    | Beam Angle | CCT        | CRI |
|------------|-------|-----------|----------|-----------|--------|------------|------------|------------|-----|
| KA0GL68022 | 60W   | 515x460mm | 72       | SMD 3030  | 7800lm | AC100-265V | 120°       | 2800-6500K | ≥80 |

BLASK  
G H TING  
MW  
MEAN WELL  
PHILIPS  
LUMILED



Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



CE



IK08






LED

| Model      | Power | Size      | Chip qty | Chip Size | Lumen  | Voltage    | Beam Angle | CCT        | CRI |
|------------|-------|-----------|----------|-----------|--------|------------|------------|------------|-----|
| KA0GL68023 | 60W   | 515x460mm | 72       | SMD 3030  | 7800lm | AC100-265V | 120°       | 2800-6500K | ≥80 |

IP  
65

MW  
MEAN WELL

PHILIPS  
LUMILED

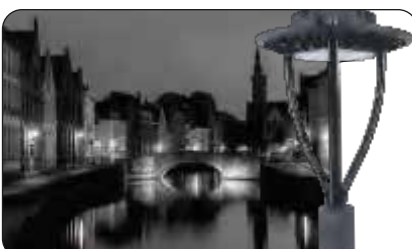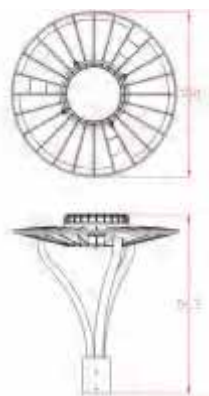


Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



CE






IK08



LED

| Model             | Power | Size       | Chip qty | Chip Size | Lumen   | Voltage    | Beam Angle | CCT        | CRI |
|-------------------|-------|------------|----------|-----------|---------|------------|------------|------------|-----|
| <b>KAOGL68024</b> | 50W   | Ø380x563mm | 60       | SMD 3030  | 5000lm  | AC100-265V | 120°       | 2800-6500K | ≥80 |
| <b>KAOGL68025</b> | 100W  | Ø380x563mm | 120      | SMD 3030  | 10000lm | AC100-265V | 120°       | 2800-6500K | ≥80 |
| <b>KAOGL68026</b> | 150W  | Ø380x563mm | 150      | SMD 3030  | 15000lm | AC100-265V | 120°       | 2800-6500K | ≥80 |

BLASK  
65 LIGHTING  
MEAN WELL  
PHILIPS  
LUMILED




Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



CE




IK08



LED

| Model             | Power | Size          | Chip qty | Chip Size | Lumen   | Voltage    | Beam Angle | CCT        | CRI |
|-------------------|-------|---------------|----------|-----------|---------|------------|------------|------------|-----|
| <b>KAOGL68027</b> | 80W   | 474x416x390mm | 96       | SMD 3030  | 10400lm | AC100-265V | 120°       | 2800-6500K | ≥80 |
| <b>KAOGL68028</b> | 150W  | 580x522x390mm | 208      | SMD 3030  | 19500lm | AC100-265V | 120°       | 2800-6500K | ≥80 |



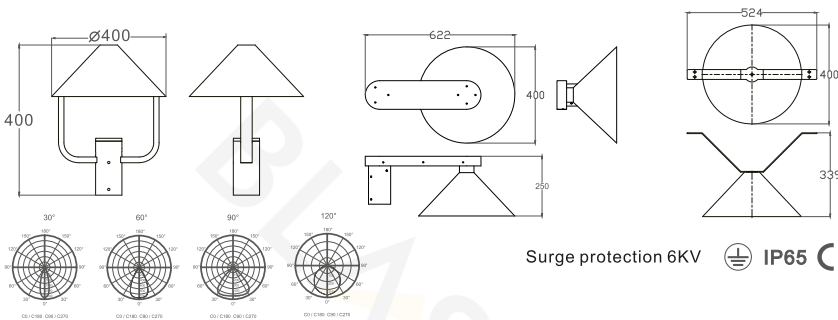

Surge protection 6KV IP65 CE IK08 LED

| Model      | Power | Size          | Chip qty | Chip size   | Lumen   | Voltage    | Baem Angle    | CCT        | CRI |
|------------|-------|---------------|----------|-------------|---------|------------|---------------|------------|-----|
| KAOGL68029 | 50W   | 400*400*525MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | >70 |
| KAOGL68030 | 50W   | 622*400*250MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | >70 |
| KAOGL68031 | 50W   | 524*400*339MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | >70 |









| Model      | Power | Size          | Chip qty | Chip size   | Lumen   | Voltage    | Beam Angle    | CCT        | CRI |
|------------|-------|---------------|----------|-------------|---------|------------|---------------|------------|-----|
| KAOGL68032 | 50W   | 400*400*450MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | >70 |
| KAOGL68033 | 50W   | 622*400*171MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | 174 |
| KAOGL68034 | 50W   | 521*400*299MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | >70 |



| Model      | Power | Size          | Chip qty | Chip size   | Lumen   | Voltage    | Baem Angle    | CCT        | CRI  |
|------------|-------|---------------|----------|-------------|---------|------------|---------------|------------|------|
| KAOGL68035 | 50W   | 400*400*450MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | 1570 |
| KAOGL68036 | 50W   | 622*400*171MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | >70  |
| KAOGL68037 | 50W   | 524*400*398MM | 56pcs    | Philips3030 | 130lm/w | AC100-265V | 30°60°90°120° | 2700-6500K | >70  |

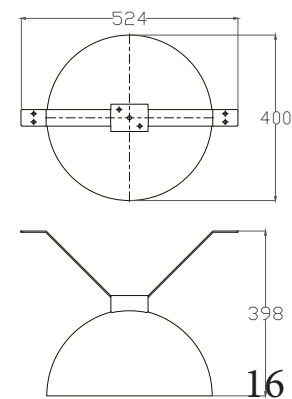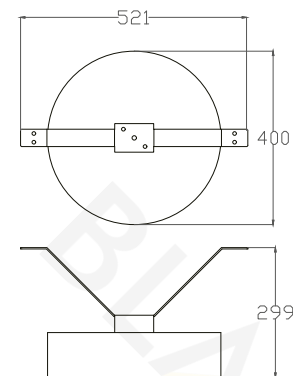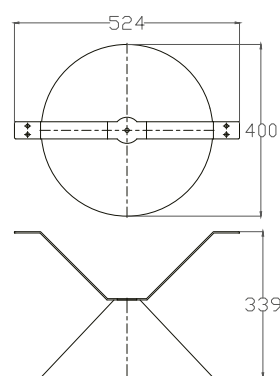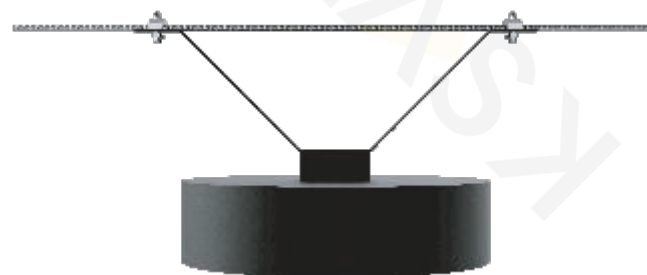


STREET POLE

Slip-joint version



PRODUCT PARAMETERS


| Specification |                 | Height | Package size |
|---------------|-----------------|--------|--------------|
| Top diameter  | Φ76             | 2.5m   | 113x24x23cm  |
| Bottom pole   | Φ114            | 3m     |              |
| Base Flange   | 250*250         | 4m     |              |
| Material      | galvanized pipe | 5m     |              |
| Anchor Bolt   | 160*160*14*300H |        |              |

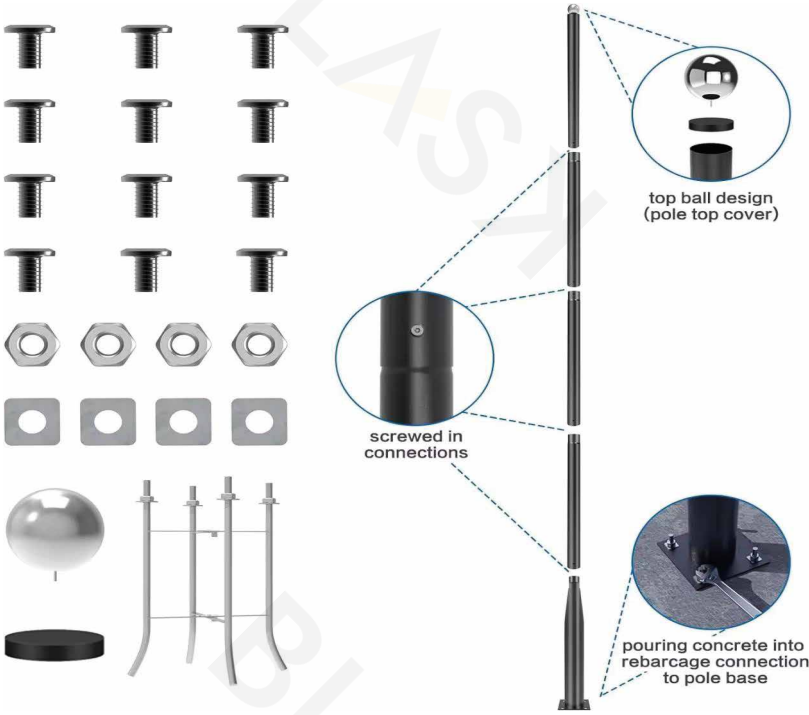

INSTALLATION STEPS



Installation Steps

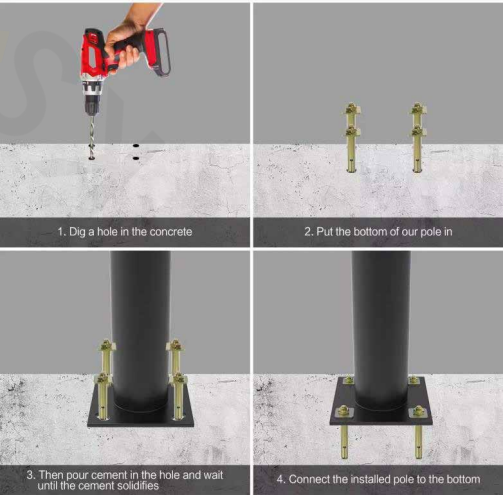




STREET POLE


Single piece version



INSTALLATION STEPS

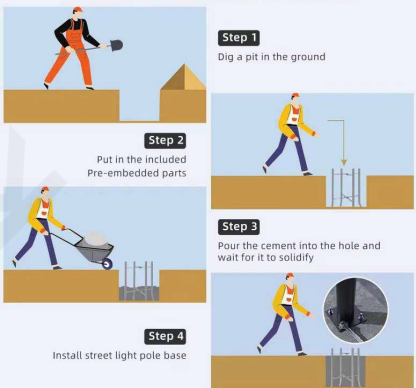

Installation Steps

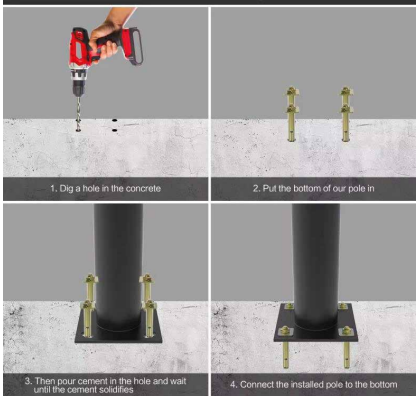


KAOSL68038

PRODUCT PARAMETERS


| Specification |                 | Height | Package size |
|---------------|-----------------|--------|--------------|
| Top diameter  | Φ 76mm          | 2. 5m  |              |
| Bottom pole   | Φ 114mm         | 3m     |              |
| Base Flange   | 250*250 mm      | 4m     |              |
| Material      | galvanized pipe | 5m     |              |
| Anchor Bolt   | 160*160*14*300H |        |              |

STREET POLE


Single piece straight version

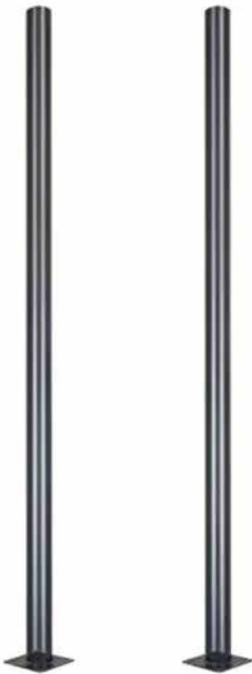

INSTALLATION STEPS

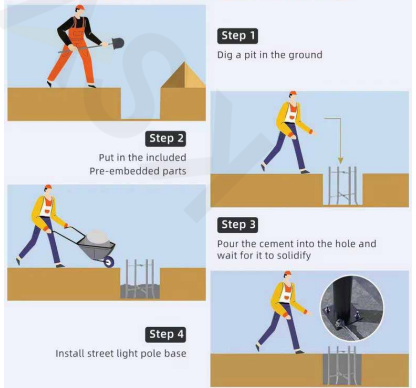

Installation Steps

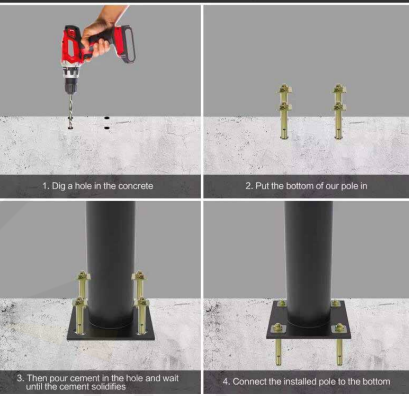

KAOSL68039

PRODUCT PARAMETERS

| Specification |                 | Height         | Package size |
|---------------|-----------------|----------------|--------------|
| diameter      | Φ 76            | 2. 5m/3m/4m/5m |              |
| Base Flange   | 250*250 mm      |                |              |
| Material      | galvanized pipe |                |              |
| Anchor Bolt   | 160*160*14*300H |                |              |