


OUTDOOR

LIGHT


VOL IV

Garden Light

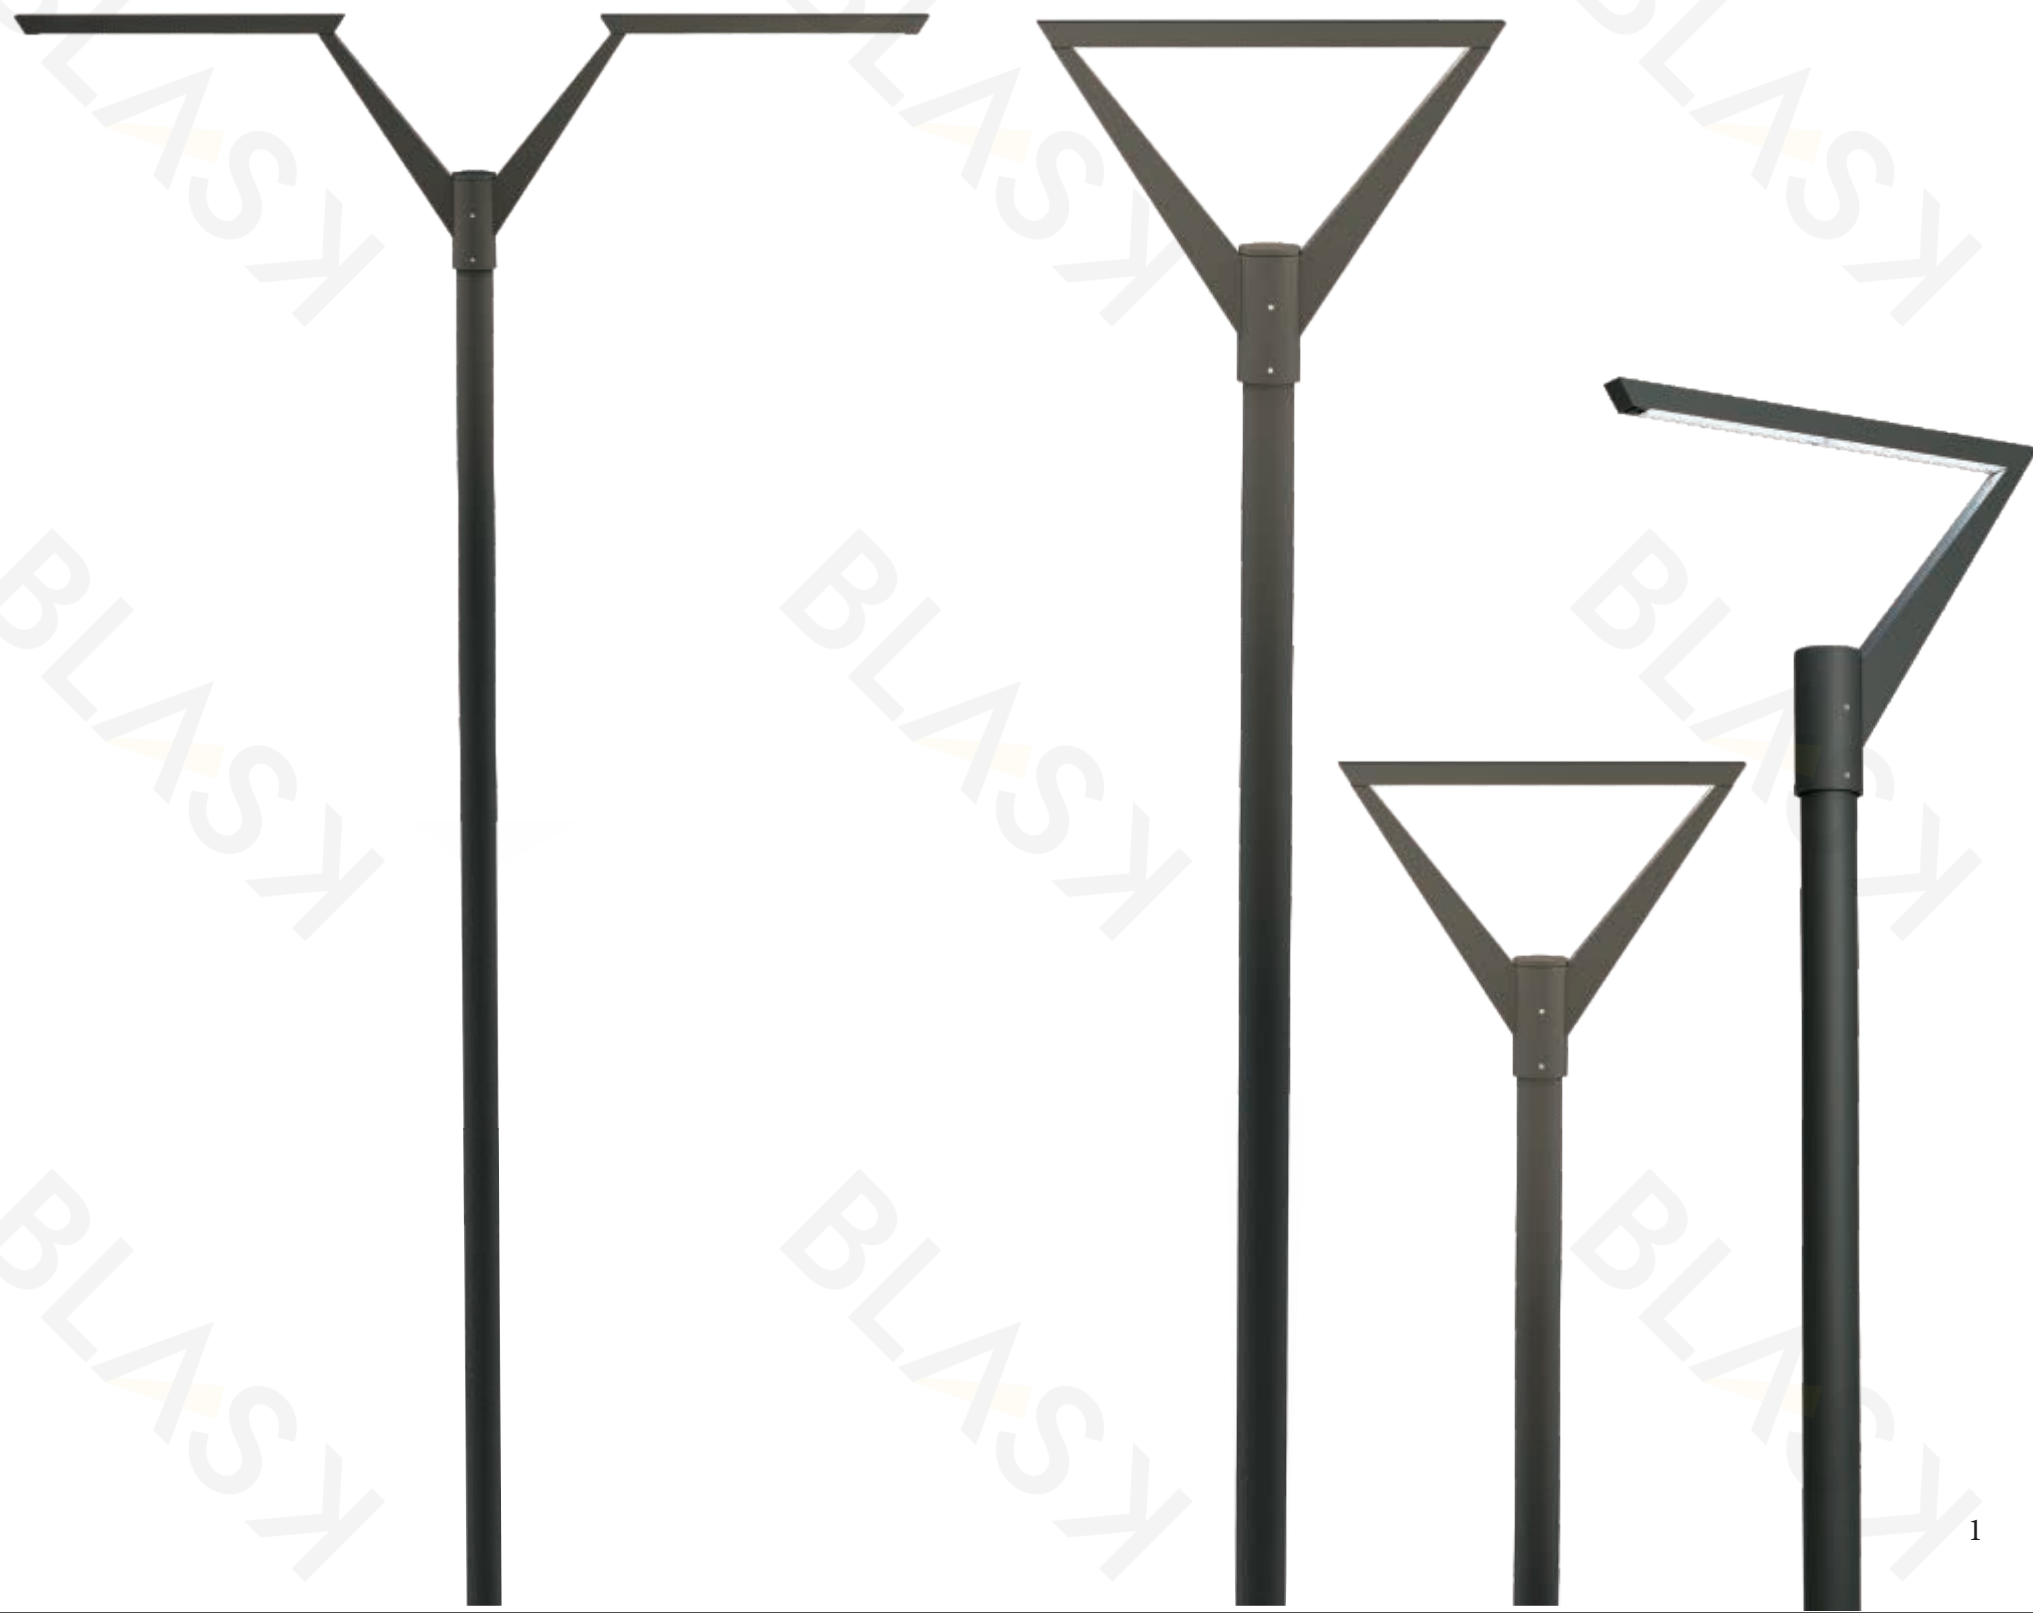



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66001	60W	1040x90x530mm	112pcs	SMD3030	6,000lm	AC85-265V	120°	2700-6500K	>70
KHGLO66002	120W	1950x243x120mm	224pcs	SMD3030	12,000lm	AC85-265V	120°	2700-6500K	>70

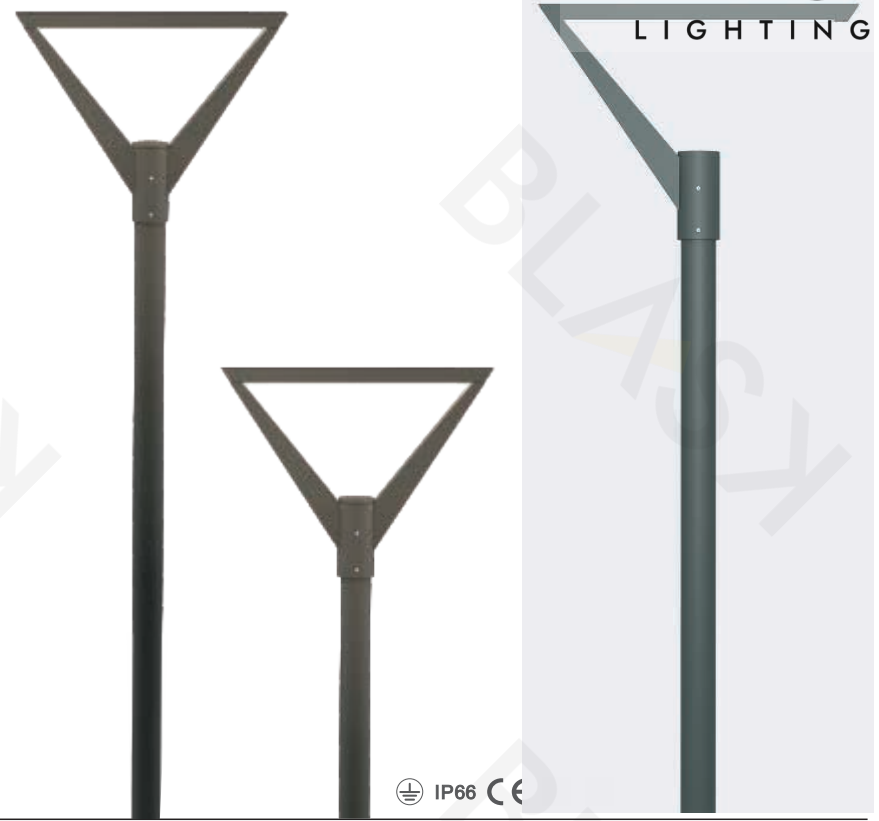

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66004	60W	690x90x530mm	112pcs	SMD2835	7,800lm	AC85-265V	120°	2700-6500K	>70

wallwasher light



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66003	60W	680x82x124MM	112pcs	SMD3030	6,000lm	AC85-265V	120°	2700-6500K	>70

linear light




Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66005	60W	680x40x40mm	112pcs	SMD3030	6,000lm	AC85-265V	120°	2700-6500K	>70



IP66 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66004	60W	690x90x530mm	112pcs	SMD2835	7,800lm	AC85-265V	120°	2700-6500K	>70




IP66 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66004	60W	690x90x530mm	112pcs	SMD2835	7,800lm	AC85-265V	120°	2700-6500K	>70

MW
MEAN WELL
PHILIPS
5 Years
Warranty

MW
MEAN WELL
PHILIPS
5 Years
Warranty

BLASK
LIGHTING

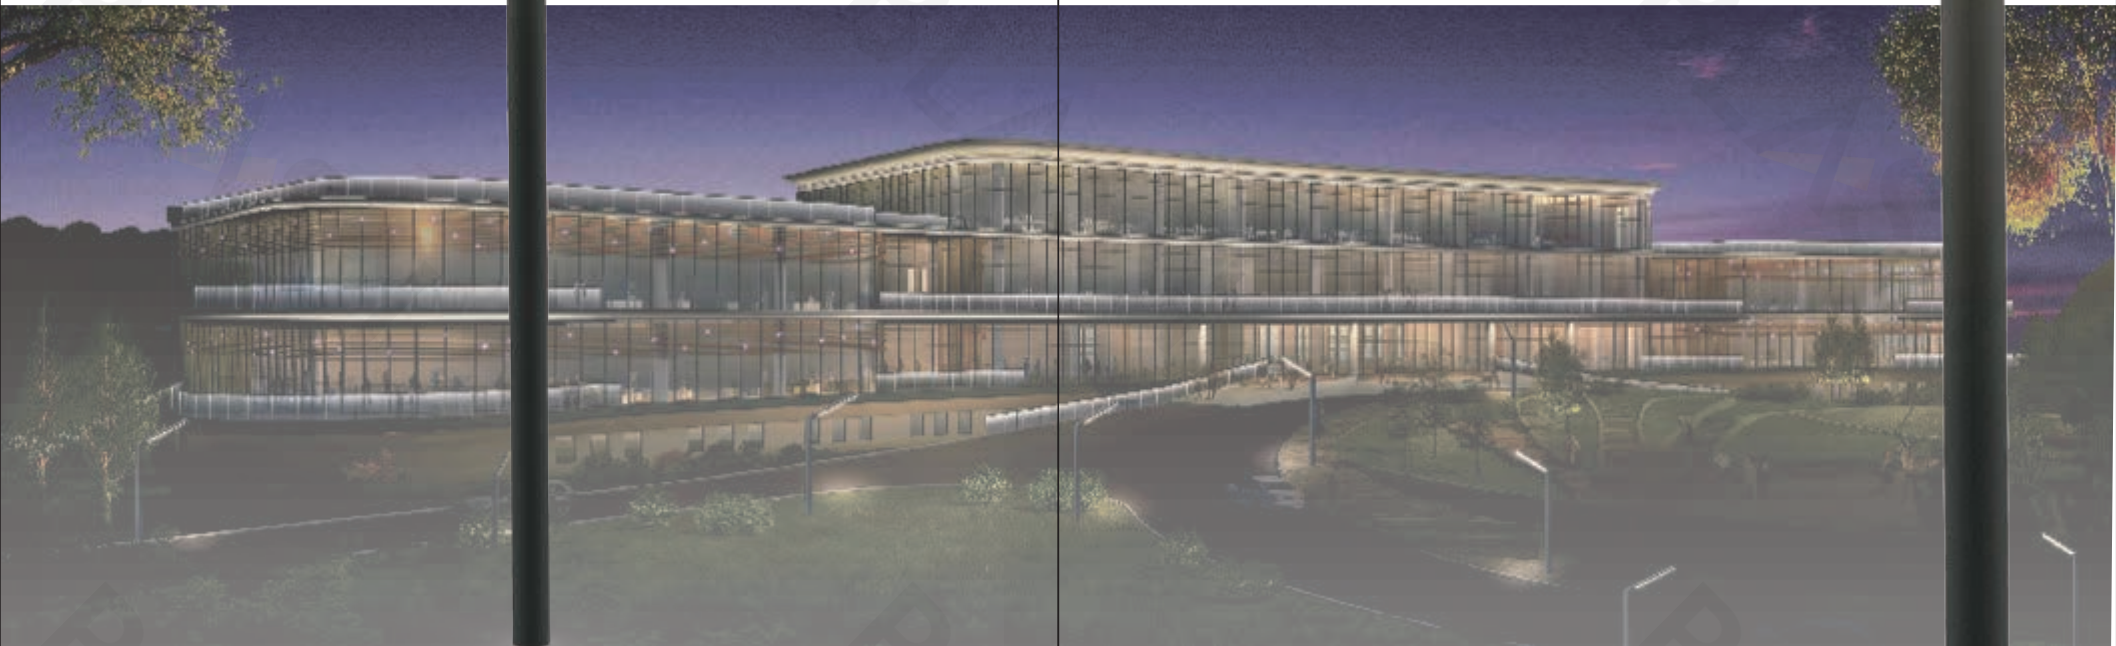

Windproof



IP65 Waterproof



Lighting protection



IP65



CE



IK08



LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT
KHGLO66002	120W	1950x243x120mm	224pcs	SMD3030	12,000lm	AC85-265V	120°	2700-6500K



Windproof



IP65 Waterproof



Lighting protection



IP65



CE



IK08



LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT
KHGLO66001	60W	1040x90x530mm	112pcs	SMD3030	6,000lm	AC85-265V	120°	2700-6500K



MW
MEAN WELL
PHILIPS
5 Years
Warranty

BLASK
LIGHTING

wallwasher light



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66003	60W	680x82x124MM	112pcs	SMD3030	6,000lm	AC85-265V	120°	2700-6500K	>70



MW
MEAN WELL
PHILIPS
5 Years
Warranty

BLASK
LIGHTING

Linear light





IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66005	60W	680x40x40mm	112pcs	SMD3030	6,000lm	AC85-265V	120°	2700-6500K	>70

IP
65

MW
MEAN WELL
PHILIPS
LUMILED

BLASK
MEAN WELL
PHILIPS
LUMILED
LIGHTING

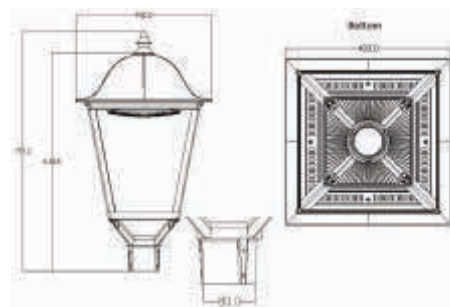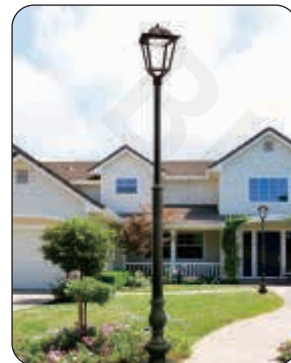


Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65






IK08



LED

Model	Power	Size	Chip qty	Chip Size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66006	80W	400x400x600mm	140	SMD 3030	10400lm	AC100-265V	120°	2800-6500K	≥80

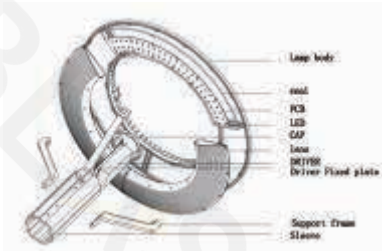


Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



IK08



LED

Model	Power	Size	Chip qty	Chip Size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66007	100W	Ø600x370mm	168	SMD 3030	13000lm	AC100-265V	120°	2800-6500K	≥80



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66008	100W	420x547mm	192pcs	PHILIPS3030	15,000lm	AC85-265V	60°/90°/120°	2700-6500K	>70
KHGLO66009	100W	420x551mm	192pcs	PHILIPS3030	15,000lm	AC85-265V	60°/90°/120°	2700-6500K	>70
KHGLO66010	100W	420x578mm	192pcs	PHILIPS3030	15,000lm	AC85-265V	60°/90°/120°	2700-6500K	>70




Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66011	60W	Ø520x278mm	70pcs	SMD3030	7,800lm	AC85-265V	120°	2700-6500K	>80

IP
65

MW
MEAN WELL

PHILIPS
LUMILED

BLASK
LIGHTING
MEAN WELL
PHILIPS
LUMILED



Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



CE




IK08



LED

Model	Power	Size	Chip qty	Chip Size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66012	60W	515x460mm	72	SMD 3030	7800lm	AC100-265V	120°	2800-6500K	≥80



Windproof



IP65 Waterproof



Lighting protection



Surge protection 6KV



IP65



CE




IK08



LED


Model	Power	Size	Chip qty	Chip Size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66013	60W	515x460mm	72	SMD 3030	7800lm	AC100-265V	120°	2800-6500K	≥80

STADIUM LIGHT

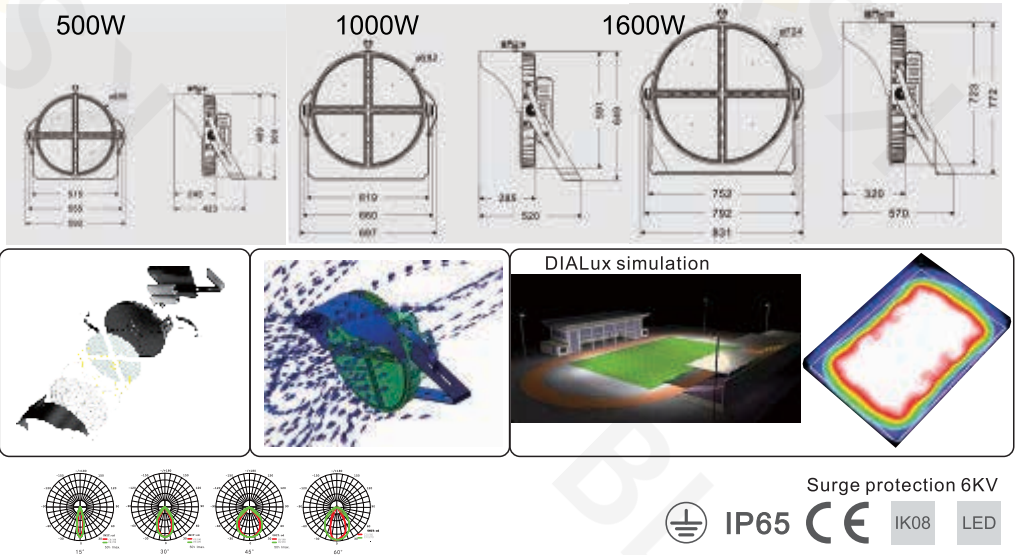

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGL066014	500W	592*509*423mm	960	PHILIPS LUMILEDS	75,000lm	AC85-265V	15°/30°/45°/60°	2800-6500K	>80 3030
KHGL066015	1000W	697*649*520mm	1632	PHILIPS LUMILEDS	150,000lm	AC85-265V	15°/30°/45°/60°	2800-6500K	>80 3030
KHGL066016	1600W	831*772*570mm	2456	PHILIPS LUMILEDS	240,000lm	AC85-265V	15°/30°/45°/60°	2800-6500K	>80 3030



MW
MEANWELL
PHILIPS
5 Years
Warranty
150lm/W



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66017	200W	184.5*372.9*120mm	336pcs	PHILIPS LUMILEDS 3030	30000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KHGLO66018	400W	369.5*372.9*120mm	672pcs	PHILIPS LUMILEDS 3030	60000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KHGLO66019	600W	554.5*372.9*139mm	1008pcs	PHILIPS LUMILEDS 3030	90000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KHGLO66020	800W	739.5*372.9*139mm	1344pcs	PHILIPS LUMILEDS 3030	120000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KHGLO66021	1000W	924.5*372.9*139mm	1680pcs	PHILIPS LUMILEDS 3030	150000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KHGLO66022	1200W	554.5*745.9*139mm	2016pcs	PHILIPS LUMILEDS 3030	180000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KHGLO66023	1600W	739.5*745.9*139mm	2688pcs	PHILIPS LUMILEDS 3030	240000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KHGLO66024	2000W	924.5*745.9*139mm	3360pcs	PHILIPS LUMILEDS 3030	300000lm	AC100-265V	15°/30°/60°	2700-6500K	>80




BLASX
MW
MEANWELL
PHILIPS
5 Years
Warranty
150lm/W

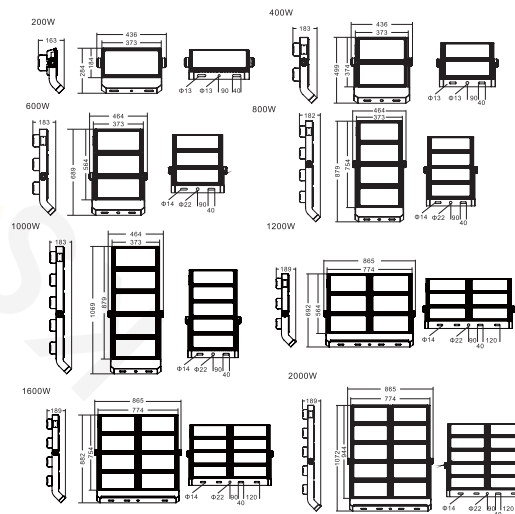

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66025	200W	436*284*183mm	240	3030	30000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66026	400W	436*499*183mm	480	3030	60000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66027	600W	464*689*183mm	720	3030	90000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66028	800W	464*879*183mm	960	3030	120000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66029	1000W	436*1069*183mm	1200	3030	150000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66030	1200W	865*692*189mm	1440	3030	180000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66031	1600W	865*882*189mm	1680	3030	210000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66032	2000W	865*1072*189mm	1920	3030	240000lm	AC100-265V	10°/25°/60°	2800-6500K	>80

MW
MEAN WELL
PHILIPS
5 Years
Warranty
150lm/W


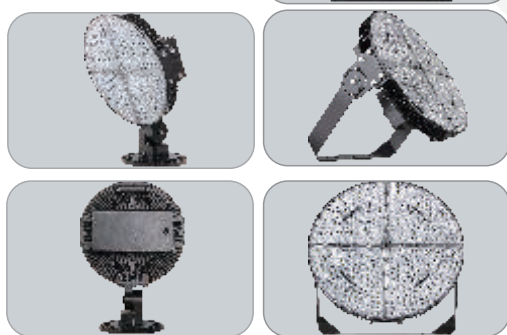
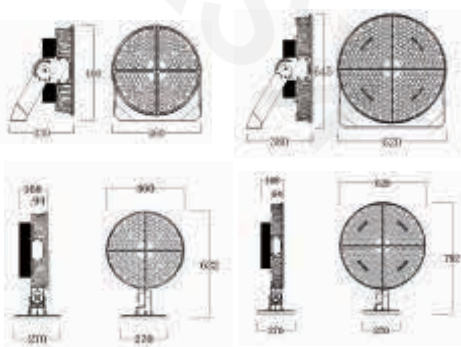


Surge protection 6KV



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66033	600W	632*460*270mm	240	5050	90000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66034	1200W	792*620*270mm	480	5050	180000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66035	600W	632*460*270mm	240	5050	90000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KHGLO66036	1200W	792*620*270mm	480	5050	180000lm	AC100-265V	10°/25°/60°	2800-6500K	>80

BLASX
L I CHILIPS
5 Years
Warranty
150lm/W

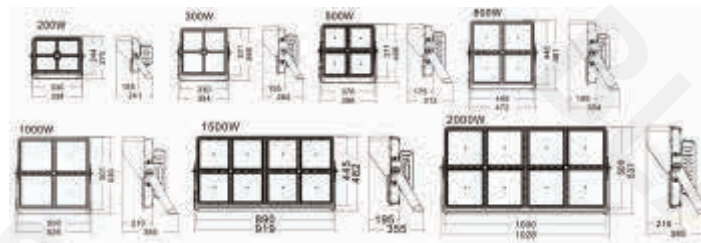

Windproof



IP65 Waterproof



Lighting protection










Surge protection 6KV



Model	Power	Size	Chip qty	LED chip	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66037	200W	338*275*241mm	368	PHILIPS LUMILEDS 3030	30,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KHGLO66038	300W	354*366*282mm	560	PHILIPS LUMILEDS 3030	45,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KHGLO66039	500W	396*408*313mm	736	PHILIPS LUMILEDS 3030	75,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KHGLO66040	720W	472*481*354mm	1248	PHILIPS LUMILEDS 3030	108,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KHGLO66041	960W	526*536*385mm	1568	PHILIPS LUMILEDS 3030	144,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KHGLO66042	1500W	919*482*355mm	2496	PHILIPS LUMILEDS 3030	225,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KHGLO66043	2000W	1028*537*385mm	3136	PHILIPS LUMILEDS 3030	300,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80

MW
MEAN WELL
PHILIPS
5 Years
Warranty
150lm/W

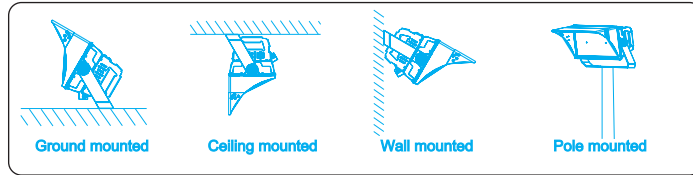



Surge protection 6KV



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66044	500W	540*250*349mm	920	3030	75000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>70
KHGLO66045	1000W	540*520*604mm	1840	3030	150000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>70
KHGLO66046	1500W	540*790*604mm	2760	3030	225000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>70
KHGLO66047	2000W	540*1060*604mm	3830	3030	300000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>70

MW
MEAN WELL
PHILIPS
5 Years
Warranty
150lm/W

BLASX
LIGHTING

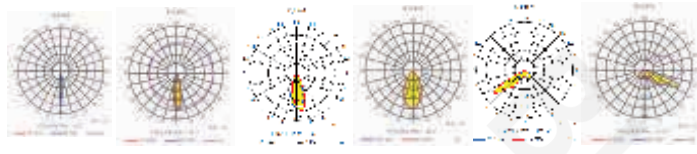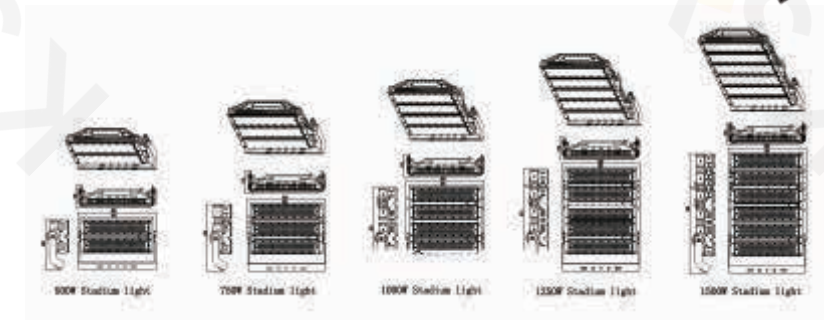

Surge protection 6KV



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66048	500W	365x625x175mm	192	PHILIPS LUMILED 5050	75000lm	AC100-265V	8°/20°/40°/30° 49°21°/30x70°	2800-6500K	>80
KHGLO66049	750W	535x625x175mm	288	PHILIPS LUMILED 5050	112500lm	AC100-265V	8°/20°/40°/30° 49°21°/30x70°	2800-6500K	>80
KHGLO66050	1000W	676x625x175mm	384	PHILIPS LUMILED 5050	150000lm	AC100-265V	8°/20°/40°/30° 49°21°/30x70°	2800-6500K	>80
KHGLO66051	1250W	816x625x175mm	480	PHILIPS LUMILED 5050	187500lm	AC100-265V	8°/20°/40°/30° 49°21°/30x70°	2800-6500K	>80
KHGLO66052	1500W	956x625x175mm	576	PHILIPS LUMILED 5050	225000lm	AC100-265V	8°/20°/40°/30° 49°21°/30x70°	2800-6500K	>80



300W



600W






High Lumen : 150LM/W 900W



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66053	300W	623.5x261x175mm	126pcs	SMD5050	45,000lm	AC85-265V	10°/20°/40°/60°	2700-6500K	>70
KHGLO66054	600W	716.5x447x216mm	252pcs	SMD5050	90,000lm	AC85-265V	10°/20°/40°/60°	2700-6500K	>70
KHGLO66055	900W	716.5x620x216mm	378pcs	SMD5050	135,00lm	AC85-265V	10°/20°/40°/60°	2700-6500K	>70
KHGLO66056	1200W	716.5x793x216mm	504pcs	SMD5050	180,000lm	AC85-265V	10°/20°/40°/60°	2700-6500K	>70
KHGLO66057	1500W	716.5x988x216mm	630pcs	SMD5050	225,000lm	AC85-265V	10°/20°/40°/60°	2700-6500K	>70
KHGLO66058	1800W	716.5x1141x216mm	756pcs	SMD5050	270,000lm	AC85-265V	10°/20°/40°/60°	2700-6500K	>70



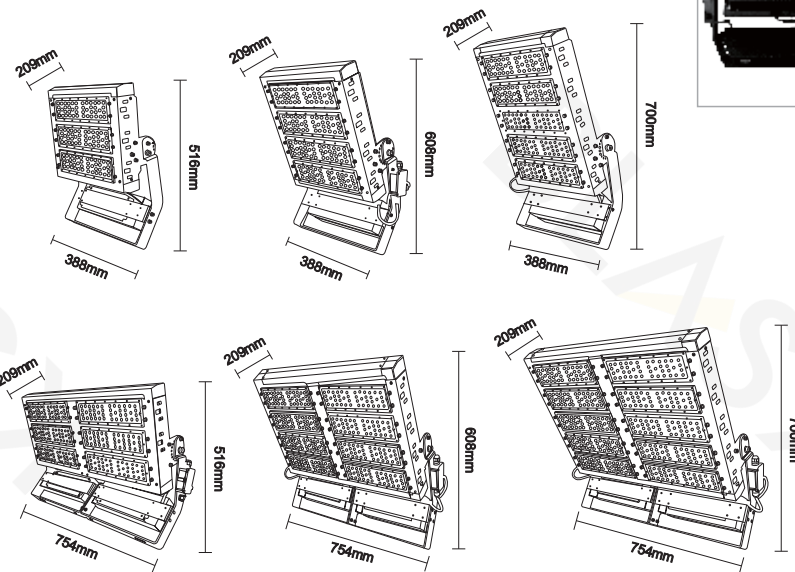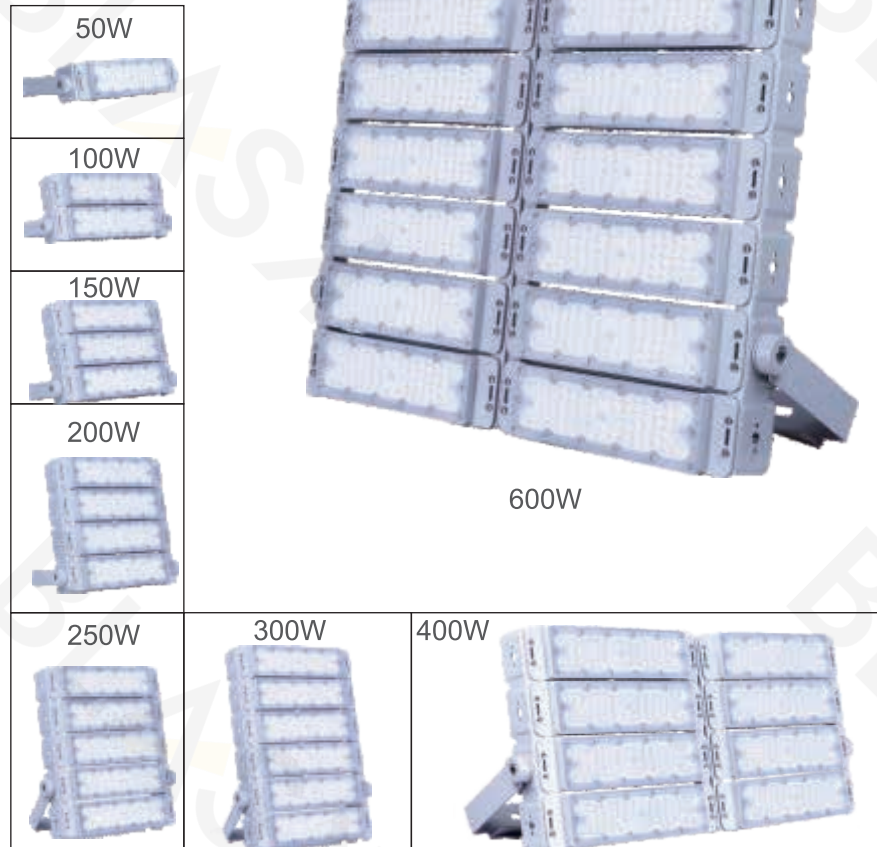

IP65 IK08 LED

IP65 IK08 LED

Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66059	50W	360x80x180mm	64pcs	6,500lm	AC100-265V	30°/60°/90°	2700-6500K	>70
KHGLO66060	100W	360x180x110mm	128pcs	13,000lm	AC100-265V	30°/60°/90°	2700-6500K	>70
KHGLO66061	150W	360x240x110mm	192pcs	19,500lm	AC100-265V	30°/60°/90°	2700-6500K	>70
KHGLO66062	200W	360x320x110mm	256pcs	26,000lm	AC100-265V	30°/60°/90°	2700-6500K	>70
KHGLO66063	250W	360x400x120mm	320pcs	32,500lm	AC100-265V	30°/60°/90°	2700-6500K	>70
KHGLO66064	300W	360x280x120mm	384pcs	39,000lm	AC100-265V	30°/60°/90°	2700-6500K	>70
KHGLO66065	400W	700x320x120mm	512pcs	52,000lm	AC100-265V	30°/60°/90°	2700-6500K	>70
KHGLO66066	500W	700x400x120mm	640pcs	65,000lm	AC100-265V	30°/60°/90°	2700-6500K	>70
KHGLO66067	600W	700x480x120mm	1440pcs	78,000lm	AC100-265V	30°/60°/90°	2700-6500K	>70

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66068	300W	516*388*209mm	132	5050	45000Lm	AC100-277V	45°/60°/90°/55°140°	2800-6500K	>70
KHGLO66069	400W	608*388*209mm	176	5050	60000Lm	AC100-277V	45°/60°/90°/55°140°	2800-6500K	>70
KHGLO66070	500W	700*388*209mm	220	5050	75000Lm	AC100-277V	45°/60°/90°/55°140°	2800-6500K	>70
KHGLO66071	600W	516*754*209mm	264	5050	90000Lm	AC100-277V	45°/60°/90°/55°140°	2800-6500K	>70
KHGLO66072	800W	608*754*209mm	352	5050	120000Lm	AC100-277V	45°/60°/90°/55°140°	2800-6500K	>70
KHGLO66073	1000W	700*754*209mm	440	5050	150000Lm	AC100-277V	45°/60°/90°/55°140°	2800-6500K	>70

MW
MEAN WELL
PHILIPS
5 Years
Warranty



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66074	100W	400*100*180mm	120pcs	13000lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66075	200W	400*205*180mm	240pcs	26000lm	AC100-265V	30°/60°/90°	2700-6500K	>80




Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66076	300W	400*305*180mm	360pcs	39000lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66077	400W	400*410*180mm	480pcs	52000lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66078	600W	765*305*180mm	720pcs	78000lm	AC100-265V	30°/60°/90°	2700-6500K	>80




Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66079	800W	765*410*180mm	960pcs	104000lm	AC100-265V	30°/60°/90°	2700-6500K	>80




Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66080	1000W	765*510*180mm	1200pcs	130000lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66081	1200W	765*620*180mm	1440pcs	156000lm	AC100-265V	30°/60°/90°	2700-6500K	>80

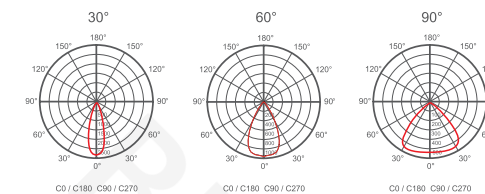


TRI-PROOF TUBE



A.Surface mounting




B.Suspension

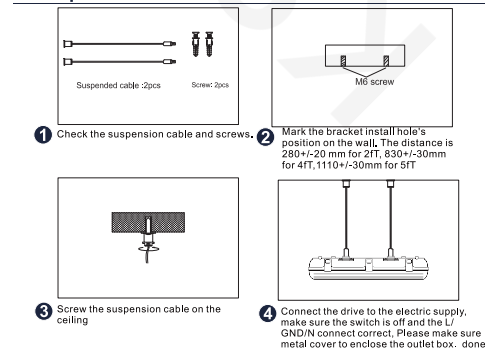

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KHGLO66082	10W	600*83*72mm	PC.+ABS	60pcs 2835	1,200LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66083	20W	600*83*72mm	PC.+ABS	120pcs 2835	2,400LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66084	20W	1200*83*72mm	PC.+ABS	120pcs 2835	1,200LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66085	40W	1200*83*72mm	PC.+ABS	240pcs 2835	4,800LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66086	30W	1500*83*72mm	PC.+ABS	180pcs 2835	3,600LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66087	50W	1500*83*72mm	PC.+ABS	360pcs 2835	6,000LM	65	AC85-265V	2.5KV	2800-6500K






Tri-proof tube

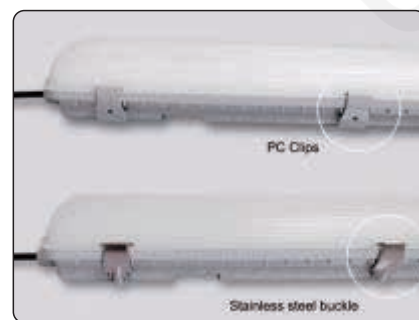

IP65 CE LED


Model	Power	Lampholder	Size	Material	Beam Angle	IP	Voltage	SPD	CCT
KHGLO66088	T8	G13	660*72*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KHGLO66089	T8*2	G13	660*102*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KHGLO66090	T8	G13	1260*72*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KHGLO66091	T8*2	G13	1260*102*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KHGLO66092	T8	G13	1560*72*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KHGLO66093	T8*2	G13	1560*102*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K

Tri-proof tube

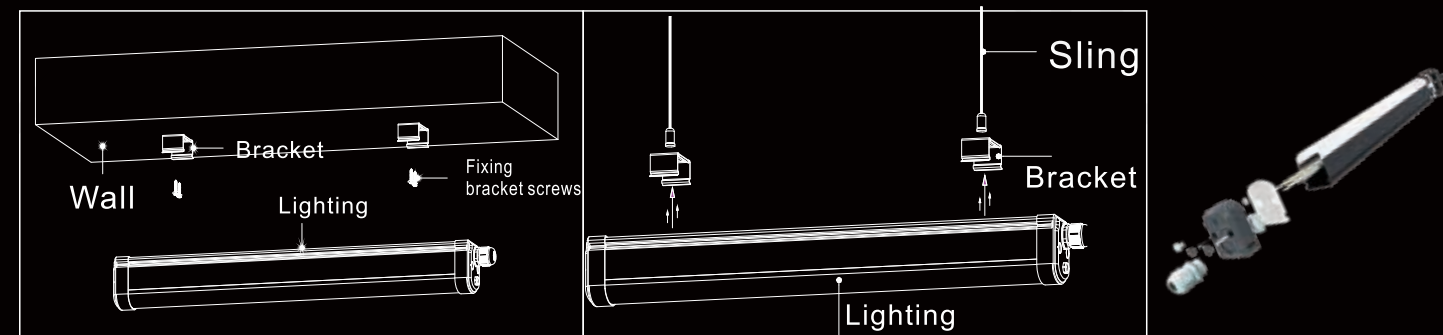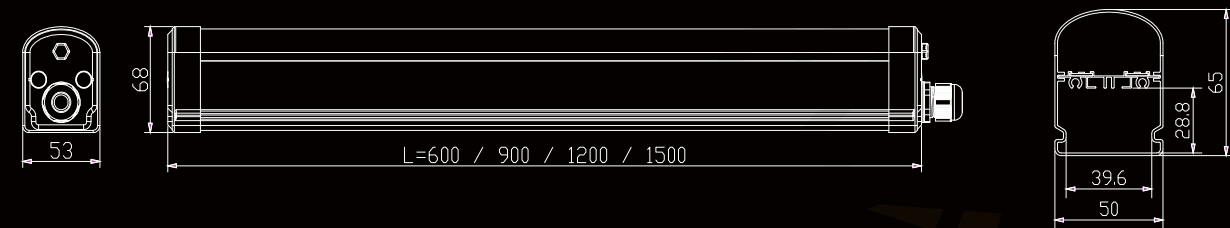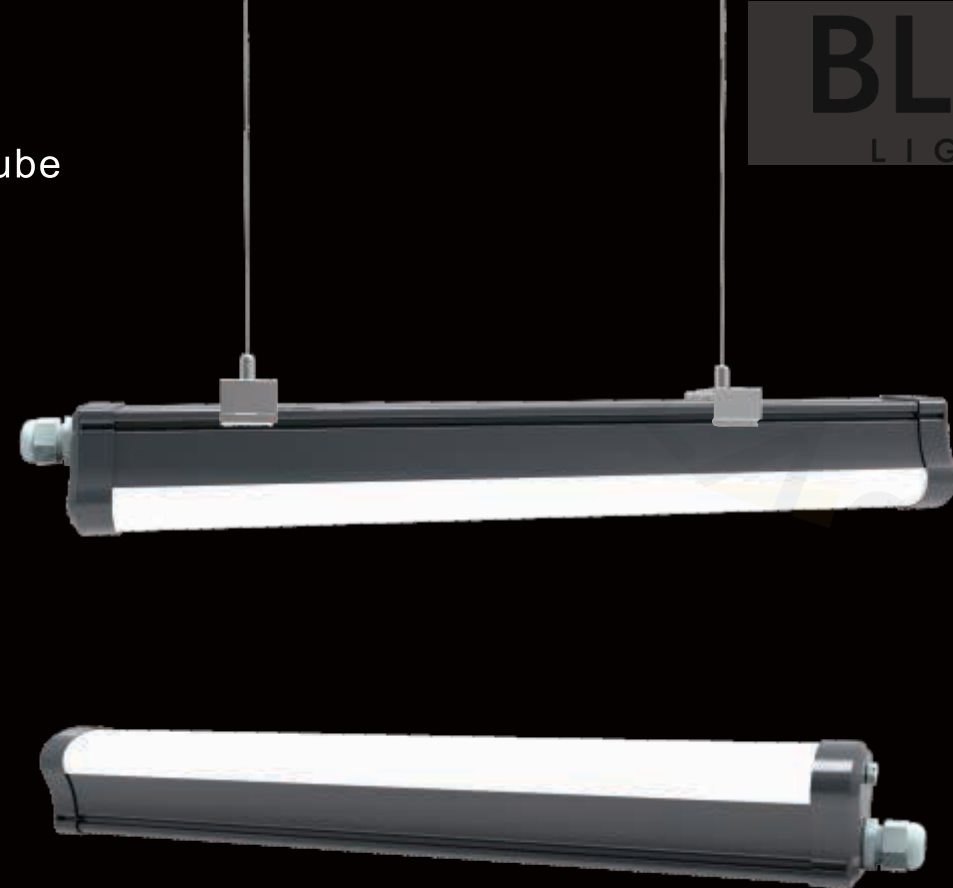

IP65 CE LED




Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KHGLO66094	20W	600*53*68mm	Al+PC.+ABS	96pcs 2835	2000LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66095	30W	900*53*68mm	Al+PC.+ABS	144pcs 2835	3000LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66096	40W	1200*53*68mm	Al+PC.+ABS	240pcs 2835	4000LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66097	50W	1500*53*68mm	Al+PC.+ABS	288pcs 2835	5000LM	65	AC85-265V	2.5KV	2800-6500K

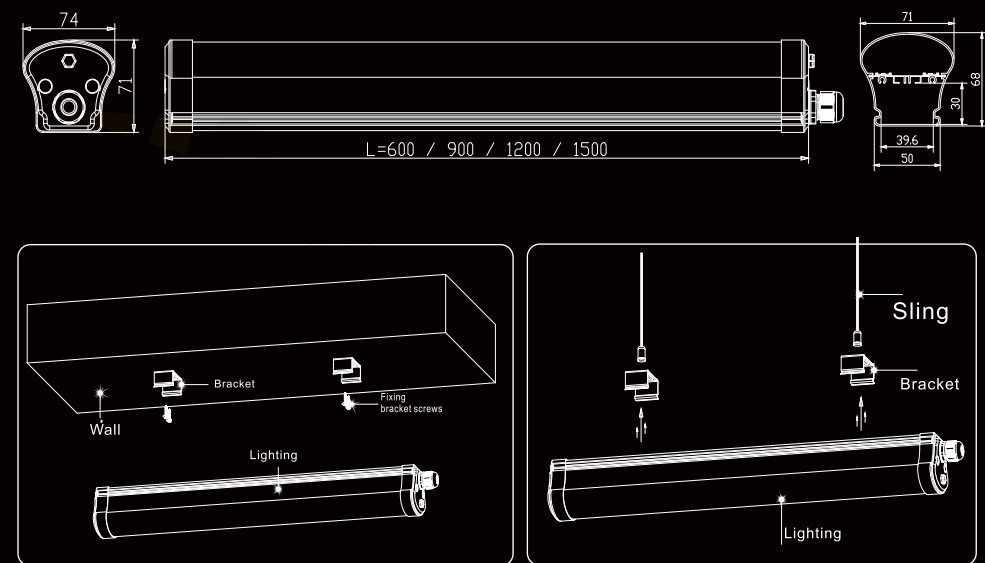

IP65

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KHGLO66098	20W	600*74*71mm	Al+PC.+ABS	96pcs 2835	2000LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66099	30W	900*74*71mm	Al+PC.+ABS	144pcs 2835	3000LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66100	40W	1200*74*71mm	Al+PC.+ABS	240pcs 2835	4000LM	65	AC85-265V	2.5KV	2800-6500K
KHGLO66101	50W	1500*74*71mm	Al+PC.+ABS	288pcs 2835	5000LM	65	AC85-265V	2.5KV	2800-6500K

Tri-proof tube

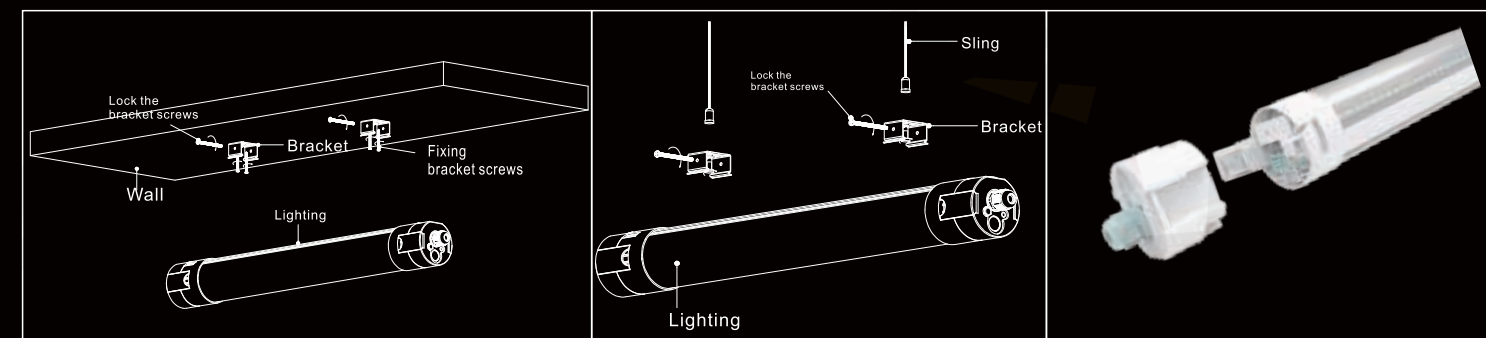
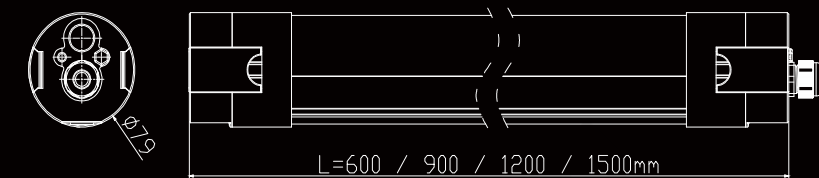
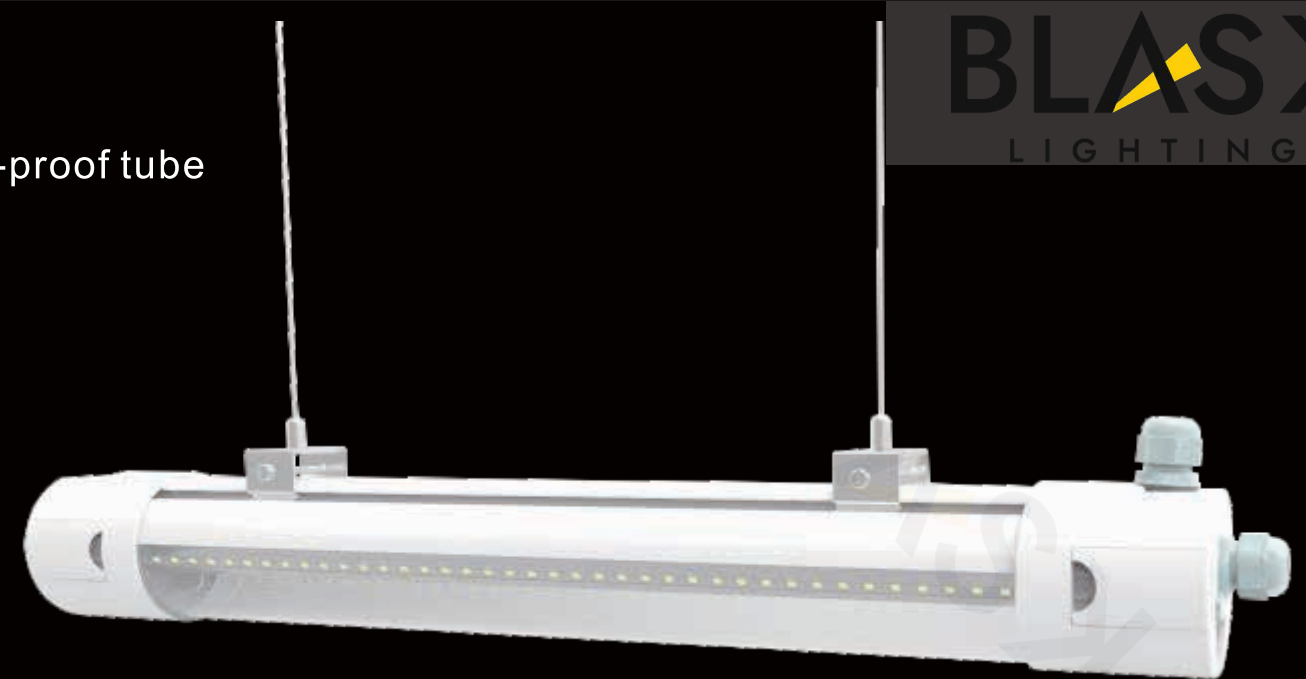


IP65


Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KHGLO66102	20W	Ø600*79mm	Al+PC.+ABS	144pcs 2835	2400LM	65	AC85-265V	4KV	2800-6500K
KHGLO66103	30W	Ø900*79mm	Al+PC.+ABS	246pcs 2835	3600LM	65	AC85-265V	4KV	2800-6500K
KHGLO66104	50W	Ø1200*79mm	Al+PC.+ABS	336pcs 2835	6000LM	65	AC85-265V	4KV	2800-6500K
KHGLO66105	60W	Ø1500*79mm	Al+PC.+ABS	384pcs 2835	7200LM	65	AC85-265V	4KV	2800-6500K

Tri-proof tube

Tri-proof tube

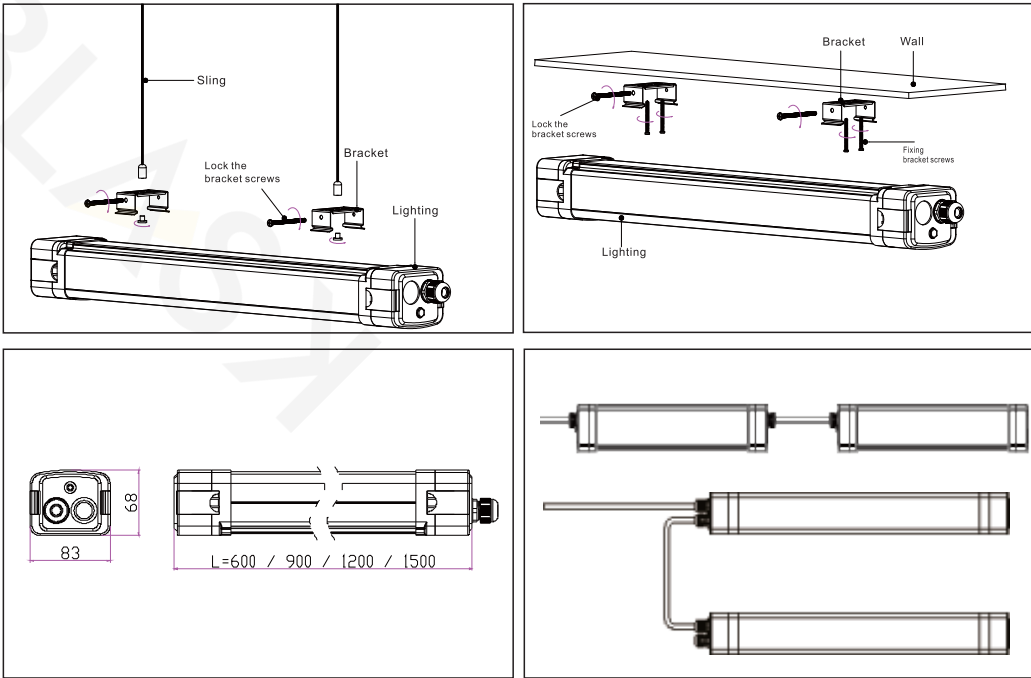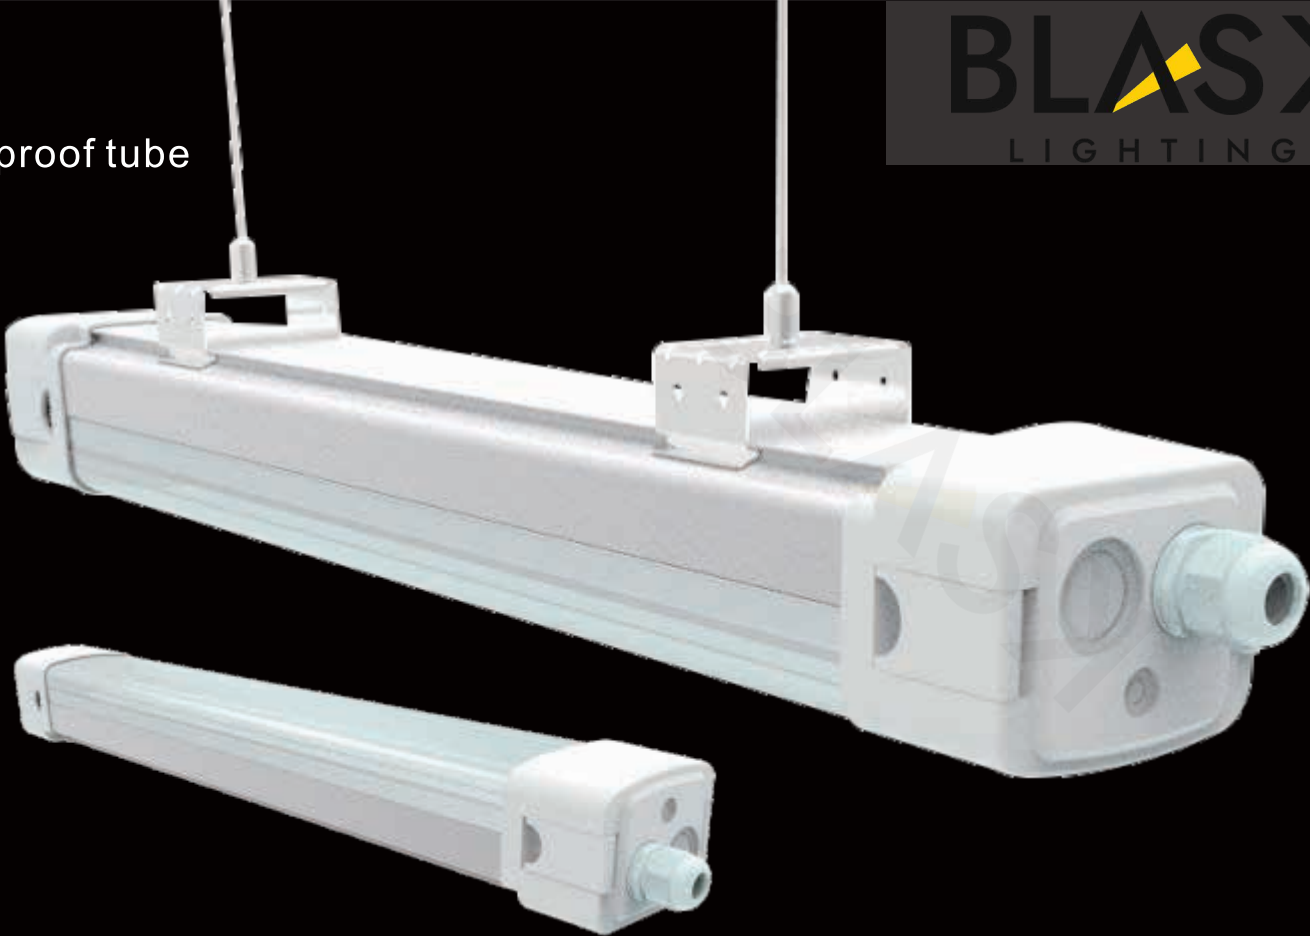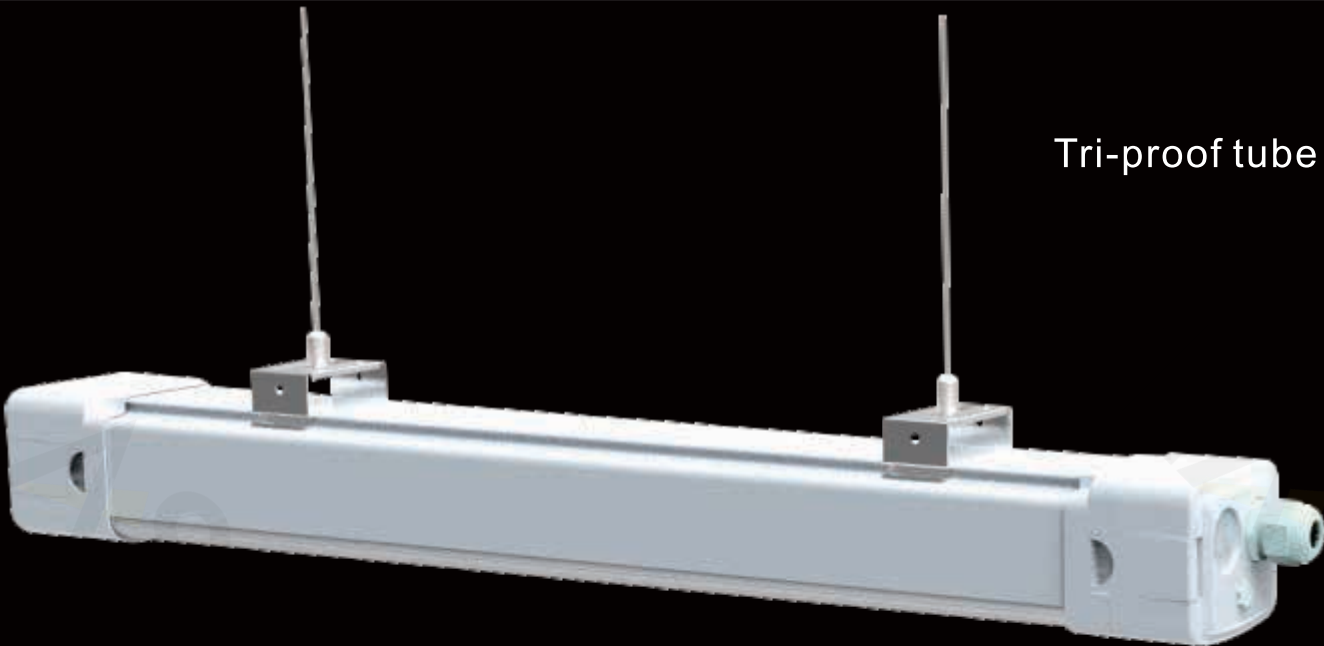

IP65 CE LED

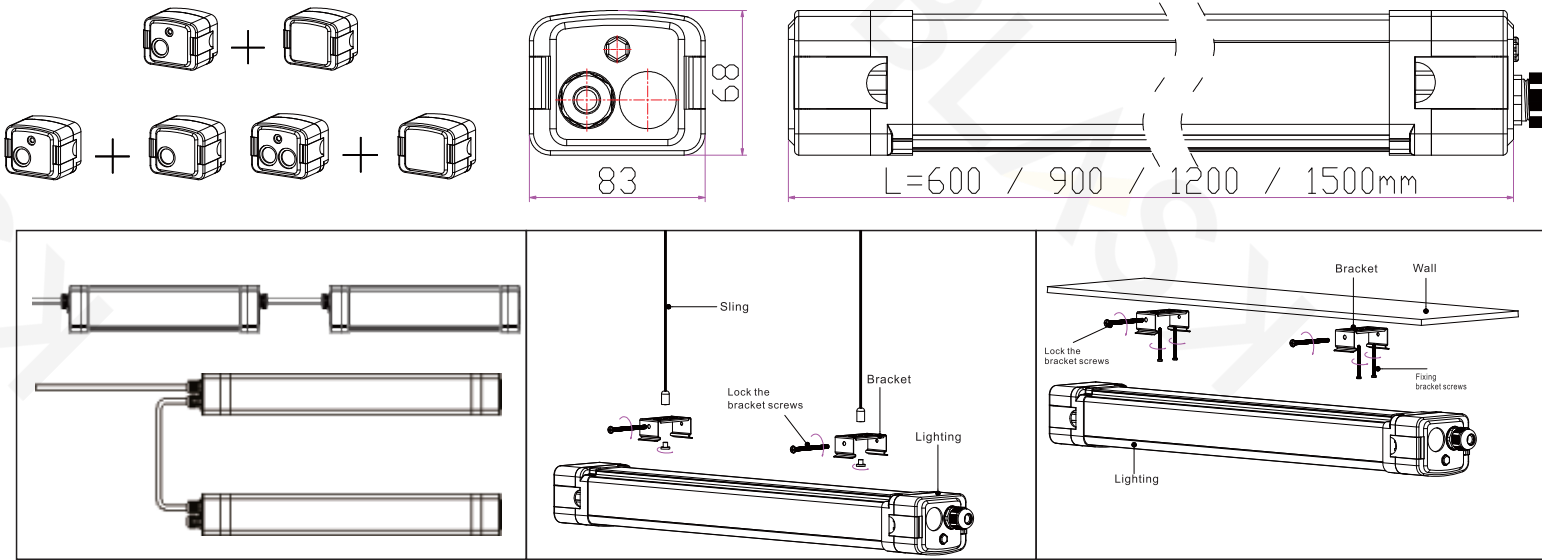

IP65 CE LED

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KHGLO66106	20W	600*83*68mm	Al+PC.+ABS	120pcs 2835	2400LM	65	AC85-265V	4KV	2800-6500K
KHGLO66107	30W	900*83*68mm	Al+PC.+ABS	168pcs 2835	3600LM	65	AC85-265V	4KV	2800-6500K
KHGLO66108	50W	1200*83*68mm	Al+PC.+ABS	240pcs 2835	6000LM	65	AC85-265V	4KV	2800-6500K
KHGLO66109	60W	1500*83*68mm	Al+PC.+ABS	288pcs 2835	7200LM	65	AC85-265V	4KV	2800-6500K

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KHGLO66110	20W	600*83*68mm	Al+PC.+ABS	120pcs 2835	2400LM	65	AC85-265V	4KV	2800-6500K
KHGLO66111	30W	900*83*68mm	Al+PC.+ABS	168pcs 2835	3600LM	65	AC85-265V	4KV	2800-6500K
KHGLO66112	50W	1200*83*68mm	Al+PC.+ABS	240pcs 2835	6000LM	65	AC85-265V	4KV	2800-6500K
KHGLO66113	60W	1500*83*68mm	Al+PC.+ABS	288pcs 2835	7200LM	65	AC85-265V	4KV	2800-6500K


LED Bulkhead Light

with micro wave sensor


IP65



- *with micro wave sensor*
- *with daylight sensor*
- *micro wave sensor+ remote controller*
- **IP65**

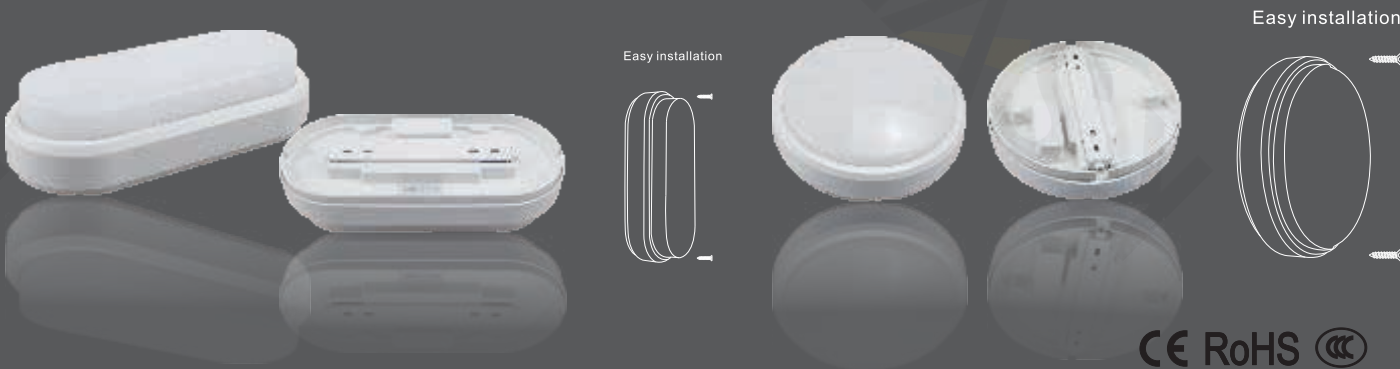

Model NO	Power	Size	Material	SMD Qty	Lumious flux	IP Rate	Input voltage	CCT
KHGLO66114	12W	198*98*55mm	PC.+PS	80pcs 2835	840-960lm	54	AC100-265V	3000-6500K
KHGLO66115	15W	230*105*55mm	PC.+PS	90pcs 2835	1050-1200lm	54	AC100-265V	3000-6500K
KHGLO66116	12W	Φ 175*60mm	PC.+PS	80pcs 2835	840-960lm	54	AC100-265V	3000-6500K
KHGLO66117	15W	Φ 210*60mm	PC.+PS	90pcs 2835	1050-1200lm	54	AC100-265V	3000-6500K

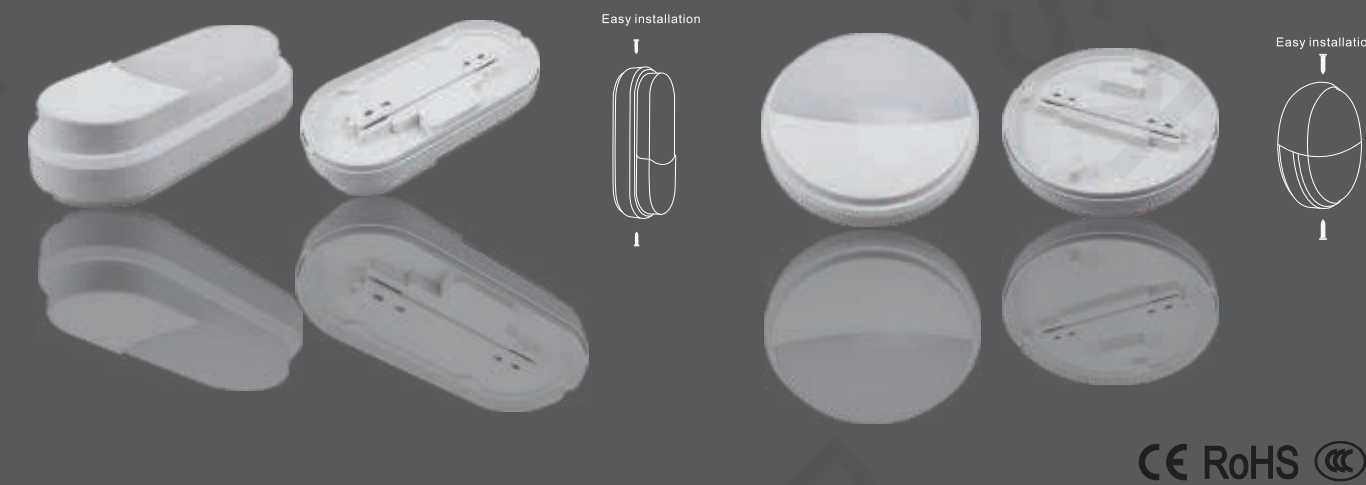




Model NO	Power	Size	Material	SMD Qty	Lumious flux	IP Rate	Input voltage	CCT
KHGLO66118	12W	198*98*55mm	PC.+PS	80pcs 2835	840-960lm	54	AC100-265V	3000-6500K
KHGLO66119	15W	230*105*55mm	PC.+PS	90pcs 2835	1050-1200lm	54	AC100-265V	3000-6500K
KHGLO66120	12W	Φ 175*60mm	PC.+PS	80pcs 2835	840-960lm	54	AC100-265V	3000-6500K
KHGLO66121	15W	Φ 210*60mm	PC.+PS	90pcs 2835	1050-1200lm	54	AC100-265V	3000-6500K



Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	CCT
KHGLO66122	8W	214*112*65mm	ABS. + PS	40pcs 2835	720LM	54	AC175-265V	2800-6500K
KHGLO66123	12W	214*112*65mm	ABS. + PS	60pcs 2835	960LM	54	AC175-265V	2800-6500K
KHGLO66124	15W	270*143*75mm	ABS. + PS	80pcs 2835	1350LM	54	AC175-265V	2800-6500K
KHGLO66125	20W	270*143*75mm	ABS. + PS	100pcs 2835	1800LM	54	AC175-265V	2800-6500K



Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	CCT
KHGLO66126	8W	Ø162*65mm	ABS. + PS	40pcs 2835	720LM	54	AC175-265V	2800-6500K
KHGLO66127	12W	Ø162*65mm	ABS. + PS	60pcs 2835	960LM	54	AC175-265V	2800-6500K
KHGLO66128	15W	Ø218*70mm	ABS. + PS	80pcs 2835	1350LM	54	AC175-265V	2800-6500K
KHGLO66129	20W	Ø218*70mm	ABS. + PS	100pcs 2835	1800LM	54	AC175-265V	2800-6500K

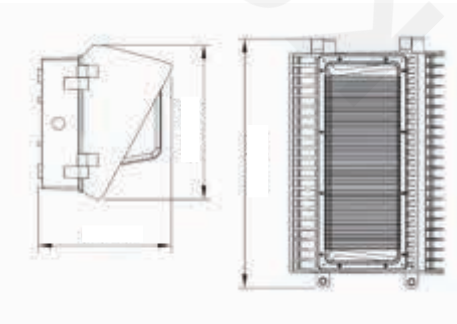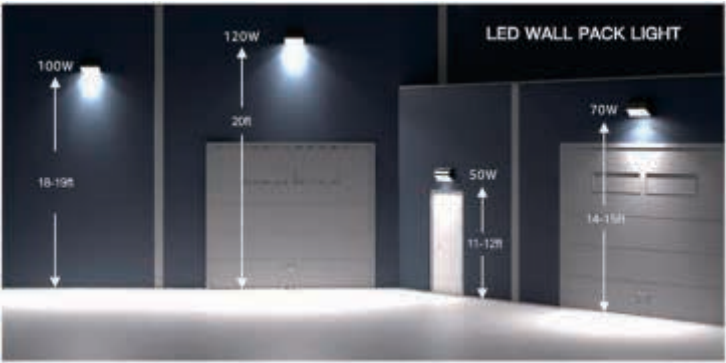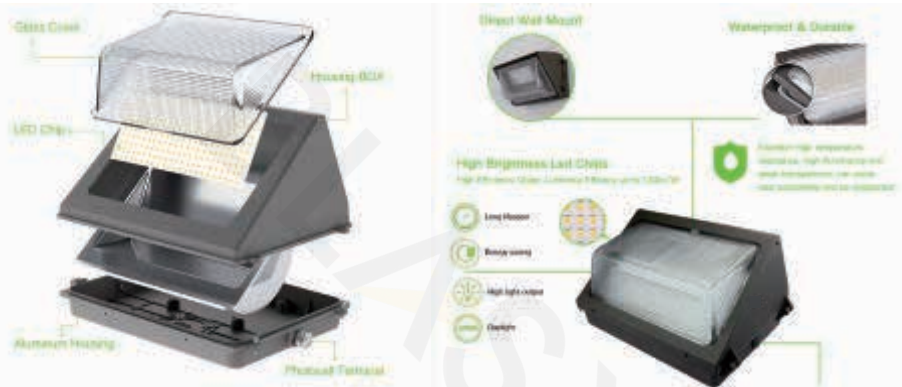

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KHGLO66130	60W	336*216*182mm	78PCS	SMD 3030	7800LM	AC85-265V	120°	3000-6500K	>70
KHGLO66131	100W	385*247*195mm	98PCS	SMD 3030	13000LM	AC85-265V	120°	3000-6500K	>70
KHGLO66132	120W	385*247*195mm	126PCS	SMD 3030	15600LM	AC85-265V	120°	3000-6500K	>70