

OUTDOOR

LIGHT

VOL I




CERTIFICATE

CE CB EN EC RoHS


IP66 IK09 10Kv 140lm/w LUMILEDS

PRODUCT SPECIFICATION

Item	YLMGLO99001,YLMGLO99002			
Power	30W	50w	70w	100w
Efficiency	PC:>100lm/w		Glass:>140lm/w	
Lumen output	≥3000lm ≥4200lm	≥5000lm ≥7000lm	≥7000lm ≥9800lm	≥10000lm ≥14000lm
Led chips	Philips lumileds 3030			
CRI	>80			
Life span	50,000hrs at Ta=25deg, L70/B10			
Color Temperature	2700K-6500K			
Optic lens	PC Lenses			
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)			
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz			
Power factor	>95%			
THD	<10%			
Protection level	CLASS I			
SPD	10KV (optional 20KV or other)			
Housing	aluminum by die-casting			
Finish	powder coating			
Housing color	●RAL 7035 ●RAL7024 (others upon request)			
IP Rating	IP66			
IK Rating	IK10			
Working Temperature	-30°C ~ + 65°C			
Warranty	5 years			
Warranty	5 years			

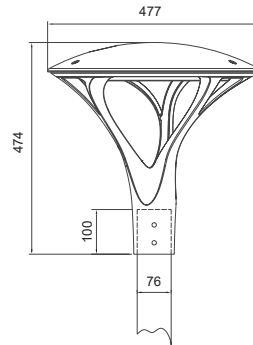

YLMGLO99002

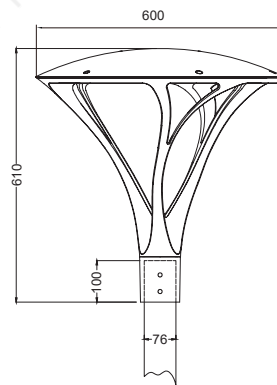

YLMGLO99001

APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS








URBAN &
RESIDENTIAL
STREETS




BLASX
LIGHTING

BLASX
LIGHTING

BLASX
LIGHTING

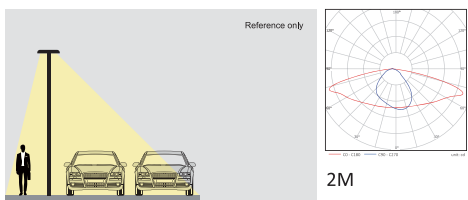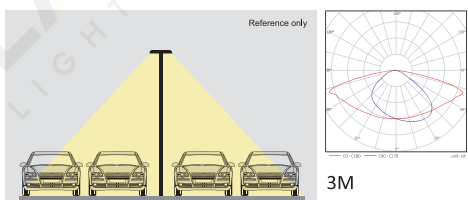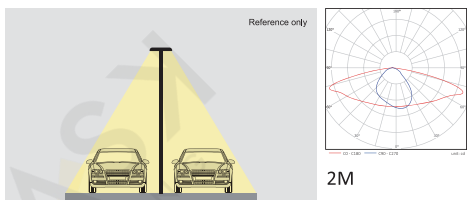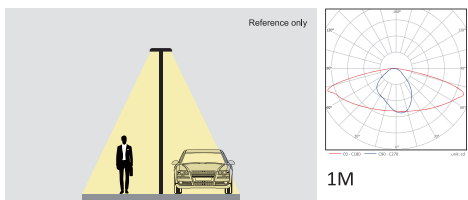

Large wall mount
[10-18 ft. Mounting heights]

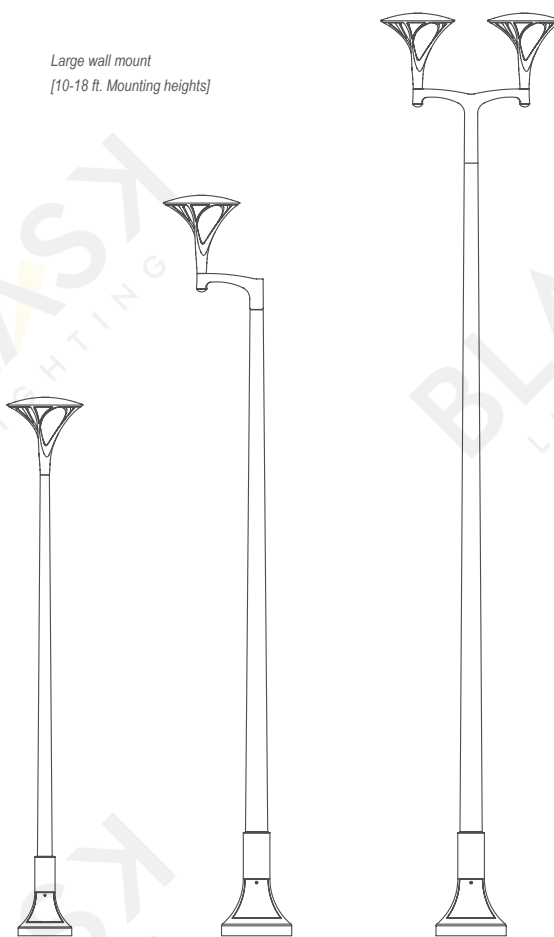

Single post top
[10-18 ft. Mounting heights]

Single arm post top
[18-22 ft. Mounting heights]

Twin arm post top
[18-30 ft. Mounting heights]

Led Urban light series





APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS



URBAN &
RESIDENTIAL
STREETS


CERTIFICATE

CE CB  RoHS


IP66 IK09 10Kv 80lm/w CREE 

PRODUCT SPECIFICATION

Item	YLMGLO99003,YLMGLO99004				
Power	10W	20W	30W	40W	50W
Efficiency	80lm/w				
Lumen output	≥800lm	≥1600lm	≥2400lm	≥3200lm	≥4000lm
Led chips	CREE CXA series				
CRI	>80				
Life span	50,000hrs at Ta=25deg, L70/B10				
Color Temperature	1750K-6500K				
Optic lens	Nano reflector				
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)				
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz				
Power factor	>95%				
THD	<10%				
Protection level	CLASS I				
SPD	10KV (optional 20KV or other)				
Housing	aluminum by die-casting				
Finish	powder coating				
Housing color	● RAL 7035 ● RAL7024 (others upon request)				
IP Rating	IP66				
IK Rating	IK10				
Mounting	Vertical on Ø60 / Ø76mm pipe				
Working Temperature	-30°C ~ + 65°C				
Warranty	5 years				

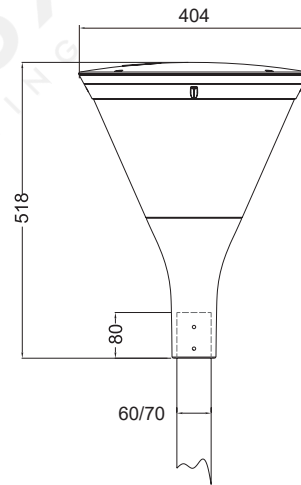

YLMGLO99004

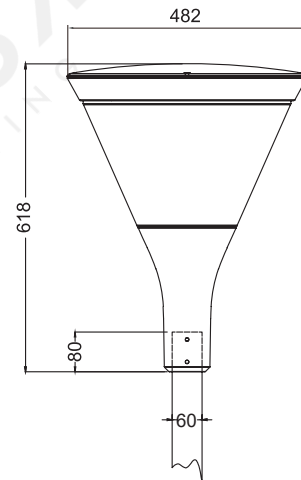

YLMGLO99003

APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS










URBAN &
RESIDENTIAL
STREETS



YLMGLO99003

YLMGLO99004

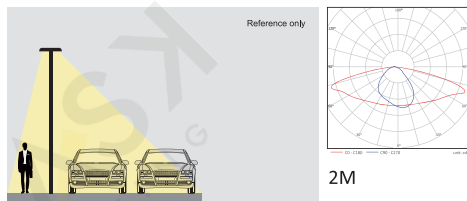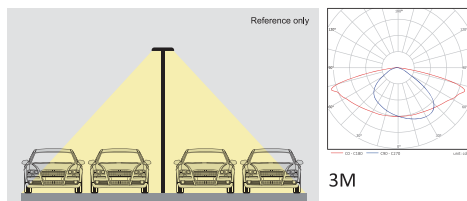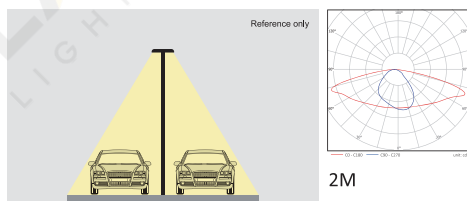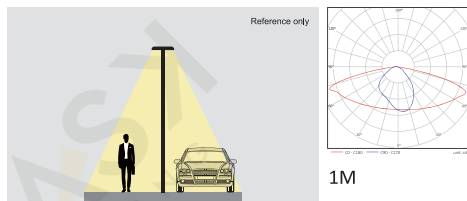

YLMGLO99005





APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS




PEDESTRIAN
AREAS & CYCLE
PATHS




URBAN &
RESIDENTIAL
STREETS

CERTIFICATE




PRODUCT SPECIFICATION

Item	YLMGLO99005,YLMGLO99006					
Power	30W	50W	60W	70W	90W	100W
Efficiency	>140lm/w					
Lumen output	≥4200lm	≥7000lm	≥8400lm	≥9800lm	≥12600lm	≥14000lm
Led chips	Philips lumileds 3030					
CRI	>80					
Life span	60,000hrs at Ta=25deg, L70/B10					
Color Temperature	2700K-6500K					
Optic lens	PC Lenses					
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)					
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz					
Power factor	>95%					
THD	<10%					
Protection level	CLASS I					
SPD	10KV (optional 20KV or other)					
Housing	aluminum by die-casting					
Finish	powder coating					
Housing color	● RAL 7035 ● RAL7024 (others upon request)					
IP Rating	IP66					
IK Rating	IK10					
Mounting	Vertical on Ø60 / Ø76mm pipe					
Working Temperature	-30°C ~ + 65°C					
Warranty	5 years					

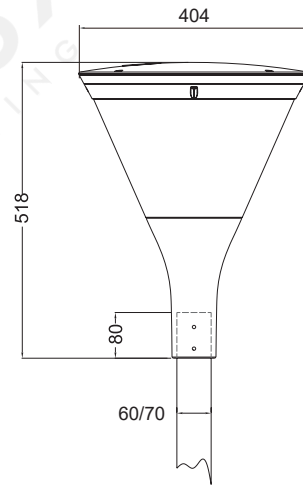

YLMGLO99006

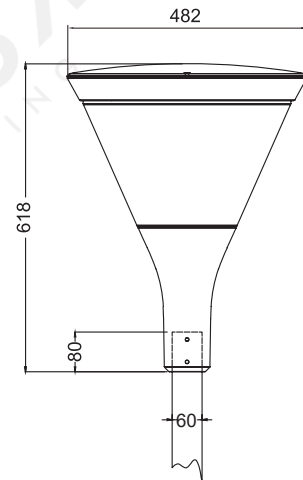

YLMGLO99005

APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS









URBAN &
RESIDENTIAL
STREETS



YLMGLO99005

YLMGLO99006

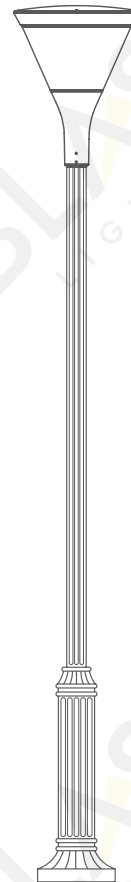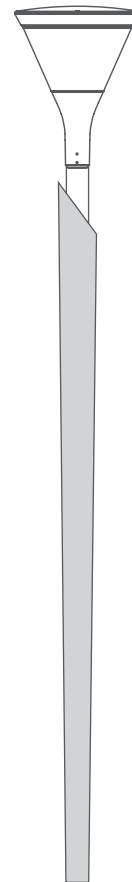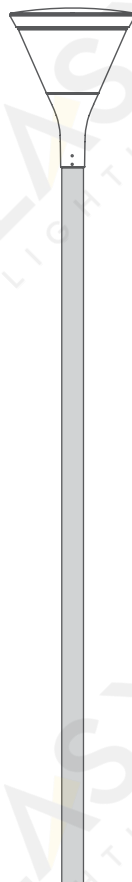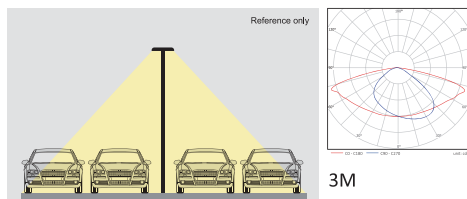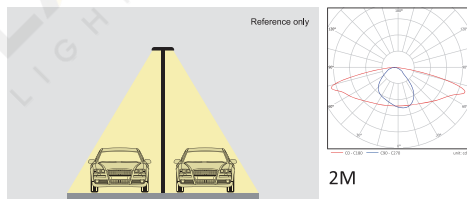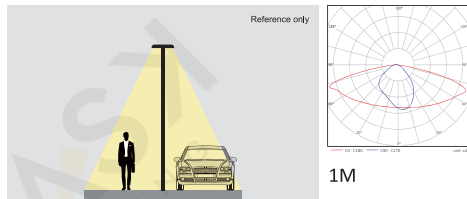

YLMGLO99007





APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS



URBAN &
RESIDENTIAL
STREETS

CERTIFICATE

CE CB  RoHS

IP66

IK09


10Kv

140lm/w


 LUMILEDS

PRODUCT SPECIFICATION

Item	YLMGLO99007,YLMGLO99008					
Power	30W	50W	60W	70W	90W	100W
Efficiency	Chequered glass:>100lm/w Transparent Glass:>140lm/w					
Lumen output	≥3000lm ≥4200lm	≥5000lm ≥7000lm	≥6000lm ≥8400lm	≥7000lm ≥9800lm	≥9000lm ≥12600lm	≥10000lm ≥14000lm
Led chips	Philips lumileds 3030					
CRI	>80					
Life span	60,000hrs at Ta=25deg, L70/B10					
Color Temperature	2700K-6500K					
Optic lens	PC Lenses					
Driver	Philips Xi-LP series (Meanwell/Inventronic/Osram upon request)					
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz					
Power factor	>95%					
THD	<10%					
Protection level	CLASS I					
SPD	10KV (optional 20KV or other)					
Housing	aluminum by die-casting					
Finish	powder coating					
Housing color	● RAL 7035 ● RAL7024 (others upon request)					
IP Rating	IP66					
IK Rating	IK09					
Mounting	Vertical on Ø60 / Ø76mm pipe					
Working Temperature	-30°C ~ + 65°C					
Warranty	5 years					



YLMGLO99008



YLMGLO99007

APPLICATIONS



BUILDING
SURROUNDS




PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS







URBAN &
RESIDENTIAL
STREETS

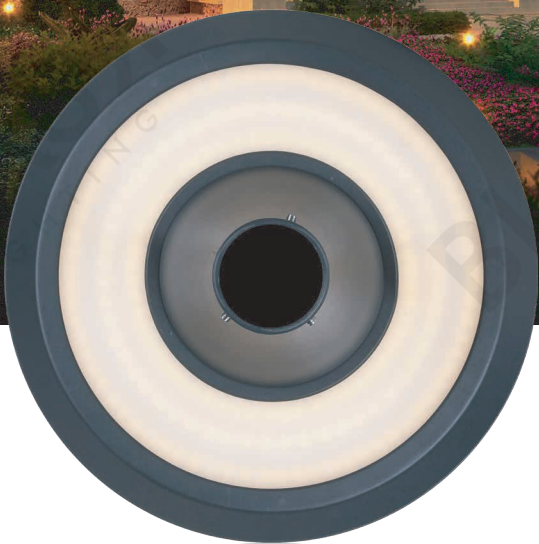

YLMGLO99007

YLMGLO99008

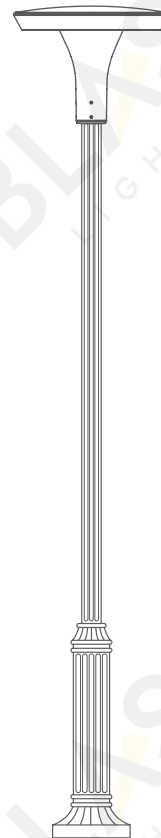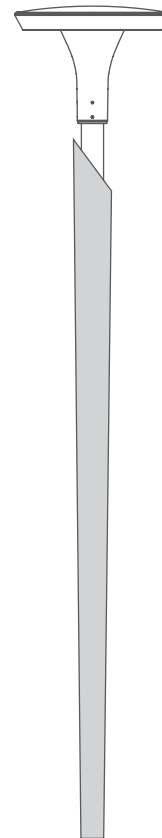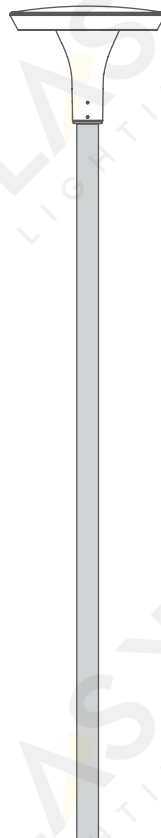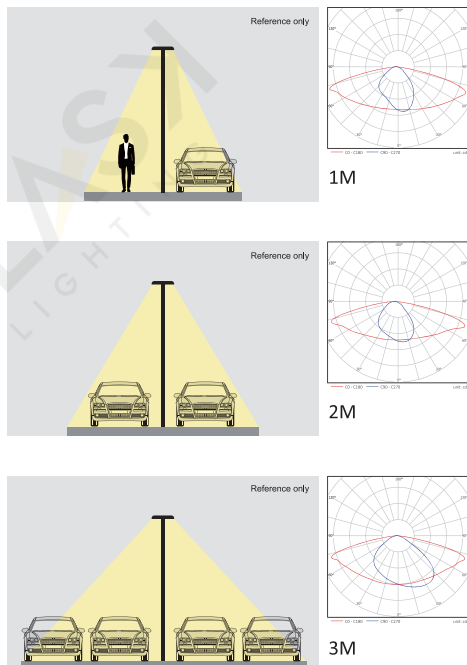


YLMGLO99009






CERTIFICATE

CE CB  RoHS




PRODUCT SPECIFICATION

Item	YLMGLO99009					
Power	50W			90W		
Efficiency	>140lm/w					
Lumen output	≥7000lm			≥12600lm		
Item	YLMGLO99010					
Power	30W	50W	60W	70W	90W	100W
Efficiency	>140lm/w					
Lumen output	≥4200lm	≥7000lm	≥8400lm	≥9800lm	≥12600lm	≥14000lm
Item	YLMGLO99009,YLMGLO99010					
Led chips	Philips lumileds 3030					
CRI	>80					
Life span	50,000hrs at Ta=25deg, L70/B10					
Color Temperature	2700K-6500K					
Optic lens	PC Lenses					
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)					
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz					
Power factor	>95%					
THD	<10%					
Protection level	CLASS I					
SPD	10KV (optional 20KV or other)					
Housing	aluminum by die-casting					
Finish	powder coating					
Housing color	●RAL 7035		●RAL7024 (others upon request)			
IP Rating	IP66					
IK Rating	IK10					
Working Temperature	-30°C ~ + 65°C					
Warranty	5 years					



YLMGLO99010



YLMGLO99009

APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS










URBAN &
RESIDENTIAL
STREETS



YLMGLO99009

YLMGLO99010

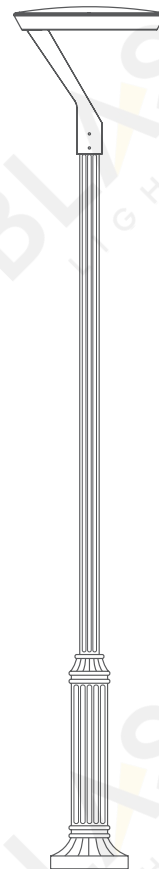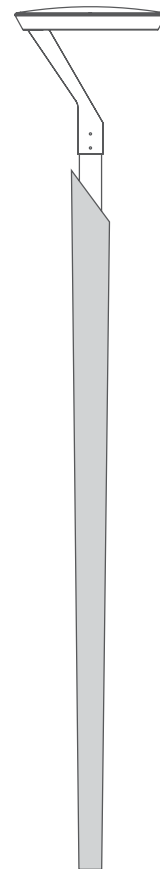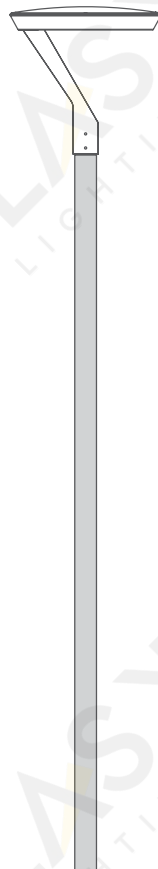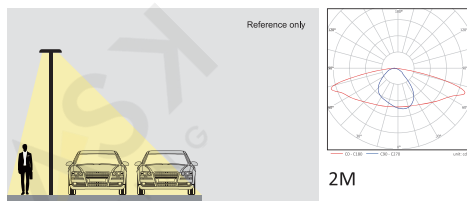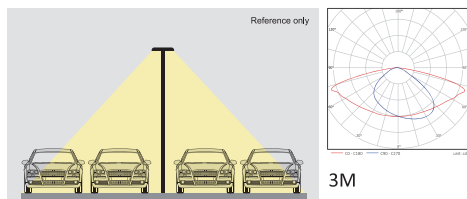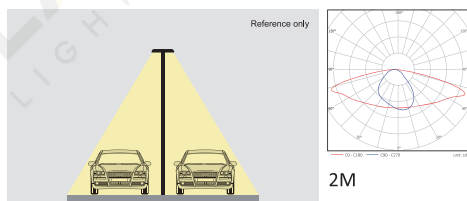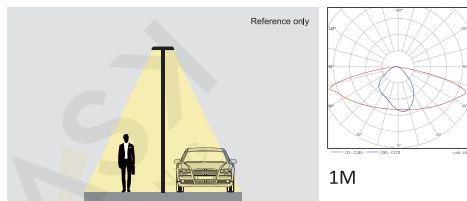

YLMGLO99011





APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS



URBAN &
RESIDENTIAL
STREETS

CERTIFICATE

CE CB  RoHS

IP66

IK09





10Kv

140lm/w

 LUMILEDS

PRODUCT SPECIFICATION

Item	YLMGLO99011					
Power	30W	40W	50W	60W	80W	100W
Efficiency	>140lm/w					
Lumen output	≥4200lm	≥5600lm	≥7000lm	≥8400lm	≥11200lm	≥14000lm
Led chips	Philips lumileds 3030					
CRI	>80					
Life span	60,000hrs at Ta=25deg, L70/B10					
Color Temperature	2700K-6500K					
Optic lens	PC Lenses					
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)					
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz					
Power factor	>95%					
THD	<10%					
Protection level	GLASS I/II					
SPD	10KV (optional 20KV or other)					
Housing	aluminum by die-casting					
Finish	powder coating					
Housing color	● RAL 7035 ● RAL7024 (others upon request)					
IP Rating	IP66					
IK Rating	IK10					
Mounting	Vertical on Ø60 / Ø76mm pipe					
Working Temperature	-30°C ~ + 65°C					
Warranty	5 years					

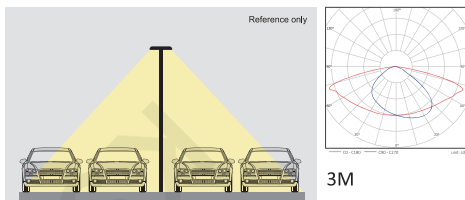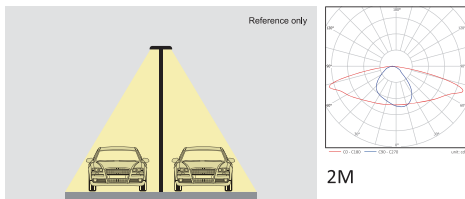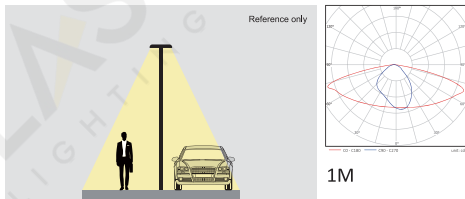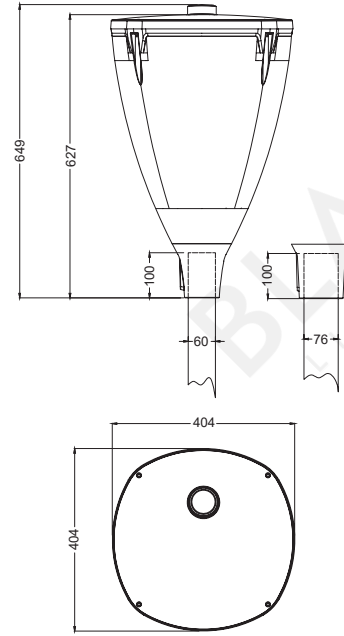



YLMGLO99012



APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS



URBAN &
RESIDENTIAL
STREETS











CERTIFICATE

CE CB  RoHS

IP66 IK09 10Kv 140lm/w  LUMILEDS

PRODUCT SPECIFICATION

Item	YLMGLO99012					
Power	30W	40W	50W	60W	80W	100W
Efficiency	>140lm/w					
Lumen output	≥4200lm	≥5600lm	≥7000lm	≥8400lm	≥11200lm	≥14000lm
Led chips	Philips lumileds 3030					
CRI	>80					
Life span	60,000hrs at Ta=25deg, L70/B10					
Color Temperature	2700K-6500K					
Optic lens	PC Lenses					
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)					
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz					
Power factor	>95%					
THD	<10%					
Protection level	GLASS I/II					
SPD	10KV (optional 20KV or other)					
Housing	aluminum by die-casting					
Finish	powder coating					
Housing color	● RAL 7035 ● RAL7024 (others upon request)					
IP Rating	IP66					
IK Rating	IK10					
Mounting	Hoisting on Ø35~40 pipe					
Working Temperature	-30°C ~ + 65°C					
Warranty	5 years					

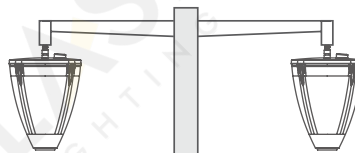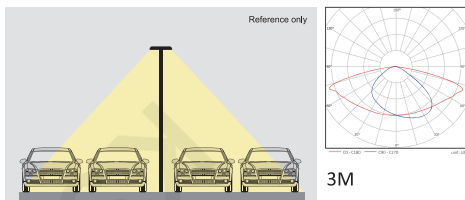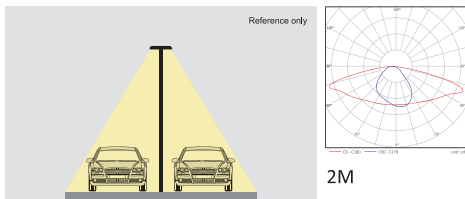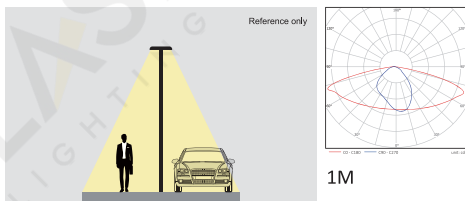



YLMGLO99013



APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS



URBAN &
RESIDENTIAL
STREETS

CERTIFICATE

CE CB  RoHS

IP66

IK09


10Kv

140lm/w

 LUMILEDS

PRODUCT SPECIFICATION

Item	YLMGLO99013		
Power	20W	30W	40W
Efficiency	>140lm/w		
Lumen output	≥2800lm	≥4200lm	≥5600lm
Led chips	Philips lumileds 3030		
CRI	>80		
Life span	60,000hrs at Ta=25deg, L70/B10		
Color Temperature	2700K-6500K		
Optic lens	PC Lenses		
Driver	Philips Xi-EP series (others upon request)		
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz		
Power factor	>95%		
THD	<10%		
Protection level	CLASS I		
SPD	10KV (optional 20KV or other)		
Housing	aluminum by die-casting		
Finish	powder coating		
Housing color	●RAL 7035	●RAL7024 (others upon request)	
IP Rating	IP66		
IK Rating	IK09		
Working Temperature	-30°C ~ + 65°C		
Warranty	5 years		

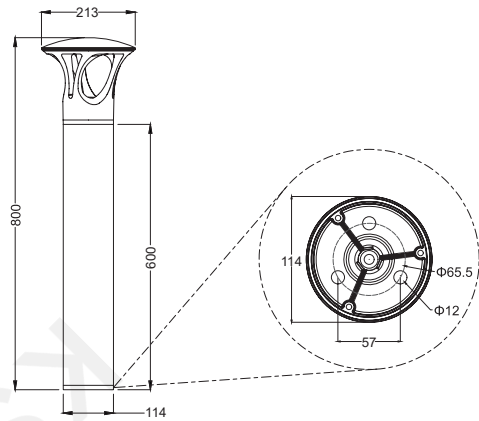



YLMGLO99014



APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS



URBAN &
RESIDENTIAL
STREETS


CERTIFICATE

CE CB  RoHS

IP66 IK09 10Kv 100lm/w  LUMILEDS

PRODUCT SPECIFICATION

Item	YLMGLO99014		
Power	10W	15W	20W
Efficiency	>100lm/w		
Lumen output	≥1000lm	≥1500lm	≥2000lm
Led chips	AC 2835		
CRI	>80		
Life span	50,000hrs at Ta=25deg, L70/B10		
Color Temperature	2700K-6500K		
Optic lens	PC Cover		
Driver	AC soluation		
Input Voltage	100~240 VAC 47~63 Hz		
Power factor	>95%		
THD	<10%		
Protection level	CLASS I		
SPD	10KV (Optional)		
Housing	aluminum by die-casting		
Finish	powder coating		
Housing color	●RAL 7035	●RAL7024 (others upon request)	
IP Rating	IP66		
IK Rating	IK09		
Working Temperature	-30°C ~ + 65°C		
Warranty	5 years		

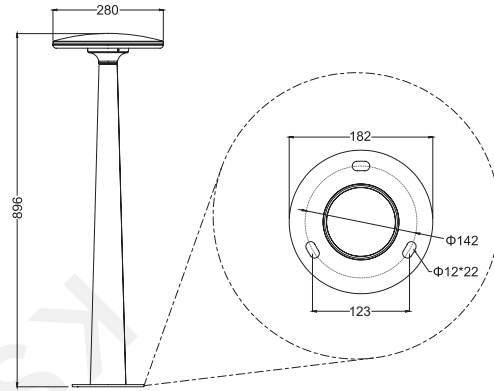



YLMGLO99015



APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS




PEDESTRIAN
AREAS & CYCLE
PATHS




URBAN &
RESIDENTIAL
STREETS

CERTIFICATE

CE CB  RoHS








PRODUCT SPECIFICATION

Item	YLMGLO99015		
Power	10W	15W	20W
Efficiency	>140lm/w		
Lumen output	≥1400lm	≥2100lm	≥2800lm
Led chips	TD2835		
CRI	>80		
Life span	50,000hrs at Ta=25deg, L70/B10		
Color Temperature	2700K-6500K		
Optic lens	PC Cover		
Driver	AC solution (Optional driver)		
Input Voltage	100~240 VAC 47~63 Hz		
Power factor	>95%		
THD	<10%		
Protection level	CLASS I		
SPD	10KV (Optional)		
Housing	aluminum by die-casting		
Finish	powder coating		
Housing color	●RAL 7035	●RAL7024 (others upon request)	
IP Rating	IP66		
IK Rating	IK09		
Working Temperature	-30°C ~ + 65°C		
Warranty	5 years		





YLMGLO99016



APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS



PEDESTRIAN
AREAS & CYCLE
PATHS



URBAN &
RESIDENTIAL
STREETS

CERTIFICATE

CE CB  RoHS

IP66

IK09

10Kv

140lm/w

 LUMILEDS

PRODUCT SPECIFICATION

Item	YLMGLO99016		
Power	10W	15W	20W
Efficiency	>140lm/w		
Lumen output	≥1400lm	≥2100lm	≥2800lm
Led chips	TD2835		
CRI	>80		
Life span	50,000hrs at Ta=25deg, L70/B10		
Color Temperature	2700K-6500K		
Optic lens	PC Cover		
Driver	AC solution (Optional driver)		
Input Voltage	100~240 VAC 47~63 Hz		
Power factor	>95%		
THD	<10%		
Protection level	CLASS I		
SPD	10KV (Optional)		
Housing	aluminum by die-casting		
Finish	powder coating		
Housing color	●RAL 7035	●RAL7024 (others upon request)	
IP Rating	IP66		
IK Rating	IK09		
Working Temperature	-30°C ~ + 65°C		
Warranty	5 years		

