

# ARCH.

## LIGHT

VOL III

# Mini Spotlight



## SMALL

Embedded Mini Spotlight  
Small opening and high power






Flexible adjustment of irradiation angle and more powerful function

## STRETCHABLE ZOOM SPOTLIGHT

Small Cutout  
Retractable Spotlight




- SCR Dimming
- 0-10V Dimming
- DALI Dimming
- Bluetooth Dimming
- Tuya Dimming
- High-power LED  
SDCM<3
- CRI>90
- Anti-Glare



### JHLSLI11001

|              |          |       |       |       |
|--------------|----------|-------|-------|-------|
| Power        | MAX 3W   |       |       |       |
| Voltage      | 3V       |       |       |       |
| Current      | 700mA    |       |       |       |
| Angle        | 15°      | 24°   | 36°   | 50°   |
| Lumen        | 156LM    | 165LM | 173LM | 142LM |
| CRI          | 90       |       |       |       |
| IP           | 20       |       |       |       |
| Installation | Embedded |       |       |       |





### JHLSLI11004

|              |          |       |       |       |
|--------------|----------|-------|-------|-------|
| Power        | MAX 3W   |       |       |       |
| Voltage      | 3V       |       |       |       |
| Current      | 700mA    |       |       |       |
| Angle        | 15°      | 24°   | 36°   | 50°   |
| Lumen        | 156LM    | 165LM | 173LM | 142LM |
| CRI          | 90       |       |       |       |
| IP           | 20       |       |       |       |
| Installation | Embedded |       |       |       |




**BLASK**  
LIGHTING

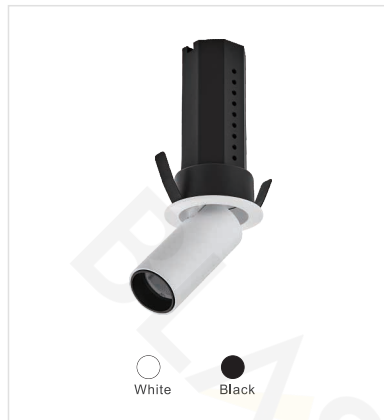


### JHLSLI11002

|              |          |       |       |       |
|--------------|----------|-------|-------|-------|
| Power        | MAX 6W   |       |       |       |
| Voltage      | 36V      |       |       |       |
| Current      | 150mA    |       |       |       |
| Angle        | 18°      | 24°   | 36°   | 50°   |
| Lumen        | 485LM    | 516LM | 552LM | 543LM |
| CRI          | 90       |       |       |       |
| IP           | 20       |       |       |       |
| Installation | Embedded |       |       |       |



### JHLSLI11005

|              |          |       |       |       |
|--------------|----------|-------|-------|-------|
| Power        | MAX 6W   |       |       |       |
| Voltage      | 36V      |       |       |       |
| Current      | 150mA    |       |       |       |
| Angle        | 18°      | 24°   | 36°   | 50°   |
| Lumen        | 485LM    | 516LM | 552LM | 543LM |
| CRI          | 90       |       |       |       |
| IP           | 20       |       |       |       |
| Installation | Embedded |       |       |       |





PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




### JHLSLI11003

|              |          |       |       |       |
|--------------|----------|-------|-------|-------|
| Power        | MAX 8W   |       |       |       |
| Voltage      | 36V      |       |       |       |
| Current      | 200mA    |       |       |       |
| Angle        | 18°      | 24°   | 36°   | 50°   |
| Lumen        | 760LM    | 776LM | 779LM | 721LM |
| CRI          | 90       |       |       |       |
| IP           | 20       |       |       |       |
| Installation | Embedded |       |       |       |

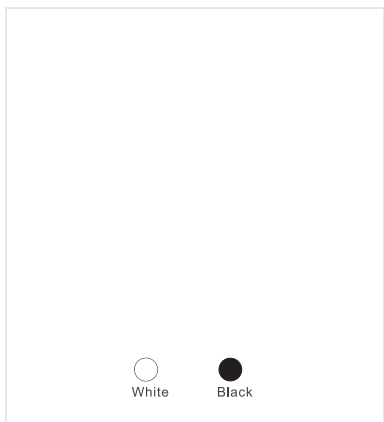

### JHLSLI11006

|              |          |       |       |       |
|--------------|----------|-------|-------|-------|
| Power        | MAX 8W   |       |       |       |
| Voltage      | 36V      |       |       |       |
| Current      | 200mA    |       |       |       |
| Angle        | 18°      | 24°   | 36°   | 50°   |
| Lumen        | 760LM    | 776LM | 779LM | 721LM |
| CRI          | 90       |       |       |       |
| IP           | 20       |       |       |       |
| Installation | Embedded |       |       |       |



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K





PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Deep Focal Length Anti-Glare Trim Design  $UGR < 9$

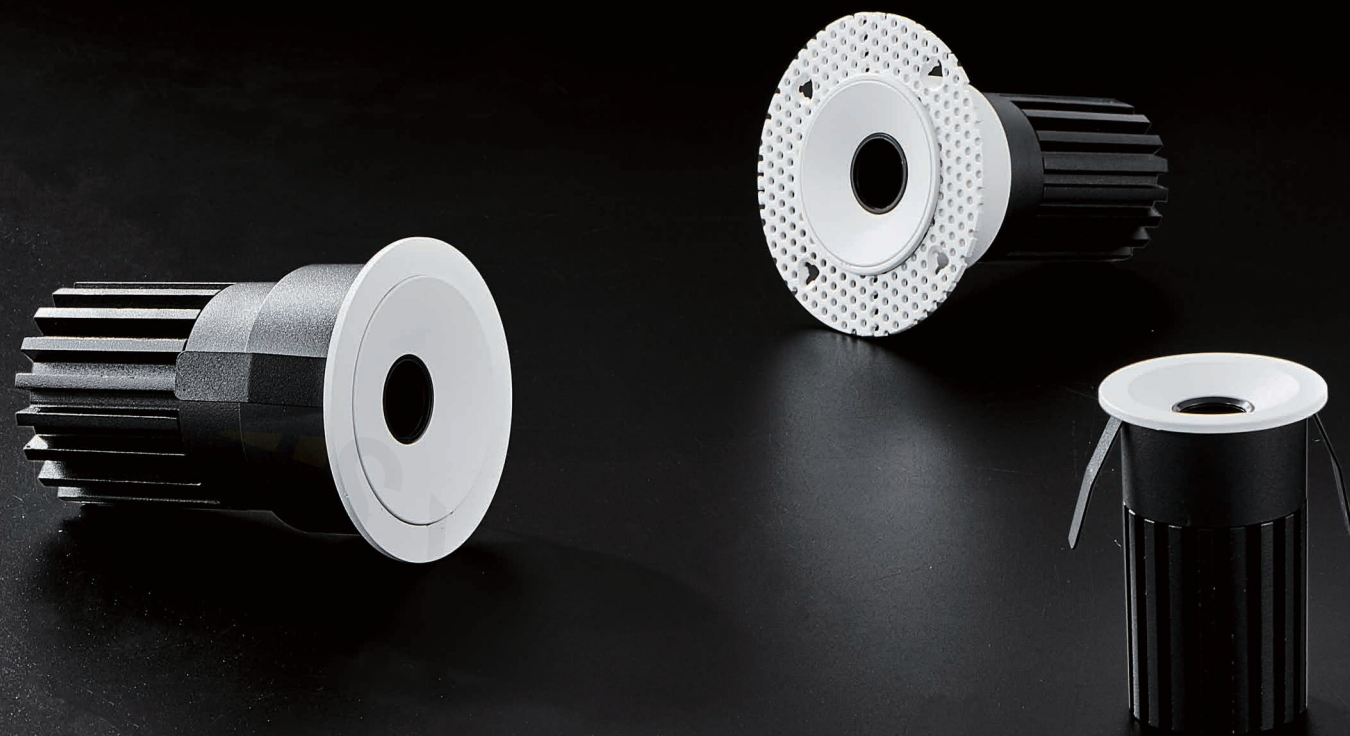

Best Solution to see Light from NoWhere

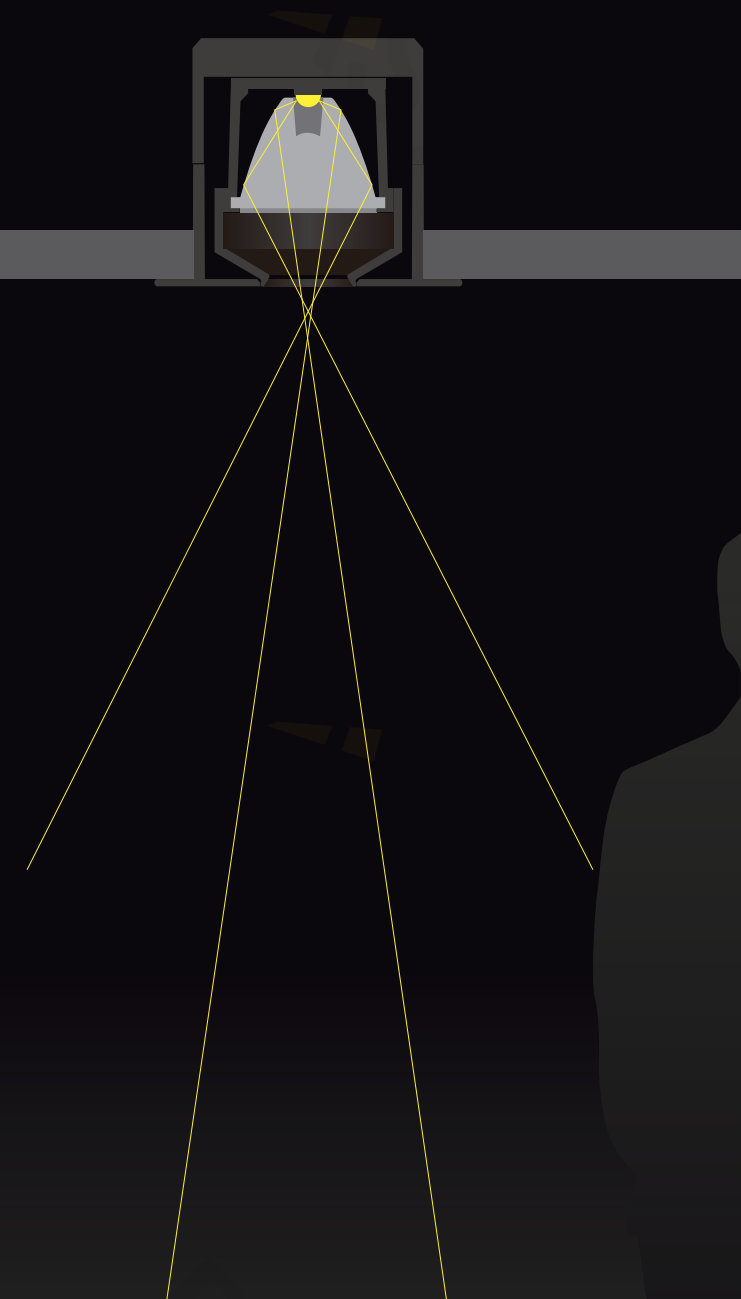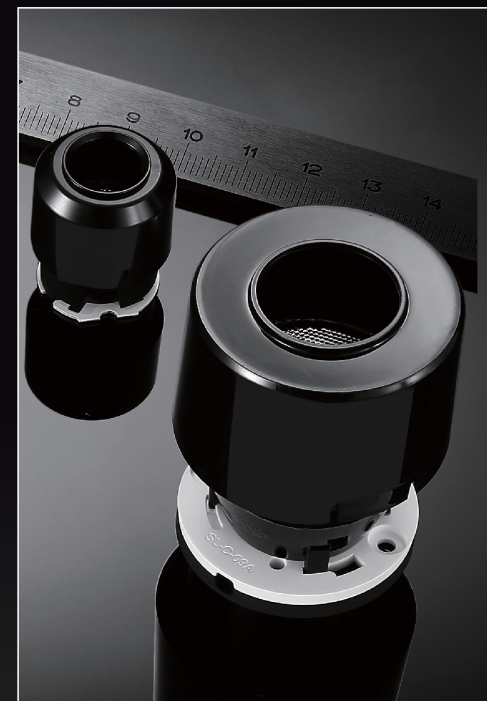




### JHLSLI11007

|              |             |
|--------------|-------------|
| Power        | MAX 3W      |
| Voltage      | AC 220~240V |
| Current      | 700mA       |
| Angle        | 24° 36°     |
| Lumen        | 135LM 150LM |
| CRI          | 90          |
| IP           | 20          |
| Installation | Embedded    |



bridgelux LUMINUS CREE OSRAM

2700K / 3000K / 3500K / 4000K / 5000K




### JHLSLI11008

|              |             |
|--------------|-------------|
| Power        | MAX 8W      |
| Voltage      | AC 220~240V |
| Current      | 200mA       |
| Angle        | 24° 36°     |
| Lumen        | 365LM 400LM |
| CRI          | 90          |
| IP           | 20          |
| Installation | Embedded    |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




### JHLSLI11009

|              |             |
|--------------|-------------|
| Power        | MAX 10W     |
| Voltage      | AC 220~240V |
| Current      | 250mA       |
| Angle        | 24° 36°     |
| Lumen        | 455LM 513LM |
| CRI          | 90          |
| IP           | 20          |
| Installation | Embedded    |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




### JHLSLI11010

|              |             |
|--------------|-------------|
| Power        | MAX 8W      |
| Voltage      | AC 220~240V |
| Current      | 200mA       |
| Angle        | 24° 36°     |
| Lumen        | 365LM 400LM |
| CRI          | 90          |
| IP           | 20          |
| Installation | Embedded    |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




### JHLSLI11011

|              |             |
|--------------|-------------|
| Power        | MAX 10W     |
| Voltage      | AC 220~240V |
| Current      | 250mA       |
| Angle        | 24° 36°     |
| Lumen        | 455LM 513LM |
| CRI          | 90          |
| IP           | 20          |
| Installation | Embedded    |





PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




#### Angle



# Mini small hole spotlights

Small lamp body with high power suitable for low and low ceiling suspension



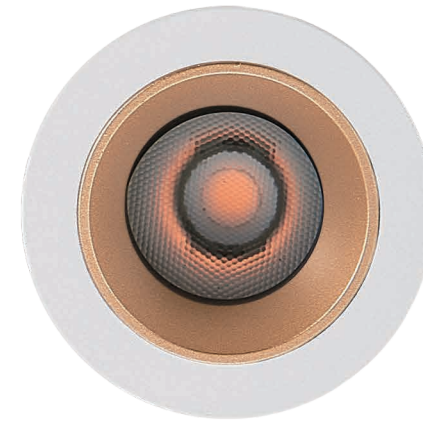

## SMALL OPENING

Mix and match the fashion atmosphere to Stella  
Their color confrontation and collision can  
attack the front line of style  
express the meaning  
that is difficult to express



### JHLSLI11012


|              |             |       |       |       |
|--------------|-------------|-------|-------|-------|
| Power        | MAX 8W      |       |       |       |
| Voltage      | AC 220~240V |       |       |       |
| Current      | 200mA       |       |       |       |
| Angle        | 20°         | 30°   | 40°   | 50°   |
| Lumen        | 576LM       | 632LM | 635LM | 592LM |
| CRI          | 90          |       |       |       |
| IP           | 20          |       |       |       |
| Installation | Embedded    |       |       |       |



#### Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K



### JHLSLI11013


|              |          |       |       |       |
|--------------|----------|-------|-------|-------|
| Power        | MAX 8W   |       |       |       |
| Voltage      | 36V      |       |       |       |
| Current      | 200mA    |       |       |       |
| Angle        | 18°      | 24°   | 36°   | 50°   |
| Lumen        | 627LM    | 704LM | 632LM | 616LM |
| CRI          | 90       |       |       |       |
| IP           | 20       |       |       |       |
| Installation | Embedded |       |       |       |



#### Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K



### JHLSLI11014



|              |             |       |       |       |
|--------------|-------------|-------|-------|-------|
| Power        | MAX 10W     |       |       |       |
| Voltage      | AC 220~240V |       |       |       |
| Current      | 250mA       |       |       |       |
| Angle        | 18°         | 24°   | 36°   | 50°   |
| Lumen        | 780LM       | 881LM | 793LM | 772LM |
| CRI          | 90          |       |       |       |
| IP           | 20          |       |       |       |
| Installation | Embedded    |       |       |       |



#### Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K

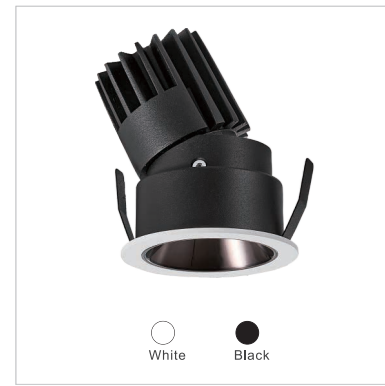

### JHLSLI11015



|              |             |       |       |       |
|--------------|-------------|-------|-------|-------|
| Power        | MAX 8W      |       |       |       |
| Voltage      | AC 220~240V |       |       |       |
| Current      | 200mA       |       |       |       |
| Angle        | 18°         | 24°   | 36°   | 50°   |
| Lumen        | 623LM       | 709LM | 645LM | 616LM |
| CRI          | 90          |       |       |       |
| IP           | 20          |       |       |       |
| Installation | Embedded    |       |       |       |



#### Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K

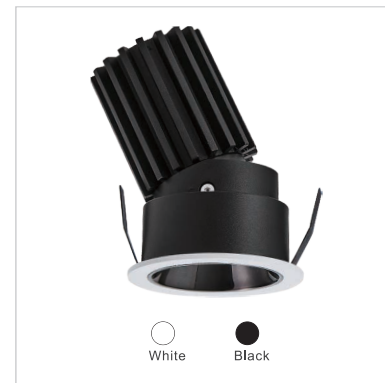

### JHLSLI11016


|              |             |        |       |       |
|--------------|-------------|--------|-------|-------|
| Power        | MAX 12W     |        |       |       |
| Voltage      | AC 220~240V |        |       |       |
| Current      | 300mA       |        |       |       |
| Angle        | 18°         | 24°    | 36°   | 50°   |
| Lumen        | 924LM       | 1056LM | 984LM | 923LM |
| CRI          | 90          |        |       |       |
| IP           | 20          |        |       |       |
| Installation | Embedded    |        |       |       |







#### Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K




#### Angle





### JHLSLI11017

|              |          |       |       |       |
|--------------|----------|-------|-------|-------|
| Power        | MAX 8W   |       |       |       |
| Voltage      | 36V      |       |       |       |
| Current      | 200mA    |       |       |       |
| Angle        | 18°      | 24°   | 36°   | 50°   |
| Lumen        | 627LM    | 704LM | 632LM | 616LM |
| CRI          | 90       |       |       |       |
| IP           | 20       |       |       |       |
| Installation | Embedded |       |       |       |



90°

355°



White  
Black







#### Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

#### Angle



### JHLSLI11018

|              |             |       |       |       |
|--------------|-------------|-------|-------|-------|
| Power        | MAX 10W     |       |       |       |
| Voltage      | AC 220~240V |       |       |       |
| Current      | 250mA       |       |       |       |
| Angle        | 18°         | 24°   | 36°   | 50°   |
| Lumen        | 780LM       | 881LM | 793LM | 772LM |
| CRI          | 90          |       |       |       |
| IP           | 20          |       |       |       |
| Installation | Embedded    |       |       |       |



90°

355°







White  
Black



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

#### Angle



### JHLSLI11019

|              |             |       |       |       |
|--------------|-------------|-------|-------|-------|
| Power        | MAX 8W      |       |       |       |
| Voltage      | AC 220~240V |       |       |       |
| Current      | 200mA       |       |       |       |
| Angle        | 18°         | 24°   | 36°   | 50°   |
| Lumen        | 623LM       | 709LM | 645LM | 616LM |
| CRI          | 90          |       |       |       |
| IP           | 20          |       |       |       |
| Installation | Embedded    |       |       |       |




90°

355°



White  
Black







#### Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

#### Angle



### JHLSLI11020

|              |             |        |       |       |
|--------------|-------------|--------|-------|-------|
| Power        | MAX 12W     |        |       |       |
| Voltage      | AC 220~240V |        |       |       |
| Current      | 300mA       |        |       |       |
| Angle        | 18°         | 24°    | 36°   | 50°   |
| Lumen        | 924LM       | 1056LM | 984LM | 923LM |
| CRI          | 90          |        |       |       |
| IP           | 20          |        |       |       |
| Installation | Embedded    |        |       |       |



90°


355°



White  
Black







#### Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®

2700K / 3000K / 3500K / 4000K / 5000K

#### Angle








Different optical accessories present different optical effects


## SMALL HOLE SPOTLIGHTS




-   
SCR Dimming
-   
0-10V Dimming
-   
DALI Dimming
-   
Bluetooth Dimming
-   
Tuya Dimming
-   
High-power LED  
SDCM<3
-   
CRI>90
-   
Anti-Glare




|              |             |       |       |       |
|--------------|-------------|-------|-------|-------|
| JHLSLI11021  |             |       |       |       |
| Power        | MAX 8W      |       |       |       |
| Voltage      | AC 220~240V |       |       |       |
| Current      | 200mA       |       |       |       |
| Angle        | 18°         | 24°   | 36°   | 50°   |
| Lumen        | 623LM       | 709LM | 645LM | 616LM |
| CRI          | 90          |       |       |       |
| IP           | 20          |       |       |       |
| Installation | Embedded    |       |       |       |



|              |             |       |       |       |
|--------------|-------------|-------|-------|-------|
| JHLSLI11022  |             |       |       |       |
| Power        | MAX 8W      |       |       |       |
| Voltage      | AC 220~240V |       |       |       |
| Current      | 200mA       |       |       |       |
| Angle        | 18°         | 24°   | 36°   | 50°   |
| Lumen        | 623LM       | 709LM | 645LM | 616LM |
| CRI          | 90          |       |       |       |
| IP           | 20          |       |       |       |
| Installation | Embedded    |       |       |       |




|              |             |        |       |       |
|--------------|-------------|--------|-------|-------|
| JHLSLI11023  |             |        |       |       |
| Power        | MAX 12W     |        |       |       |
| Voltage      | AC 220~240V |        |       |       |
| Current      | 300mA       |        |       |       |
| Angle        | 18°         | 24°    | 36°   | 50°   |
| Lumen        | 924LM       | 1056LM | 984LM | 923LM |
| CRI          | 90          |        |       |       |
| IP           | 20          |        |       |       |
| Installation | Embedded    |        |       |       |







PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




Angle






-   
SCR Dimming
-   
0-10V Dimming
-   
DALI Dimming
-   
Bluetooth Dimming
-   
Tuya Dimming
-   
High-power LED  
SDCM<3
-   
CRI>90
-   
Anti-Glare

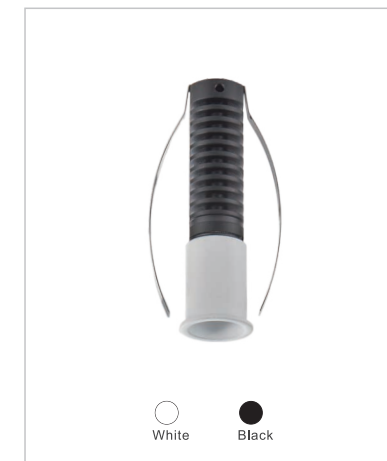

### JHLSLI11024


|              |          |
|--------------|----------|
| Power        | MAX 3W   |
| Voltage      | 3V       |
| Current      | 700mA    |
| Angle        | 24°      |
| Lumen        | 136LM    |
| CRI          | 90/98    |
| IP           | 20       |
| Installation | Embedded |



bridgelux. LUMINUS CREE OSRAM


2700K / 3000K / 3500K / 4000K / 5000K

#### Angle



### JHLSLI11025


|              |          |
|--------------|----------|
| Power        | MAX 3W   |
| Voltage      | 3V       |
| Current      | 700mA    |
| Angle        | 24°      |
| Lumen        | 152LM    |
| CRI          | 90       |
| IP           | 20       |
| Installation | Embedded |




bridgelux. LUMINUS CREE OSRAM

2700K / 3000K / 3500K / 4000K / 5000K

#### Angle






-   
SCR Dimming
-   
0-10V Dimming
-   
DALI Dimming
-   
Bluetooth Dimming
-   
Tuya Dimming
-   
High-power LED  
SDCM<3
-   
CRI>90
-   
Anti-Glare



JHLSLI11026




|              |          |       |       |
|--------------|----------|-------|-------|
| Power        | MAX 3W   |       |       |
| Voltage      | 3V       |       |       |
| Current      | 700mA    |       |       |
| Angle        | 15°      | 24°   | 36°   |
| Lumen        | 180LM    | 195LM | 205LM |
| CRI          | 90       |       |       |
| IP           | 20       |       |       |
| Installation | Embedded |       |       |



LUMINUS CREE bridgelux OSRAM


2700K / 3000K / 3500K / 4000K / 5000K

Angle



JHLSLI11027

|              |          |       |       |
|--------------|----------|-------|-------|
| Power        | MAX 3W   |       |       |
| Voltage      | 3V       |       |       |
| Current      | 700mA    |       |       |
| Angle        | 15°      | 24°   | 36°   |
| Lumen        | 180LM    | 195LM | 205LM |
| CRI          | 90       |       |       |
| IP           | 20       |       |       |
| Installation | Embedded |       |       |



LUMINUS CREE bridgelux OSRAM

2700K / 3000K / 3500K / 4000K / 5000K

Angle

