

ALUMINUM PROFILES



VOL I

Types of installation:



Material: Extruded aluminum
Dimension: 25.1×11.9mm
Length: MAX 6m

BLEIAP10001

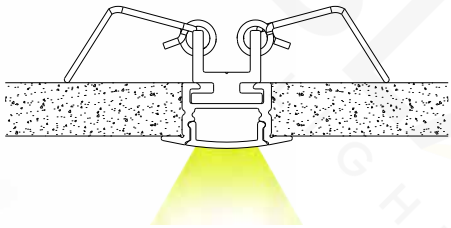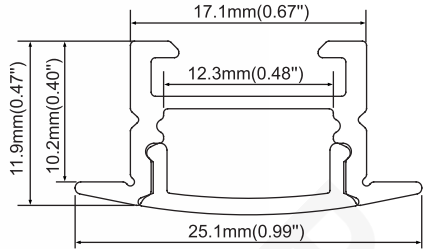

FINISH



Anod. aluminum



white



Black



IP20

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

ACCESSORIES



Spring clip



90° Horizontal connector



90° Vertical connector



135° Horizontal connector



180° Connector






135° Vertical connector

Types of installation:



Material: Extruded aluminum
Dimension: 17.1×11.9mm
Length: MAX 6m

BLEIAP10002

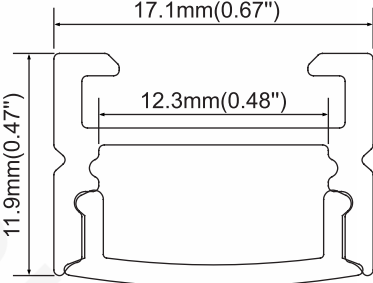

IP20

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

ACCESSORIES



Mounting clip (metal)



Magnet



Adjustable bracket



90° Vertical connector



90° Horizontal connector



180° Connector



135° Vertical connector

BLEIAP10003

Types of installation:

Material: Extruded aluminum
Dimension: 17.1×18.5mm
Length: MAX 6m


CE IP20

17.1mm(0.67")
18.5mm(0.73")
16.8mm(0.66")
12.3mm(0.48")


FINISH

Anod. aluminum white Black


END CAPS

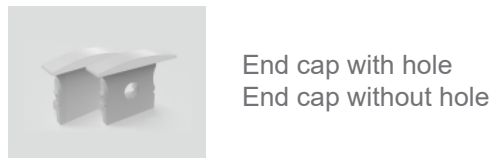

DIFFUSERS

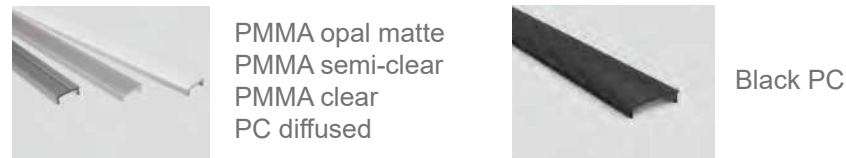

ACCESSORIES

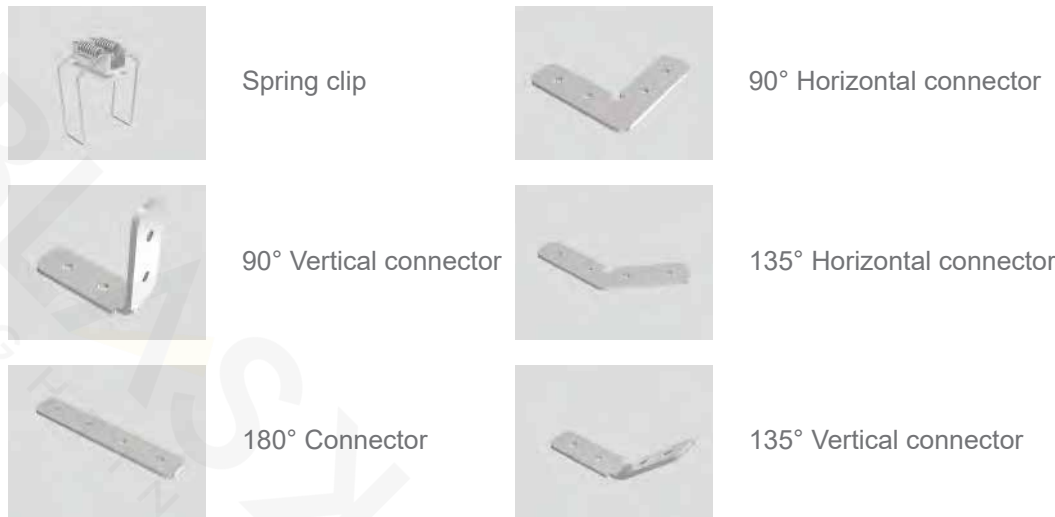

BLEIAP10004

Types of installation:

Material: Extruded aluminum
Dimension: 17.1×18.5mm
Length: MAX 6m


CE IP20

17.1mm(0.67")
18.5mm(0.73")
12.3mm(0.48")


FINISH

Anod. aluminum white Black


END CAPS

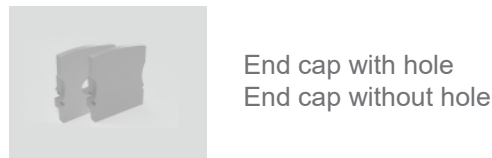


DIFFUSERS

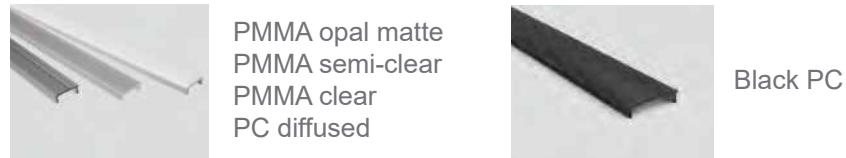


ACCESSORIES

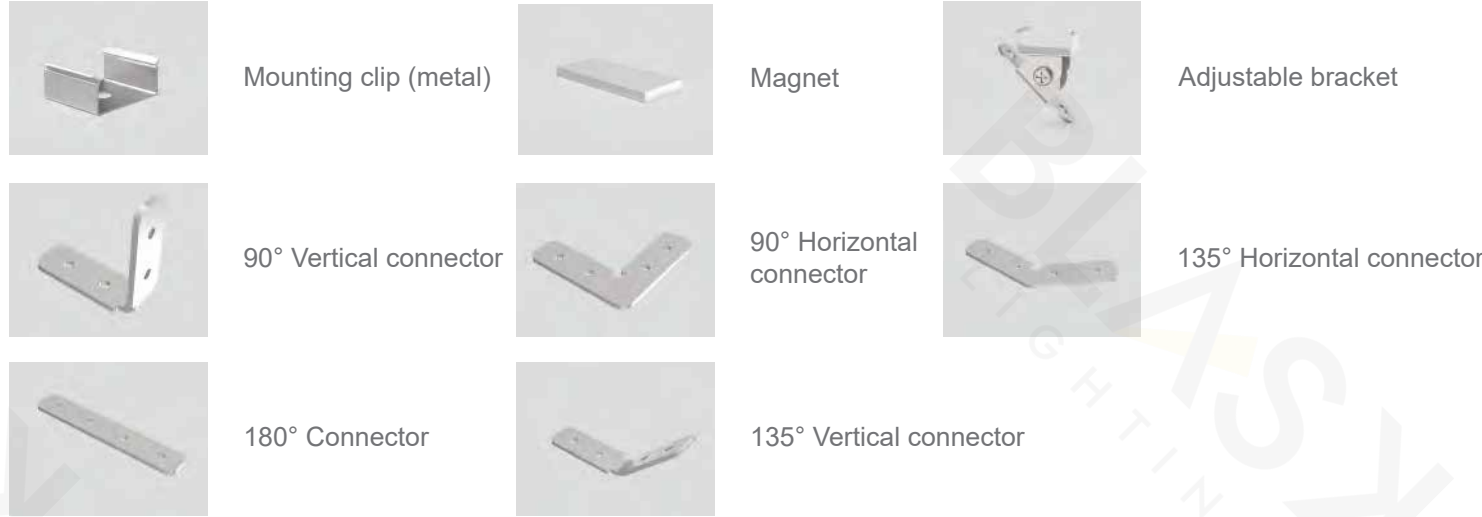


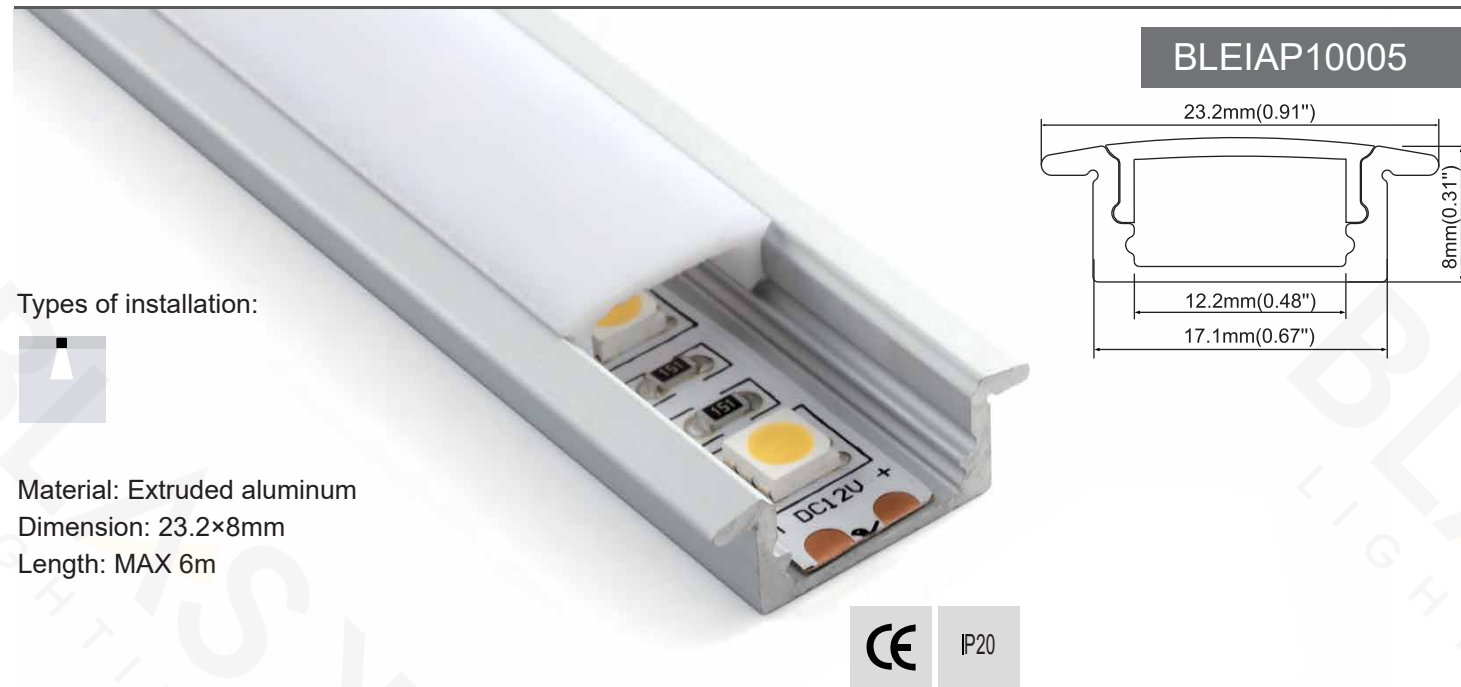

END CAPS

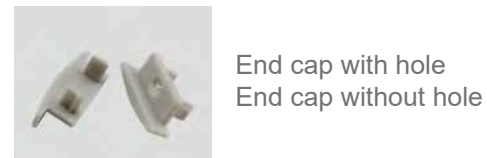

DIFFUSERS

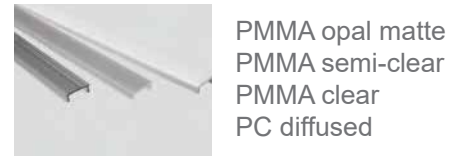


INSTAIATION STEPS








END CAPS



DIFFUSERS

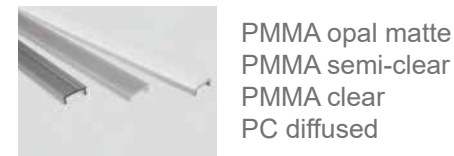

ACCESSORIES

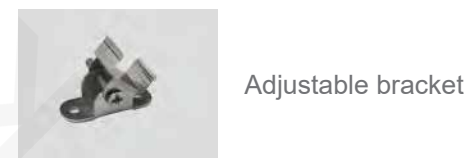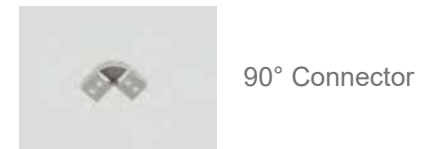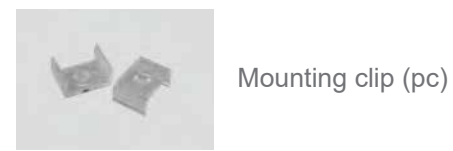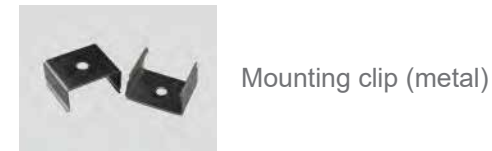



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

ACCESSORIES



Mounting clip (metal)



Mounting clip (PC)




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused


ACCESSORIES



Mounting clip (metal)



BLEIAP10009

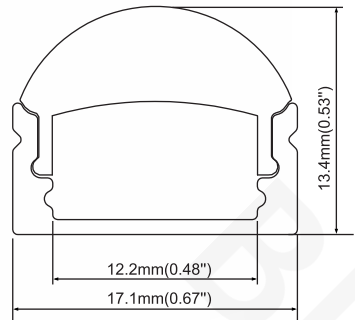

Types of installation:



Material: Extruded aluminum
Dimension: 17.1×13.4mm
Length: MAX 6m




END CAPS



End cap with hole
End cap without hole

FINISH




Anod. aluminum white Black

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
60 degrees



PC diffused

ACCESSORIES



Mounting clip (metal)




Mounting clip (PC)



180° Connector



BLEIAP10010

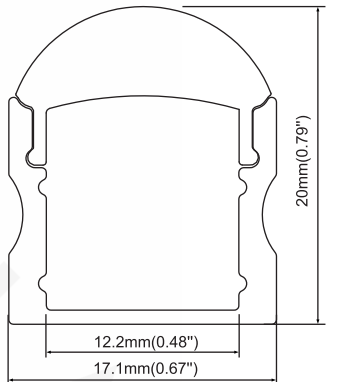

Types of installation:



Material: Extruded aluminum
Dimension: 17.1×20mm
Length: MAX 6m




END CAPS



End cap with hole
End cap without hole

FINISH



Anod. aluminum white Black

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
15 degrees



PC diffused

ACCESSORIES



Mounting clip (metal)



Mounting clip (PC)



180° Connector



Types of installation:



Material: Extruded aluminum
Dimension: 23.2×15.3mm
Length: MAX 6m



END CAPS



End cap with hole
End cap without hole

DIFFUSERS




PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

INSTAIIATION STEPS



step 01



step 02



Types of installation:



Material: Extruded aluminum
Dimension: 17.1×15.3mm
Length: MAX 6m



END CAPS




End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

FINISH



ACCESSORIES



Mounting clip(metal)



Mounting clip (PC)



Adjustable bracket




90° Connector



180° Connector



BLEIAP10013




Types of installation:



Material: Extruded aluminum
Dimension: 16×16mm
Length: MAX 6m



FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PC diffused

DIFFUSERS



Mounting clip (PC)



Mounting clip (metal)

INSTALLATION STEPS



step 01



step 02




step 03



step 04

BLEIAP10014

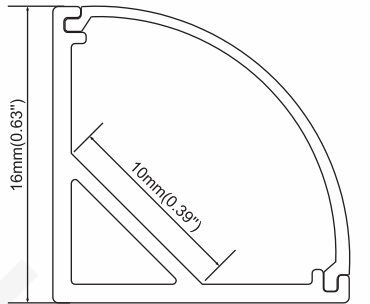

Types of installation:




Material: Extruded aluminum
Dimension: 16×16mm
Length: MAX 6m

END CAPS



End cap with hole
End cap without hole

DIFFUSERS




PMMA opal matte
PMMA semi-clear
PC diffused



Black PC

FINISH



ACCESSORIES



Mounting clip (metal)



Mounting clip (PC)





Types of installation:



Material: Extruded aluminum
Dimension: 18.4×18.4mm
Length: MAX 6m

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

ACCESSORIES



Mounting clip (metal)



Mounting clip (PC)



FINISH



Anod. aluminum



white




Black



Types of installation:



Material: Extruded aluminum
Dimension: $\phi 20.8\text{mm}$
Length: MAX 6m



FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PC diffused

ACCESSORIES



Mounting clip (metal)



Steel wire





BLEIAP10020

Types of installation:

Material: Extruded aluminum
Dimension: 20.3×27mm
Length: MAX 6m

END CAPS

End cap with hole
End cap without hole

DIFFUSERS

PMMA opal matte
PMMA semi-clear
PC diffused

ACCESSORIES

Metal clip

Steel wire

CE IP20

FINISH

Anod. aluminum white Black

27mm(1.06") 16mm 16.7mm(0.66") 20.3mm(0.80")

BLEIAP10021

Types of installation:

Material: Extruded aluminum
Dimension: 20.3×36.5mm
Length: MAX 6m

END CAPS

End cap without hole

DIFFUSERS

PC diffused

ACCESSORIES

Metal clip

Steel wire

CE IP20

FINISH

Anod. aluminum white Black

36.5mm(1.44") 25mm(0.99") 16.7mm(0.66") 20.3mm(0.80")

BLEIAP10022

Types of installation:

Material: Extruded aluminum
Dimension: 20.3×27mm
Length: MAX 6m

END CAPS

End cap with hole
End cap without hole

DIFFUSERS

PMMA opal matte
PMMA semi-clear
PC diffused

ACCESSORIES

Metal clip

Steel wire

CE IP20

FINISH

Anod. aluminum white Black


27mm(1.06") 16mm 16.7mm(0.66") 20.3mm(0.80")



Types of installation:



Material: Extruded aluminum
Dimension: 30.5×12.8mm
Length: MAX 6m

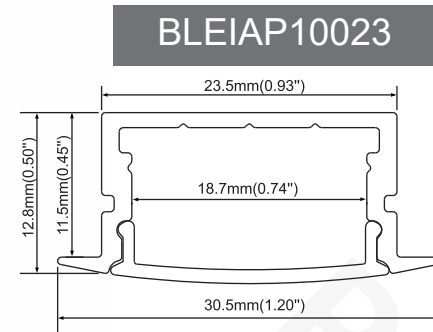

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

ACCESSORIES




Spring clip




Mounting clip (metal)

Types of installation:



Material: Extruded aluminum
Dimension: 23.5×12.8mm
Length: MAX 6m

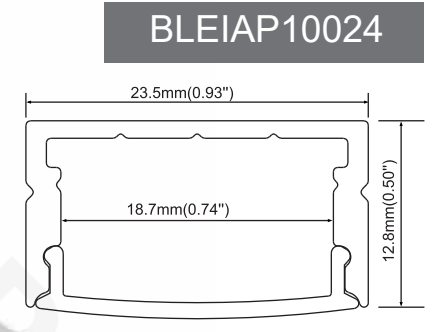

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

ACCESSORIES



Mounting clip (PC)



Mounting clip (metal)



Adjustable bracket





END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

ACCESSORIES



Adjustable bracket



Mounting clip (PC)



Mounting clip (metal)




Types of installation:




Material: Extruded aluminum
Dimension: 36×28mm
Length: MAX 6m



FINISH



Anod. aluminum white Black

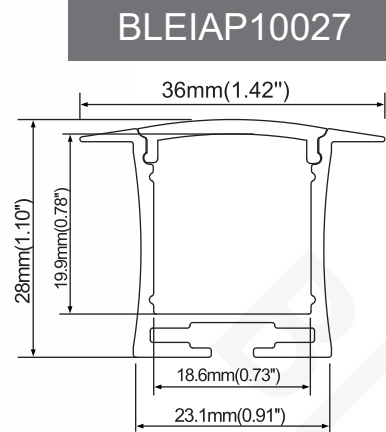

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused




Black PC


ACCESSORIES



Spring clip

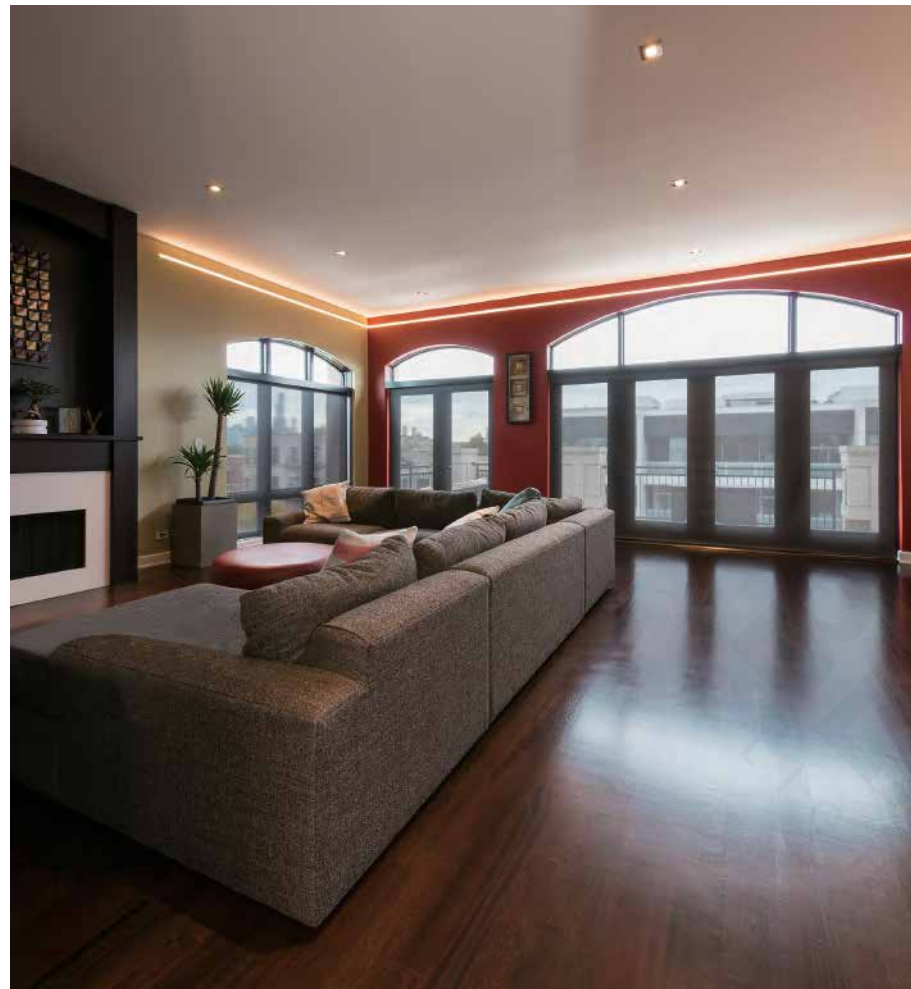


Types of installation:




Material: Extruded aluminum
Dimension: 23.4×28mm
Length: MAX 6m



FINISH



Anod. aluminum white Black

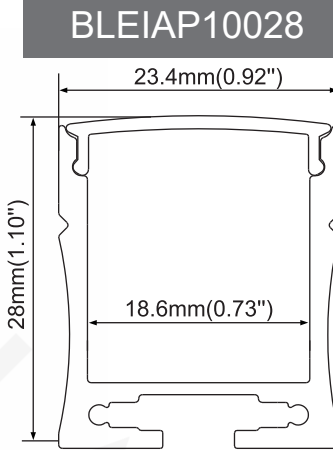

END CAPS



End caps

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

ACCESSORIES



Steel wire



Mounting clip (metal)






END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear

ACCESSORIES



Mounting clip (metal)




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PC diffused

ACCESSORIES



Mounting clip (metal)



90° Joining connector




180° Joining connector

FINISH



Anod. aluminum white Black

BLEIAP10031

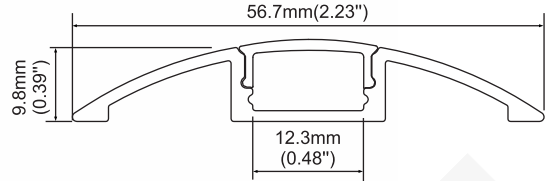


Types of installation:



Material: Extruded aluminum
Dimension: 56.7×9.8mm
Length: MAX 6m



FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused




Black PC

Types of installation:




Material: Extruded aluminum
Dimension: ϕ 33mm
Length: MAX 6m

BLEIAP10032

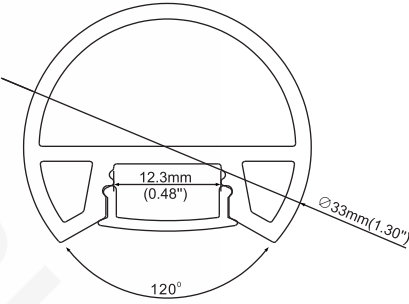

FINISH




END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




Hanging clip

BLEIAP10033

Types of installation:



Material: Extruded aluminum
Dimension: 17.1×15mm
Length: MAX 6m



END CAPS



End cap with hole
End cap without hole

FINISH




Anod. aluminum white Black

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

ACCESSORIES

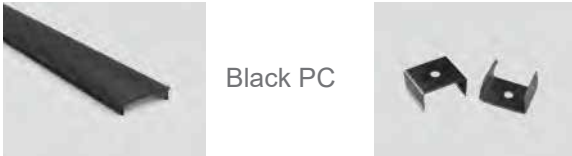

Black PC Mounting clip (metal)


CE IP20

BLEIAP10034

Types of installation:



Material: Extruded aluminum
Dimension: 23.5×15mm
Length: MAX 6m

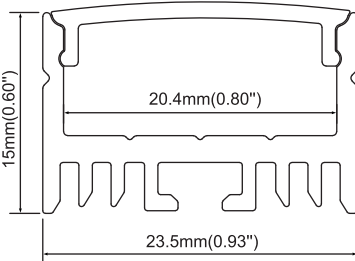

END CAPS



End cap with hole
End cap without hole

FINISH




Anod. aluminum white Black

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

ACCESSORIES

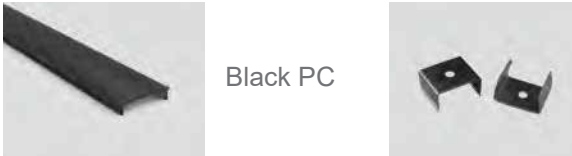

Black PC Mounting clip (metal)


CE IP20

BLEIAP10035

Types of installation:



Material: Extruded aluminum
Dimension: 26×33mm
Length: MAX 6m

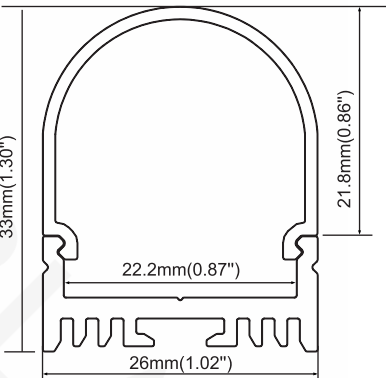

END CAPS



End cap with hole
End cap without hole

FINISH




Anod. aluminum white Black

DIFFUSERS



PC diffused

ACCESSORIES

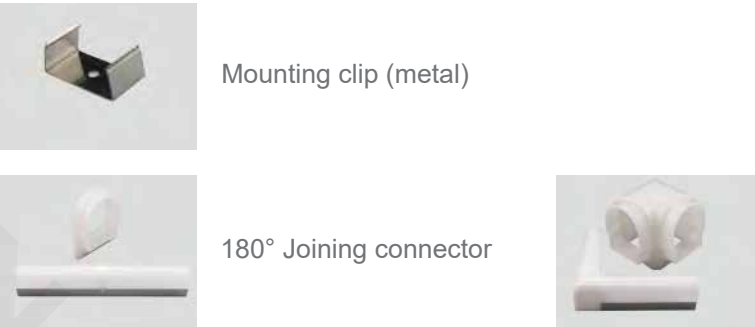

Mounting clip (metal) 180° Joining connector 90° Joining connector


CE IP20

BLEIAP10036

Types of installation:



Material: PMMA
Dimension: 11.7×12mm
Length: MAX 6m



END CAPS




End cap with hole
End cap without hole

ACCESSORIES



Mounting clip (metal)



Rigid LED light bar

FINISH



white


CE IP20

BLEIAP10037

Types of installation:



Material: PMMA
Dimension: 10×10mm
Length: MAX 6m



END CAPS



End cap with hole
End cap without hole

ACCESSORIES



Mounting clip (metal)




Rigid LED light bar

FINISH




white

CE IP20

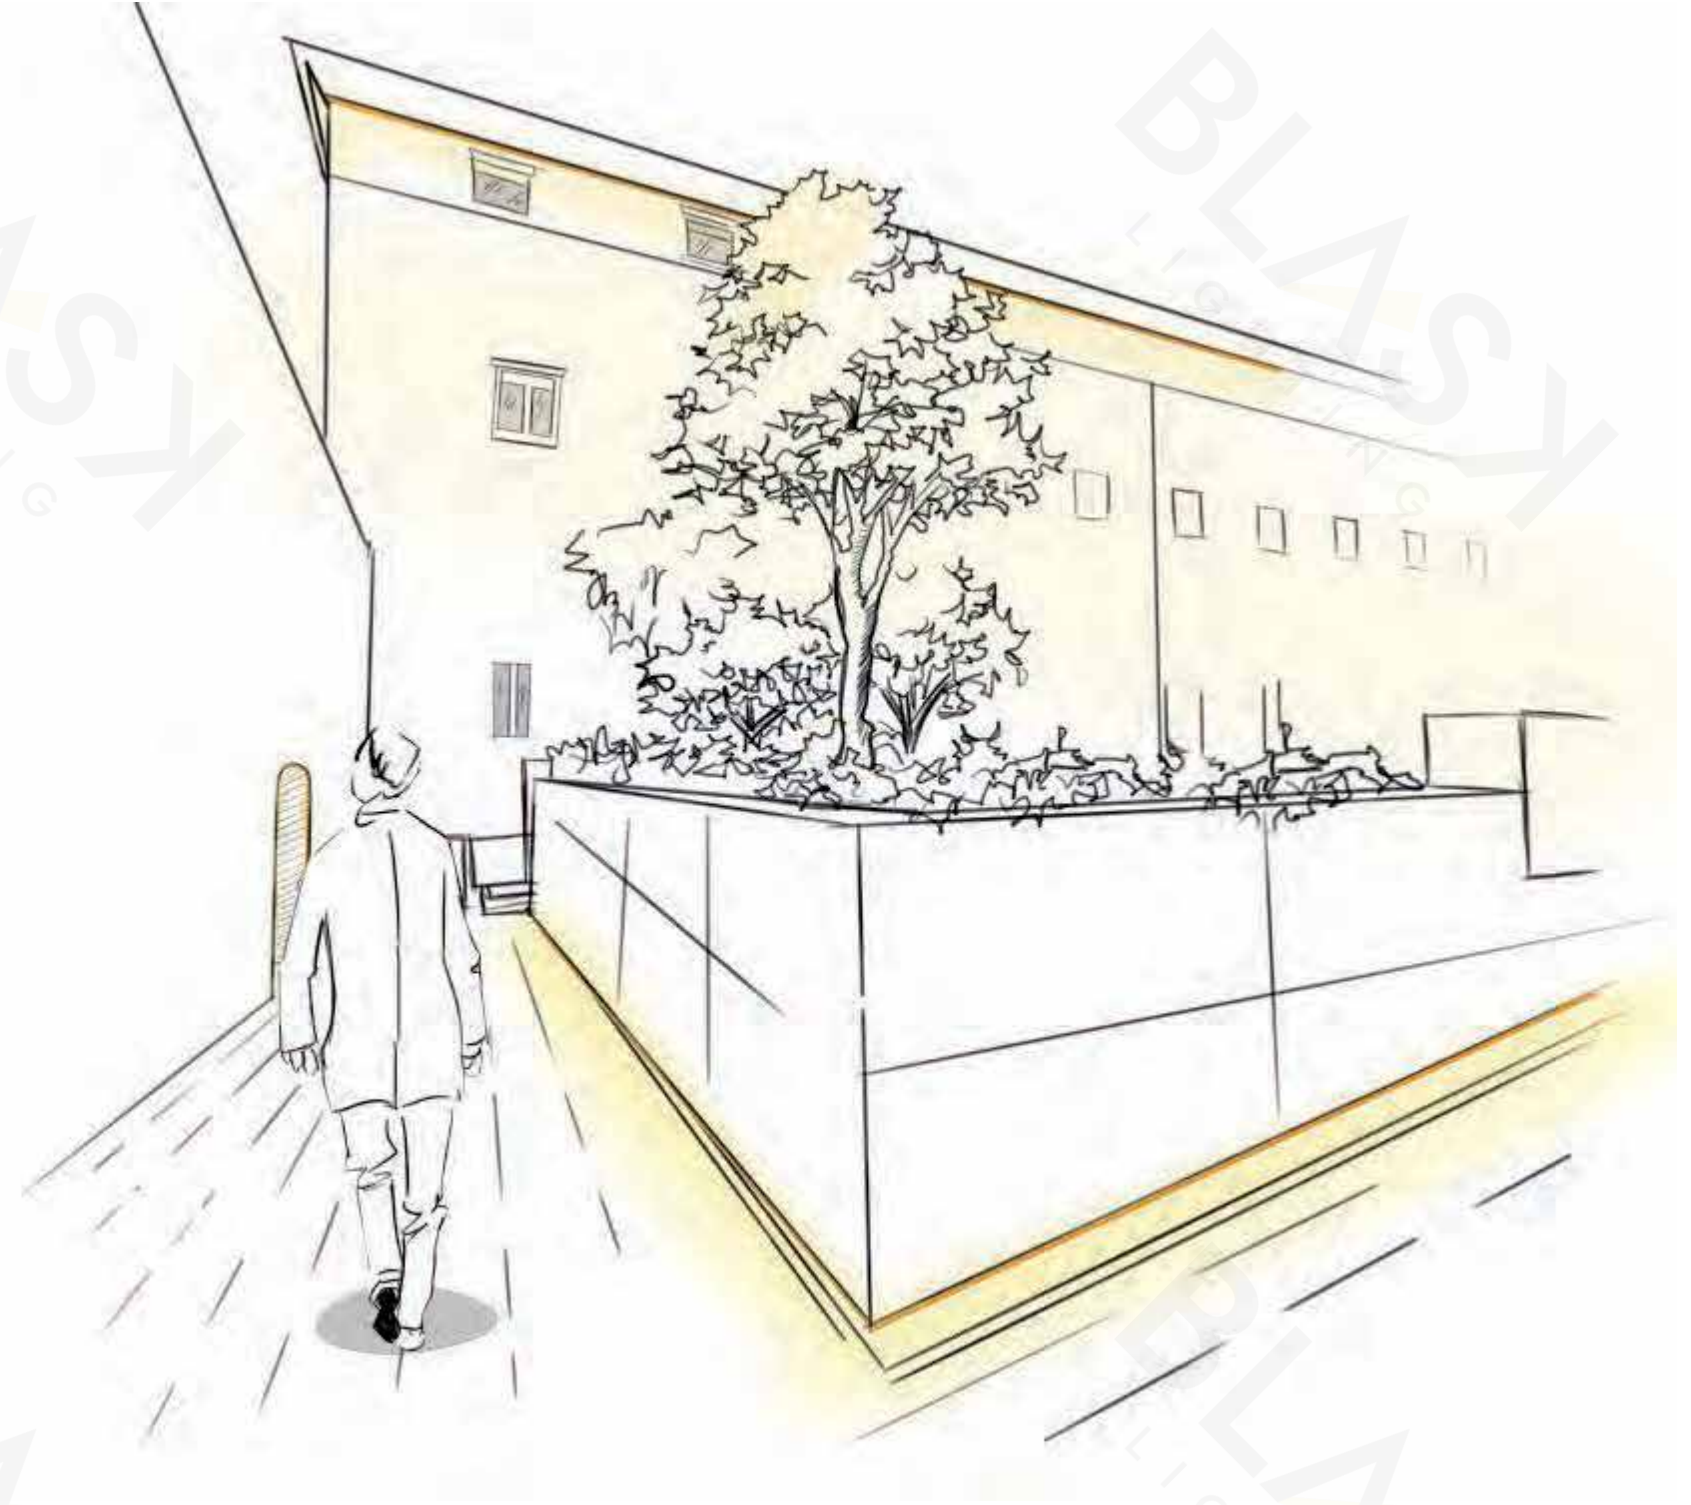



BLEIAP10038

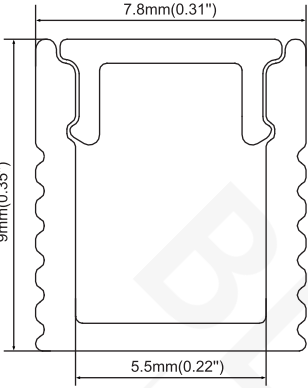


Types of installation:




Material: Extruded aluminum
Dimension: 7.8×9mm
Length: MAX 6m




FINISH



END CAPS

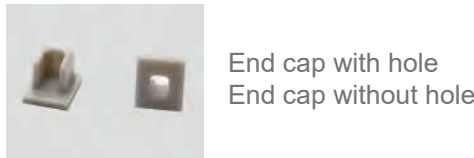

DIFFUSERS

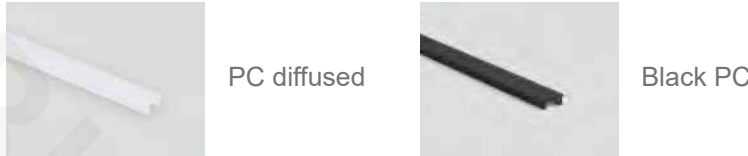


ACCESSORIES





BLEIAP10039

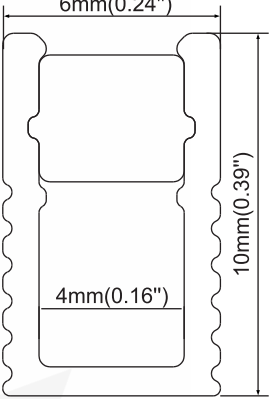


Types of installation:




Material: Extruded aluminum
Dimension: 6×10mm
Length: MAX 6m




FINISH




END CAPS

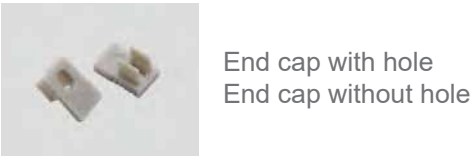

DIFFUSERS



ACCESSORIES

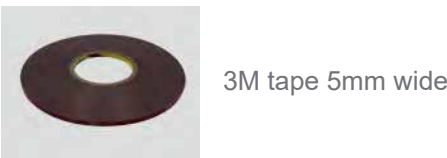


Types of installation:



Material: Extruded aluminum
Dimension: 11×10mm
Length: MAX 6m




FINISH



Anod. aluminum white Black


BLEIAP10040




Types of installation:



Material: Extruded aluminum
Dimension: 18×5.6mm
Length: MAX 6m

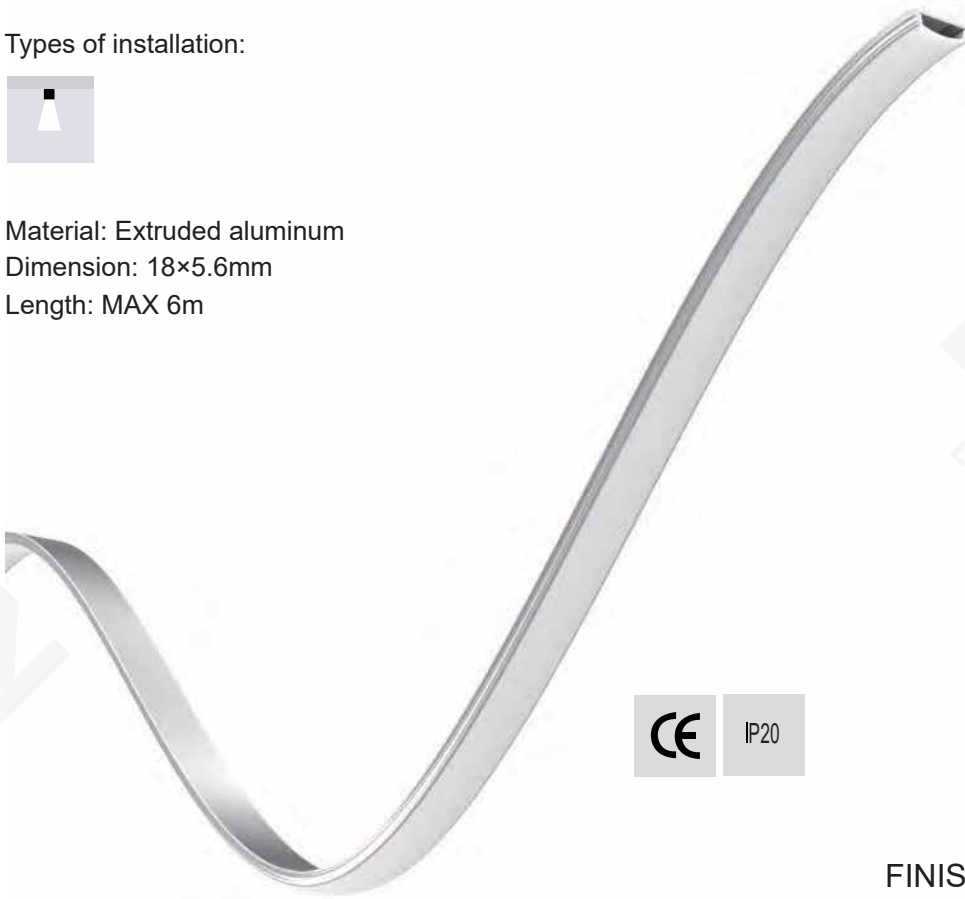


FINISH



Anod. aluminum white Black

BLEIAP10041

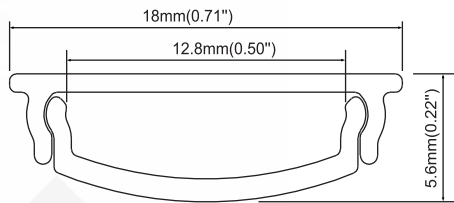

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



Silicon

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 7.8×12mm
Length: MAX 6m

BLEIAP10042

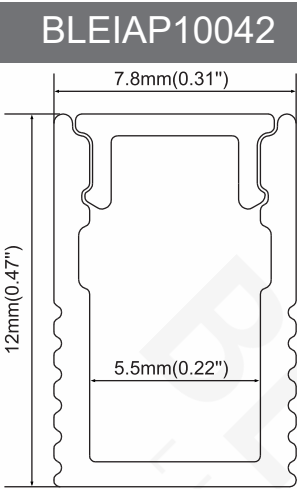

FINISH



Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC frosted




Black PC

ACCESSORIES



Mounting clip(metal)

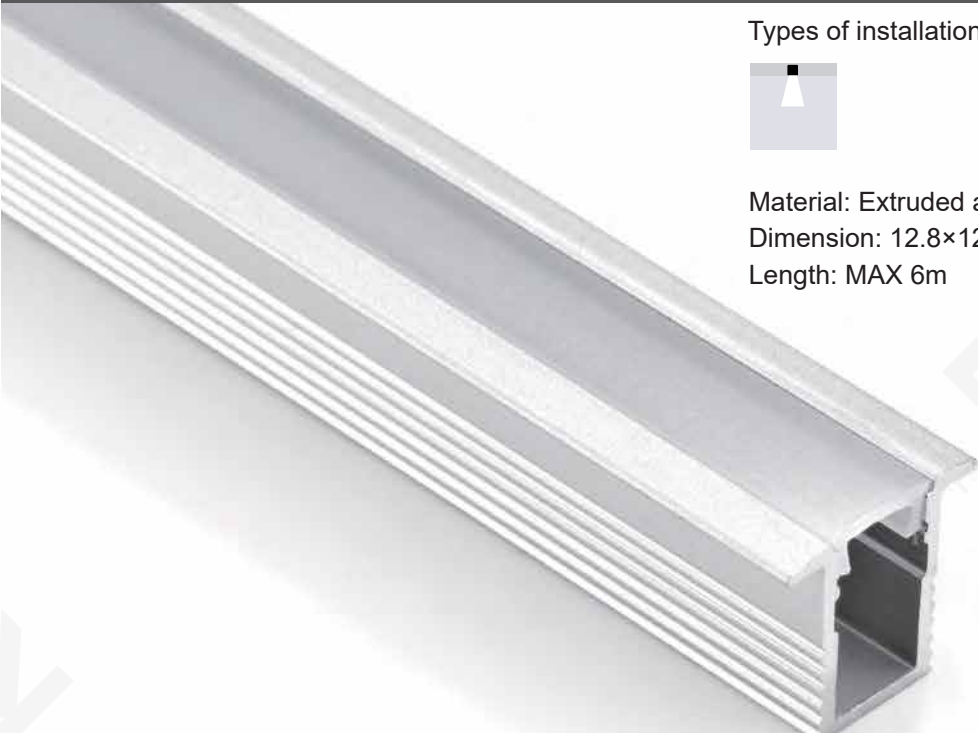


Types of installation:



Material: Extruded aluminum
Dimension: 12.8×12mm
Length: MAX 6m

BLEIAP10043

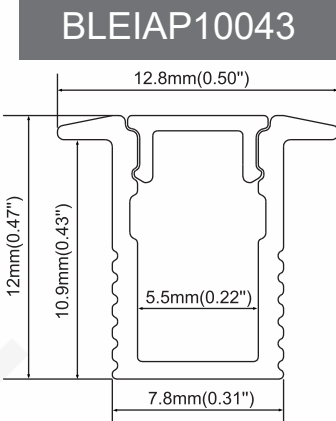

FINISH



Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS




PC frosted



Black PC



BLEIAP10044

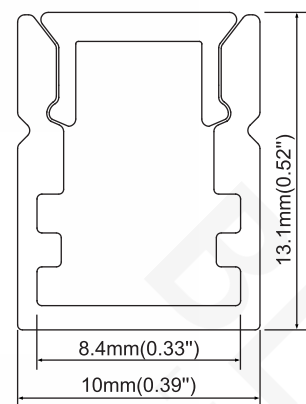


Types of installation:




Material: Extruded aluminum
Dimension: 10×13.1mm
Length: MAX 6m



FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA diffused



Black PC


ACCESSORIES




Mounting clip (metal)



BLEIAP10045

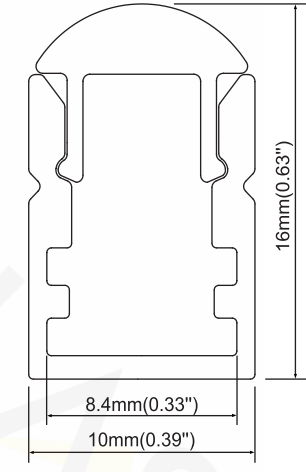


Types of installation:



Material: Extruded aluminum
Dimension: 10×16mm
Length: MAX 6m



FINISH



END CAPS



End cap with hole



End cap without hole

DIFFUSERS




PMMA forsted 15 degrees

ACCESSORIES



Mounting clip (matal)

BLEIAP10046

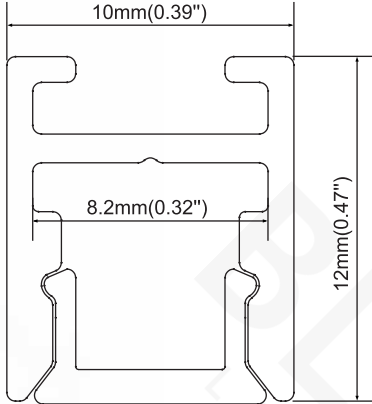

Types of installation:



Material: Extruded aluminum
Dimension: 10×12mm
Length: MAX 6m



FINISH



Anod. aluminum



white



Black



Golden

END CAPS



End Caps

DIFFUSERS



PC frosted



Black PC

ACCESSORIES



Steel wire



90° Horizontal connector






180° Connector



90° Vertical connector




BLEIAP10047

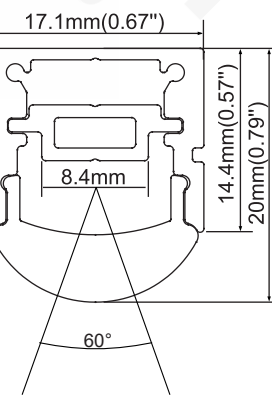


Types of installation:



Material: Extruded aluminum
Dimension: 17.1×20mm
Length: MAX 6m




0 degrees adjustable



15 degrees adjustable



30 degrees adjustable



45 degrees adjustable

END CAPS



End Caps

DIFFUSERS



PC or PMMA lens

ACCESSORIES



Mounting clip (metal)



Adjustable bracket

FINISH



Anod. aluminum



white




Black


Types of installation:



Material: Extruded aluminum
Dimension: 29.5×13.4mm
Length: MAX 6m

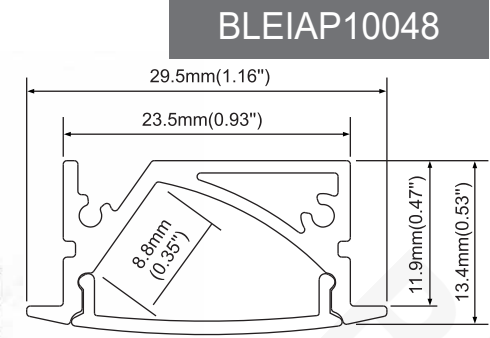

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




Spring clip


Types of installation:



Material: Extruded aluminum
Dimension: 36.1×18.5mm
Length: MAX 6m

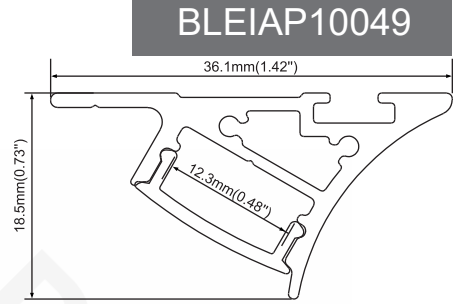

FINISH



END CAPS




End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




3M tape 10mm wide

BLEIAP10050

Types of installation:



Material: Extruded aluminum
Dimension: 18×16.2mm
Length: MAX 6m



CE IP20

END CAPS



End cap with hole
End cap without hole

FINISH



Anod. aluminum white Black

DIFFUSERS



PMMA opal matte
PMMA semi clear


ACCESSORIES




Mounting clip (metal)

BLEIAP10051

Types of installation:



Material: Extruded aluminum
Dimension: 18×15.2mm
Length: MAX 6m



CE IP20

END CAPS



End cap with hole
End cap without hole

FINISH




Anod. aluminum white Black

DIFFUSERS



30 degrees lens
PMMA semi clear

ACCESSORIES




Mounting clip (metal)

BLEIAP10052

Types of installation:



Material: Extruded aluminum
Dimension: 18×15.3mm
Length: MAX 6m



CE IP20

END CAPS



End cap with hole
End cap without hole

FINISH



Anod. aluminum white Black

DIFFUSERS



60 degrees lens
PMMA semi clear

ACCESSORIES




Mounting clip (metal)

BLEIAP10053

Types of installation:



Material: Extruded aluminum
Dimension: 18×14mm
Length: MAX 6m



CE IP20

END CAPS




End cap with hole
End cap without hole

FINISH



Anod. aluminum white Black

DIFFUSERS



90 degrees lens
PMMA semi clear

ACCESSORIES



Mounting clip (metal)




END CAPS



End Caps

FINISH



DIFFUSERS



PMMA opal matte
PMMA semi clear

ACCESSORIES



Mounting clip (metal)




END CAPS



End Caps

FINISH



DIFFUSERS



30 degrees lens
PMMA semi clear

ACCESSORIES



Mounting clip (metal)




END CAPS



End Caps

FINISH



DIFFUSERS



60 degrees lens
PMMA semi clear

ACCESSORIES



Mounting clip (metal)



END CAPS



End Caps

FINISH



DIFFUSERS




90 degrees lens
PMMA semi clear


ACCESSORIES




Mounting clip (metal)

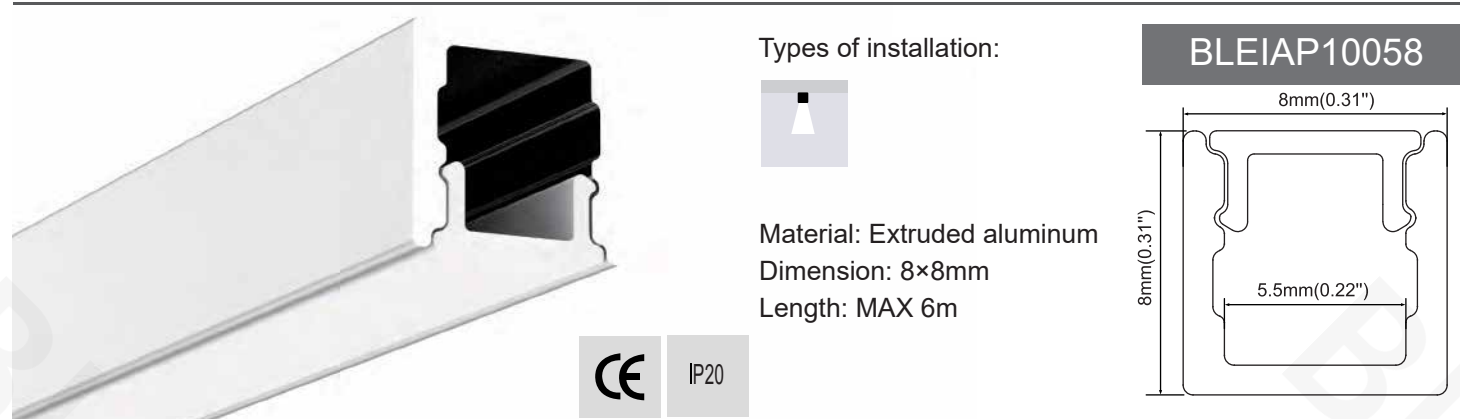


END CAPS

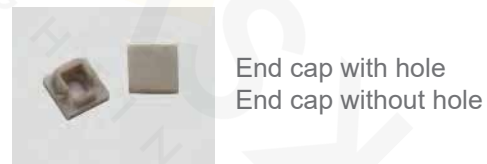


FINISH




DIFFUSERS



ACCESSORIES

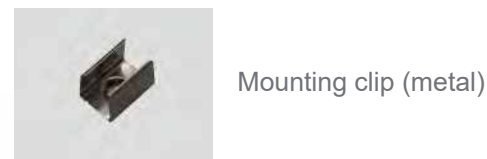


END CAPS

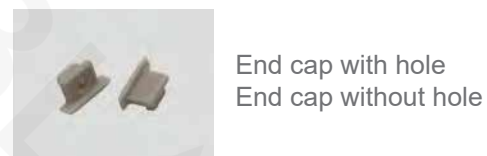


FINISH




DIFFUSERS




END CAPS

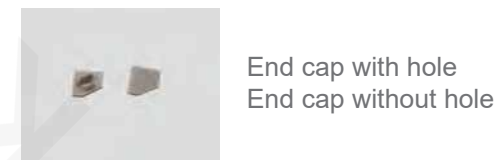



FINISH




DIFFUSERS

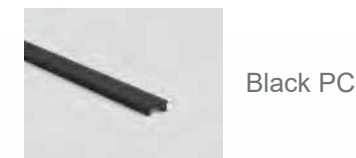


ACCESSORIES

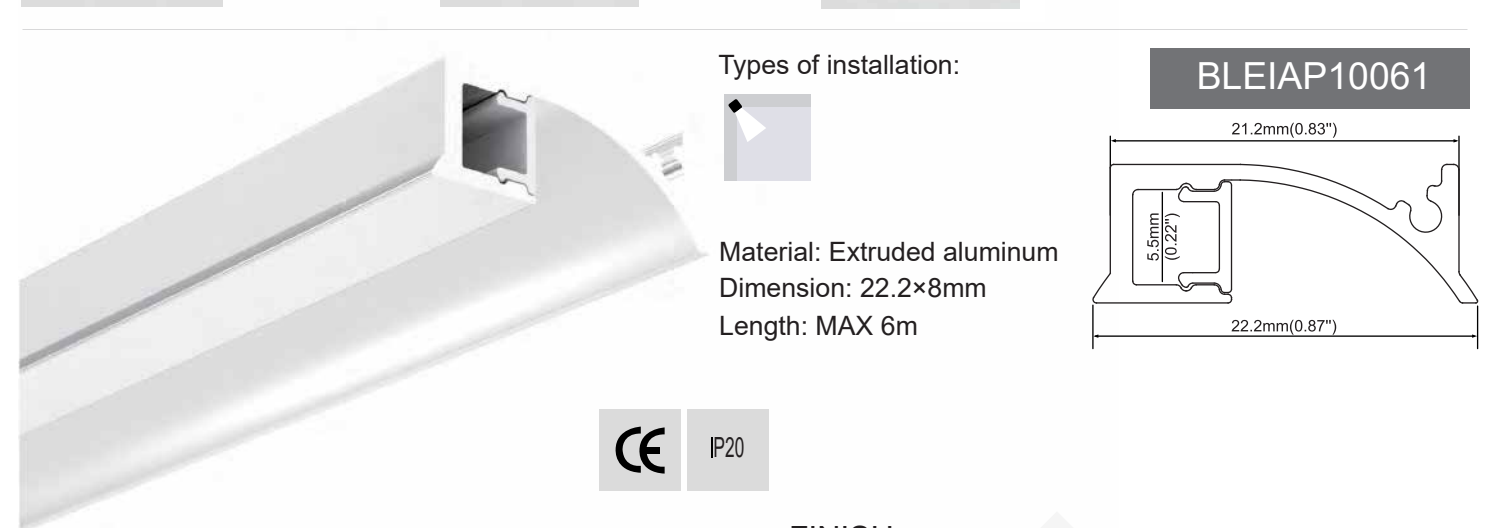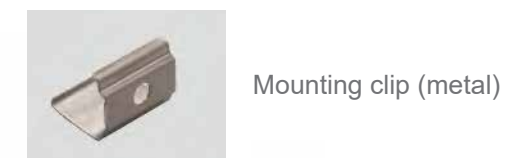


END CAPS

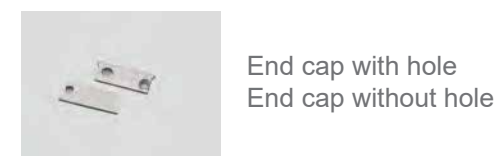

FINISH



DIFFUSERS

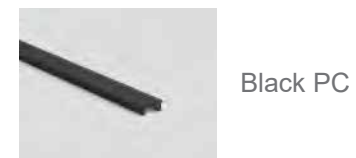

BLEIAP10062

Types of installation:

Material: Extruded aluminum
Dimension: 25×14mm
Length: MAX 6m

25mm(0.98")

8mm(0.31")
6mm(0.24")
11mm(0.43")
14mm(0.55")

CE IP20

FINISH

Anod. aluminum white Black

END CAPS

End cap with hole
End cap without hole

DIFFUSERS

PC diffused

BLEIAP10063

Types of installation:

Material: Extruded aluminum
Dimension: 19×12mm
Length: MAX 6m

14mm(0.55")
11.8mm(0.47")
12mm(0.47")
19mm(0.75")

CE IP20

FINISH

Anod. aluminum white Black

END CAPS

End cap with hole
End cap without hole

DIFFUSERS

PC diffused

ACCESSORIES

Mounting clip (metal)

BLEIAP10064

Types of installation:

Material: Extruded aluminum
Dimension: 27.9×20.4mm
Length: MAX 6m

27.9mm(1.10")
15mm(0.59")
10.5mm(0.41")
10mm(0.39")
18.2mm(0.72")
20.4mm(0.80")

CE IP20

FINISH

Anod. aluminum white Black

END CAPS

End cap with hole
End cap without hole

DIFFUSERS

PC diffused

BLEIAP10065

Types of installation:

Material: Extruded aluminum
Dimension: 27.9×27.6mm
Length: MAX 6m

27.9mm(1.10")
15mm(0.59")
10.5mm(0.41")
10mm(0.39")
25.2mm(0.99")
27.6mm(1.09")

CE IP20

FINISH

Anod. aluminum white Black

END CAPS

End cap with hole
End cap without hole

DIFFUSERS

PC diffused



BLEIAP10066

25.4mm(1.00")

16mm(0.63")

22.4mm(0.88")

Types of installation:



Material: Extruded aluminum
Dimension: 25.4×16mm
Length: MAX 6m



FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)



90° Horizontal connector



90° Vertical connector



180° connector



Steel wire



Types of installation:



Material: Extruded aluminum
Dimension: 25.4×23mm
Length: MAX 6m



FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)



90° Vertical connector



180° Connector




90° Horizontal connector



Steel wire



FINISH





END CAPS




DIFFUSERS




ACCESSORIES

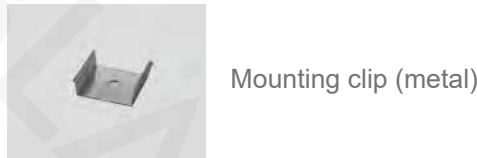


FINISH




END CAPS

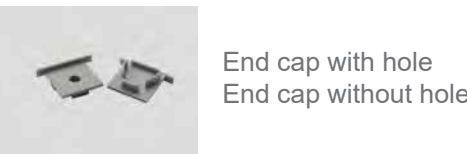

DIFFUSERS

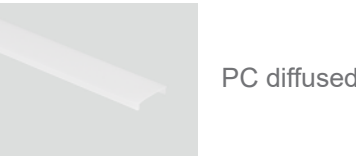

ACCESSORIES









END CAPS



DIFFUSERS




ACCESSORIES

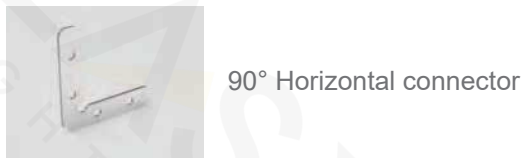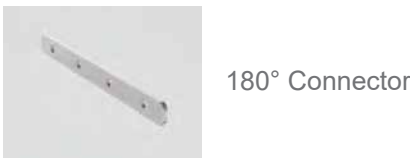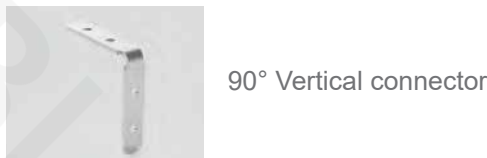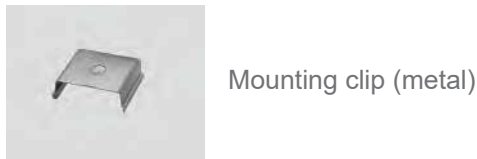




END CAPS




DIFFUSERS

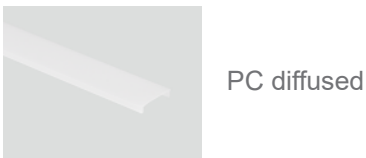

ACCESSORIES

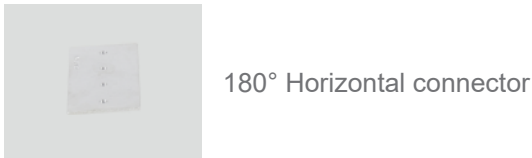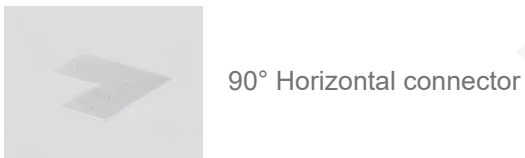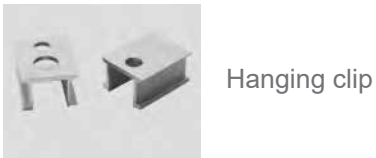

BLEIAP10072

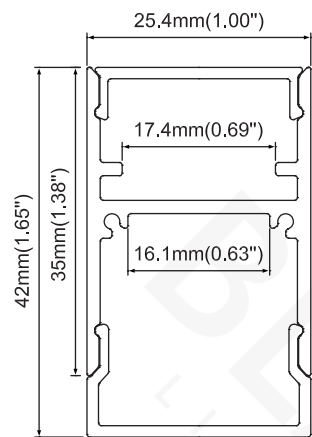

Types of installation:



Material: Extruded aluminum
Dimension: 25.4×42mm
Length: MAX 6m



FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused



PC diffused


ACCESSORIES



Hanging clip



Steel wire

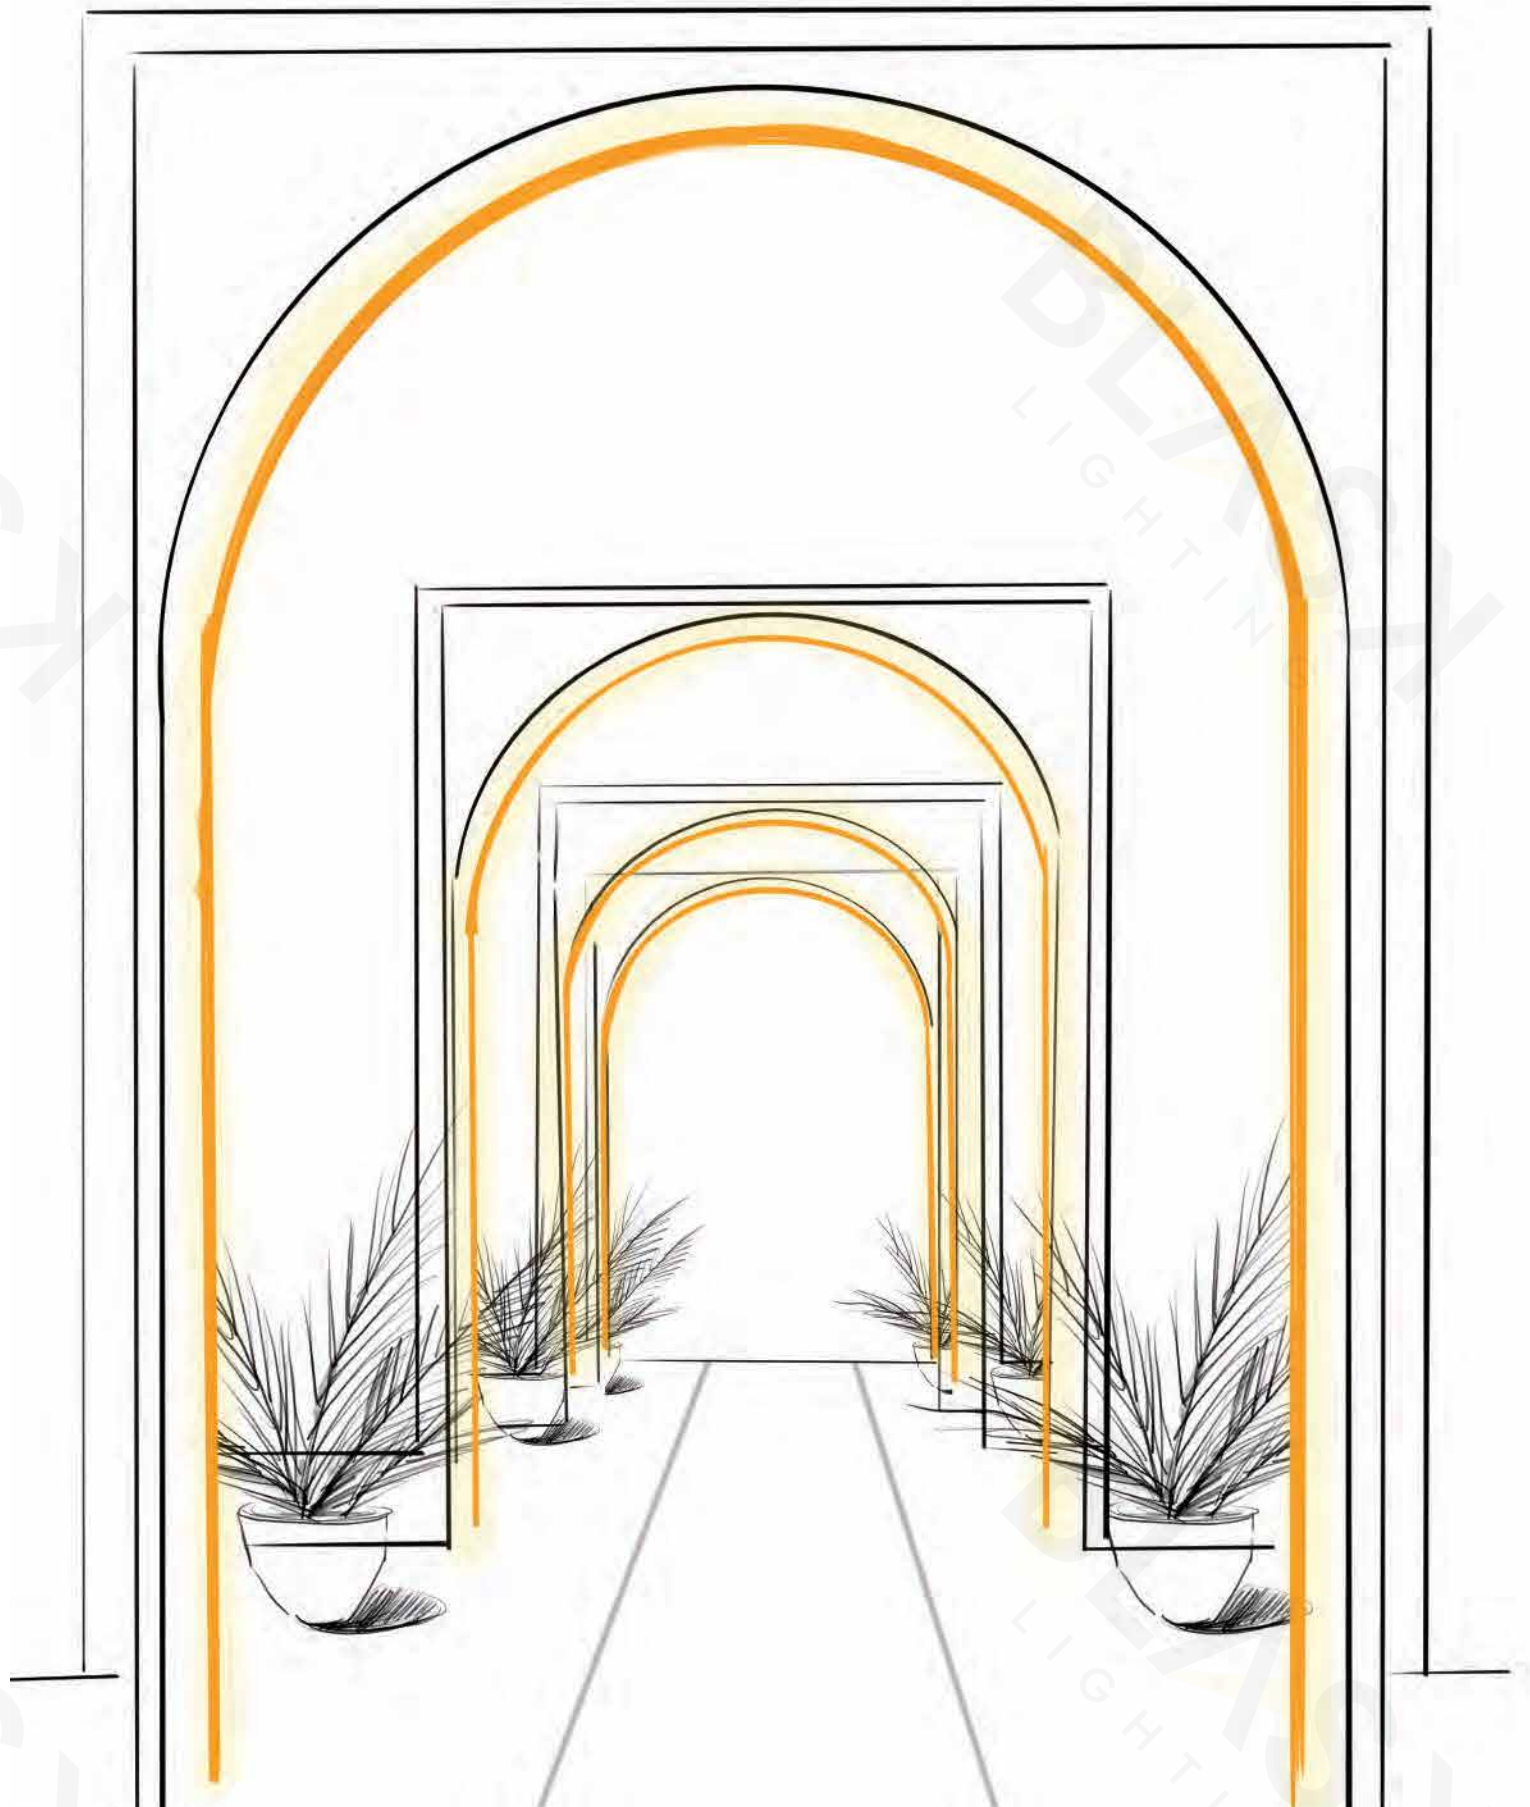


Types of installation:



Material: Extruded aluminum
Dimension: 50×35mm
Length: MAX.6m

BLEIAP10073

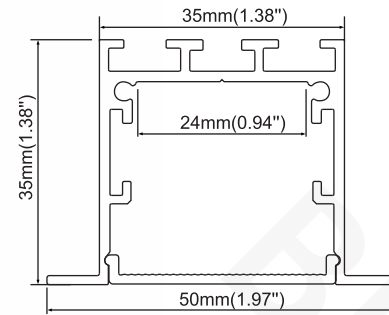

FINISH



Anod. aluminum



white



Black

END CAPS



Aluminium end cap
without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PC diffused



Black PC

ACCESSORIES



Spring clip



Connector T



Connector X



Connector IL




Types of installation:



Material: Extruded aluminum
Dimension: 35×35mm
Length: MAX 6m

BLEIAP10074

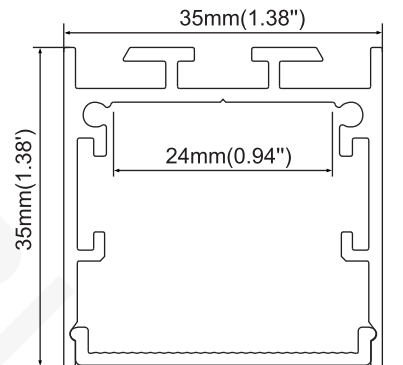

FINISH



Anod. aluminum




white



Black

END CAPS



Aluminium end cap
without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PC diffused



Black PC

ACCESSORIES




Mounting clip (metal)



Steel wire



Connector T



Connector X




Connector IL



Types of installation:



Material: Extruded aluminum
Dimension: 65×35mm
Length: MAX 6m

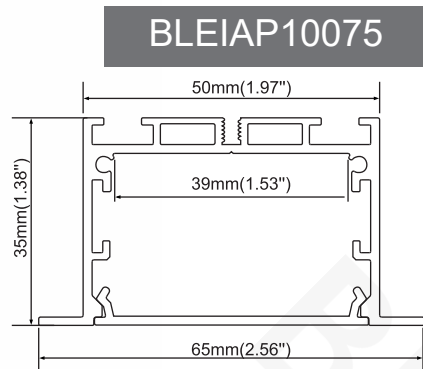

FINISH




Anod. aluminum white Black

END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC diffused

ACCESSORIES



Spring clip



Connector X



Connector T




Connector IL

Types of installation:



Material: Extruded aluminum
Dimension: 50×35mm
Length: MAX 6m

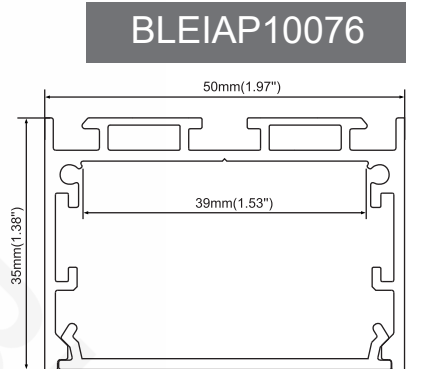

FINISH




Anod. aluminum white Black

END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)



Steel wire



90° Horizontal connector



180° Connector




90° Vertical Connector



Connector T




Connector X




Connector IL


Types of installation:



Material: Extruded aluminum
Dimension: 90×35mm
Length: MAX 6m

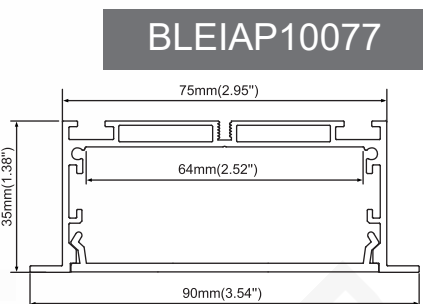

FINISH



END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC diffused

ACCESSORIES



Spring clip



Connector T



Connector X





Connector IL




Connector IL


Types of installation:



Material: Extruded aluminum
Dimension: 75×35mm
Length: MAX 6m

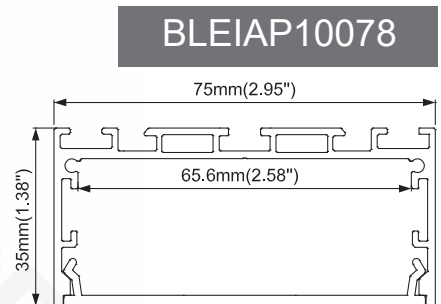

FINISH



END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)



Steel wire



Connector T



Connector X




Connector L




Connector IL


Types of installation:



Material: Extruded aluminum
Dimension: 65×35mm
Length: MAX 6m

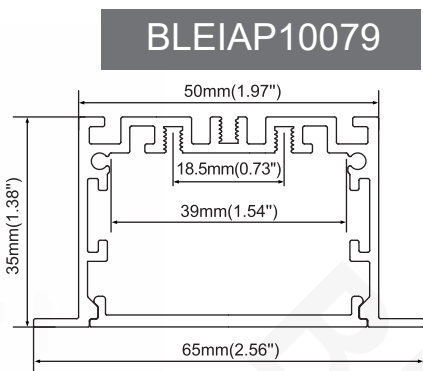

FINISH



END CAPS



Aluminium end cap without hole

DIFFUSERS



PC frosted

ACCESSORIES



Spring clip



LED Module:
2835LED 28W/1.2M



Connector T



Connector X



Connector L




Connector IL


Types of installation:



Material: Extruded aluminum
Dimension: 50×35mm
Length: MAX 6m

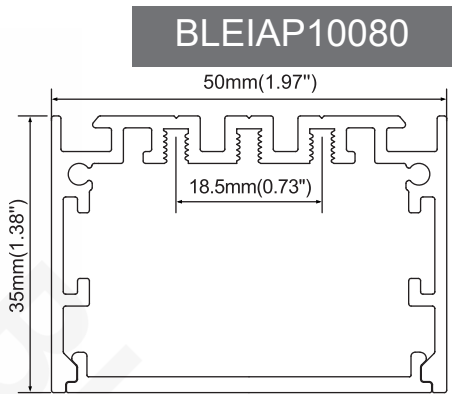

FINISH



END CAPS



Aluminium end cap without hole

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip (metal)



Steel wire



Connector T



Connector X



Connector L



Connector IL



LED Module:
2835LED 28W/1.2M


BLEIAP10081



Types of installation:



Material: Extruded aluminum
Dimension: 42.28×85mm
Length: MAX 6m

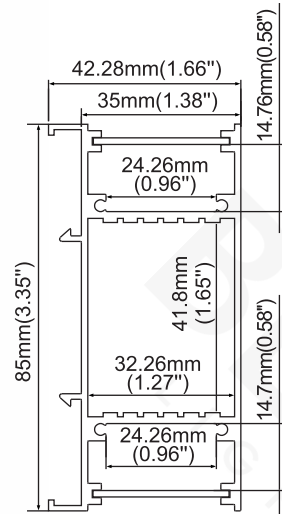

IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS




PC diffused

ACCESSORIES



Mounting clip (metal)

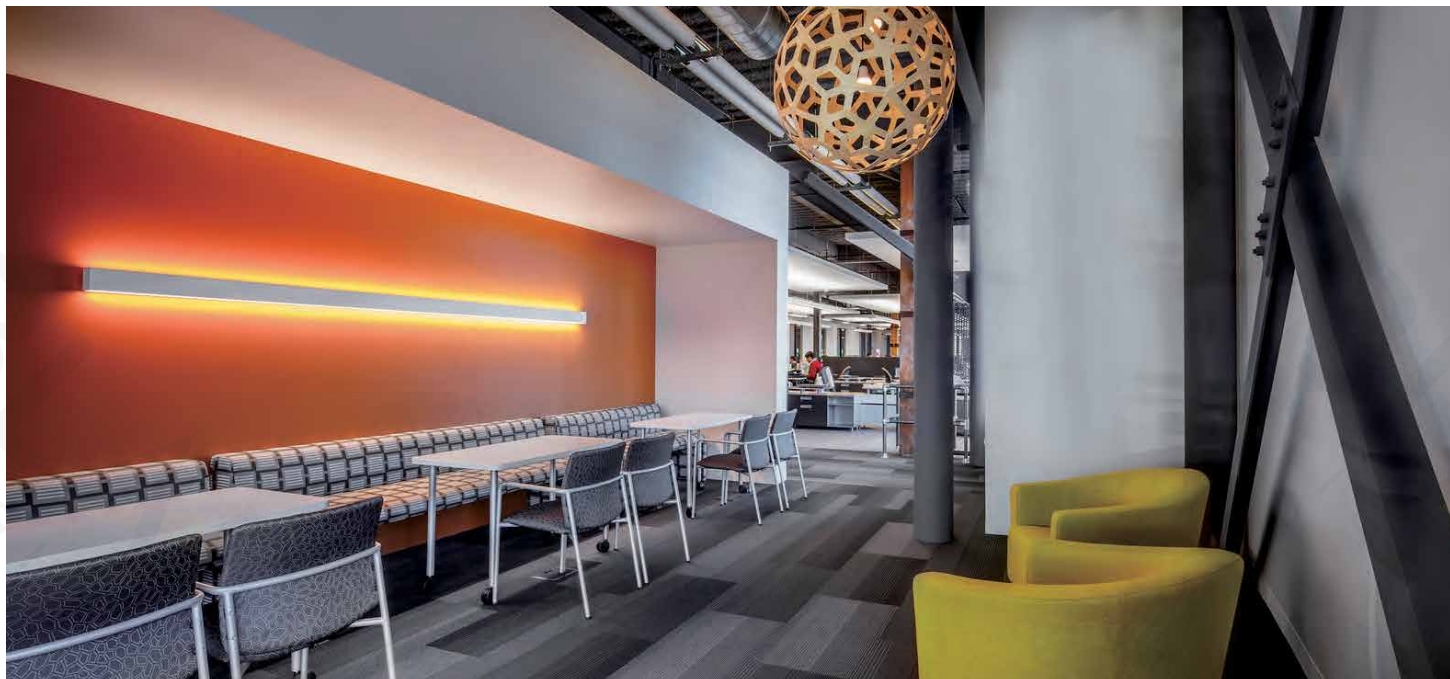


Types of installation:



Material: Extruded aluminum
Dimension: 50×90mm
Length: MAX 6m

BLEIAP10082

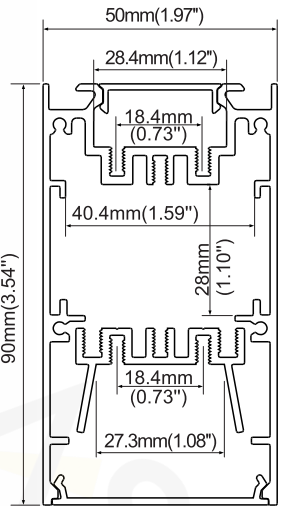

IP20

FINISH



Anod. aluminum



white




Black

END CAPS



End Caps

DIFFUSERS



PC frosted



PC frosted



Prismatic

ACCESSORIES



Internal clip



Mounting clip (metal)




Steel wire



LED Module 2835LED
28W/1.2M

BLEIAP10083

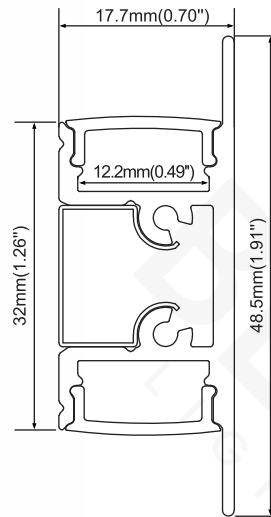

Types of installation:



Material: Extruded aluminum
Dimension: 17.7×48.5mm
Length: MAX 6m



FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS




PC semi clear

ACCESSORIES



Mounting clip (metal)

BLEIAP10084

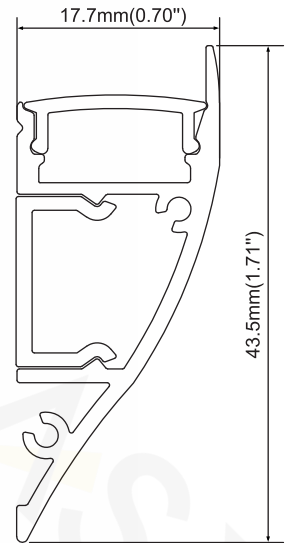

Types of installation:



Material: Extruded aluminum
Dimension: 17.7×43.5mm
Length: MAX 6m



END CAPS



End Caps

DIFFUSERS



PC semi clear

FINISH



Anod. aluminum



white




Black



Types of installation:



Material: Extruded aluminum
Dimension: 30×32mm
Length: MAX 6m

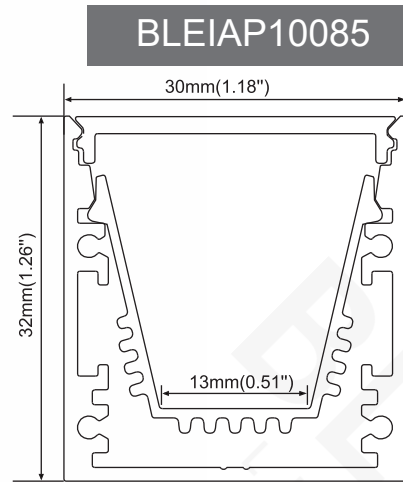

FINISH




Anod. aluminum white Black

END CAPS



End Cap

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire



180° Connector



90° Horizontal connector




90° Vertical connector

Types of installation:



Material: Extruded aluminum
Dimension: 39×36mm
Length: MAX 6m

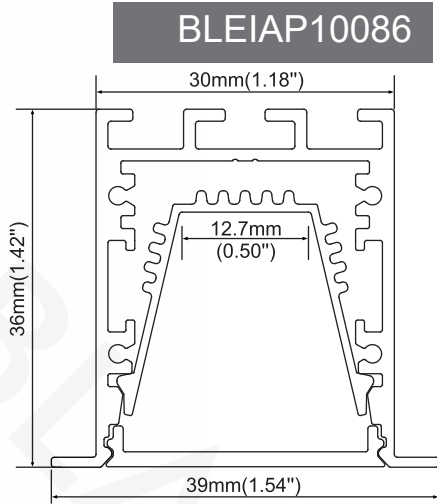

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Spring clip



180° Connector



90° Horizontal connector




90° Vertical connector

Types of installation:



Material: Extruded aluminum
Dimension: 70×32mm
Length: MAX 6m

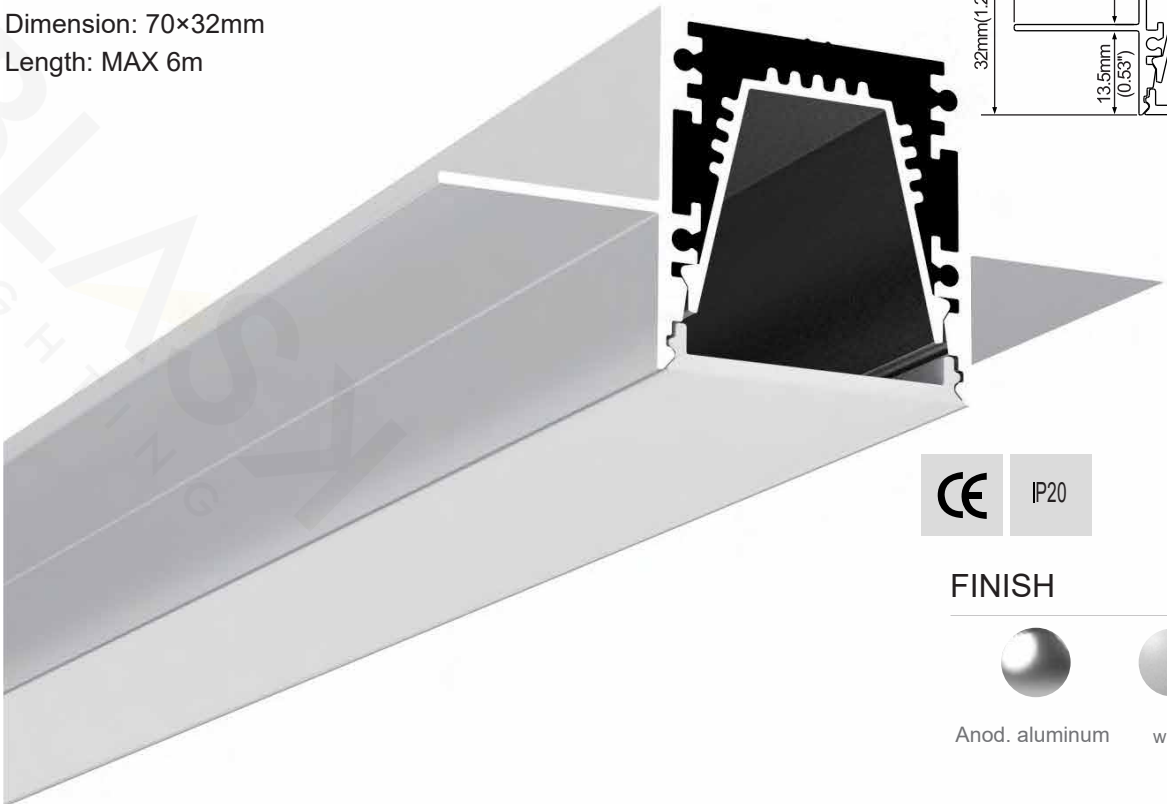

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



90° Horizontal connector




180° Connector



90° Vertical connector


BLEIAP10087

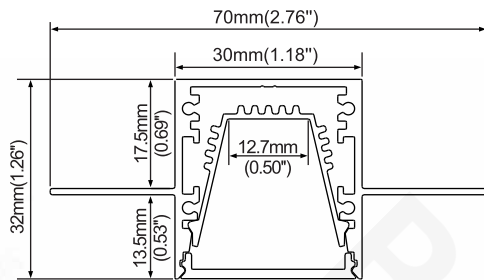


Types of installation:



Material: Extruded aluminum
Dimension: 70×32mm
Length: MAX 6m

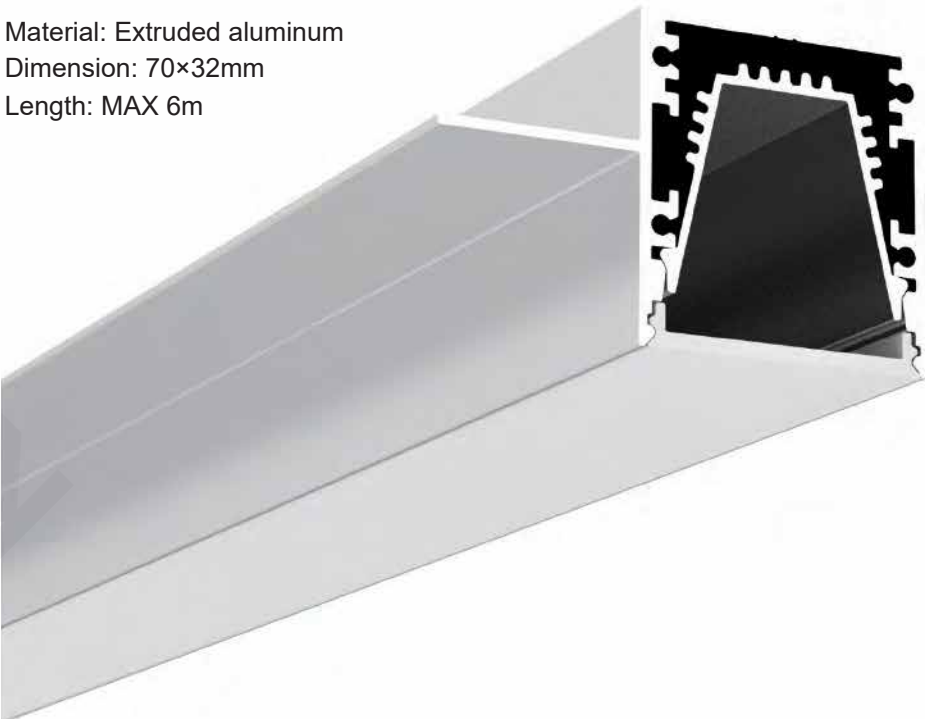

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



90° Horizontal connector




180° Connector



90° Vertical connector


BLEIAP10088

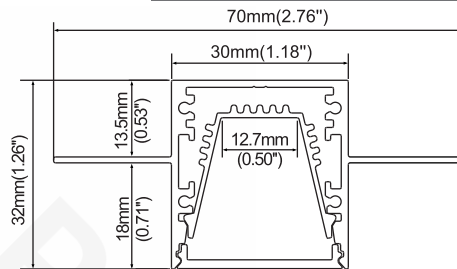

Types of installation:



Material: Extruded aluminum
Dimension: 60×60mm
Length: MAX 6m

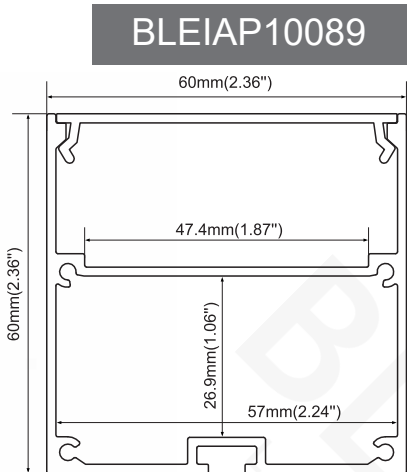

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES




Steel wire

Types of installation:



Material: Extruded aluminum
Dimension: 60×60mm
Length: MAX 6m

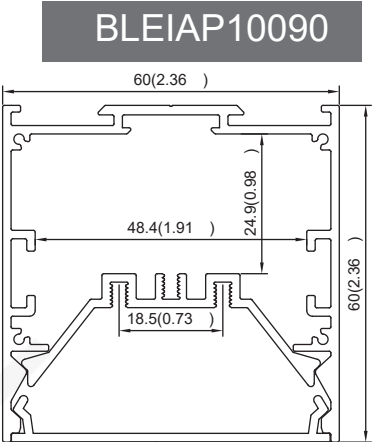

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip (metal)



90° Connector L



Steel wire




90° Connector IL



180° Connector

Types of installation:




Material: Extruded aluminum
Dimension: 38.1×80mm
Length: MAX 6m



FINISH




Anod. aluminum white Black

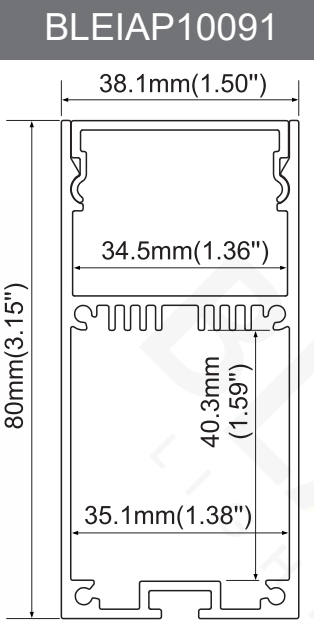

Types of installation:




Material: Extruded aluminum
Dimension: 35.2×66.8mm
Length: MAX 6m

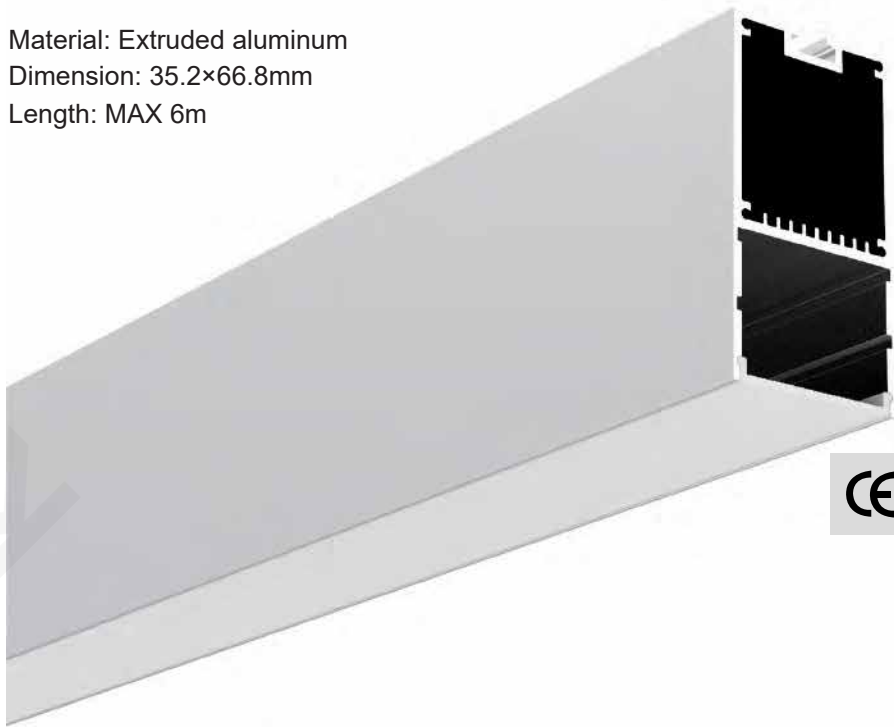


FINISH



Anod. aluminum white Black

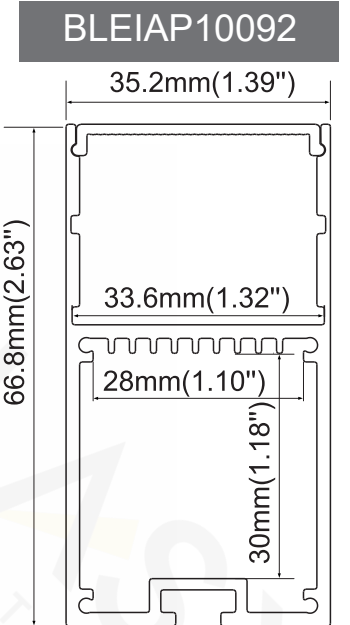

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire

END CAPS



End Caps

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PC diffused

ACCESSORIES




Steel wire


Types of installation:



Material: Extruded aluminum
Dimension: 35×43.8mm
Length: MAX 6m

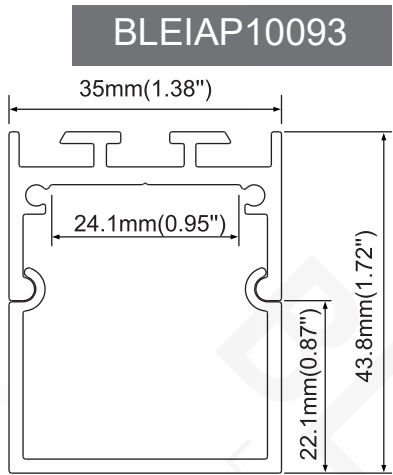

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused
PC frosted

ACCESSORIES



Mounting clip (metal)




Steel wire


Types of installation:



Material: Extruded aluminum
Dimension: 35×61.7mm
Length: MAX 6m

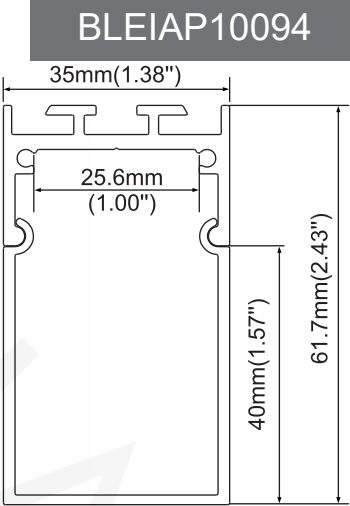

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused


ACCESSORIES



Mounting clip (metal)



Steel wire

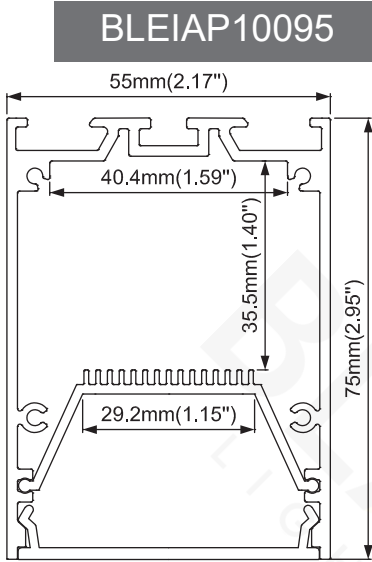

Types of installation:



Material: Extruded aluminum
Dimension: 55×75mm
Length: MAX 6m



FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted


ACCESSORIES



Mounting clip (metal)



Steel wire

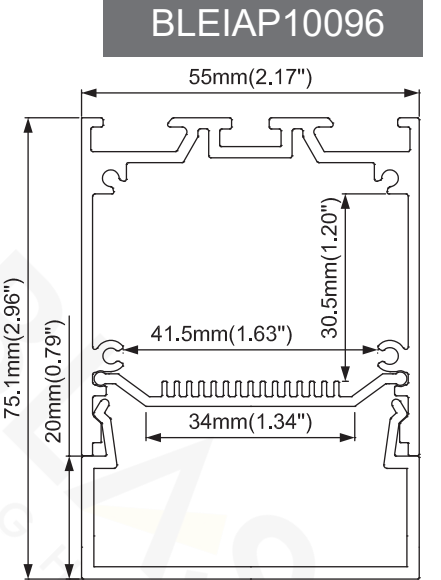

Types of installation:



Material: Extruded aluminum
Dimension: 55×75.1mm
Length: MAX 6m



FINISH



Anod. aluminum




white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire



Mounting clip (metal)



END CAPS



End Caps

DIFFUSERS



PC diffused
PC semi-clear

ACCESSORIES



90° Connector



180° Connector



Steel wire



Types of installation:



Material: Extruded aluminum
Dimension: 75×75mm
Length: MAX 6m

END CAPS



End Caps

DIFFUSERS



PC diffused


ACCESSORIES



Steel wire



BLEIAP10098

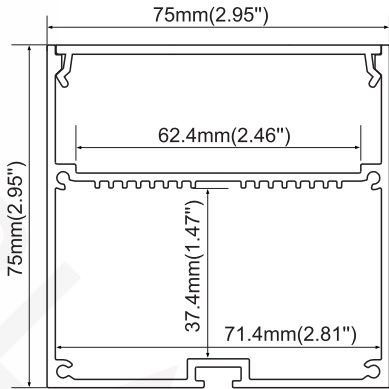

IP20

FINISH



Anod. aluminum




white



Black


Types of installation:



Material: Extruded aluminum
Dimension: 38.1×75mm
Length: MAX 6m



BLEIAP10099

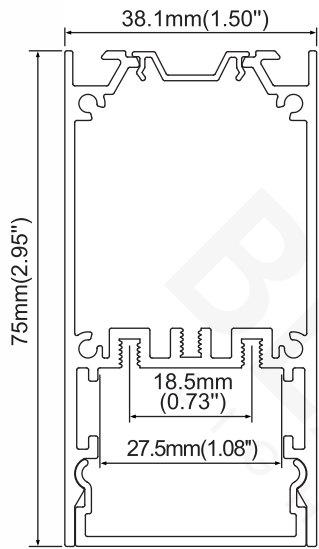

IP20

FINISH



Anod. aluminum



white



Black

END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire




Mounting clip
(metal)



Connector X



LED Module:2835LED
28W/1.2M



Connector T




Connector L



Connector IL


Types of installation:



Material: Extruded aluminum
Dimension: 38.1×95mm
Length: MAX 6m



BLEIAP10100

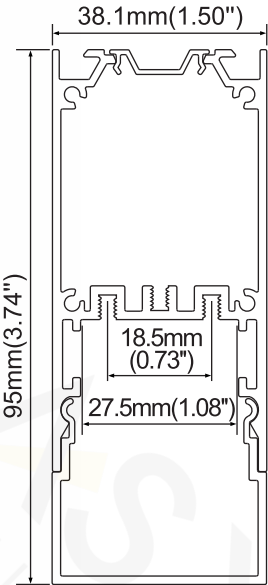

IP20

FINISH



Anod. aluminum



white




Black

END CAPS




Aluminium end cap
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip (metal)



Steel wire




LED Module:2835LED
28W/1.2M


Types of installation:



Material: Extruded aluminum
Dimension: 50×75mm
Length: MAX 6m

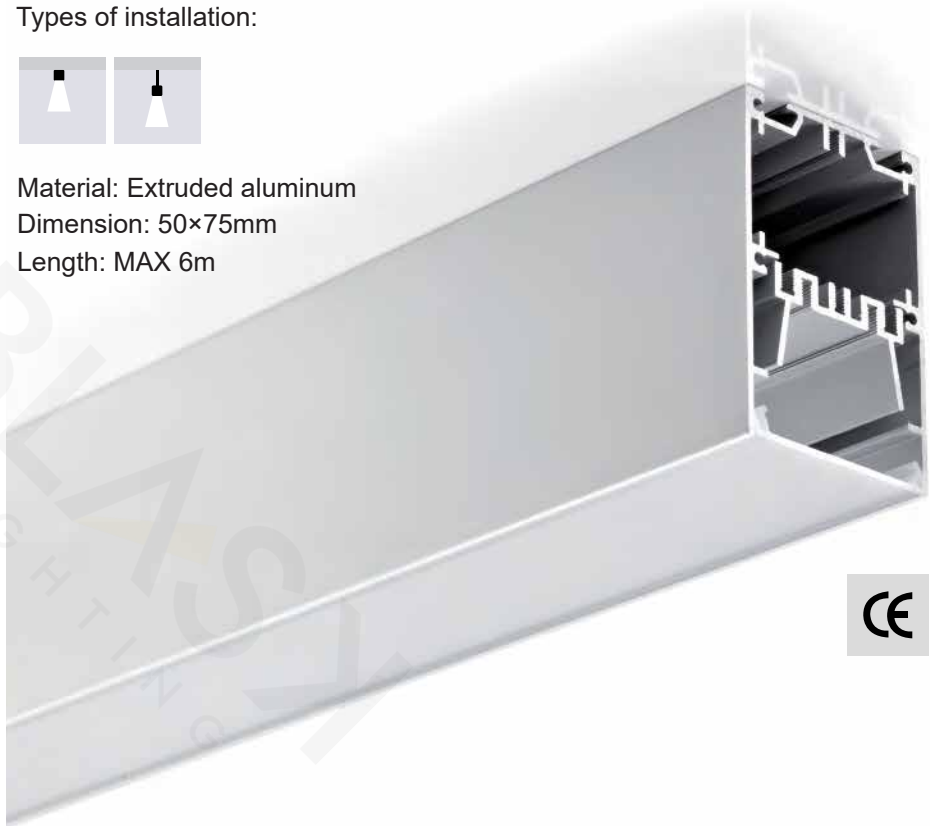

BLEIAP10101

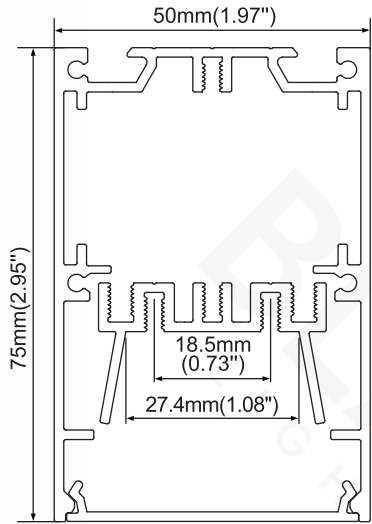

FINISH



Anod. aluminum white Black

END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC frosted



Large lens



Anti glare cover

ACCESSORIES



Steel wire



LED Module:2835LED
28W/1.2M



Trimless recessed clip



Mounting clip
(metal)




Connector T



Internal Clip



Connector X



Connector L



Connector IL


Types of installation:



Material: Extruded aluminum
Dimension: 50×95mm
Length: MAX 6m



BLEIAP10102

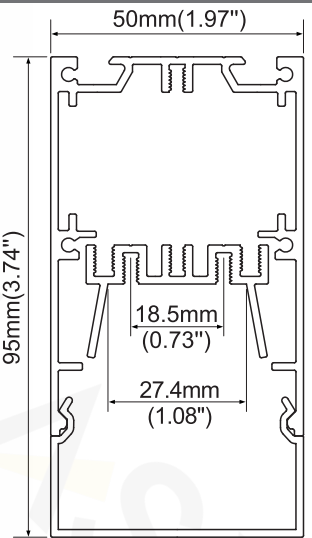

FINISH




Anod. aluminum white Black

END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip (metal)



Steel wire



Internal clip




LED Module:2835LED
28W/1.2M


Types of installation:




Material: Extruded aluminum
Dimension: 50×75mm
Length: MAX 6m

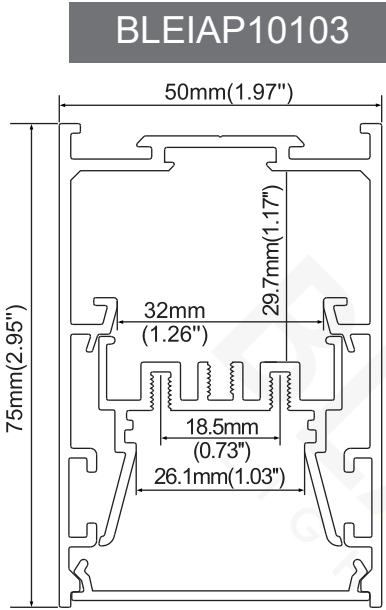

FINISH



END CAPS



Die cast end caps

DIFFUSERS



PC frosted



Anti glare cover

ACCESSORIES



Internal Clip



Outside clip



Safety wire




Steel wire




Types of installation:



Material: Extruded aluminum
Dimension: 50×75mm
Length: MAX 6m

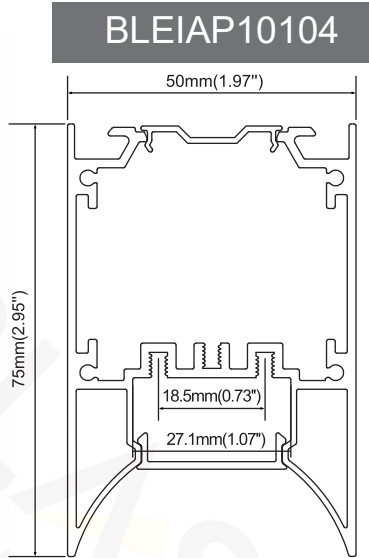

FINISH



END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip
(metal)




Steel wire



Types of installation:



Material: Extruded aluminum
Dimension: 65×45mm
Length: MAX 6m

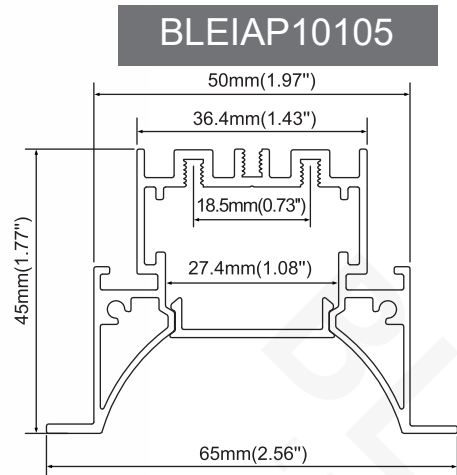

IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS




PC frosted


ACCESSORIES



Spring clip



LED Module 2835LED
28W/1.2M

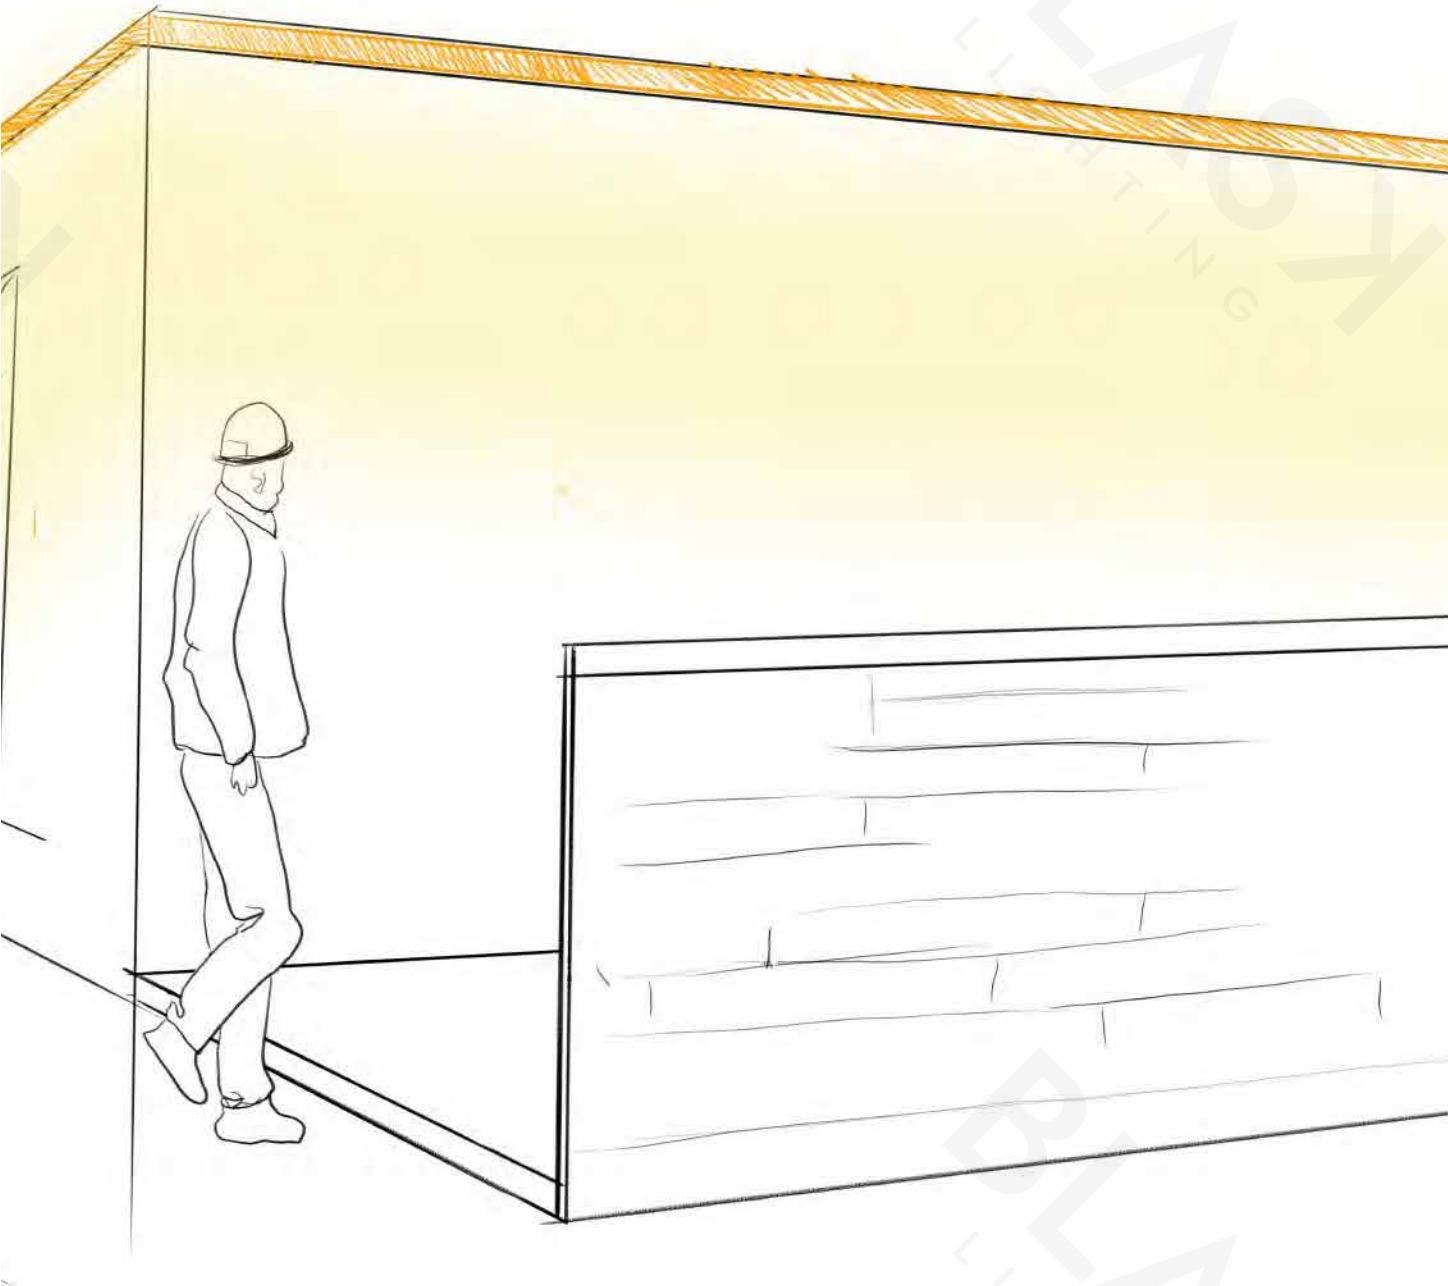

Types of installation:

Material: Extruded aluminum
Dimension: 75×75mm
Length: MAX 6m

BLEIAP10106

75mm(2.95")

75mm(2.95")

18.5mm(0.73")

18.5mm(0.73")


18.5mm(0.73")

CE IP20


FINISH

Anod. aluminum white Black


END CAPS

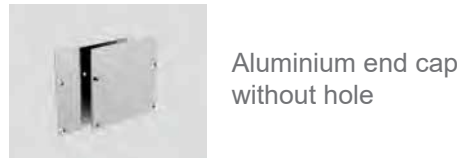

DIFFUSERS

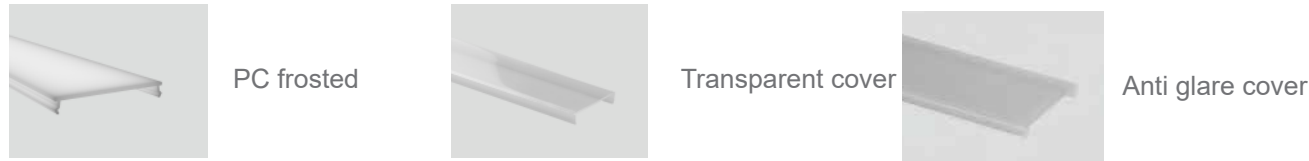

ACCESSORIES

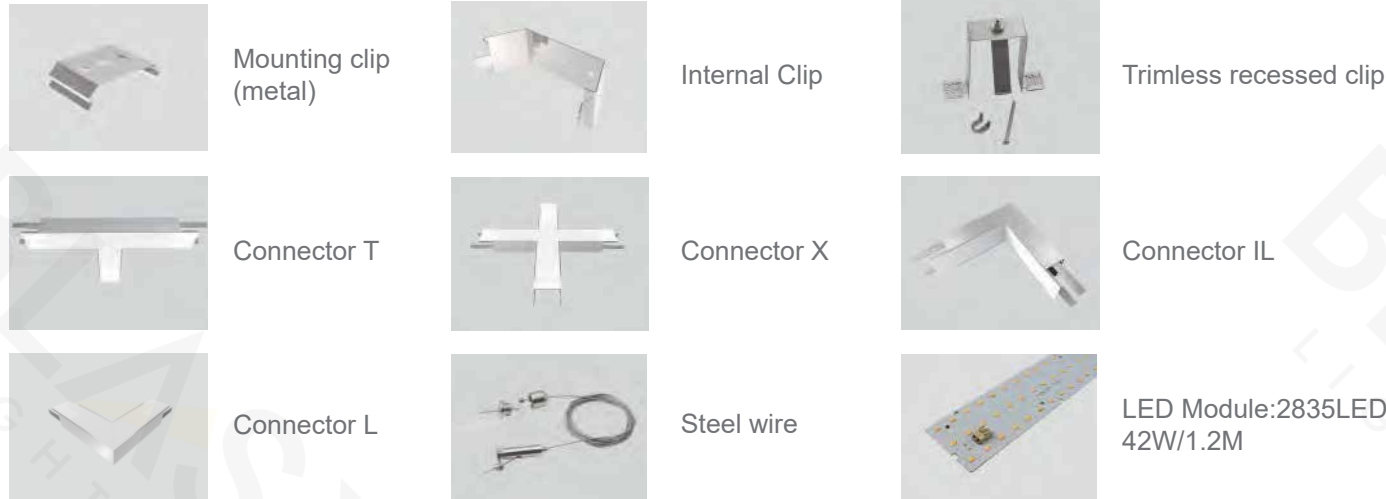

Types of installation:

Material: Extruded aluminum
Dimension: 75×95mm
Length: MAX 6m

BLEIAP10107

75mm(2.95")

95mm(3.74")

18.5mm(0.73")

18.5mm(0.73")


18.5mm(0.73")

CE IP20

FINISH

Anod. aluminum white Black


END CAPS

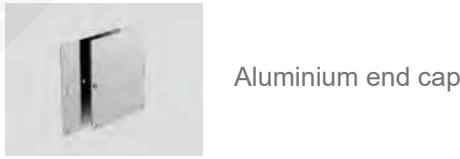

DIFFUSERS




ACCESSORIES

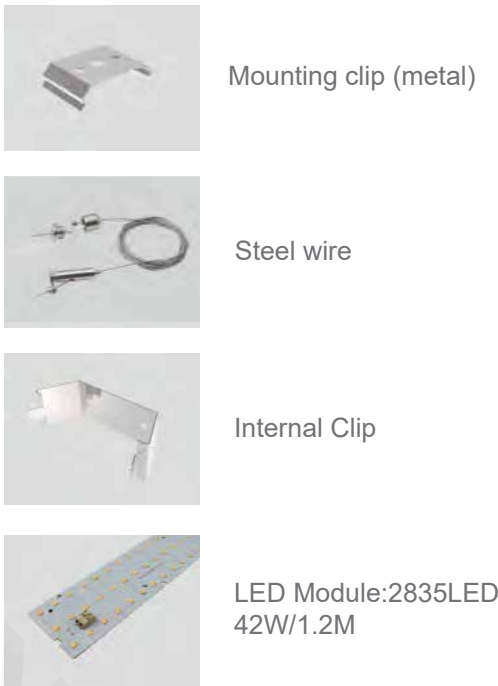

Types of installation:



Material: Extruded aluminum
Dimension: 68×75mm
Length: MAX 6m

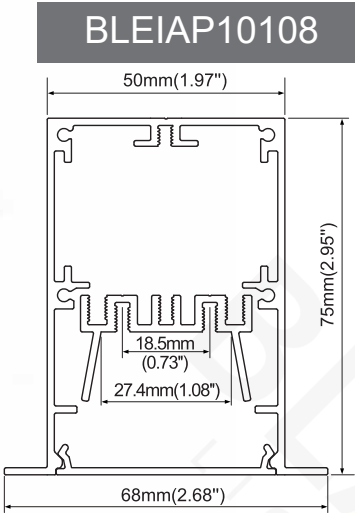

FINISH



Anod. aluminum white Black

END CAPS




Aluminium end cap
without hole

DIFFUSERS



PC frosted



Anti glare cover

ACCESSORIES



Stainless Clip



Internal Clip



Connector L



Connector T



Connector X




Connector IL

Types of installation:



Material: Extruded aluminum
Dimension: 68×95mm
Length: MAX 6m

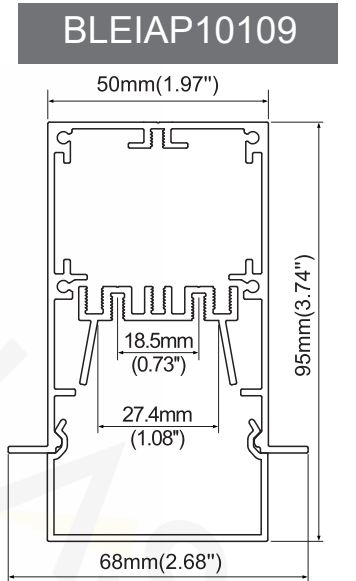

FINISH




Anod. aluminum white Black

END CAPS



Aluminium end cap
without hole

DIFFUSERS



PC frosted

ACCESSORIES



Stainless Clip



Internal Clip




LED Module 2835LED
28W/1.2M

Types of installation:



Material: Extruded aluminum
Dimension: 95×75mm
Length: MAX 6m

BLEIAP10110

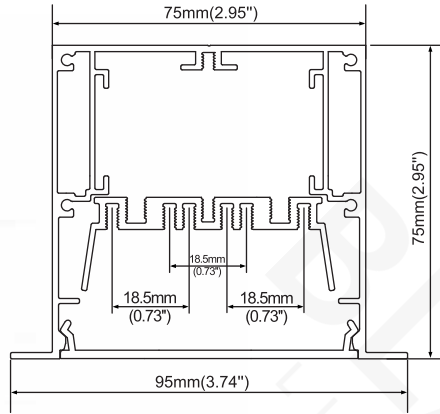

FINISH



Anod. aluminum



white




Black

END CAPS




Aluminium end cap
without hole

DIFFUSERS



PC frosted



Anti glare cover

ACCESSORIES



Internal clip



Stainless Clip



Connector L



Connector IL



Connector T



Connector X




LED Module 2835LED
42W/1.2M

Types of installation:



Material: Extruded aluminum
Dimension: 95×95mm
Length: MAX 6m

BLEIAP10111

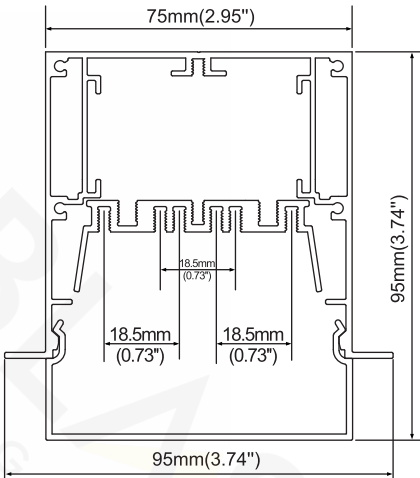

FINISH



Anod. aluminum



white




Black

END CAPS



Aluminium end cap

DIFFUSERS



PC frosted

ACCESSORIES



Stainless Clip



Internal Clip



LED Module 2835LED
42W/1.2M






Types of installation:



Material: Extruded aluminum
Dimension: 38×115mm
Length: MAX 6m

BLEIAP10112

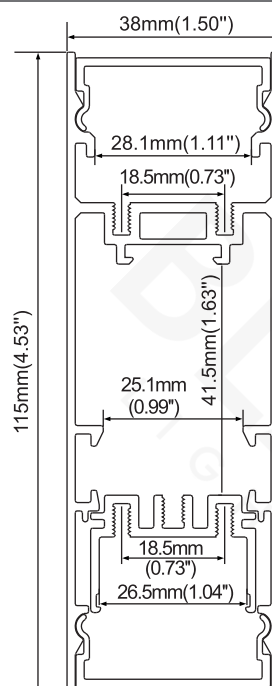




END CAPS



DIFFUSERS



ACCESSORIES

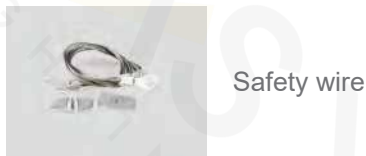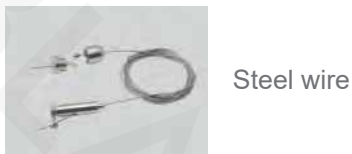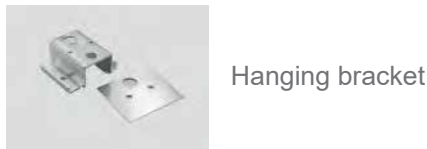


Types of installation:



Material: Extruded aluminum
Dimension: 63×120mm
Length: MAX 6m




END CAPS

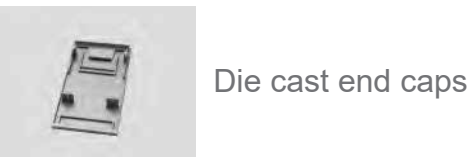

DIFFUSERS



ACCESSORIES

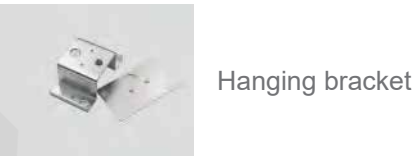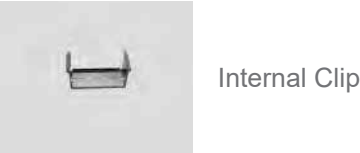






Types of installation:





Material: Extruded aluminum
Dimension: 63×120mm
Length: MAX 6m

BLEIAP10113

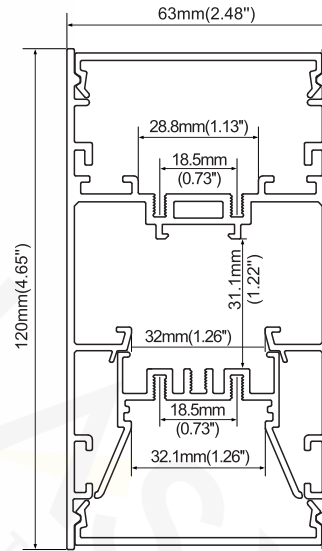

FINISH



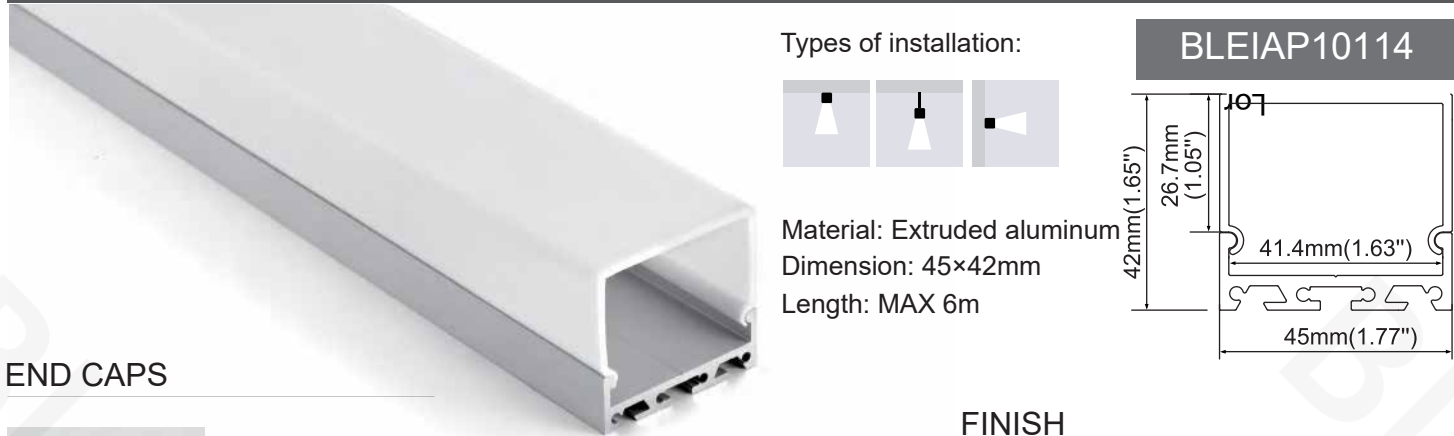

END CAPS



End Caps



IP20

FINISH



Anod. aluminum



white



Black

DIFFUSERS



PC diffused


ACCESSORIES



Mounting clip
(metal)



Steel wire

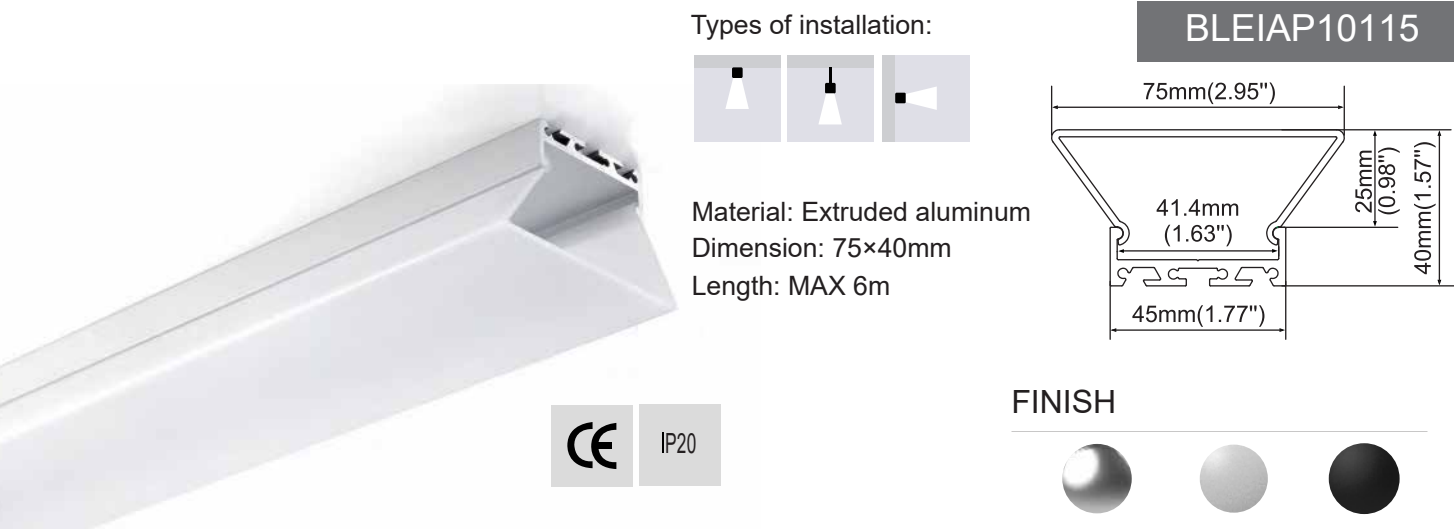

END CAPS



End Caps



IP20

FINISH



Anod. aluminum



white



Black

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip
(metal)



Steel wire



Types of installation:



Material: Extruded aluminum
Dimension: 45×42mm
Length: MAX 6m



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)




Steel wire



Types of installation:


Material: Extruded aluminum
Dimension: $\phi 60\text{mm}$
Length: MAX 6m

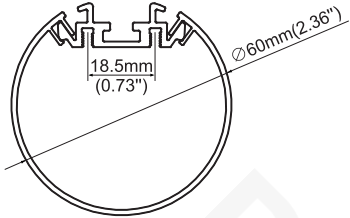

FINISH
  
Anod. aluminum white Black

END CAPS

DIFFUSERS

ACCESSORIES



End Caps



PC diffused



Steel wire




Mounting clip (metal)



Types of installation:


Material: Extruded aluminum
Dimension: $\phi 40.2\text{mm}$
Length: MAX 6m

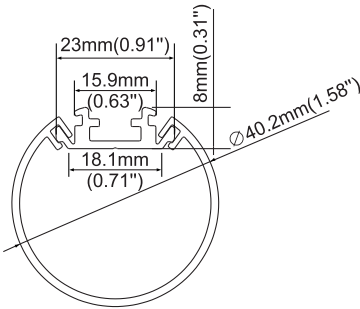

FINISH
  
Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS

ACCESSORIES




PC diffused



Steel wire




Mounting clip (metal)

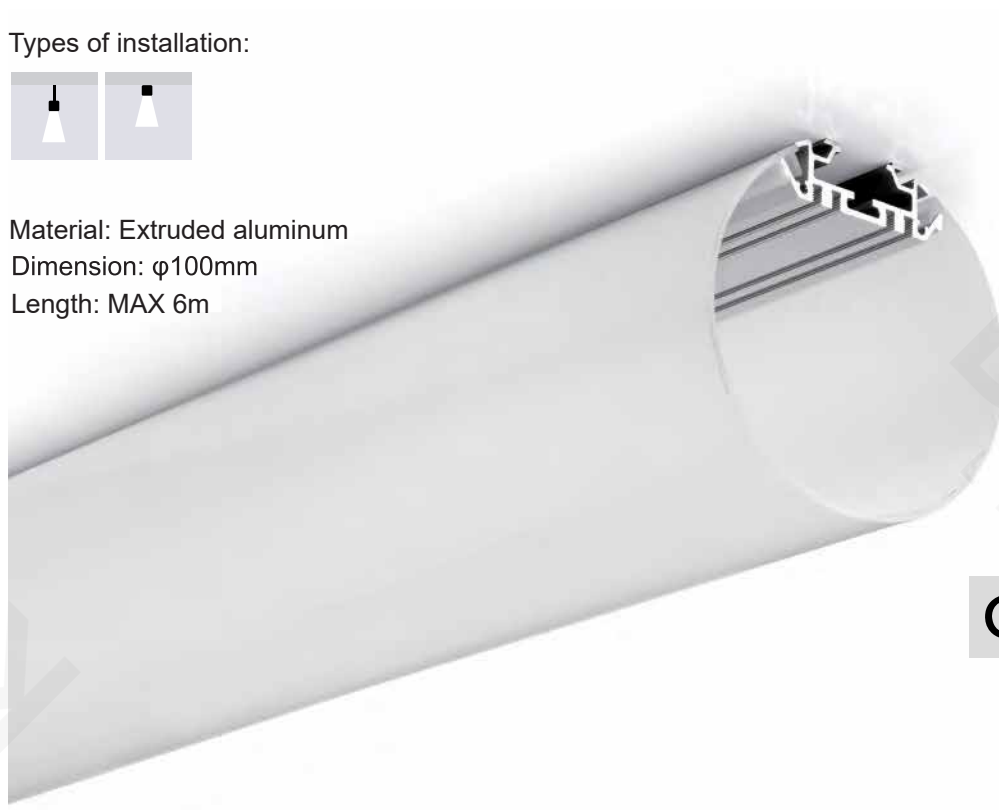

Types of installation:


Material: Extruded aluminum
Dimension: $\phi 100\text{mm}$
Length: MAX 6m

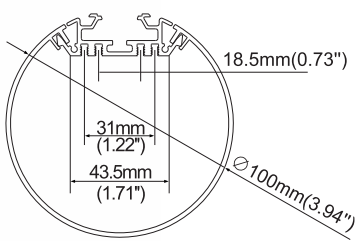


FINISH
  
Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Steel wire



Mounting clip (metal)




Types of installation:




Material: Extruded aluminum
Dimension: $\varnothing 30\text{mm}$
Length: MAX 6m

BLEIAP10120

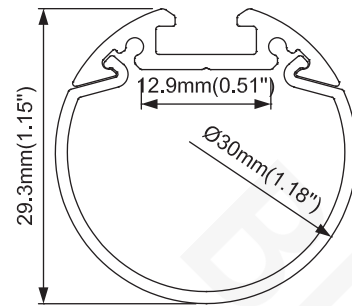

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Steel wire



Metal clip



Surface mounting kit




Types of installation:




Material: Extruded aluminum
Dimension: $\varnothing 36\text{mm}$
Length: MAX 6m

BLEIAP10121

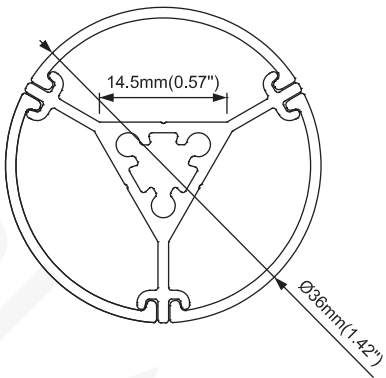

FINISH



Anod. aluminum white Black

END CAPS



End cap

DIFFUSERS



PC diffused



Black PC

ACCESSORIES



90° Connector



180° Connector



Connector X



Steel wire






Types of installation:



Material: Extruded aluminum
Dimension: 50×120mm
Length: MAX 6m

BLEIAP10122

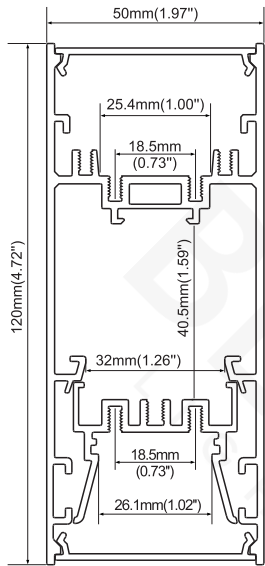

FINISH



Anod. aluminum



white



Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Wall clip



Steel wire



Hanging bracket




Safety wire

Types of installation:



Material: Extruded aluminum
Dimension: 38×75mm
Length: MAX 6m

BLEIAP10123

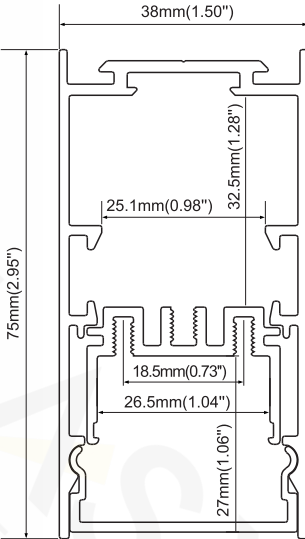

FINISH



Anod. aluminum



white



Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Outside clip



Steel wire



Safety wire


Types of installation:



Material: Extruded aluminum
Dimension: 63×80mm
Length: MAX 6m



BLEIAP10124

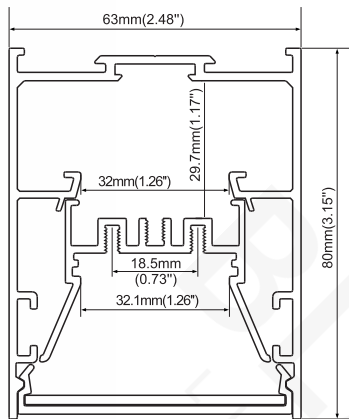

FINISH



Anod. aluminum white Black

END CAPS



Die cast end caps

DIFFUSERS




PC frosted



Prismatic

ACCESSORIES



Outside clip



Steel wire



Internal Clip




Safety wire


Types of installation:



Material: Extruded aluminum
Dimension: 83×80mm
Length: MAX 6m

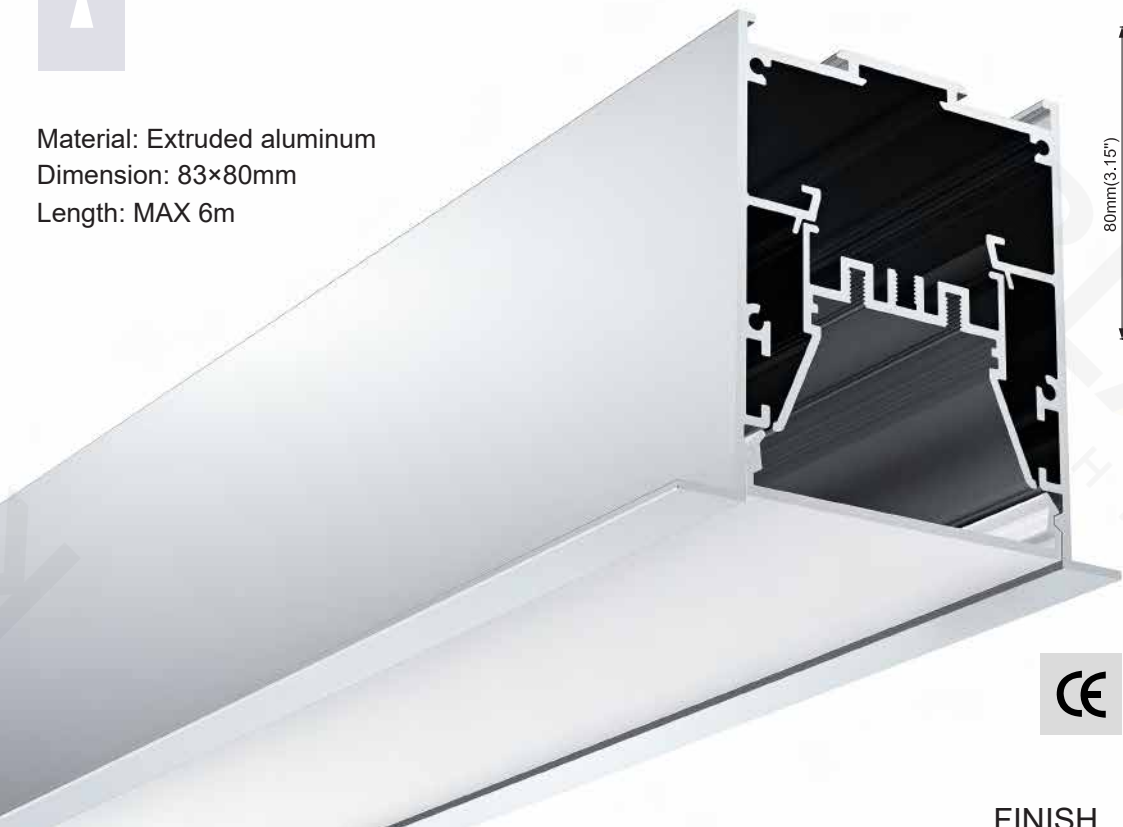

BLEIAP10125

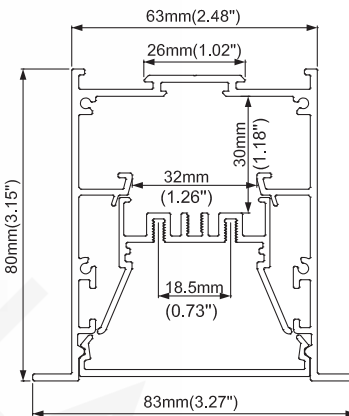


FINISH




Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Stainless clip



Internal Clip


Types of installation:



Material: Extruded aluminum
Dimension: 75×120mm
Length: MAX 6m



BLEIAP10126

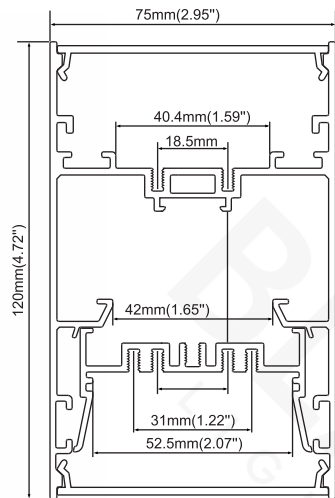

IP20

FINISH




Anod. aluminum

white

Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted


ACCESSORIES



Wall clip



Mounting clip (metal)



Steel wire



Safety wire



Hanging bracket


Types of installation:



Material: Extruded aluminum
Dimension: 75×78mm
Length: MAX 6m



BLEIAP10127

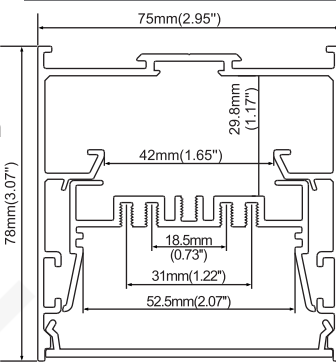

IP20

FINISH



Anod. aluminum

white

Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted



Anti glare cover

ACCESSORIES



Internal Clip



Outside clip




Steel wire



Safety wire




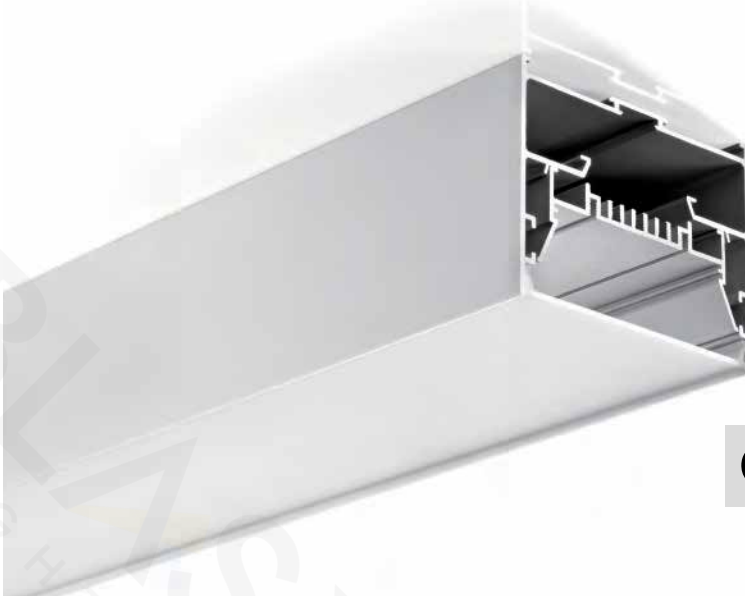

Types of installation:



Material: Extruded aluminum
Dimension: 100×78mm
Length: MAX 6m





FINISH



Anod. aluminum

white

Black

END CAPS



Die cast end caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Outside clip



Steel wire



Safety wire






① Aluminum profile
② Die cast end cap
③ Anti light leakage plate
④ Outer clip
⑤ Suspension kit
⑥ Heat sink
⑦ LED module
⑧ Inner clip with safety rope
⑨ Driver
⑩ PC frosted diffuser


Types of installation:




Material: Extruded aluminum
Dimension: 100×120mm
Length: MAX 6m

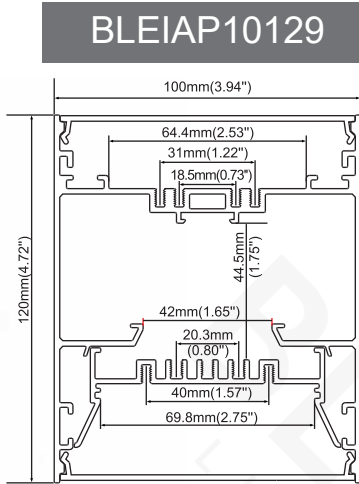

FINISH



END CAPS



Die cast end caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Hanging bracket



Steel wire



Safety wire





Wall clip


Types of installation:



Material: Extruded aluminum
Dimension: 100×75mm
Length: MAX 6m

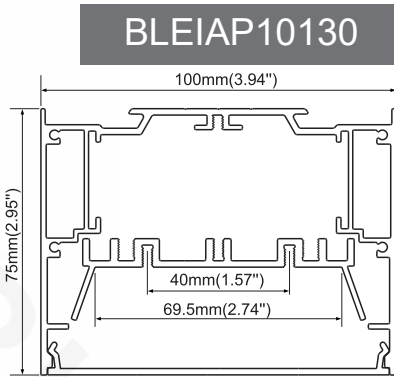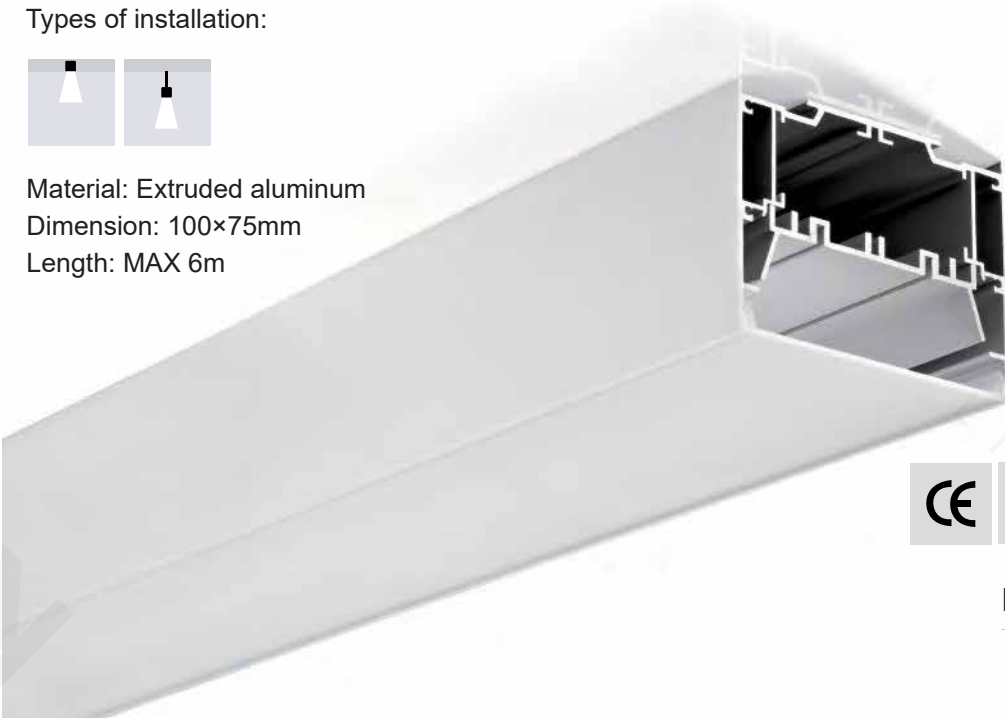

FINISH




END CAPS



Aluminium end cap
without hole

DIFFUSERS




PC frosted

ACCESSORIES



Mounting clip (metal)



LED Module 2835LED
54W/1.2M



Connector IL



Steel wire



Connector T



Connector L



Trimless recessed clip




Connector X



Internal Clip

BLEIAP10131

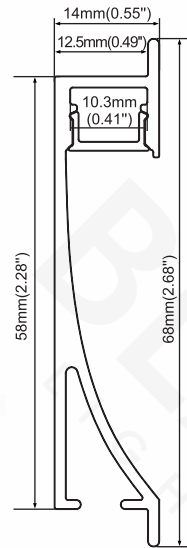

Types of installation:



Material: Extruded aluminum
Dimension: 14×58mm
Length: MAX 6m



FINISH



Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

Types of installation:



Material: Extruded aluminum
Dimension: 80×50mm
Length: MAX 6m

END CAPS




End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PC diffused


BLEIAP10132

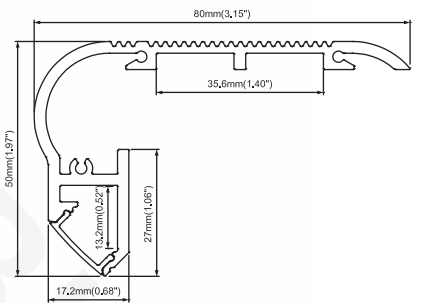

FINISH



Anod. aluminum Black

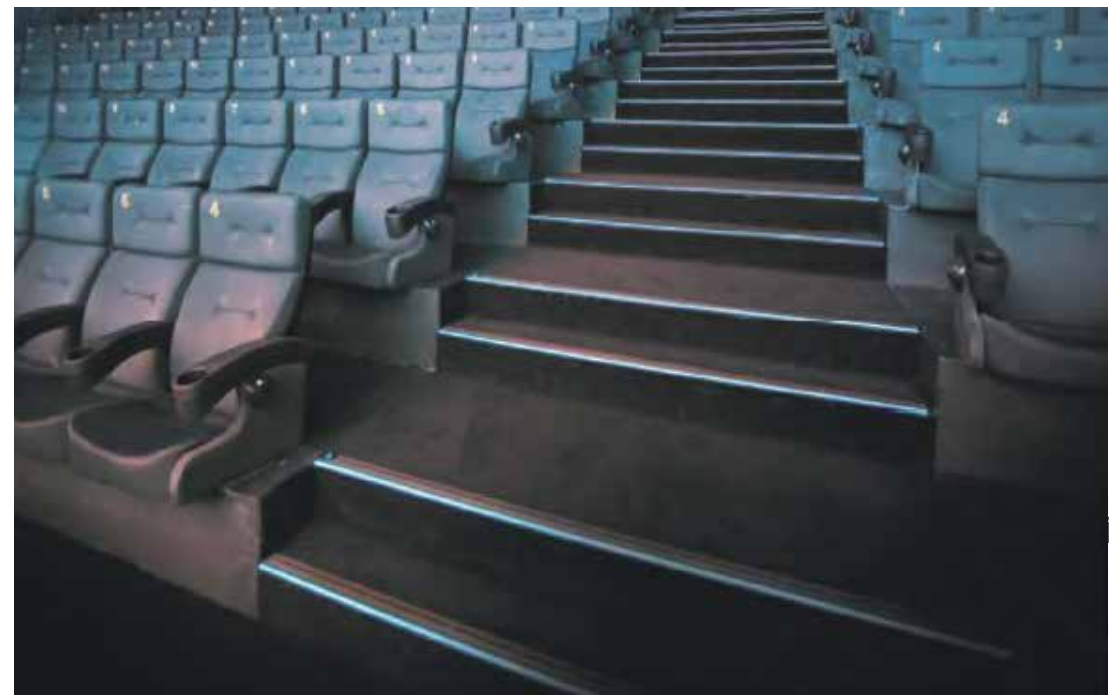



END CAPS



End cap with hole
End cap without hole


DIFFUSERS



PC diffused



PVC anti-skid

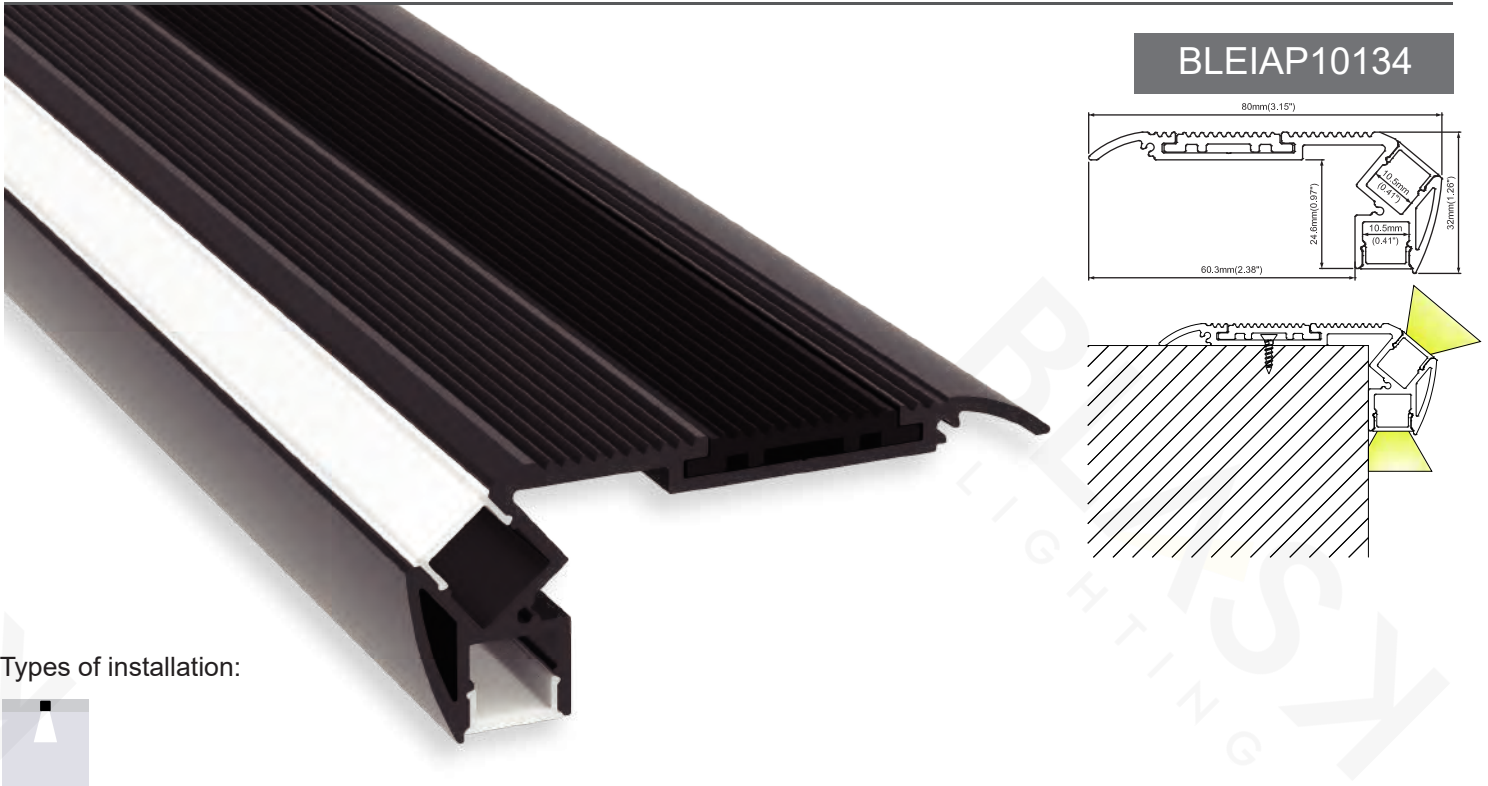

Material: Extruded aluminum
Dimension: 80×32mm
Length: MAX 6m



FINISH




Anod. aluminum Black

END CAPS




End cap with hole
End cap without hole

DIFFUSERS




PC diffused



PVC anti-skid

BLEIAP10135

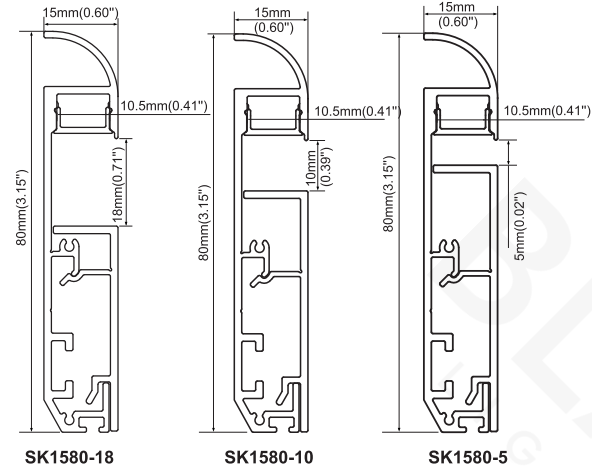


Types of installation:



Material: Extruded aluminum
Dimension: 15×80mm
Length: MAX 6m



FINISH



END CAPS




End Caps

DIFFUSERS



PC diffused

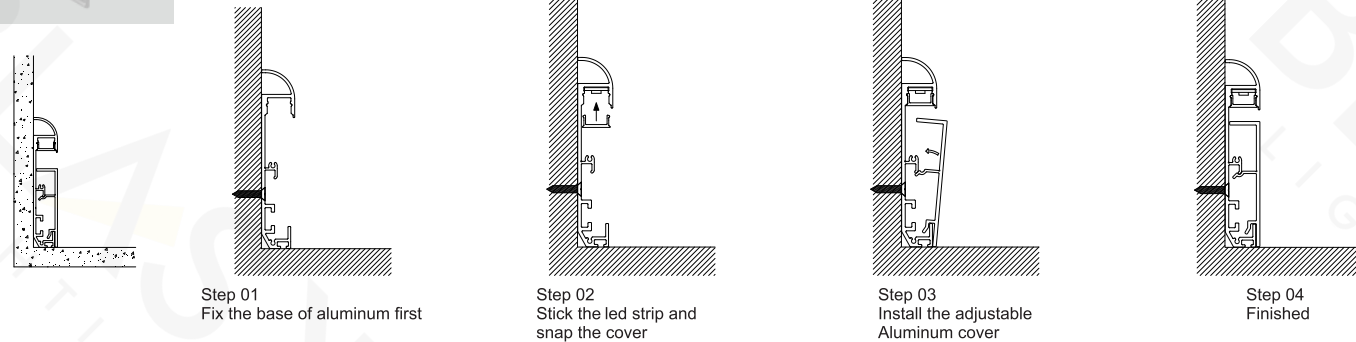


Types of installation:



Material: Extruded aluminum
Dimension: 13.5×84mm
Length: MAX 6m



FINISH



END CAPS




End cap with hole
End cap without hole


DIFFUSERS




PC diffused

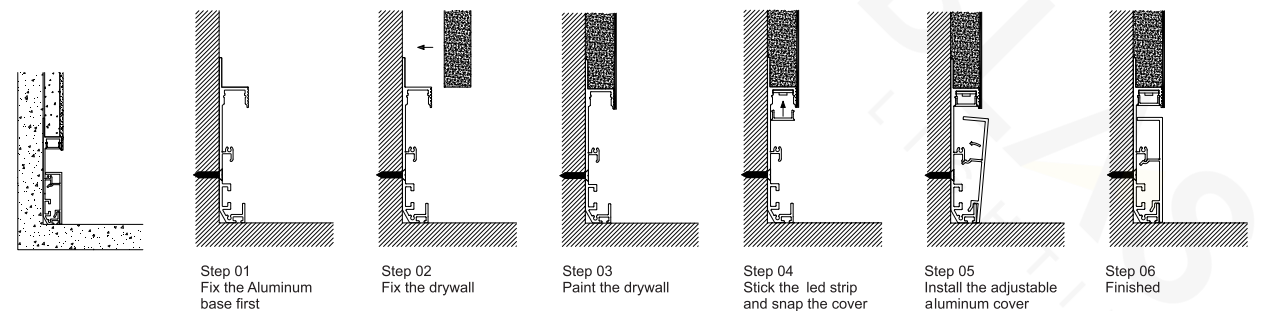

BLEIAP10136

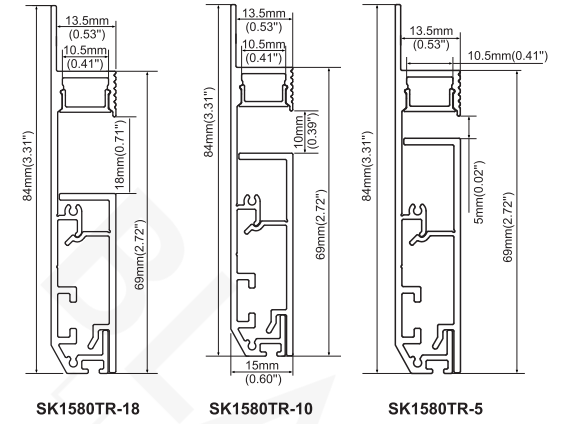

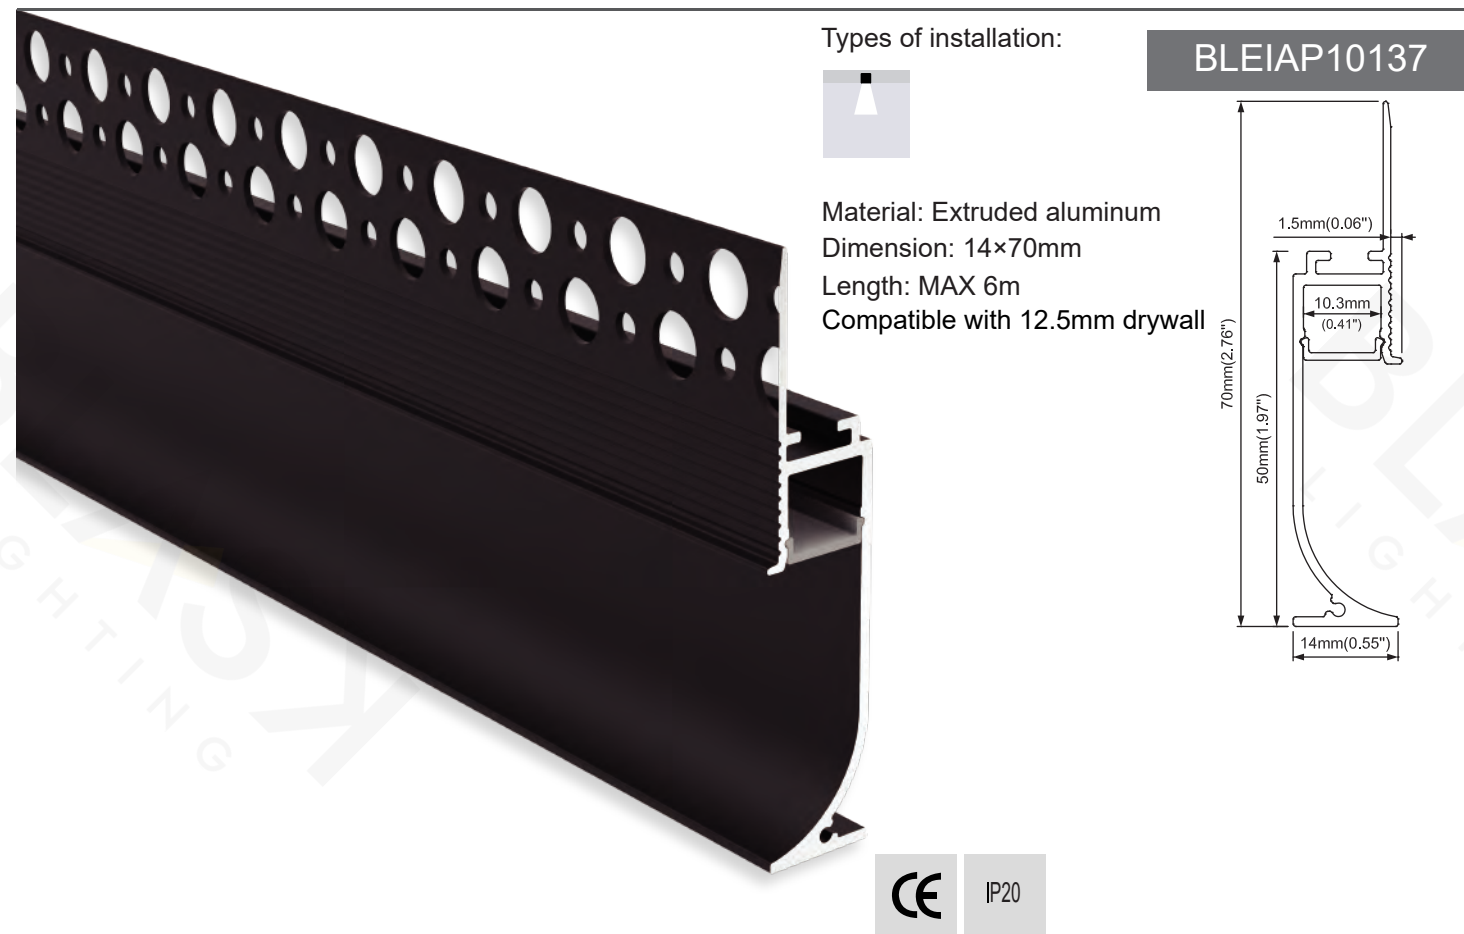


END CAPS



End cap with hole
End cap without hole

FINISH



Anod. aluminum white Black

DIFFUSERS



PC diffused

ACCESSORIES




90° Horizontal connector




180° Connector



Disposable cover

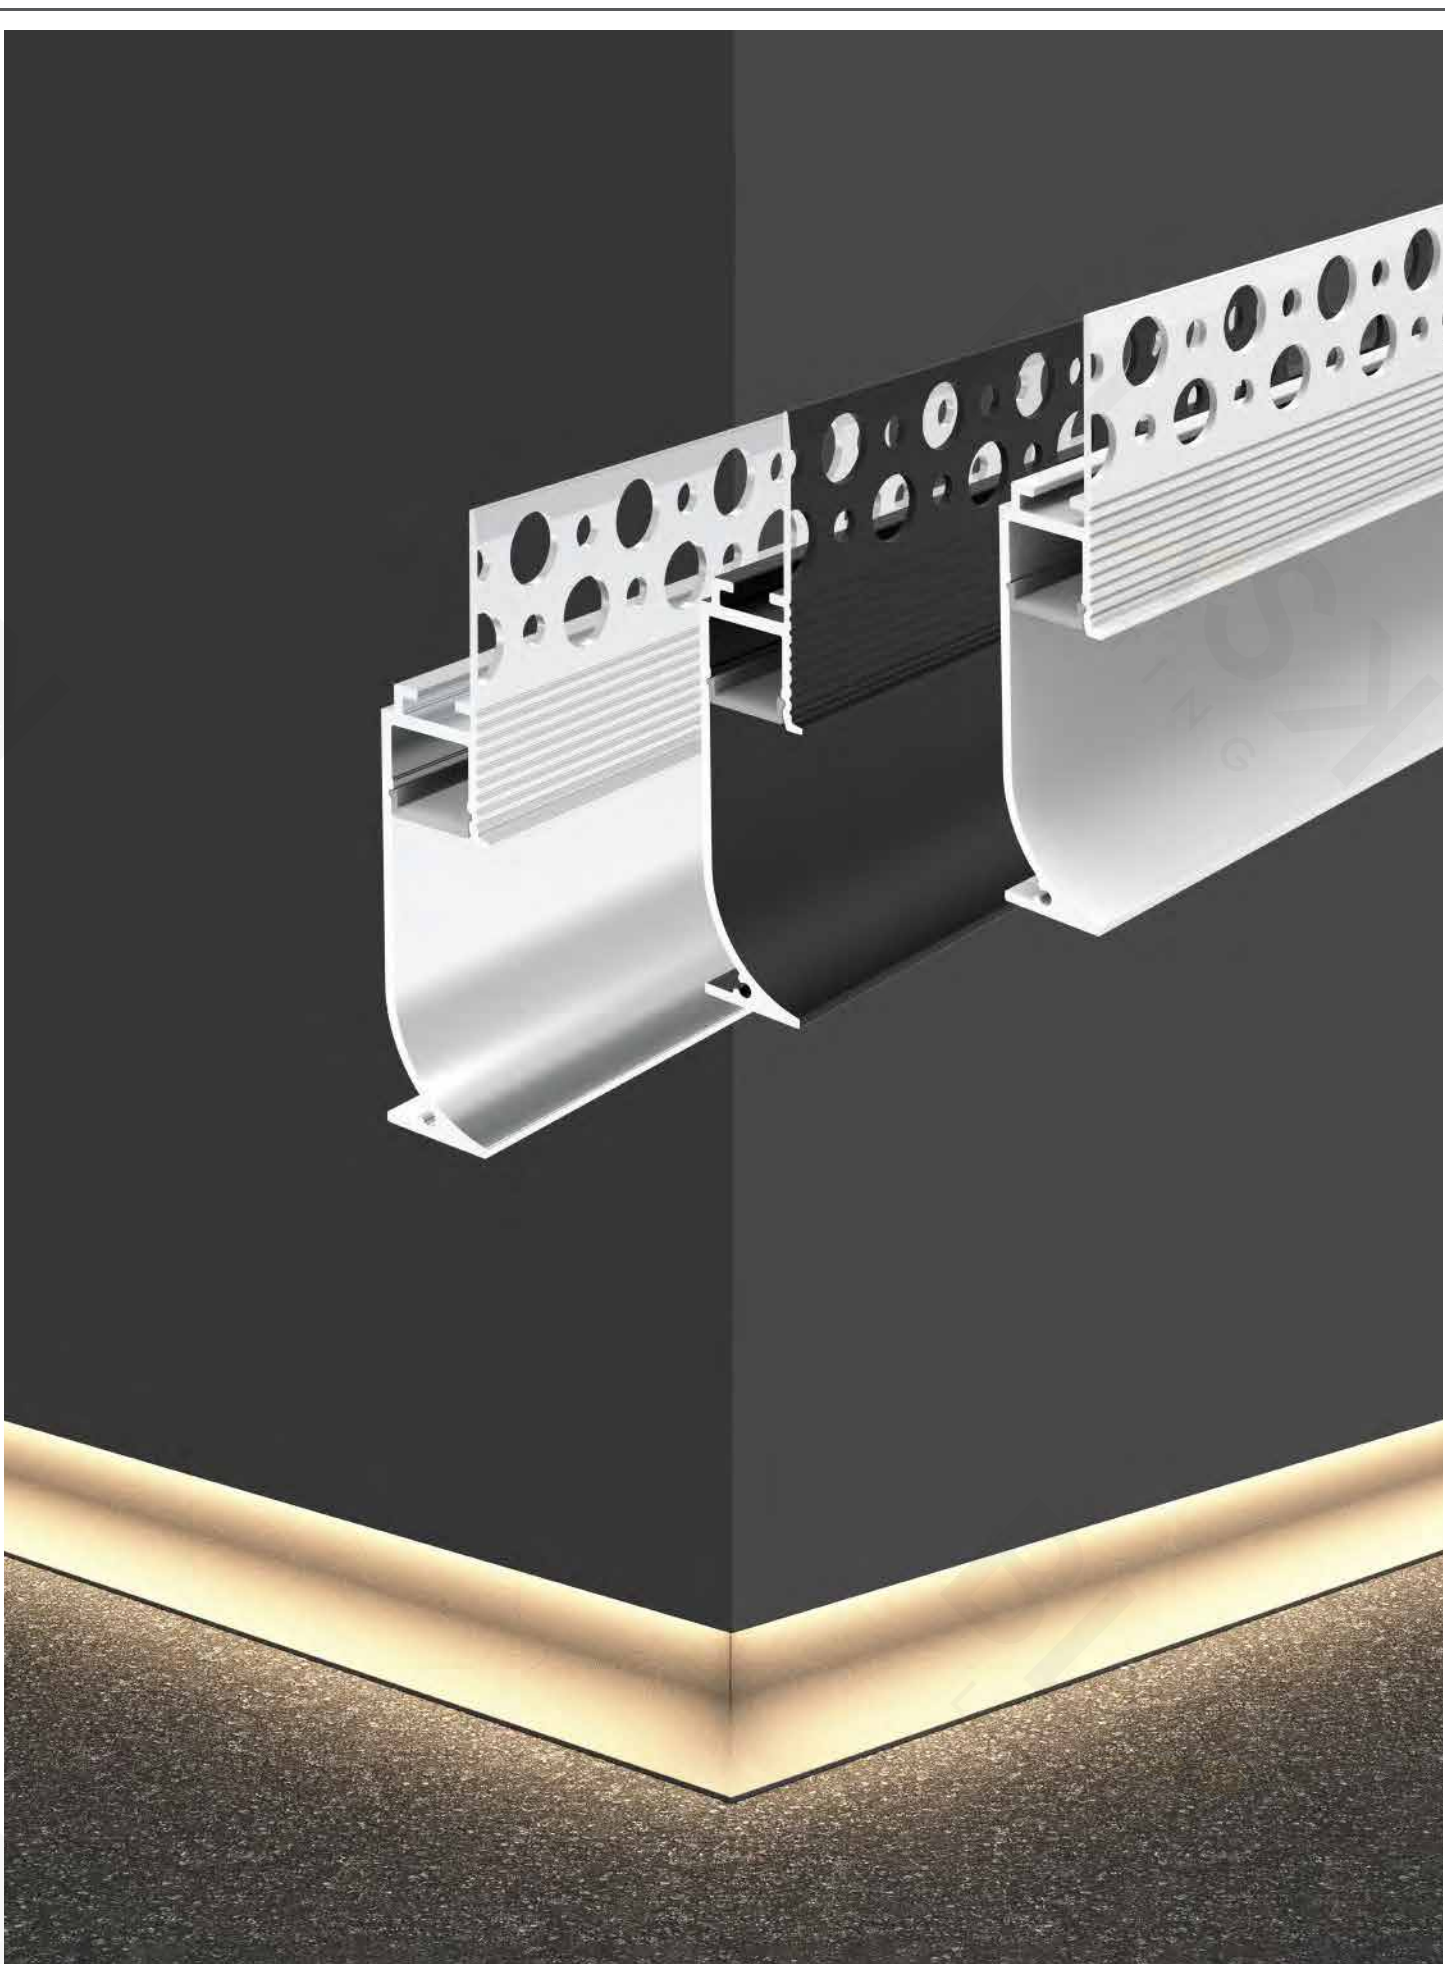

BLEIAP10138

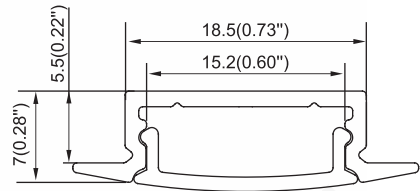

Types of installation:



Material: Extruded aluminum
Dimension: 18.5×7mm
Length: MAX 6m



FINISH



Anod. aluminum




white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

Types of installation:



Material: Extruded aluminum
Dimension: 18.5×7mm
Length: MAX 6m



FINISH



Anod. aluminum



white




Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Adjustable bracket





Mounting clip (metal)




45° Mounting clip

BLEIAP10139

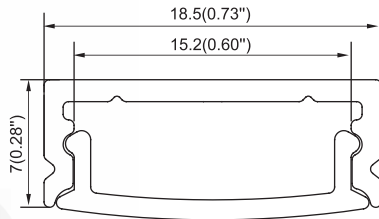



BLEIAP10140

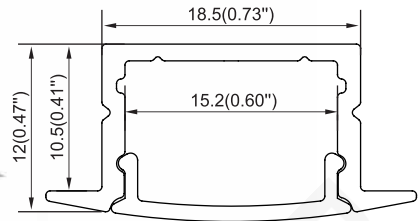

Types of installation:



Material: Extruded aluminum
Dimension: 18.5×12mm
Length: MAX 6m



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole


DIFFUSERS



PC diffused



BLEIAP10141

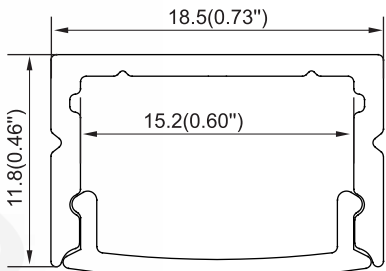

Types of installation:



Material: Extruded aluminum
Dimension: 18.5×11.8mm
Length: MAX 6m



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Adjustable bracket



Mounting clip (metal)




45° clip

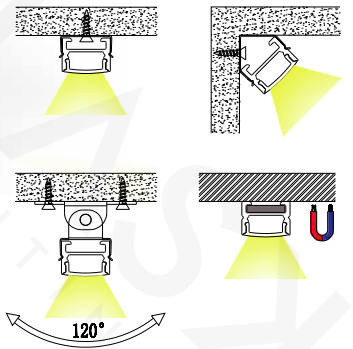




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Spring clip



90° Vertical connector



135° Vertical connector



90° Horizontal connector




135° Horizontal connector



180° Connector




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Mounting clip (metal)



Magnet



90° Horizontal connector



135° Horizontal connector



Adjustable bracket



45° Clip



90° Vertical connector




135° Vertical Connector



180° Connector

FINISH




Anod. aluminum white Black

Types of installation:



BLEIAP10144

Material: Extruded aluminum
Dimension: 64.1×13.6mm
Length: MAX 6m
Compatible with 12.5mm drywall

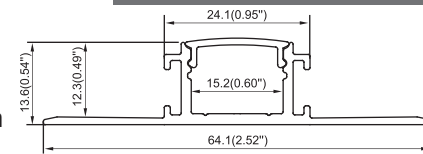

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover




Types of installation:



BLEIAP10145

Material: Extruded aluminum
Dimension: 13×69.4mm
Length: MAX 6m
Compatible with 12.5mm drywall

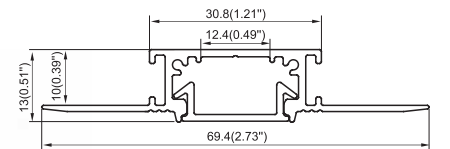

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector




90° Vertical connector


Types of installation:




Material: Extruded aluminum
Dimension: 20.9×37mm
Length: MAX 6m

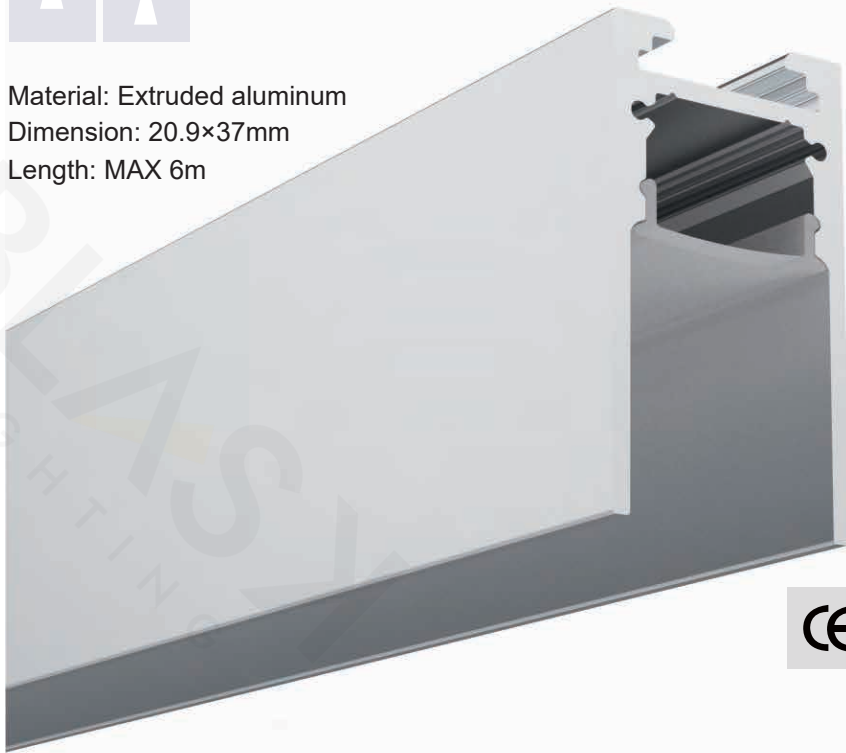

BLEIAP10146

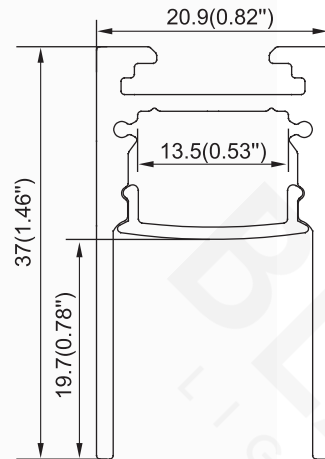

FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



Mounting clip (metal)



Hanging bracket



90° Horizontal connector



180° Connector




Steel wire


Types of installation:




Material: Extruded aluminum
Dimension: 32.7×51mm
Length: MAX 6m

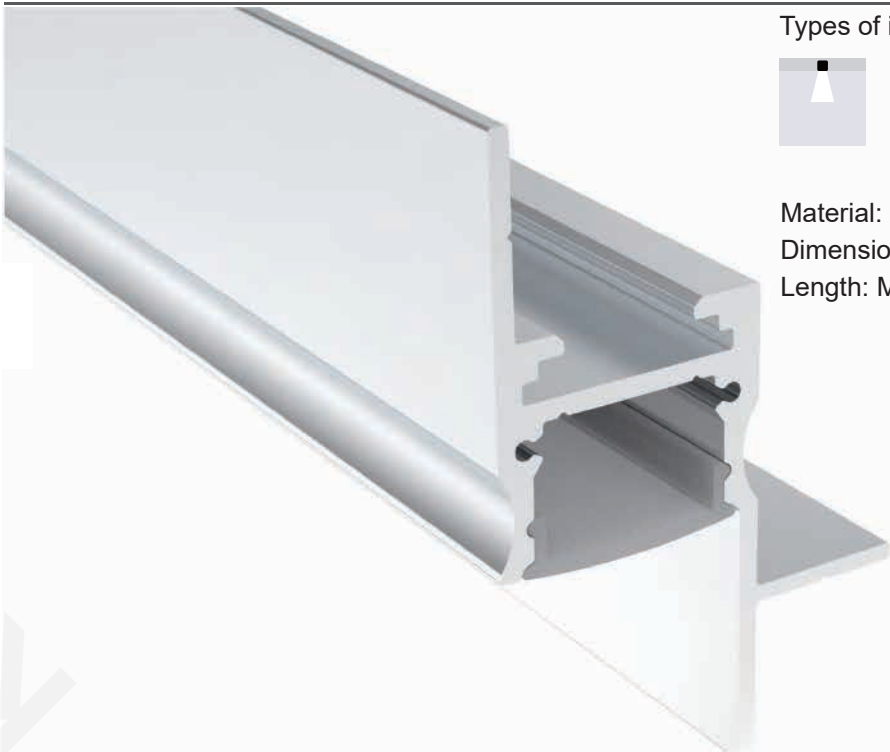

BLEIAP10147

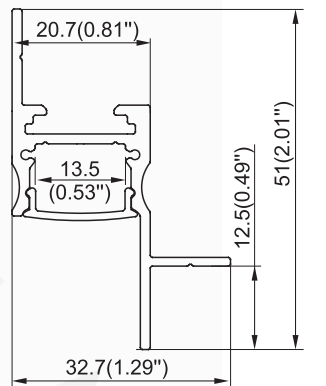

FINISH




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector




180° Connector

Types of installation:



BLEIAP10148

Material: Extruded aluminum
Dimension: 40.7×51mm
Length: MAX 6m
Compatible with 12.5mm drywall

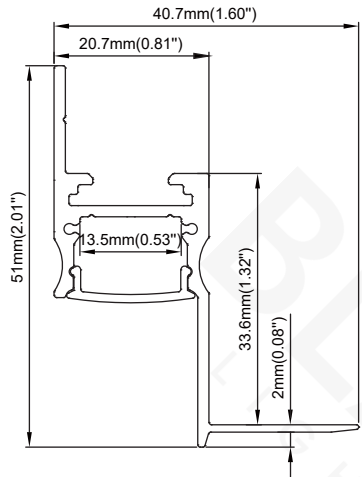

FINISH




Anod. aluminum



white



Black

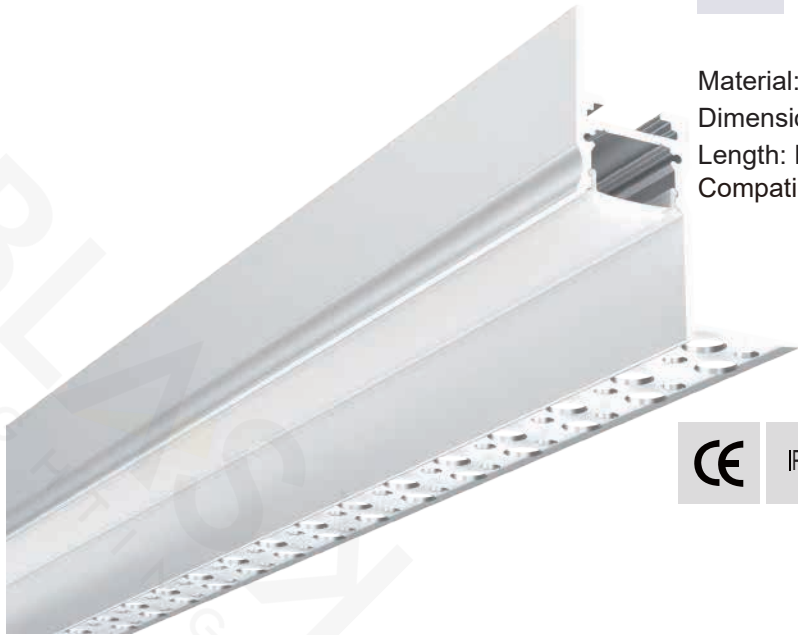


END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



180° Connector



Disposable cover




Types of installation:



BLEIAP10149

Material: Extruded aluminum
Dimension: 42.2×48.1mm
Length: MAX 6m
Compatible with 12.5mm drywall

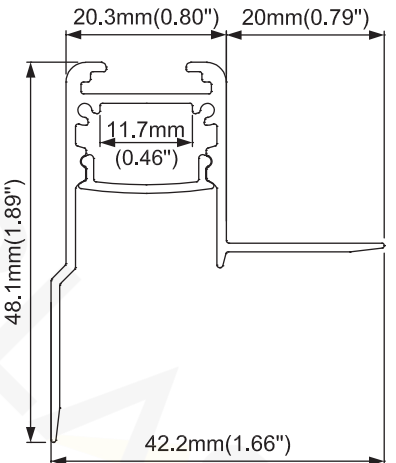

FINISH




Anod. aluminum



white



Black

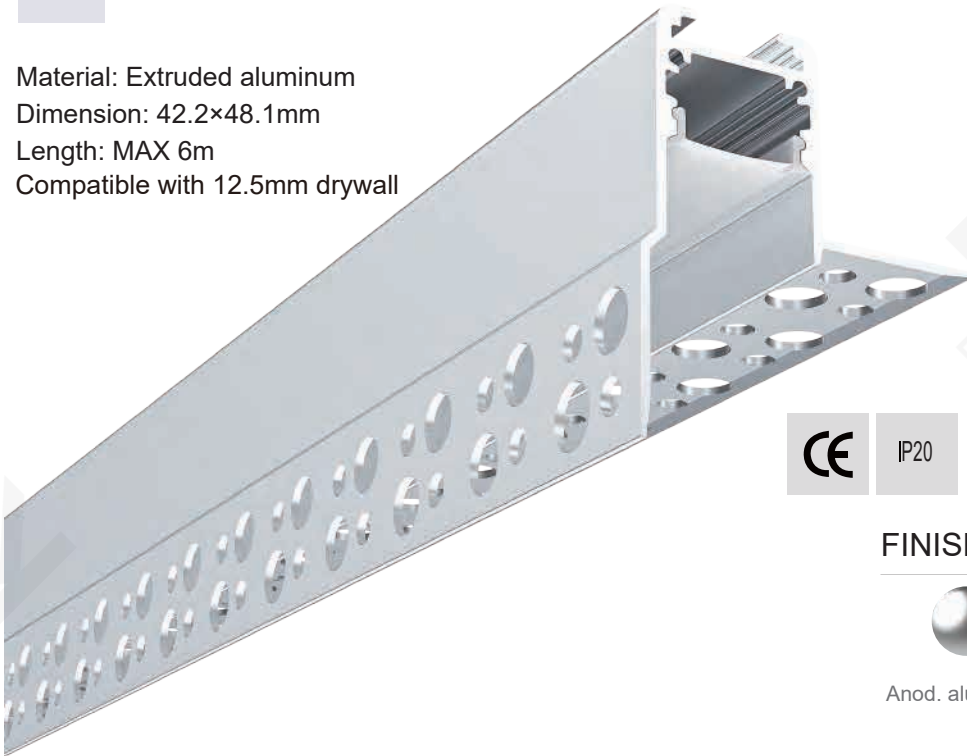

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



180° Connector



Disposable cover




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



180° Connector



90° Vertical connector




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES




90° Horizontal connector



180° Connector



90° Vertical connector





Disposable cover


Types of installation:



Material: Extruded aluminum
Dimension: 39×38mm
Length: MAX 6m

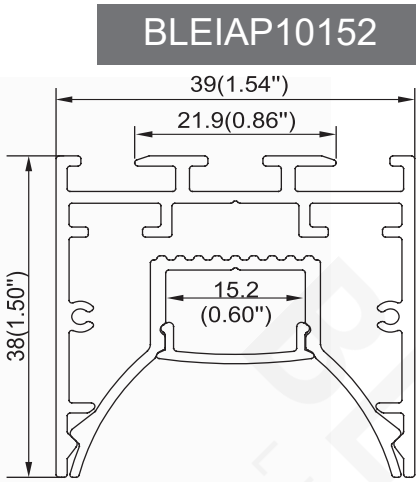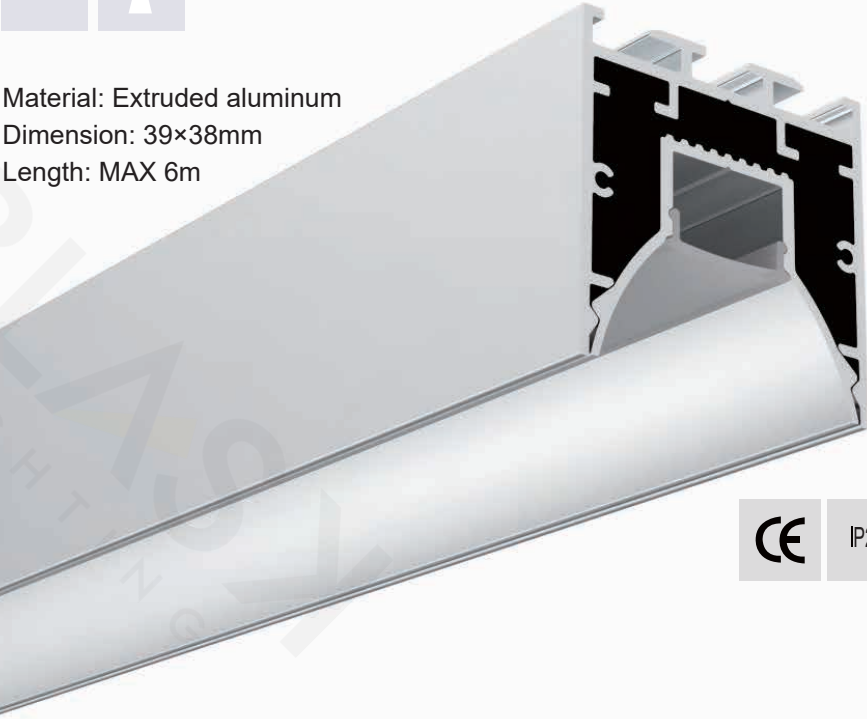

FINISH




Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



Steel wire



180° Connector





90° Vertical connector


Types of installation:



Material: Extruded aluminum
Dimension: 49×38mm
Length: MAX 6m

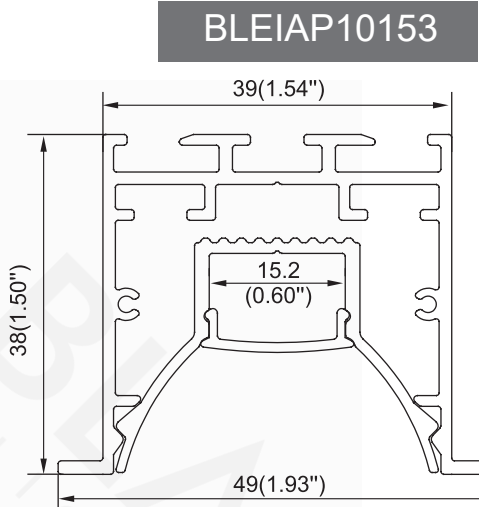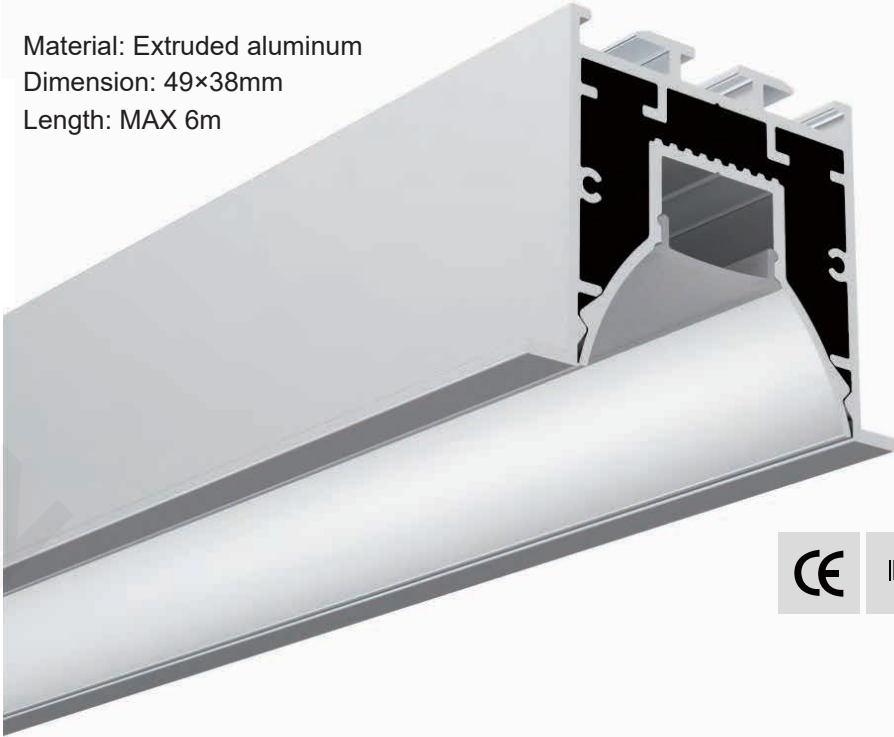

FINISH




Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused




Prismatic

ACCESSORIES



90° Horizontal connector




Spring clip



180° Connector




90° Vertical connector

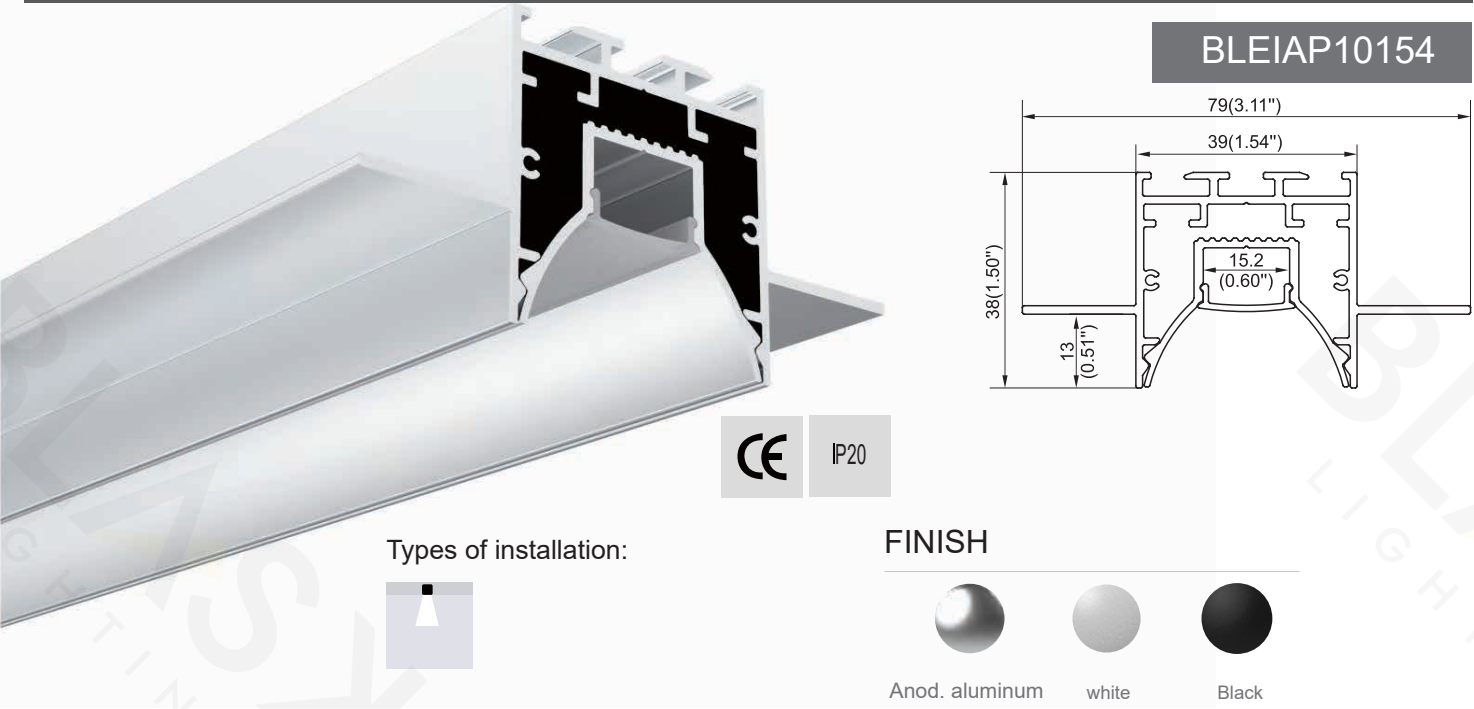

Types of installation:



FINISH




Material: Extruded aluminum
Dimension: 79×38mm
Length: MAX 6m
Compatible with 12.5mm drywall

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES




90° Horizontal connector



180° Connector



90° Vertical connector

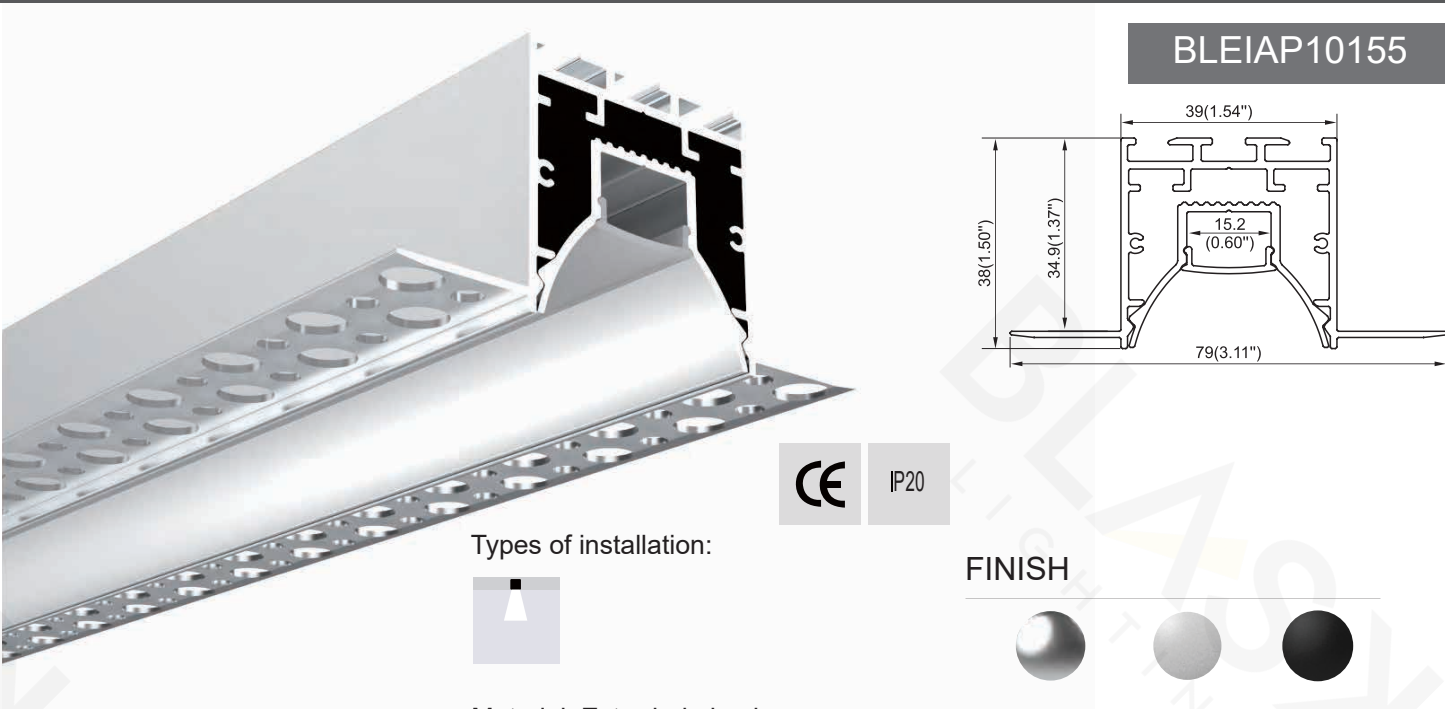

Types of installation:



FINISH



Material: Extruded aluminum
Dimension: 79×38mm
Length: MAX 6m
Compatible with 12.5mm&16mm drywall

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



180° Connector




90° Vertical connector



Disposable cover



Types of installation:



Material: Extruded aluminum
Dimension: 33×14mm
Length: MAX 6m
Compatible with 12.5mm drywall

CE **IP20**

BLEIAP10156

END CAPS



End cap with hole
End cap without hole

FINISH



Anod. aluminum white Black

DIFFUSERS



PC diffused



Types of installation:



Material: Extruded aluminum
Dimension: 14.2×147mm
Length: MAX 6m
Compatible with 12.5mm drywall

CE **IP20**

BLEIAP10157

END CAPS



End cap with hole
End cap without hole

FINISH



Anod. aluminum white Black

DIFFUSERS




PC diffused

ACCESSORIES



Disposable cover

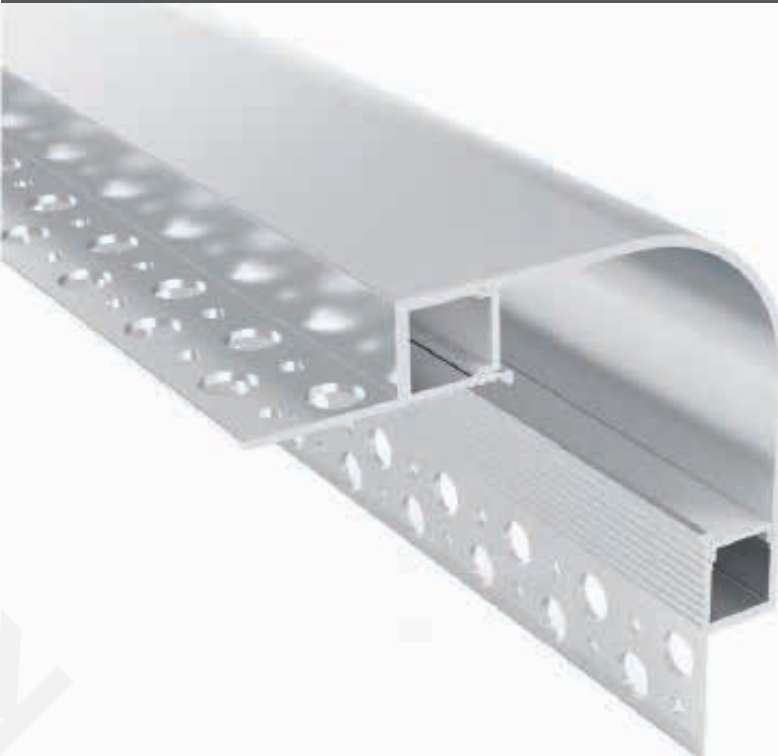

Types of installation:



Material: Extruded aluminum
Dimension: 80×80mm
Length: MAX 6m
Compatible with 12.5mm drywall

CE **IP20**

BLEIAP10158

END CAPS




End cap with hole
End cap without hole

FINISH



Anod. aluminum white Black

DIFFUSERS




PC diffused

ACCESSORIES




Disposable cover

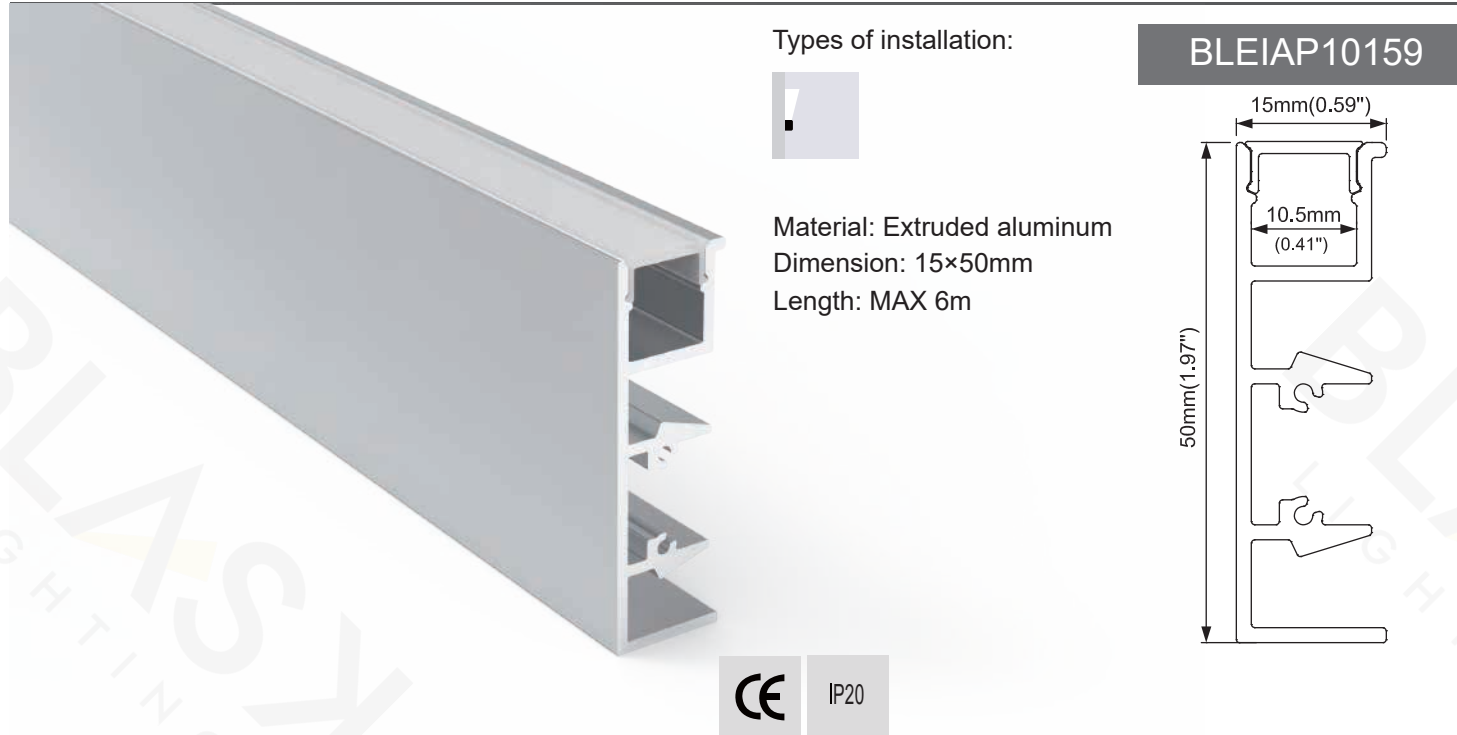

END CAPS








FINISH




DIFFUSERS




ACCESSORIES

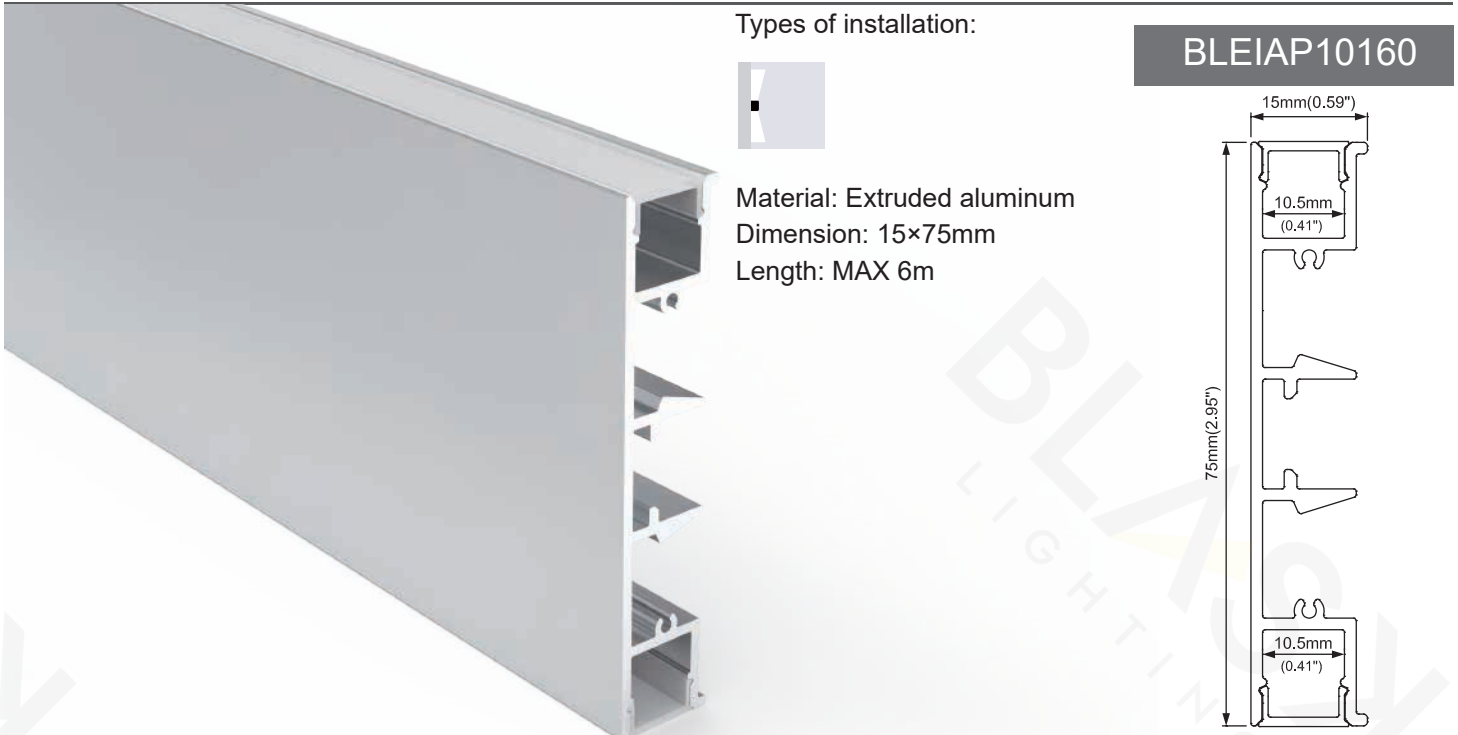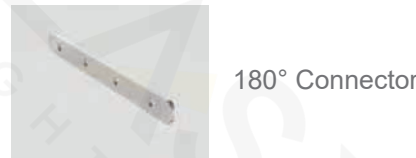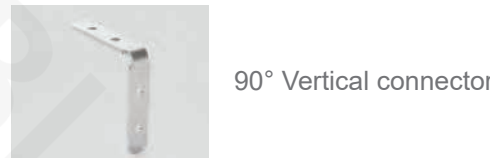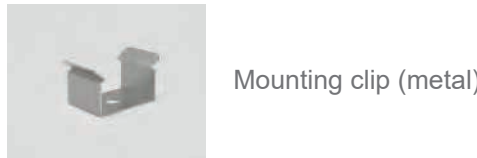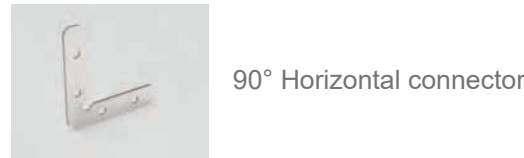

END CAPS

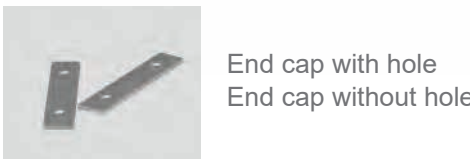






FINISH



DIFFUSERS



ACCESSORIES

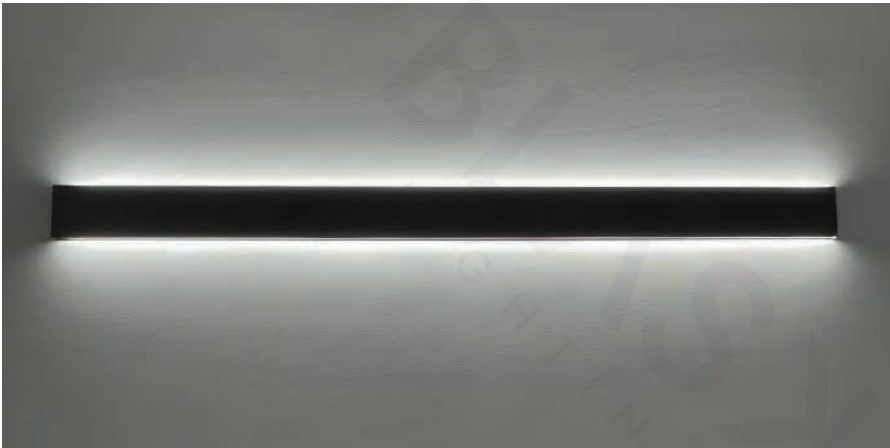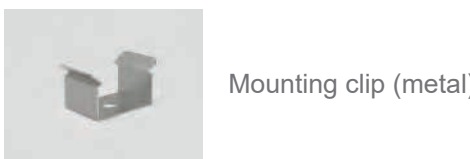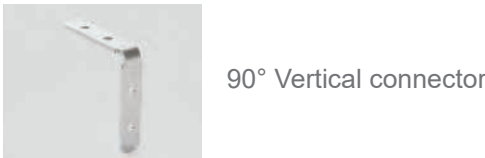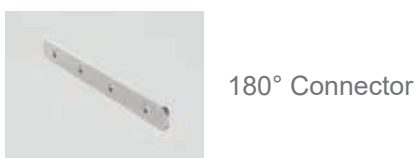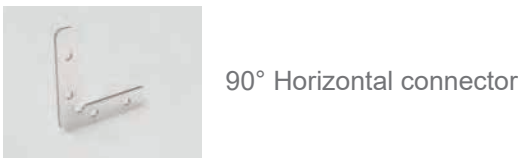


Types of installation:



Material: Extruded aluminum
Dimension: 60.3×13.1mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10161

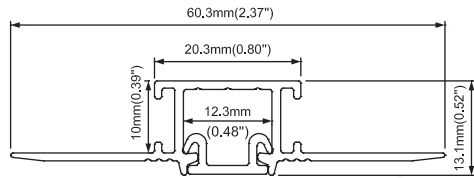

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector




Types of installation:



Material: Extruded aluminum
Dimension: 75×13.1mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10162

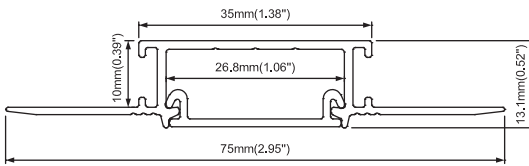

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector




180° Connector



Types of installation:



Material: Extruded aluminum
Dimension: 90×18.6mm
Length: MAX 6m
Compatible with 16mm drywall

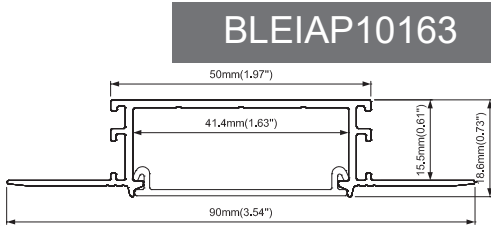

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector




180° Connector

Types of installation:



Material: Extruded aluminum
Dimension: 100×18.6mm
Length: MAX 6m
Compatible with 16mm drywall

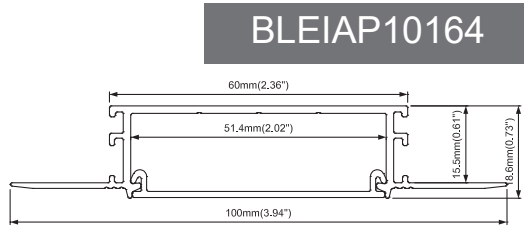

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Black diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector




180° Connector




Types of installation:



Material: Extruded aluminum
Dimension: 33×26.2mm
Length: MAX 6m

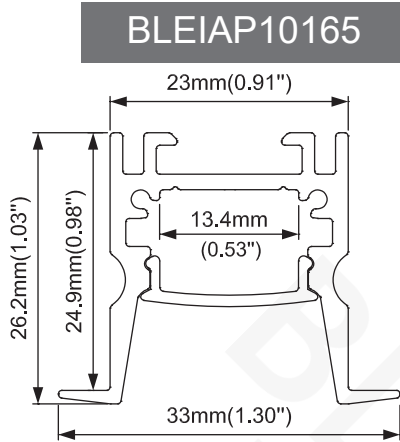

FINISH




Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic



Black PC

ACCESSORIES



90° Horizontal connector



180° Connector



90° Vertical connector




Spring clip


Types of installation:



Material: Extruded aluminum
Dimension: 23×26.2mm
Length: MAX 6m

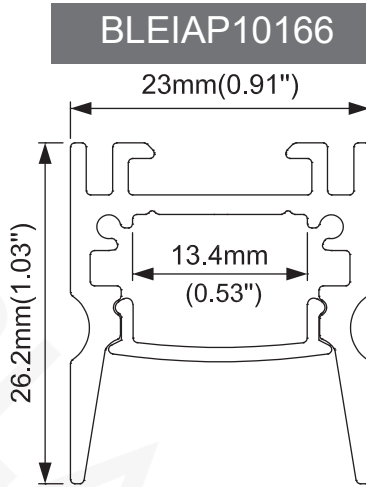

FINISH




Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic



Black PC

ACCESSORIES



90° Horizontal connector



180° Connector



90° Vertical connector



Hanging bracket



Steel wire




Mounting clip (surface)

Types of installation:



Material: Extruded aluminum
Dimension: 63×26.2mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10167

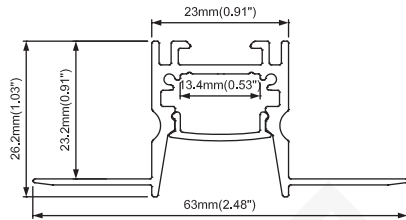

IP20

FINISH



Anod. aluminum



white




Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES




90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover




Types of installation:



Material: Extruded aluminum
Dimension: 47.8×12mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10168

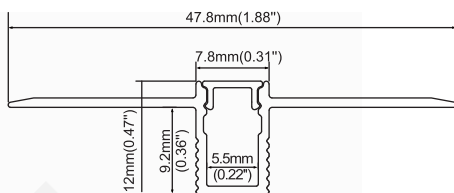

IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC frosted

ACCESSORIES




Disposable cover

Types of installation:



Material: Extruded aluminum
Dimension: 44.1×22.2mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10169

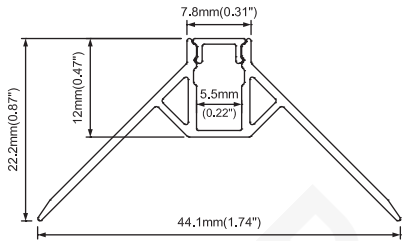

FINISH



Anod. aluminum




white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC frosted

ACCESSORIES




Disposable cover

Types of installation:



Material: Extruded aluminum
Dimension: 39.6×24.4mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10170

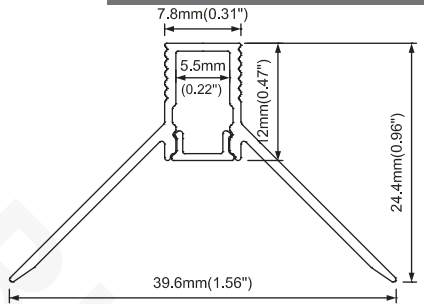

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC frosted

ACCESSORIES




Disposable cover

BLEIAP10171

Types of installation:



Material: Extruded aluminum
Dimension: 36.1×14mm
Length: MAX 6m
Compatible with 12.5mm drywall

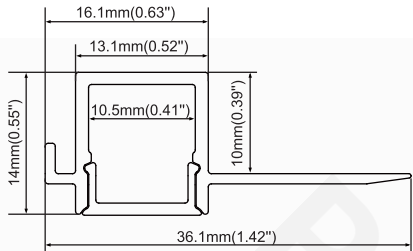

FINISH




Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS




PC diffused



Black PC

ACCESSORIES





Disposable cover

BLEIAP10172

Types of installation:



Material: Extruded aluminum
Dimension: 53×14mm
Length: MAX 6m
Compatible with 12.5mm drywall

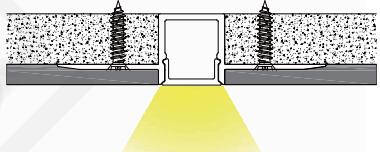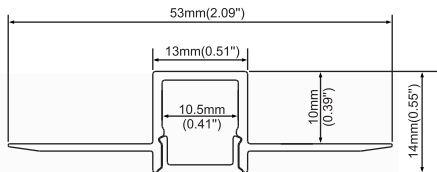

FINISH




Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS




PC diffused



Black PC

ACCESSORIES





Disposable cover


Types of installation:



Material: Extruded aluminum
Dimension: 46×26mm
Length: MAX 6m
Compatible with 12.5mm drywall

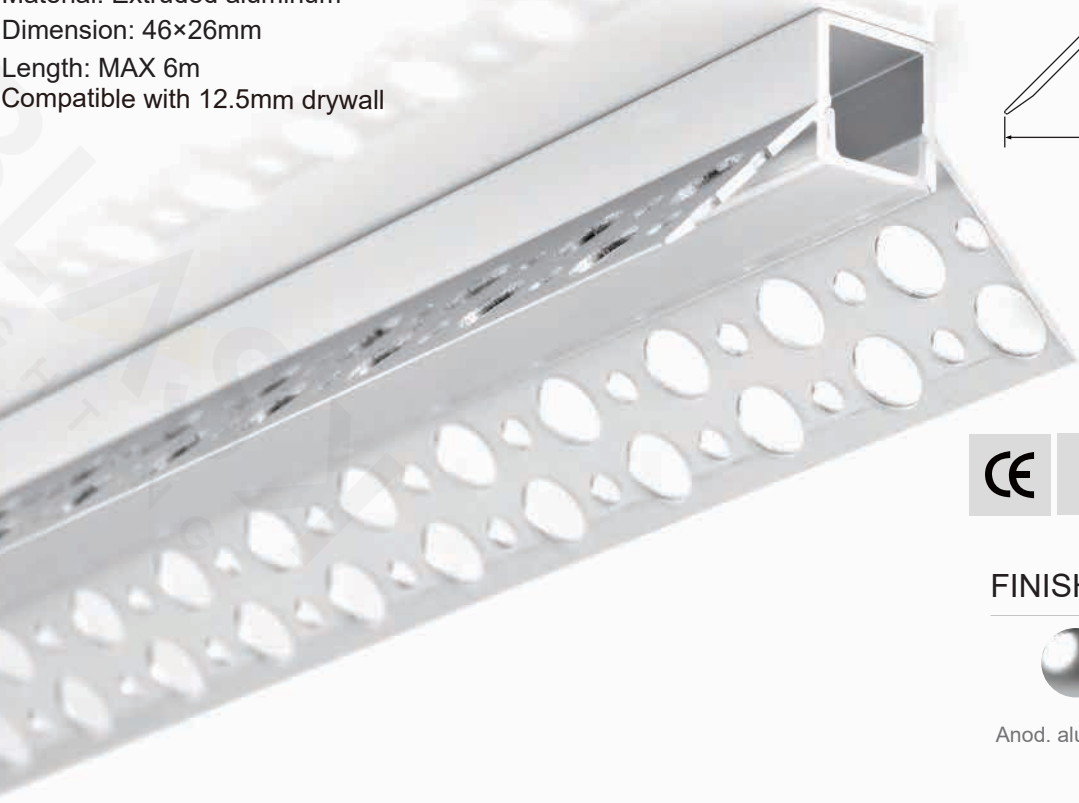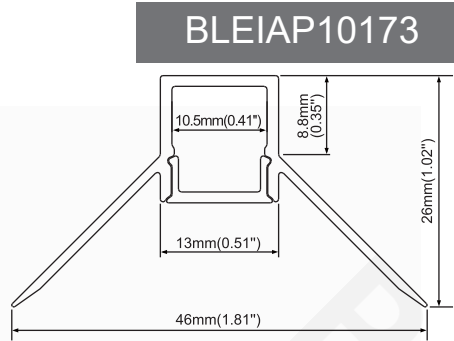

FINISH




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused




Black PC



Prismatic

ACCESSORIES




Disposable cover


Types of installation:



Material: Extruded aluminum
Dimension: 50.6×22.8mm
Length: MAX 6m
Compatible with 12.5mm drywall

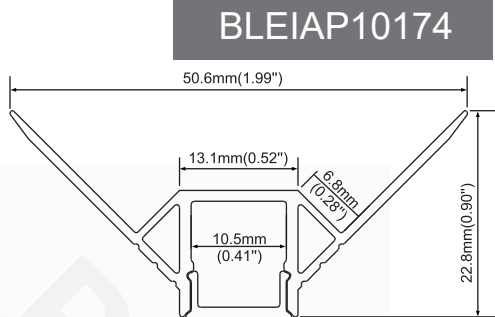

FINISH




END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused




Black PC





Prismatic

ACCESSORIES



Disposable cover

BLEIAP10175

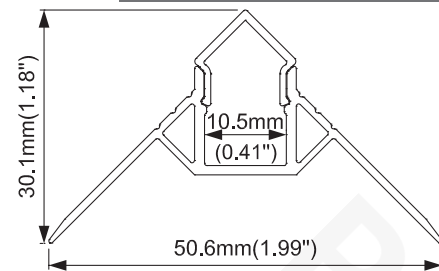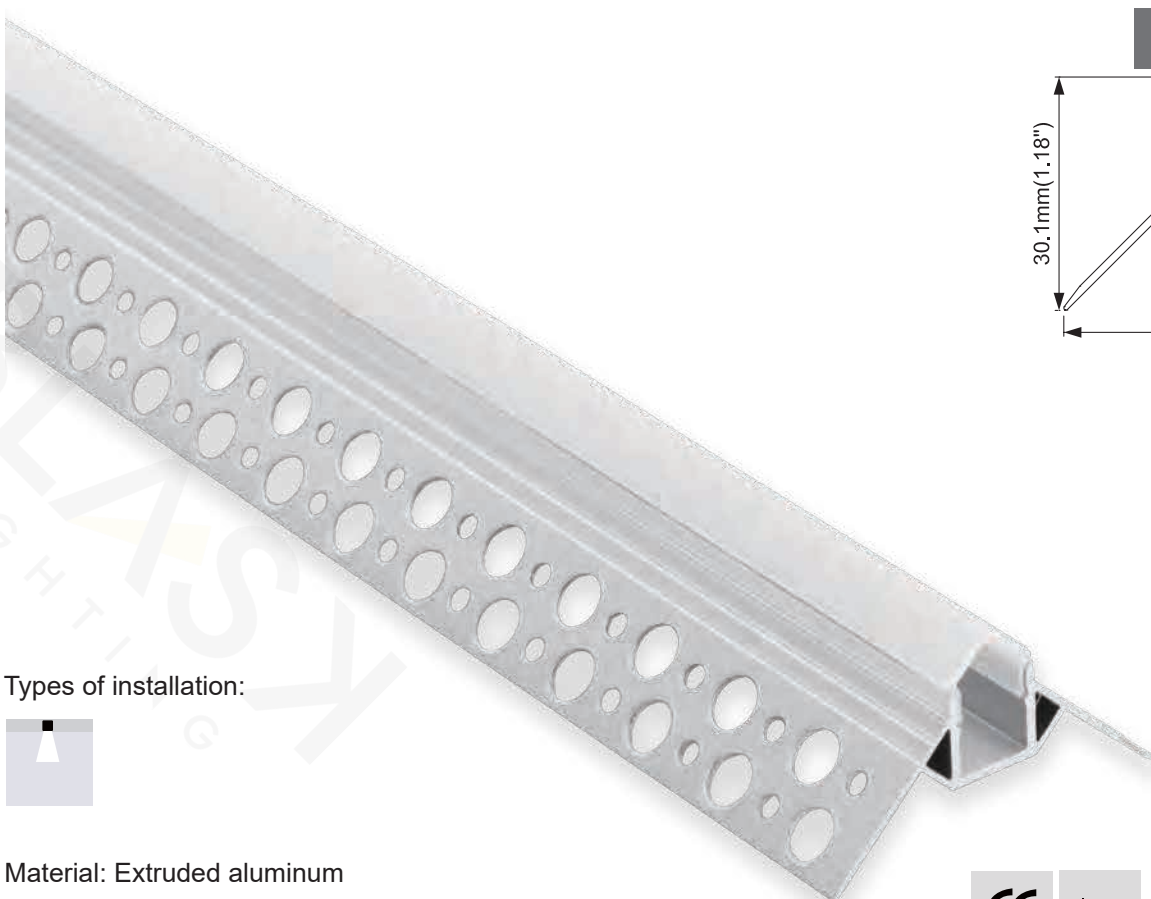


Types of installation:



Material: Extruded aluminum
Dimension: 50.6×30.1mm
Length: MAX 6m
Compatible with 12.5mm drywall

CE IP20


END CAPS

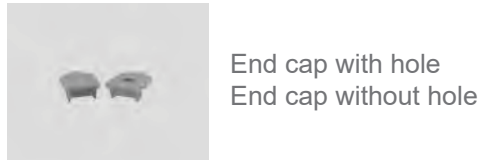


DIFFUSERS



ACCESSORIES

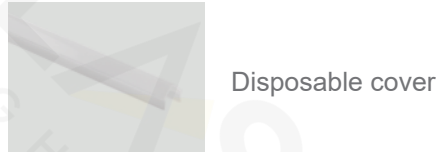

FINISH




Types of installation:




Material: Extruded aluminum
Dimension: 58.7×14mm
Length: MAX 6m
Compatible with 12.5mm drywall





END CAPS

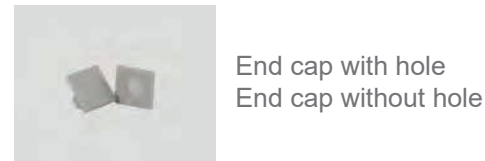

DIFFUSERS

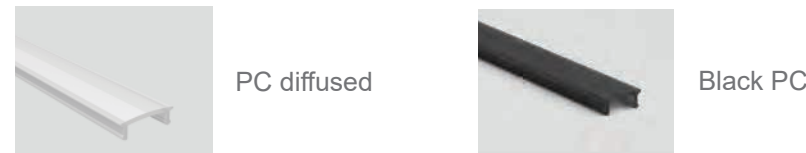

ACCESSORIES

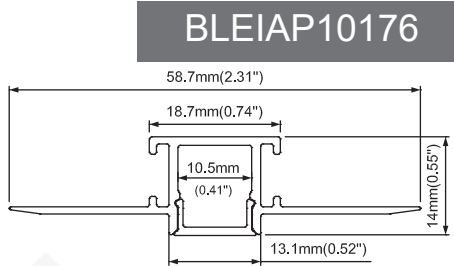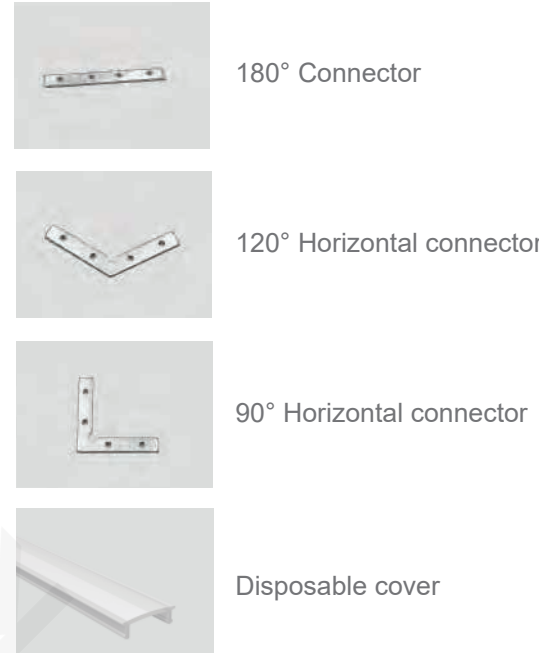

FINISH





Types of installation:




Material: Extruded aluminum
Dimension: 35.9×14mm
Length: MAX 6m
Compatible with 12.5mm drywall


BLEIAP10177

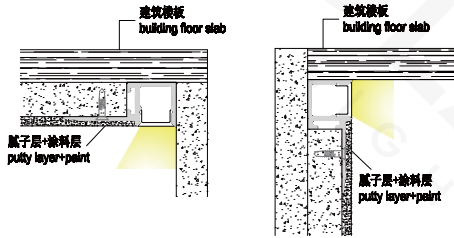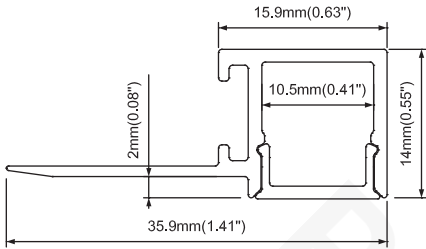

FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector




Disposable cover

Types of installation:




Material: Extruded aluminum
Dimension: 13.1×13.7mm
Length: MAX 6m

BLEIAP10178



FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic

ACCESSORIES




Mounting clip (metal)

Types of installation:



Material: Extruded aluminum
Dimension: 19.1×14mm
Length: MAX 6m

BLEIAP10179

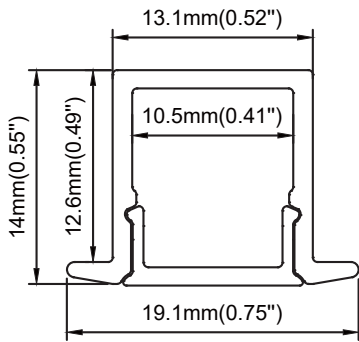

FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused




Prismatic


Types of installation:



Material: Extruded aluminum
Dimension: 61.5×14mm
Length: MAX 6m
Compatible with 12.5mm drywall

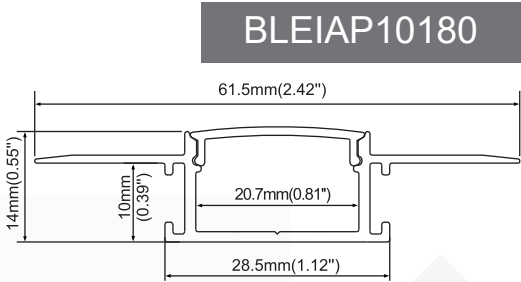

FINISH



Anod. aluminum white Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

ACCESSORIES




180° Connector



90° Horizontal connector



120° Horizontal connector





Disposable cover




Types of installation:




Material: Extruded aluminum
Dimension: 49×34.9mm
Length: MAX.6m
Compatible with 12.5mm drywall

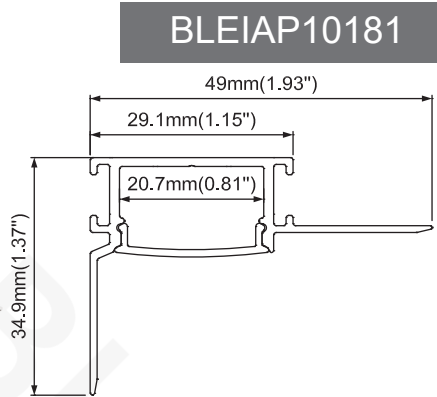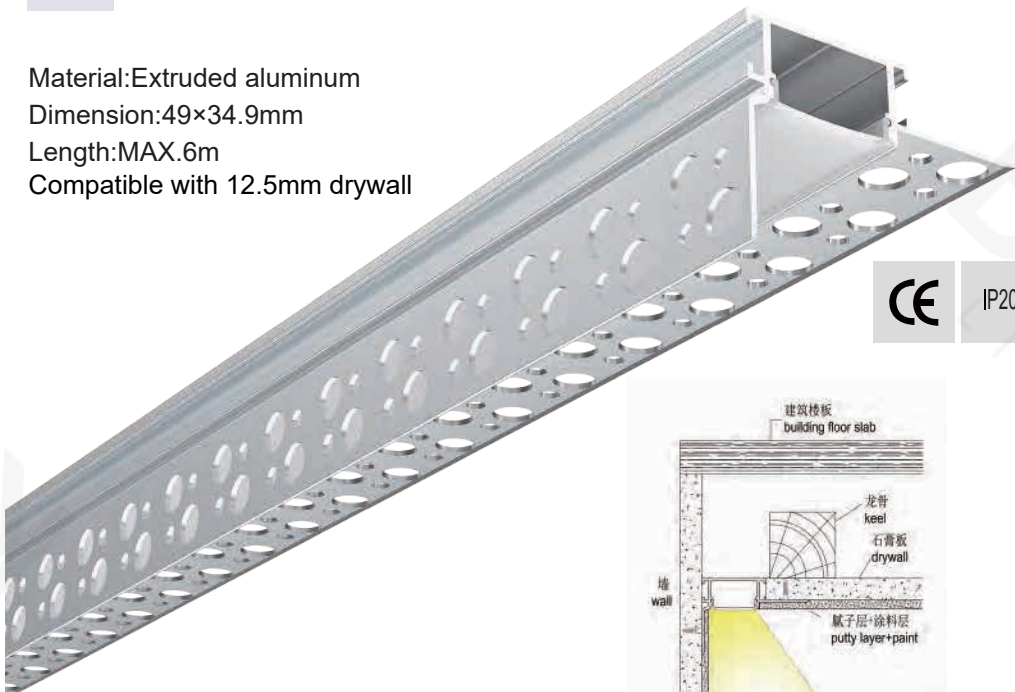

FINISH



Anod. aluminum white Black

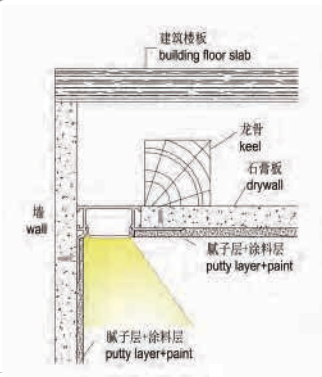

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector




Disposable cover




Types of installation:



Material: Extruded aluminum
Dimension: 73.4×18.5mm
Length: MAX 6m
Compatible with 16mm drywall

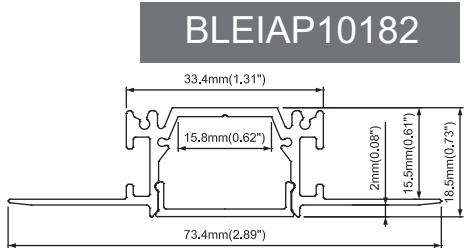

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



180° Connector



90° Horizontal connector



120° Horizontal connector




Disposable cover




Types of installation:



Material: Extruded aluminum
Dimension: 88×18.5mm
Length: MAX 6m
Compatible with 16mm drywall

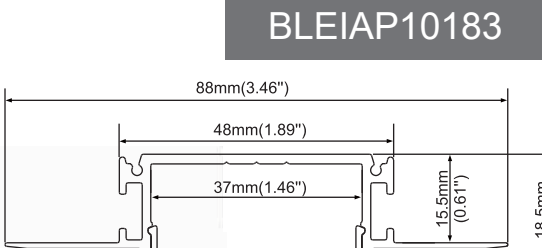

FINISH




END CAPS



End Caps

DIFFUSERS



PC diffused


ACCESSORIES




90° Outside connector



90° Inside connector



L connector



Disposable cover



BLEIAP10184



Types of installation:



END CAPS



End Caps

FINISH



white

DIFFUSERS



PC diffused

ACCESSORIES



180° Connector



90° Horizontal connector



120° Horizontal connector




Disposable cover

Types of installation:



Material: Extruded aluminum
Dimension: 98×18.5mm
Length: MAX 6m
Compatible with 16mm drywall

BLEIAP10185

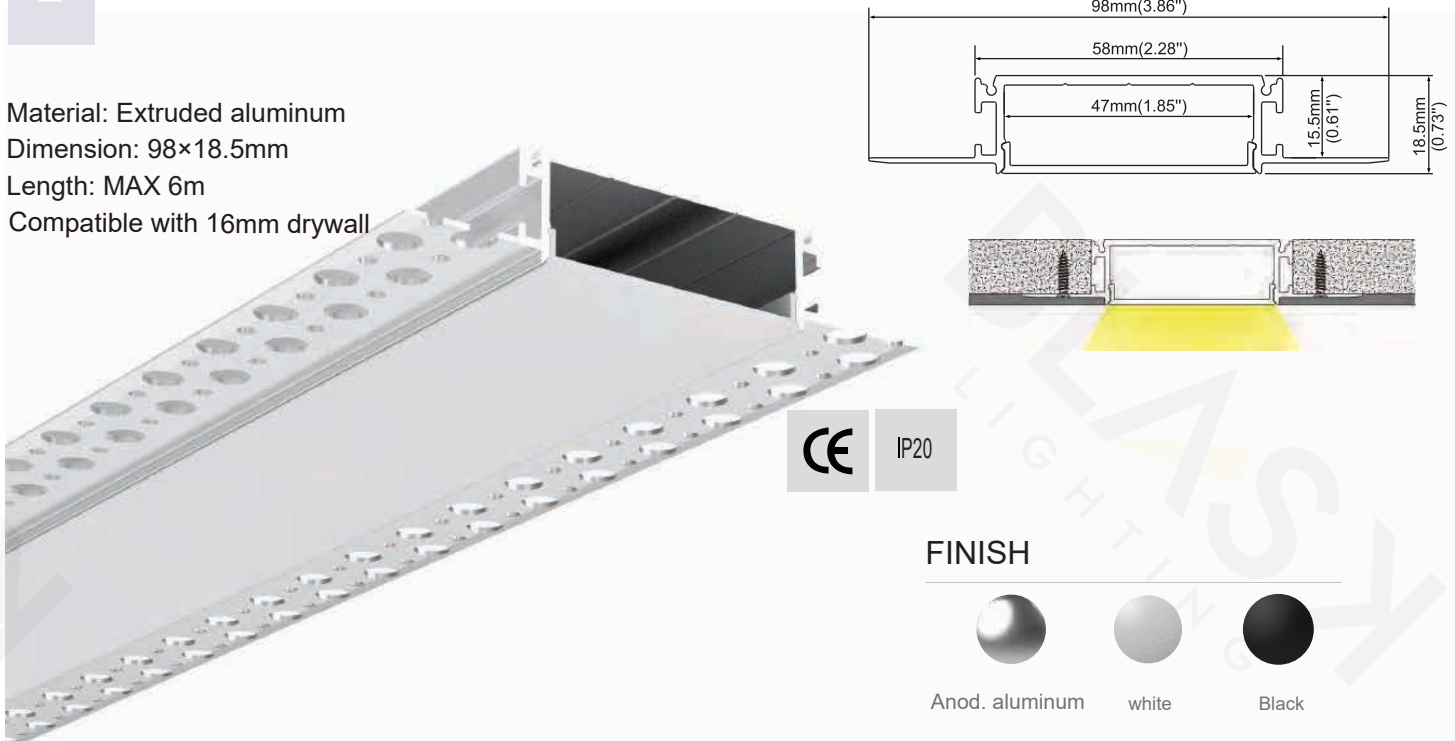


END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




180° Connector



90° Horizontal connector



120° Horizontal connector



Disposable cover




Types of installation:



Material: Extruded aluminum
Dimension: 18.5×119mm
Length: MAX 6m
Compatible with 16mm drywall



FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



180° Connector



90° Horizontal connector



120° Horizontal connector



Disposable cover



Types of installation:



Material: Extruded aluminum
Dimension: 18.5×113.8mm
Length: MAX 6m
Compatible with 16mm drywall



FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



180° Connector



90° Horizontal connector



120° Horizontal connector



Disposable cover




Types of installation:



Material: Extruded aluminum
Dimension: 33.1×11mm
Length: MAX 6m
Compatible with 10mm tile



FINISH



Anod. aluminum white Black

END CAPS




End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Disposable cover




Types of installation:



Material: Extruded aluminum
Dimension: 56.3×22.4mm
Length: MAX 6m
Compatible with 10mm tile



FINISH




Anod. aluminum white Black

END CAPS




End cap with hole
End cap without hole

DIFFUSERS



PC diffused


ACCESSORIES



Disposable cover



BLEIAP10190



39.4mm(1.55")
27.1mm(1.07")
10mm(0.39")
10.5mm(0.41")

Types of installation:



Material: Extruded aluminum
Dimension: 39.4×27.1mm
Length: MAX 6m
Compatible with 10mm tile


CEIP20

FINISH



Anod. aluminumwhiteBlack


END CAPS

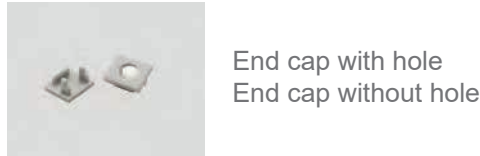

DIFFUSERS





ACCESSORIES

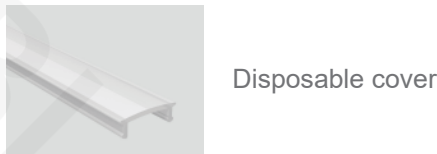

Types of installation:



Material: Extruded aluminum
Dimension: 143×46mm
Length: MAX 6m
Compatible with 16mm drywall

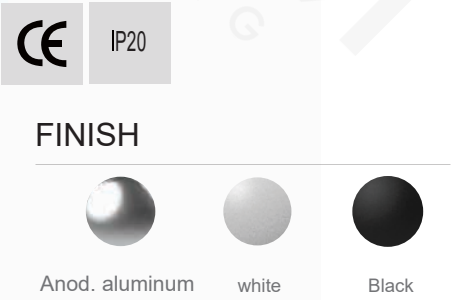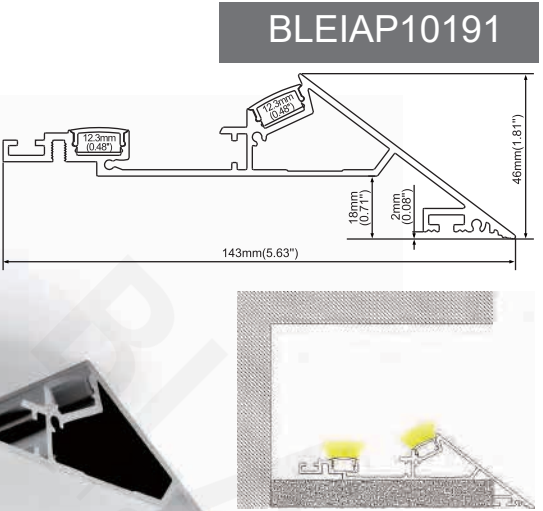


END CAPS




DIFFUSERS



ACCESSORIES

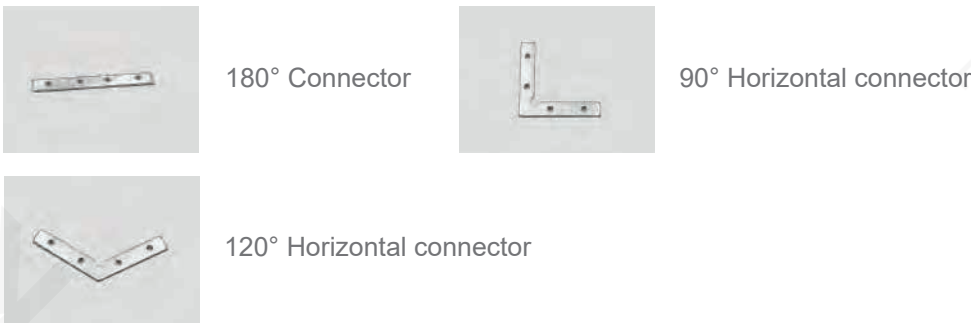

BLEIAP10192

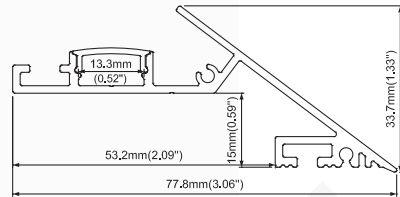

Types of installation:



Material: Extruded aluminum
Dimension: 77.8×33.7mm
Length: MAX 6m
Compatible with 16mm drywall



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PMMA opal matte
PMMA semi clear
PMMA clear

ACCESSORIES



180° Connector




90° Horizontal connector



120° Horizontal connector

BLEIAP10193

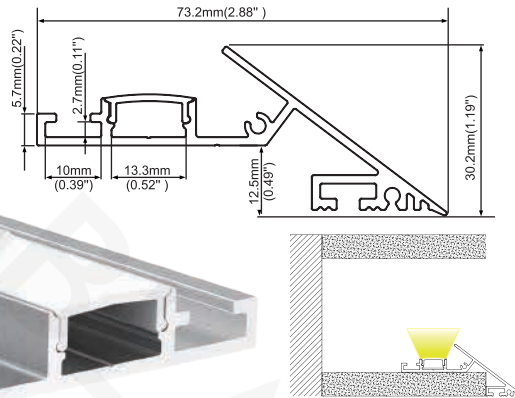

Types of installation:



Material: Extruded aluminum
Dimension: 73.2×30.2mm
Length: MAX 6m
Compatible with 12.5mm drywall



IP20

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PMMA opal matte
PMMA semi clear
PMMA clear

ACCESSORIES



180° Connector



120° Horizontal connector




90° Horizontal connector



Types of installation:



Material: Extruded aluminum
Dimension: 79×32mm
Length: MAX 6m
Compatible with 12.5mm drywall

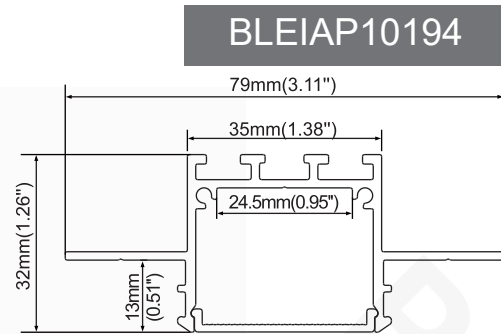

FINISH



Anod. aluminum



white



Black

END CAPS

DIFFUSERS



End Caps




PC diffused



Types of installation:



Material: Extruded aluminum
Dimension: 88.1×32mm
Length: MAX 6m
Compatible with 12.5mm drywall

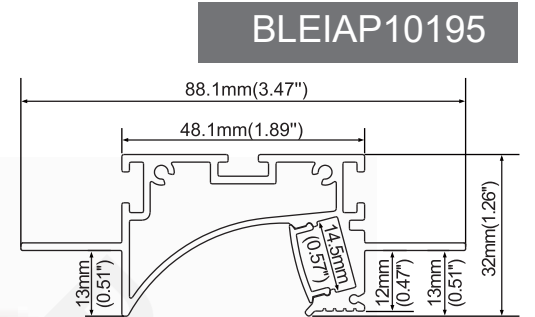

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PMMA opal matte
PMMA semi clear
PMMA clear

ACCESSORIES



180° Connector



90° Horizontal connector




120° Horizontal connector


Types of installation:



Material: Extruded aluminum
Dimension: 98×35mm
Length: MAX 6m
Compatible with 12.5mm drywall

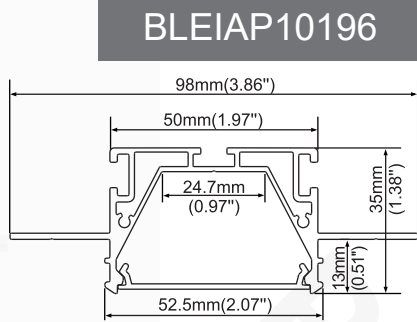

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



180° Connector



90° Horizontal connector




120° Horizontal connector


Types of installation:



Material: Extruded aluminum
Dimension: 125×39mm
Length: MAX 6m
Compatible with 12.5mm drywall

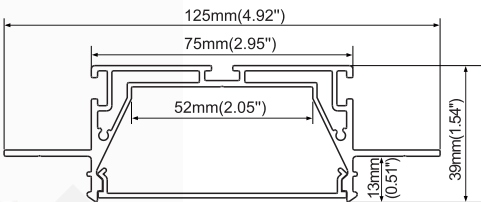

FINISH



END CAPS




End Caps

DIFFUSERS




PC diffused




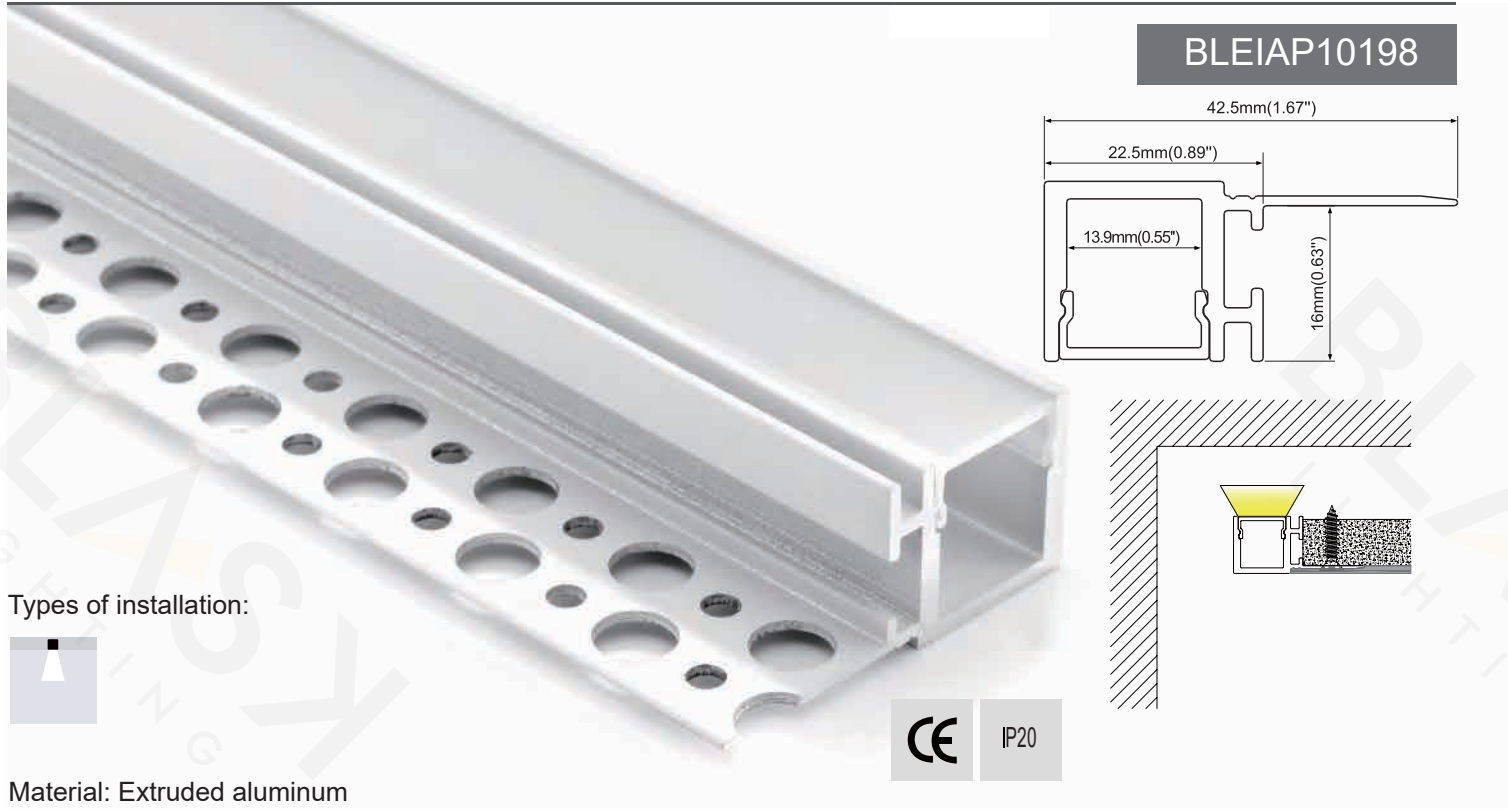

FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES






Disposable cover


Types of installation:



Material: Extruded aluminum
Dimension: 19.5×42.5mm
Length: MAX 6m
Compatible with 16mm drywall

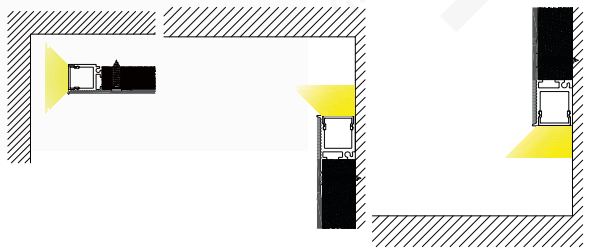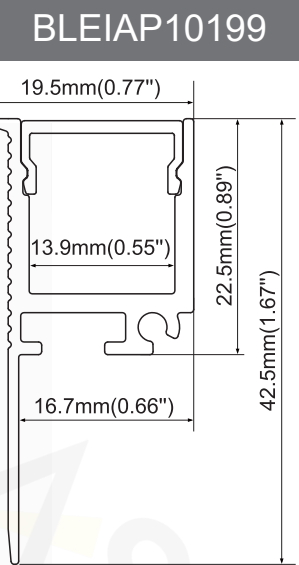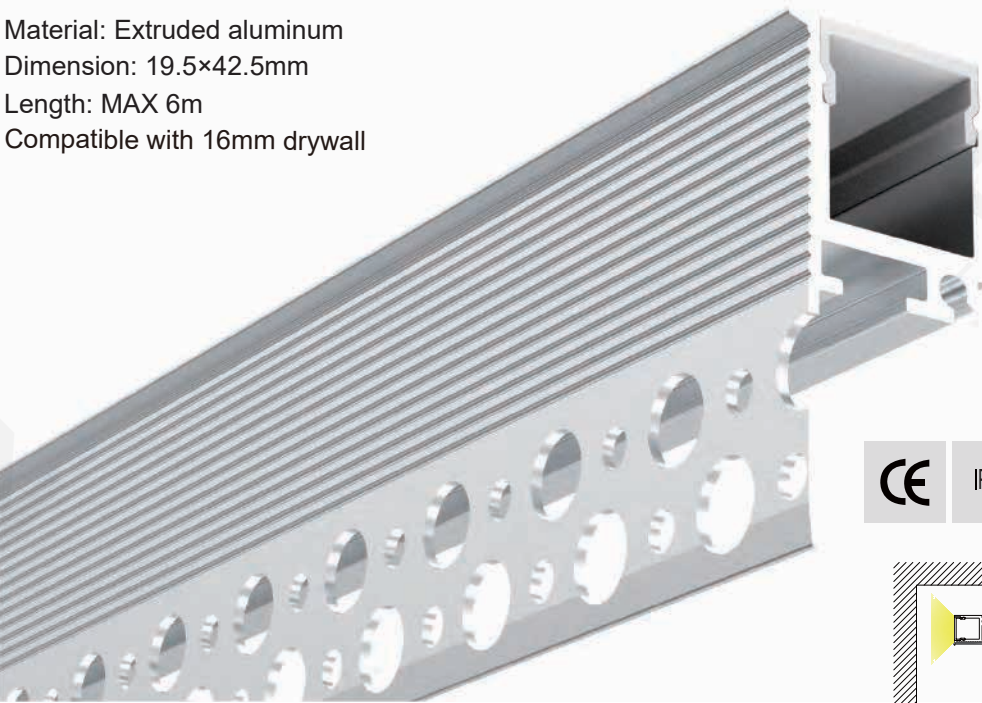

FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Disposable cover




Types of installation:



Material: Extruded aluminum
Dimension: 43.9×18.5mm
Length: MAX 6m
Compatible with 16mm drywall

BLEIAP10200

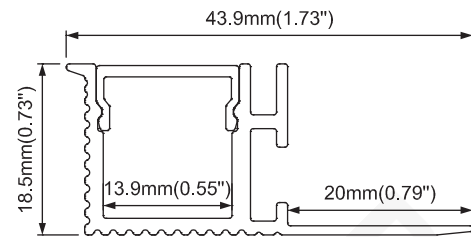

FINISH



Anod. aluminum




white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Disposable cover

Types of installation:



Material: Extruded aluminum
Dimension: 53×18.5mm
Length: MAX 6m
Compatible with 16mm drywall

BLEIAP10201

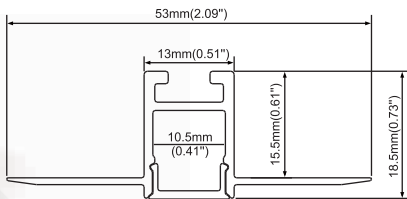

FINISH



Anod. aluminum



white




Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused


ACCESSORIES



90° Horizontal connector



180° Connector




Disposable cover



Types of installation:



BLEIAP10202

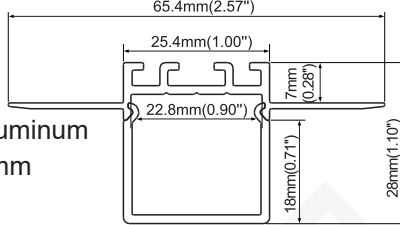

Material: Extruded aluminum
Dimension: 65.4×28mm
Length: MAX 6m
Compatible with 12.5mm drywall

FINISH





Anod. aluminum white Black

CE IP20

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Disposable cover


Types of installation:



Material: Extruded aluminum
Dimension: 65.4×28mm
Length: MAX 6m
Compatible with 12.5mm drywall

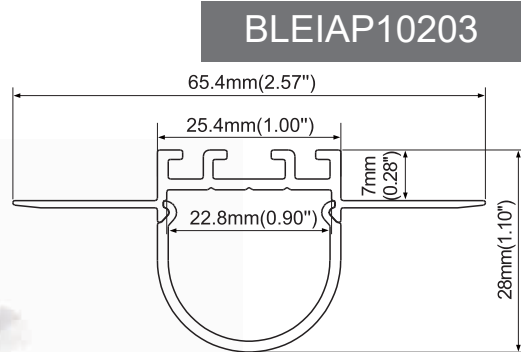

FINISH



END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Disposable cover



Types of installation:



BLEIAP10204



Material: Extruded aluminum
Dimension: 25.4×28mm
Length: MAX 6m

FINISH






Anod. aluminum white Black

CE IP20

END CAPS



End cap with hole
End cap without hole

ACCESSORIES



Mounting clip (metal)

DIFFUSERS




PC diffused



Types of installation:



BLEIAP10205

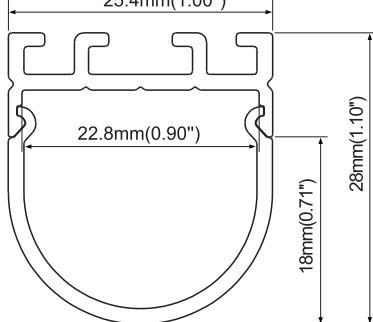

Material: Extruded aluminum
Dimension: 25.4×28mm
Length: MAX 6m

FINISH





Anod. aluminum white Black

CE IP20

END CAPS




End cap with hole
End cap without hole

ACCESSORIES




Mounting clip (metal)

DIFFUSERS



PC diffused

BLEIAP10206

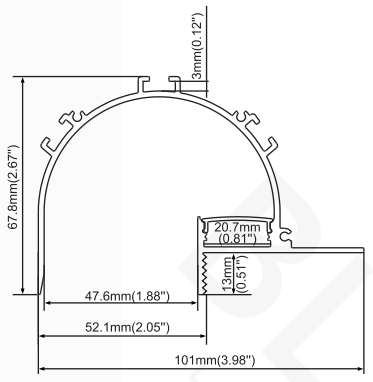

Types of installation:



Material: Extruded aluminum
Dimension: 101×67.8mm
Length: MAX 6m
Compatible with 12.5mm drywall




FINISH



white

BLEIAP10207

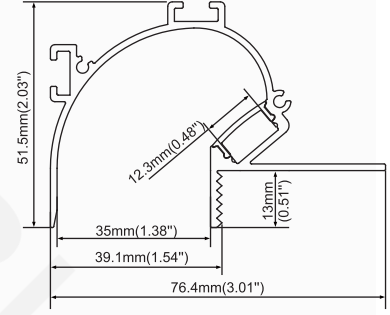

Types of installation:



Material: Extruded aluminum
Dimension: 76.4×51.5mm
Length: MAX 6m
Compatible with 12.5mm drywall



FINISH



white

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Clip for ceiling



Clip for wall

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Clip for wall




Clip for ceiling

Types of installation:



Material: Extruded aluminum
Dimension: 94.4×34mm
Length: MAX 6m
Compatible with 12.5mm drywall

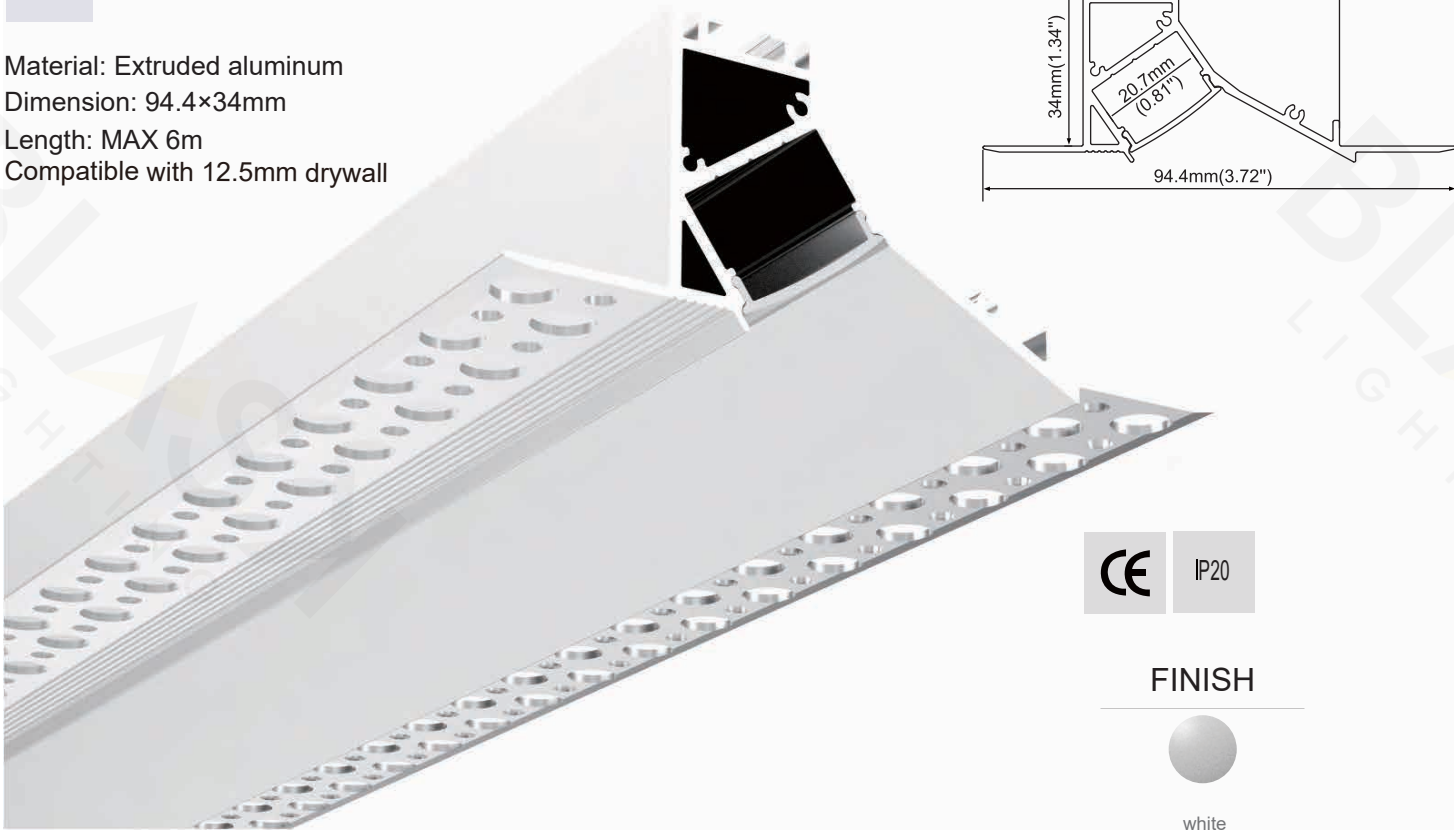

FINISH



white

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused
PC semi clear



ACCESSORIES




Disposable cover



BLEIAP10208

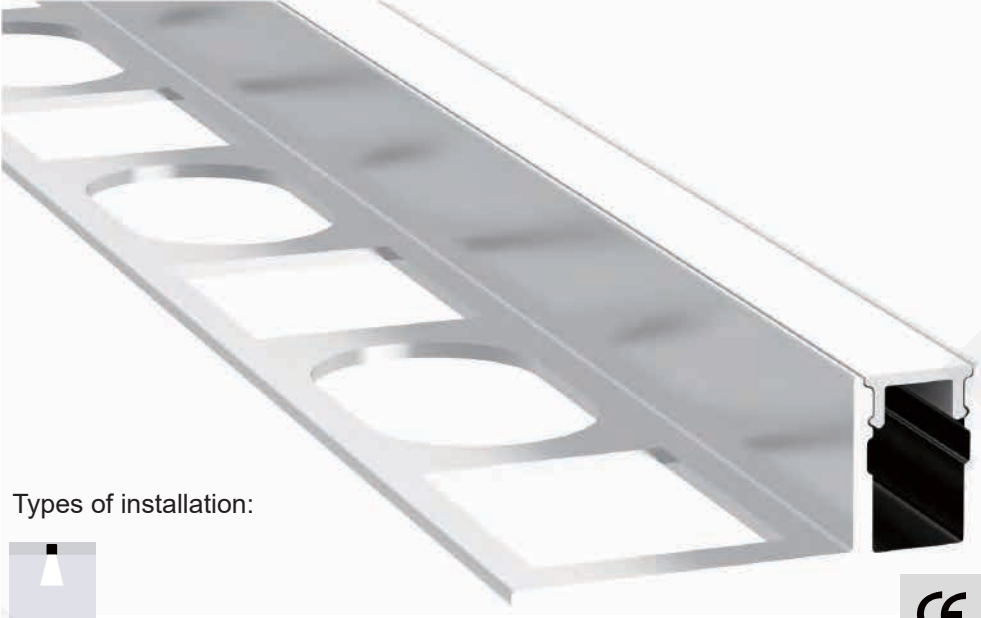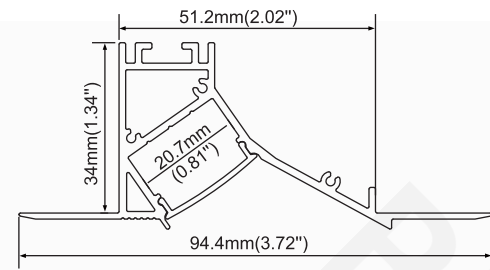

BLEIAP10209

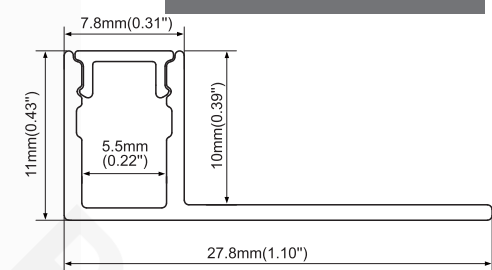

Types of installation:



Material: Extruded aluminum
Dimension: 27.8×11mm
Length: MAX 6m
Compatible with 10mm tile



FINISH



Anod. aluminum



white



Black

END CAPS




End cap with hole
End cap without hole

DIFFUSERS




PC frosted

ACCESSORIES




Disposable cover

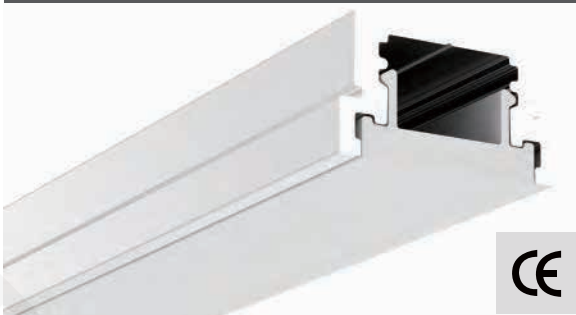


Types of installation:


Material: Extruded aluminum
Dimension: 22×13mm
Length: MAX 6m



22mm(0.87")
13mm(0.51")
12.3mm(0.48")

END CAPS



DIFFUSERS



PC diffused

FINISH




Anod. aluminum white Black




Types of installation:


Material: Extruded aluminum
Dimension: 41×13mm
Length: MAX 6m
Compatible with 10mm tile



41mm(1.61")
22mm(0.87")
12mm(0.47")
12.3mm(0.48")

END CAPS



DIFFUSERS



PC diffused

ACCESSORIES



Disposable cover

FINISH




Anod. aluminum white Black




Types of installation:


Material: Extruded aluminum
Dimension: 62×13mm
Length: MAX 6m
Compatible with 12.5mm drywall

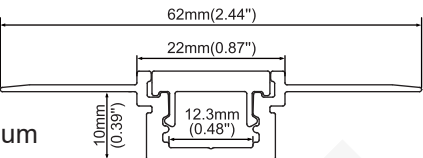

62mm(2.44")
22mm(0.87")
10mm(0.39")
12.3mm(0.48")

END CAPS



DIFFUSERS



PC diffused

ACCESSORIES



Disposable cover

FINISH




Anod. aluminum white Black




Types of installation:


Material: Extruded aluminum
Dimension: 27.06×11mm
Length: MAX 6m

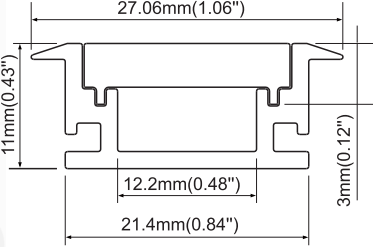

27.06mm(1.06")
11mm(0.43")
3mm(0.12")
12.2mm(0.48")
21.4mm(0.84")

END CAPS



DIFFUSERS



PC diffused

FINISH




Anod. aluminum white Black




Types of installation:


Material: Extruded aluminum
Dimension: 21.3×26.1mm
Length: MAX 6m

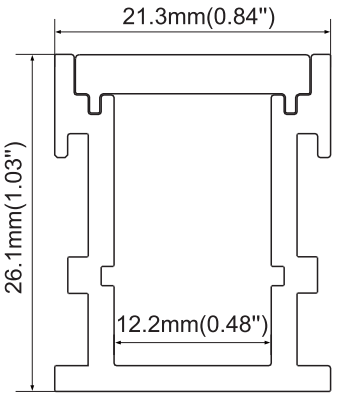

21.3mm(0.84")
26.1mm(1.03")
12.2mm(0.48")

END CAPS



DIFFUSERS




PC diffused

FINISH



Anod. aluminum white Black

BLEIAP10215

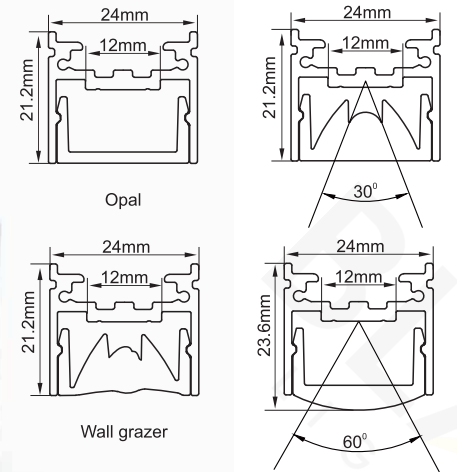

Types of installation:



Material: Extruded aluminum
Dimension: 24x21.2mm
Length: MAX 6m




END CAPS



End Caps

FINISH



DIFFUSERS



PC diffused



PMMA lens


ACCESSORIES



Mounting clip (metal)



Adjustable bracket

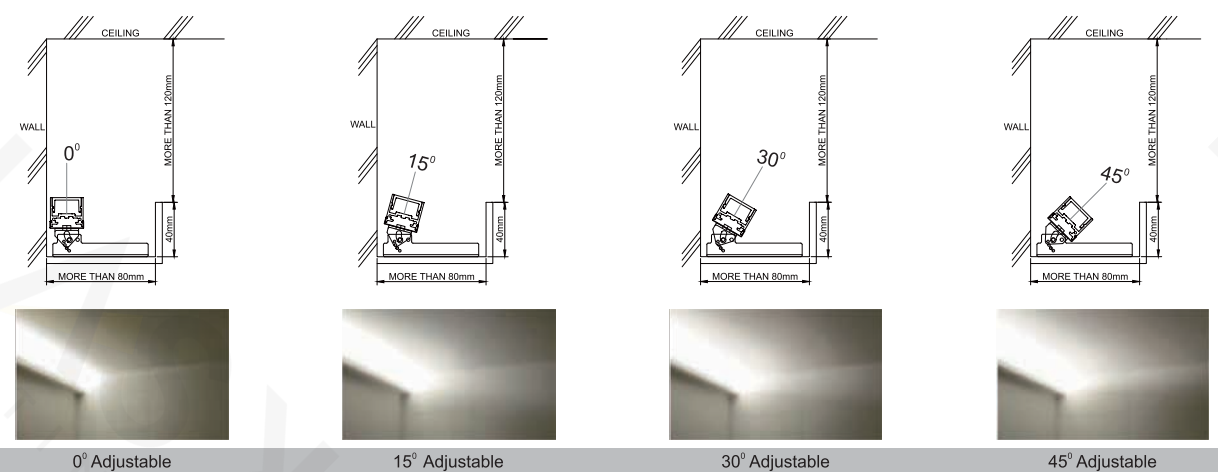


0° Adjustable

15° Adjustable

30° Adjustable

45° Adjustable


BLEIAP10216

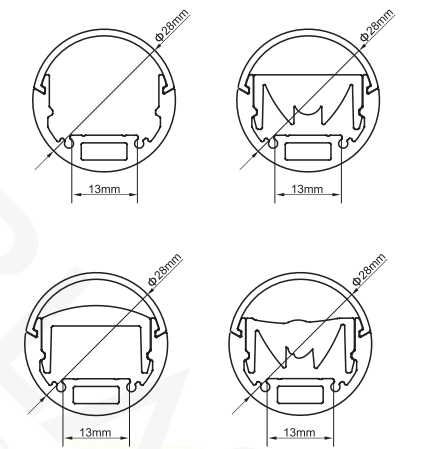


Types of installation:



Material: Extruded aluminum
Dimension: $\phi 28$ mm
Length: MAX 6m

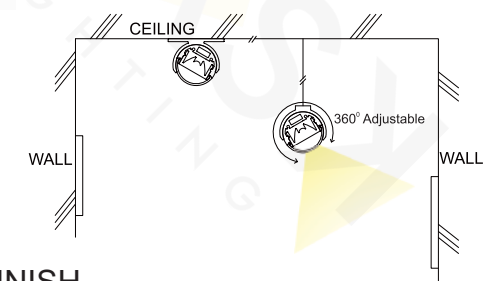

FINISH



END CAPS



End Caps



Hanging end caps

DIFFUSERS



PC diffused



PC clear



PMMA lens

ACCESSORIES



Black PC clip



Clear PC clip



Steel wire



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Black PC clip




90° Horizontal connector




Clear PC clip



180° Connector



0° Adjustable



15° Adjustable




30° Adjustable



45° Adjustable

FINISH




Anod. aluminum

white

Black



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Black PC clip



90° Horizontal connector




Clear PC clip



180° Connector

FINISH



Anod. aluminum



white

Black


Types of installation:




Material: Extruded aluminum
Dimension: 24×25.2mm
Length: MAX 6m

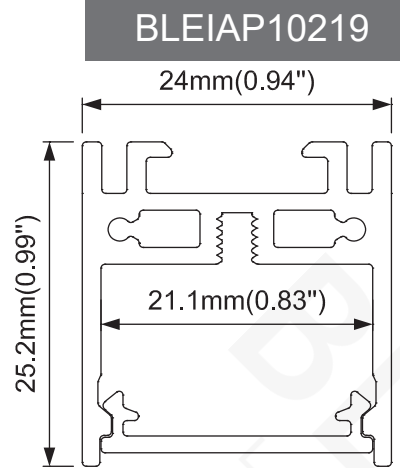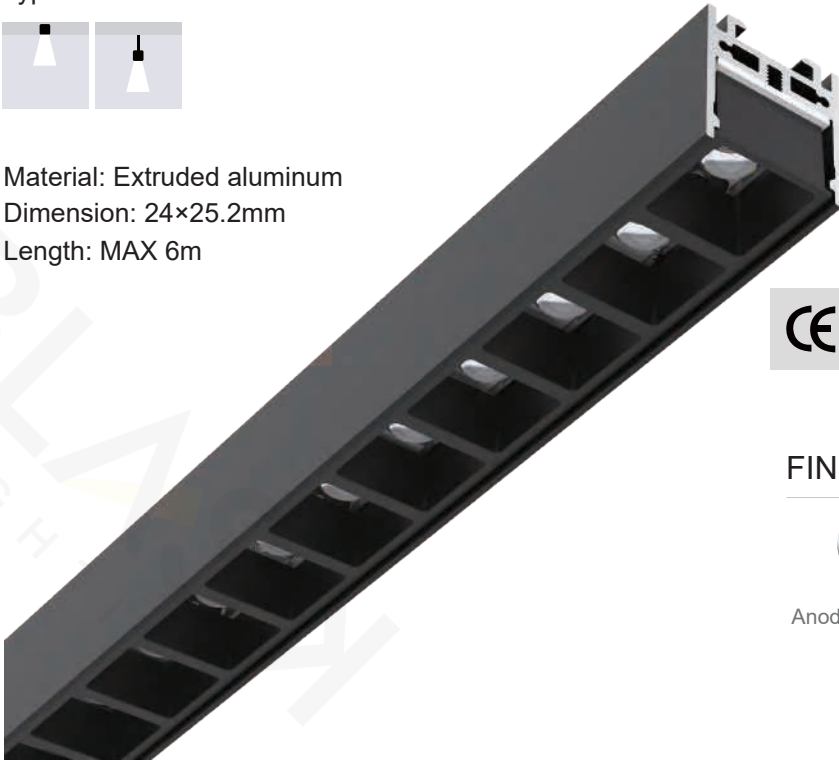

FINISH



Anod. aluminum white Black

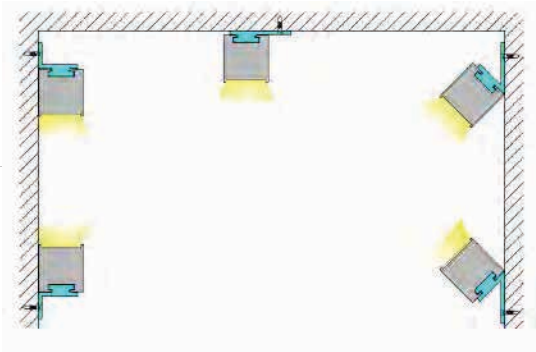

END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Black Reflector 30° or 55°
LEDiL



White Reflector 30° or 55°



Chrome Reflector 30° or 55°



Surface clip



T-bar clip



Steel wire




Hanging clip


Types of installation:



Material: Extruded aluminum
Dimension: 24×30.4mm
Length: MAX 6m

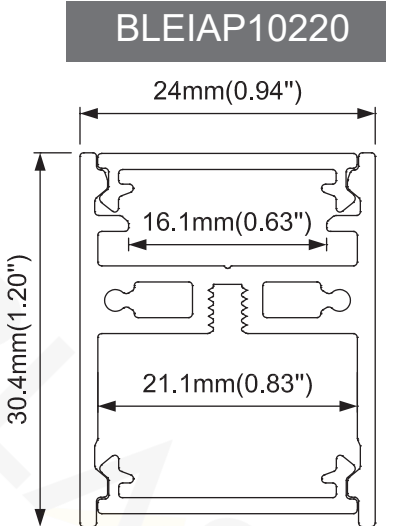

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Black Reflector 30° or 55°
LEDiL



White Reflector 30° or 55°



Chrome Reflector 30° or 55°



Steel wire



Hanging bracket


Types of installation:




Material: Extruded aluminum
Dimension: 34×25.2mm
Length: MAX 6m



BLEIAP10221

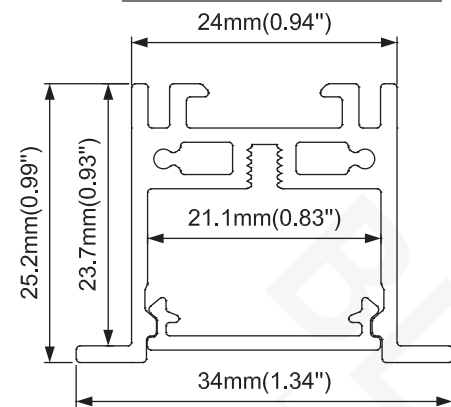

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Black Reflector 30° or 55°
LEDiL



White Reflector 30° or 55°



Chrome Reflector 30° or 55°




Spring clip


Types of installation:



Material: Extruded aluminum
Dimension: 24×90mm
Length: MAX 6m

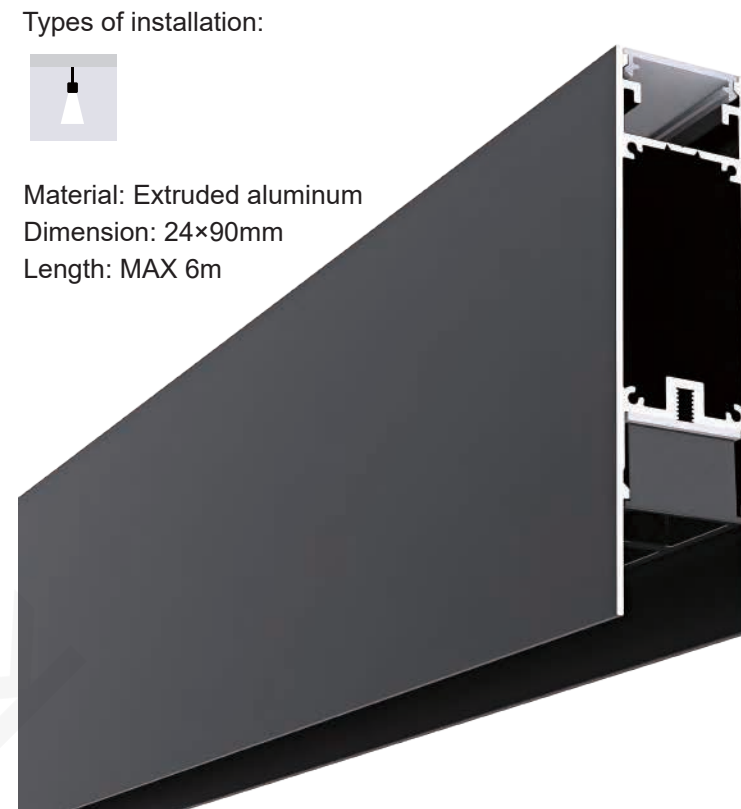

BLEIAP10222

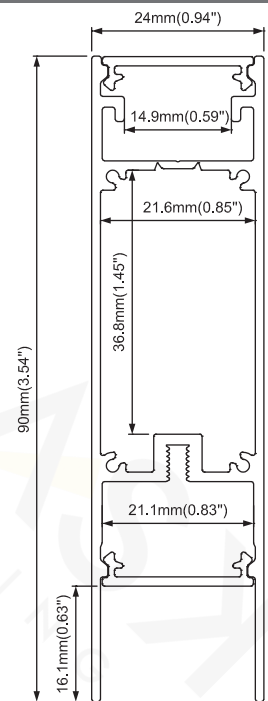

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Hanging bracket



Steel wire



Chrome Reflector 30° or 55°



Black Reflector 30° or 55°
LEDiL




White Reflector 30° or 55°

Types of installation:



Material: Extruded aluminum
Dimension: 24×75mm
Length: MAX 6m

BLEIAP10223

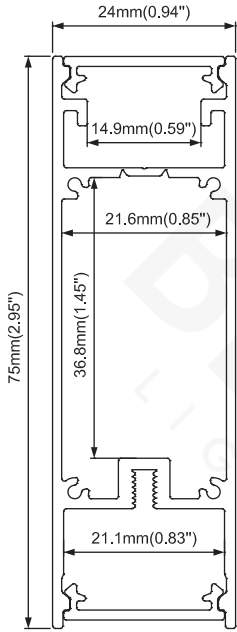

CE IP20

FINISH




Anod. aluminum white Black


END CAPS



DIFFUSERS

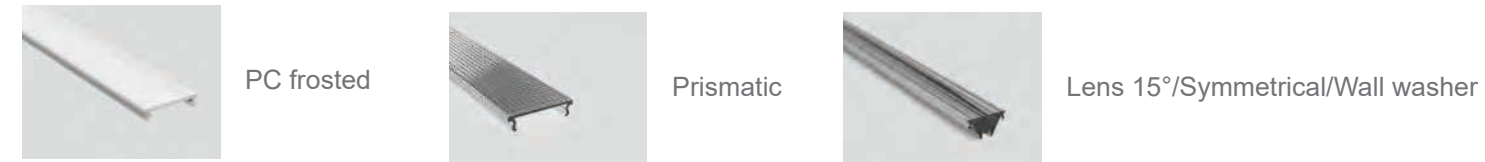

ACCESSORIES

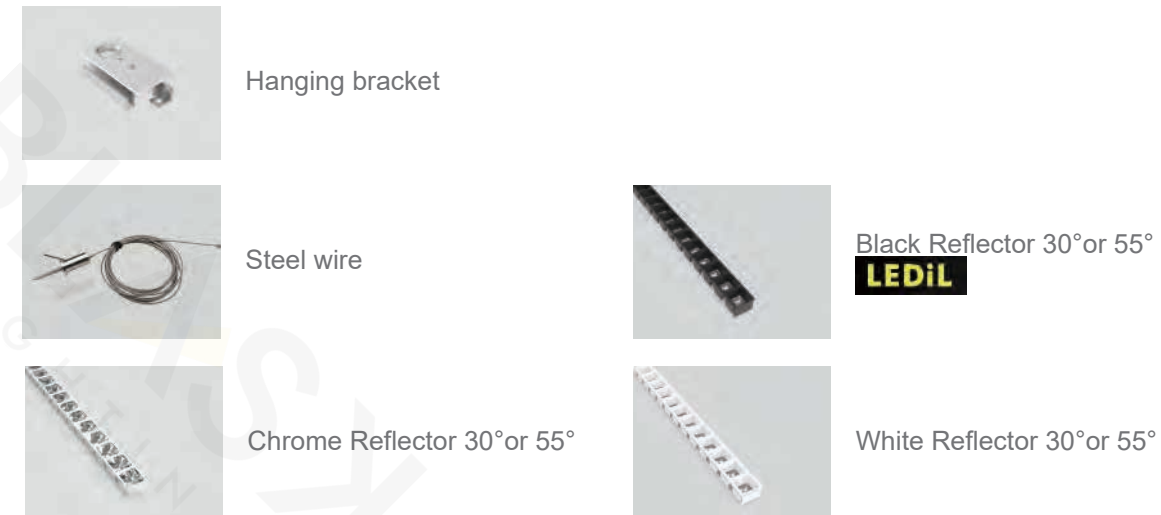


Types of installation:



Material: Extruded aluminum
Dimension: 64×25.2mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10224

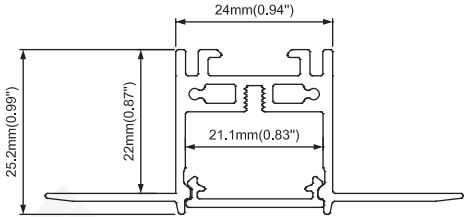


CE IP20

FINISH




Anod. aluminum white Black

END CAPS

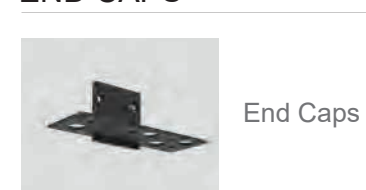

DIFFUSERS

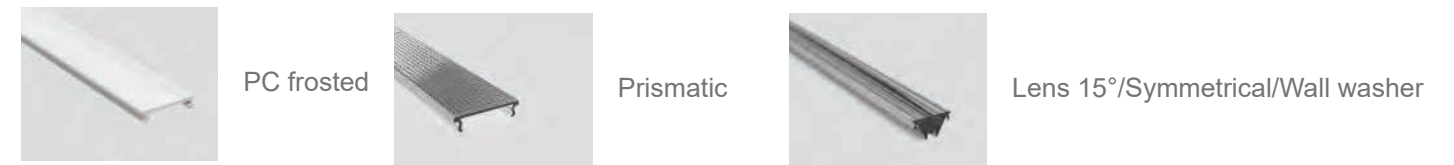


ACCESSORIES




Types of installation:



Material: Extruded aluminum
Dimension: 78×50mm
Length: MAX 6m
Compatible with 16mm drywall

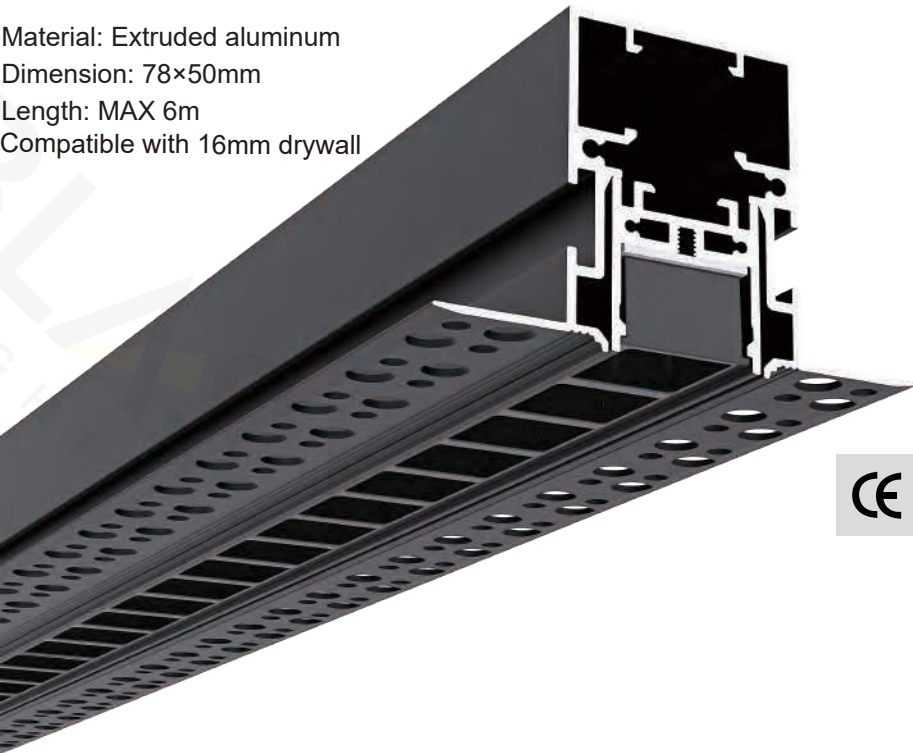

BLEIAP10225

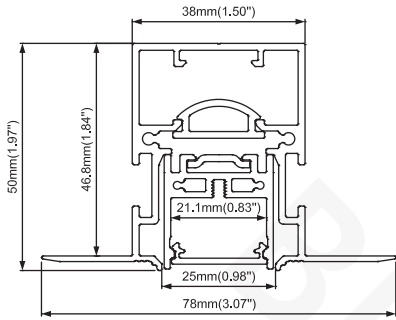

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Outside clip



Chrome Reflector 30°or 55°



Black Reflector 30°or 55°
LEDiL



White Reflector 30°or 55°




PVC cover

Types of installation:



Material: Extruded aluminum
Dimension: 22.2×42.8mm
Length: MAX 6m


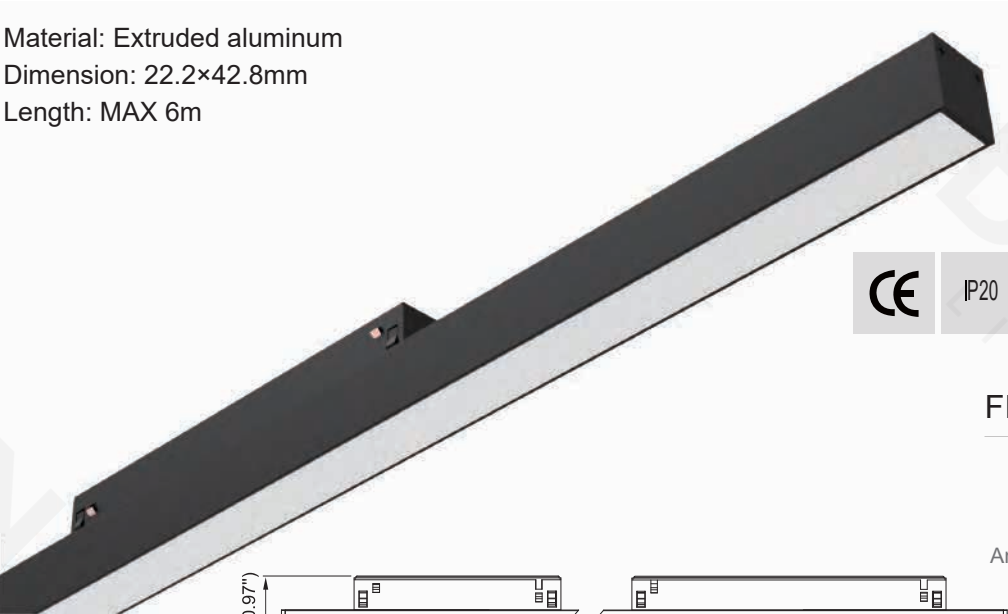


FINISH



Anod. aluminum white Black

BLEIAP10226

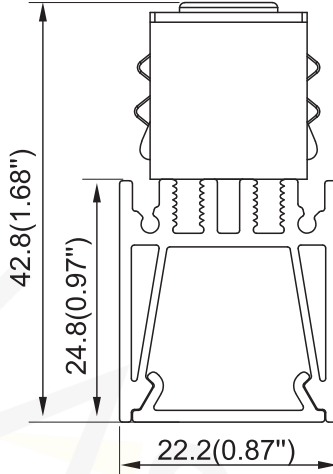

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Magnet track head



PCB board




Built in driver board

Types of installation:



Material: Extruded aluminum
Dimension: 22.2×42.8mm
Length: MAX 6m

BLEIAP10227

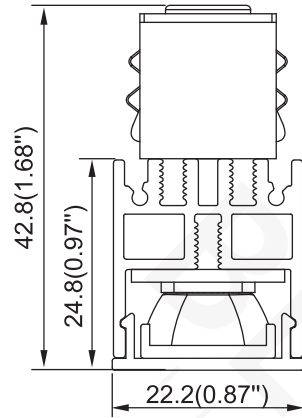

FINISH




Anod. aluminum



white



Black



END CAPS



End Caps

ACCESSORIES



Magnet track head



LED board



Built in driver board




Lens 20° /30° /60° /20-45°

Types of installation:



Material: Extruded aluminum
Dimension: 22.5×42.8mm
Length: MAX 6m

BLEIAP10228

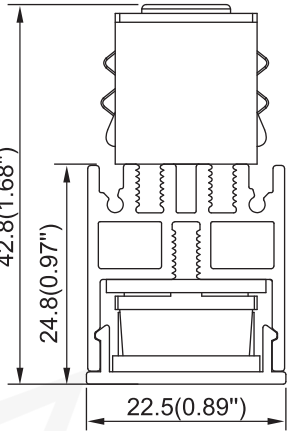

FINISH




Anod. aluminum



white



Black



END CAPS



End Caps

ACCESSORIES



Magnet track head



LED board



Built in driver board



Reflector UGR<19



Types of installation:



Material: Extruded aluminum
Dimension: 26.2×29mm
Length: MAX 6m



FINISH

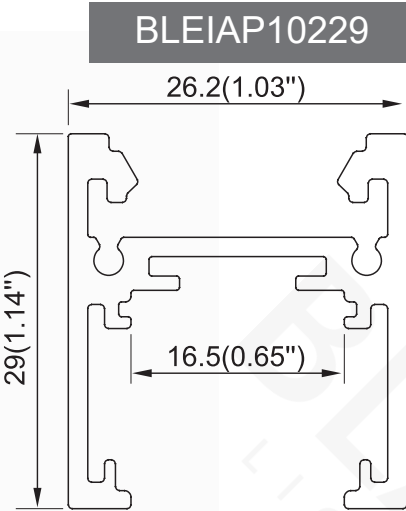

END CAPS



End Caps

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Hanging bracket



Steel wire



Types of installation:



Material: Extruded aluminum
Dimension: 26.2×54mm
Length: MAX 6m



FINISH

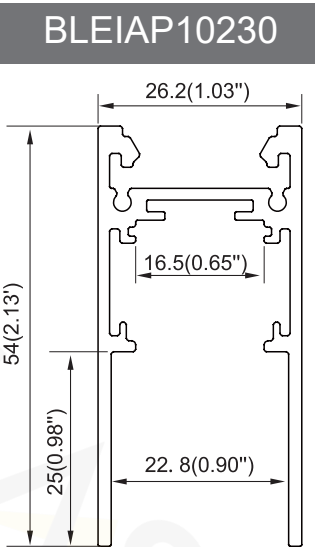

END CAPS



End Caps

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Hanging bracket




Steel wire


Types of installation:



Material: Extruded aluminum
Dimension: 73×50.3mm
Length: MAX 6m

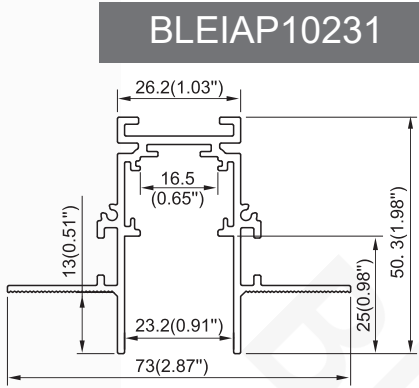

FINISH



END CAPS



End Caps

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Hanging bracket





Types of installation:



Material: Extruded aluminum
Dimension: 43.9×70mm
Length: MAX 6m



BLEIAP10232

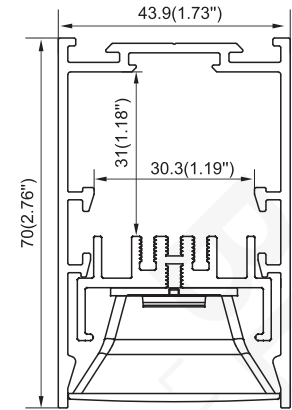

UGR values
X=4H, Y=8H S=0.2H
Radiant class 70/50/20
Transverse 13.4
Longitudinal 13.9

FINISH



Anod. aluminum white Black Golden

END CAPS



End Caps

ACCESSORIES



Bind cover



Wall washer



Safety wire



Internal Clip



Louver optic(7x1 or 28x1)
LEDiL



Steel wire



Mounting clip
(metal)



LED module




Types of installation:



Material: Extruded aluminum
Dimension: 43.9×75mm
Length: MAX 6m

BLEIAP10233

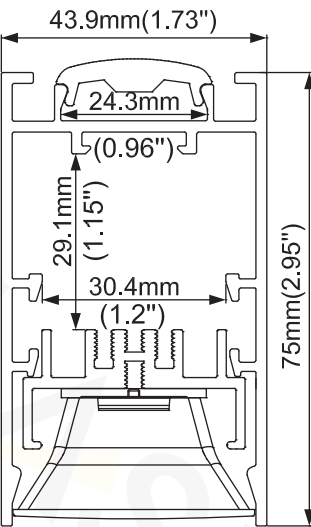

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Hanging clip



Wall washer



Safety wire



Internal Clip



Louver optic(7x1 or 28x1)
LEDiL



Steel wire



Types of installation:



Material: Extruded aluminum
Dimension: 58.9×32.8mm
Length: MAX 6m



BLEIAP10234

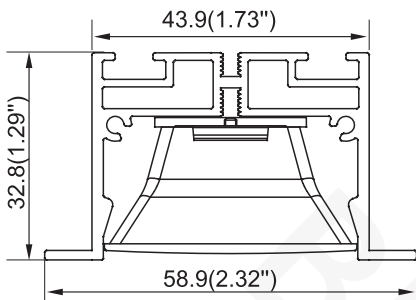

UGR values
X=4H, Y=8H S=0.2H
Radiant class 7

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

ACCESSORIES



Blind cover



Wall washer



LED module



Stainless clip



Louver optic(7x1 or 28x1)


Types of installation:



Material: Extruded aluminum
Dimension: 24×58mm
Length: MAX 6m



BLEIAP10235

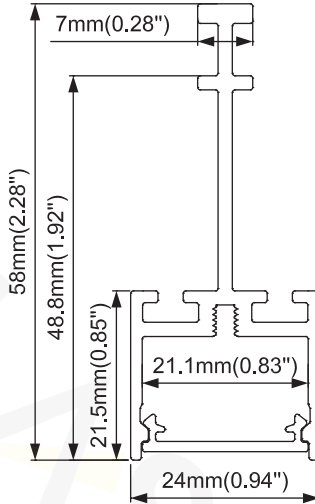

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted



Prismatic



Lens 15°/Symmetrical/Wall washer

ACCESSORIES



Black Reflector 30°or 55°




White Reflector 30°or 55°



Connector



Chrome Reflector 30°or 55°

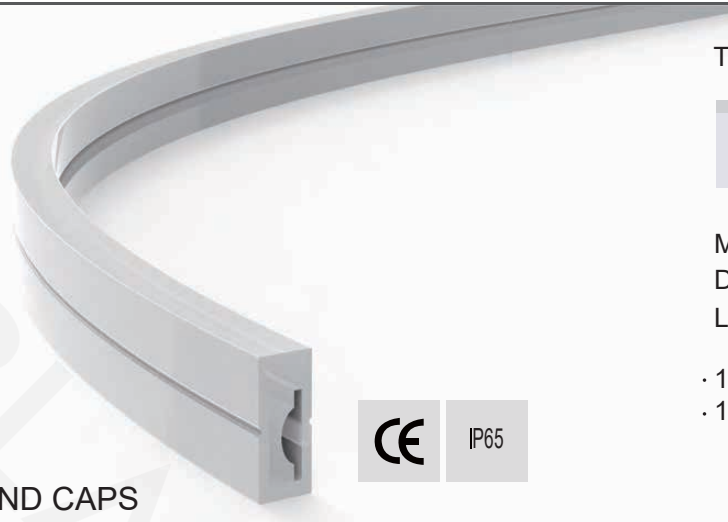


Types of installation:



Material: Silicon Co-extrusion
Dimension: 10.4×18mm
Length: MAX 100m

- 10mm PCB
- 14W at maximum

BLEIAP10236



10.4mm(0.41")
18mm(0.71")
11.2mm(0.44")
1.5mm(0.06")

FINISH




white


END CAPS



CE IP65

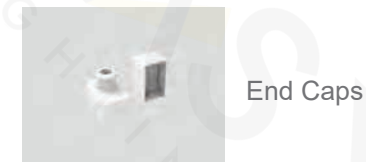

ACCESSORIES

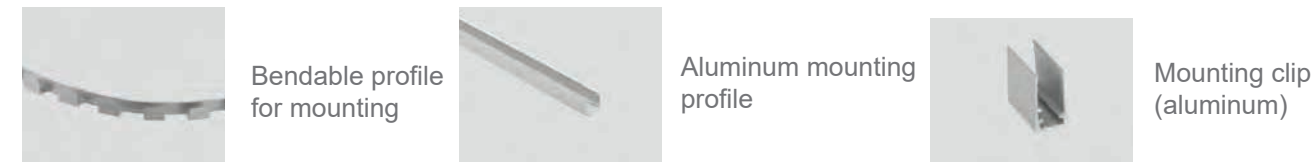




Types of installation:



Material: Silicon Co-extrusion
Dimension: 16×16mm
Length: MAX 100m

- 10mm PCB
- 14W at maximum

BLEIAP10237



16mm(0.63")
16mm(0.63")
11.2mm(0.44")
1.5mm(0.06")

FINISH



white

END CAPS




CE IP65



ACCESSORIES



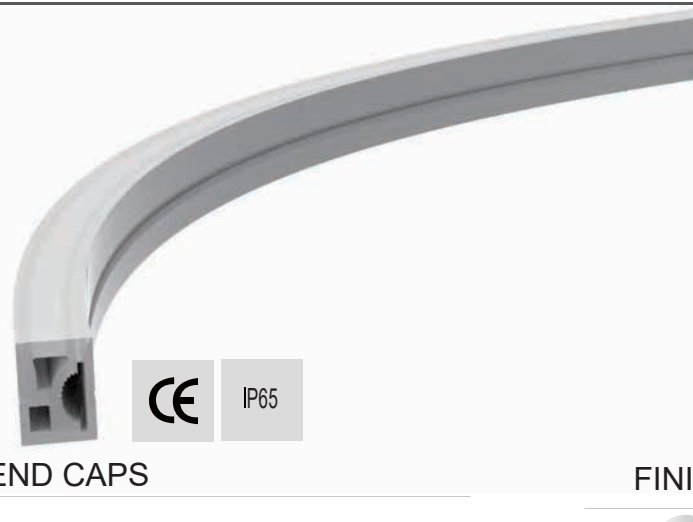


Types of installation:



Material: Silicon Co-extrusion
Dimension: 16×16mm
Length: MAX 100m

- 10mm PCB
- 14W at maximum

BLEIAP10238



16(0.63")
16(0.63")
10.8(0.43")
1.5(0.06")

FINISH




white


END CAPS



CE IP65

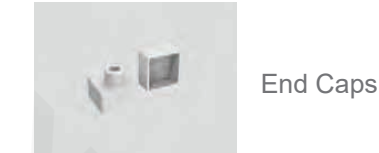

ACCESSORIES

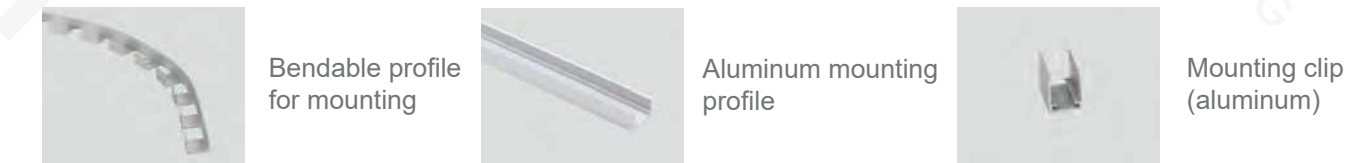




Types of installation:



Material: Silicon Co-extrusion
Dimension: 16×16mm
Length: MAX 100m

- 10mm PCB
- 14W at maximum

BLEIAP10239



16mm(0.63")
16mm(0.63")
10.8mm(0.43")
1.5mm(0.06")

FINISH




white


END CAPS



CE IP65

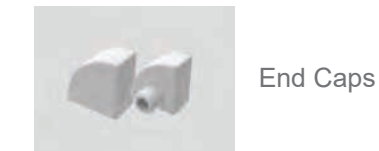

ACCESSORIES

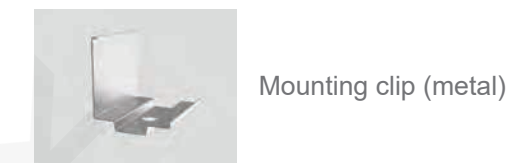



Types of installation:



Material: Silicon Co-extrusion
Dimension: 4×10mm
Length: MAX 100m

- 6mm PCB
- 14W at maximum

CE IP65

END CAPS



End Cap with hole
End cap without hole

ACCESSORIES




Mounting clip (aluminum)

FINISH



white

BLEIAP10240



4mm(0.16")
7mm(0.28")
10mm(0.39")
1.3mm(0.05")



Types of installation:



Material: Silicon Co-extrusion
Dimension: 6×12mm
Length: MAX 100m

- 8mm PCB
- 14W at maximum

CE IP65

END CAPS



End Cap with hole
End cap without hole

ACCESSORIES




Mounting clip (aluminum)

FINISH



white

BLEIAP10241

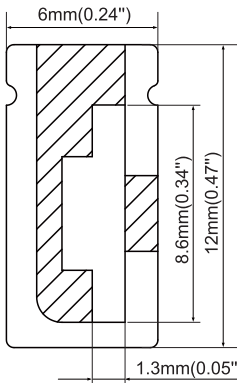

6mm(0.24")
8.6mm(0.34")
12mm(0.47")
1.3mm(0.05")



Types of installation:



Material: Silicon Co-extrusion
Dimension: 10×10mm
Length: MAX 100m

- 6mm PCB
- 14W at maximum

CE IP65

END CAPS



End Cap with hole
End cap without hole

ACCESSORIES




Mounting clip (aluminum)

FINISH



white

BLEIAP10242



10mm(0.39")
7mm(0.28")
10mm(0.39")
1.3mm(0.05")



Types of installation:



Material: Silicon Co-extrusion
Dimension: 30×21.5mm
Length: MAX 100m

- 15mm PCB
- 14W at maximum

CE IP65

END CAPS



End Cap with hole
End cap without hole

ACCESSORIES




Mounting clip

FINISH



white

BLEIAP10243



21.5mm(0.85")
16mm(0.63")
30mm(1.18")
3.1mm(0.12")



Features

- Made of highly flexible silicone, 360° light emission, matt surface
- Free cutting, minimum cutting distance of 5mm
- Choice of 2 color temperatures (3000K/4000K)
- 14w/m, 850lm/W, in door use, 24V

END CAPS



Surface

DIFFUSERS



Vertical ceiling surface



Channel surface


ACCESSORIES





Clip



Steel wire

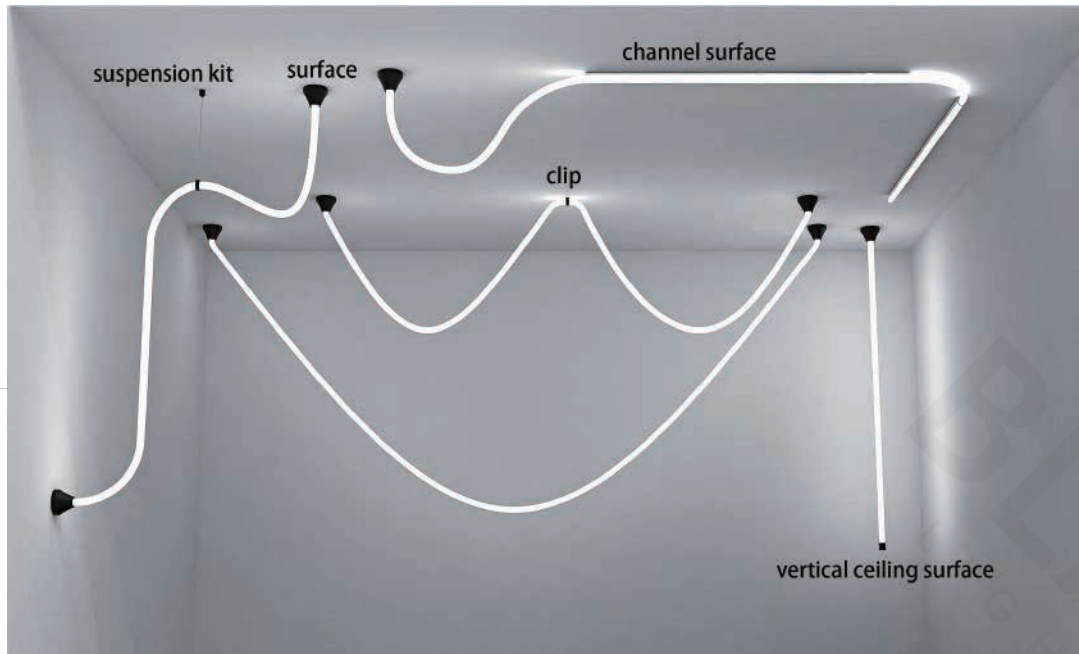

BLEIAP10244



Types of installation:



Material: Silicon Co-extrusion
Dimension: 16×16mm
Length: MAX 100m



Features

- Top bend and side bend, allowing any shape and conceive creative designs
- Outdoor rated luminaire, IP67, with flexible bending possibilities
- 7W/m, 310lm/w, 24V
- 3 years warranty, life span over 36000 hours

FINISH



white

END CAPS



End Caps

ACCESSORIES





Mounting clip (metal)



Moldable groove

BLEIAP10245

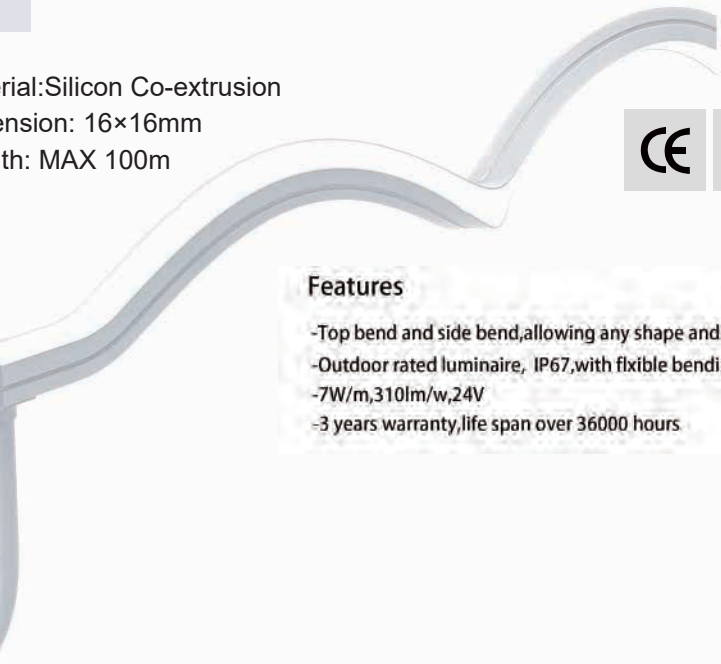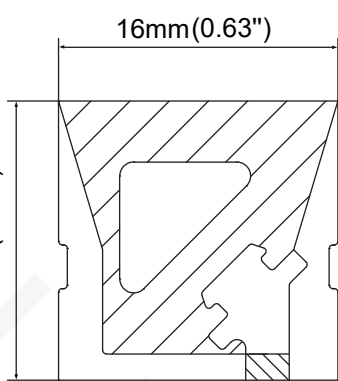


Types of installation:



Material: Silicon Co-extrusion
Dimension: $\varnothing 20\text{mm}$
Length: MAX 100m



BLEIAP10246

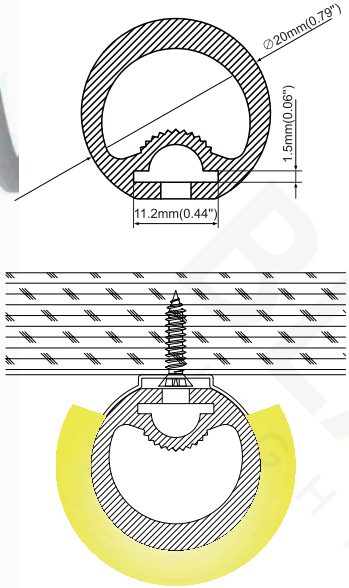

FINISH



white

END CAPS



End Cap with hole
End cap without hole

ACCESSORIES





Clip

Types of installation:



Material: PC+TPV
Dimension: 18×7.7mm
Length: MAX 6m

BLEIAP10247

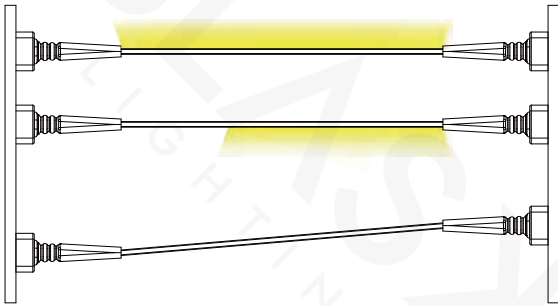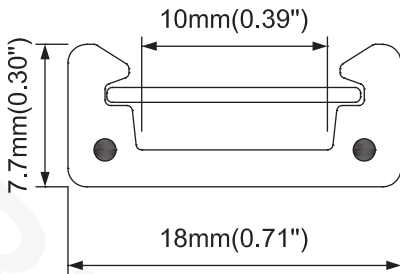

DIFFUSERS




PC diffused

ACCESSORIES



Mounting kit (Metal)




Wrench Key



Decorative Box (Metal+Silicone)



Mounting Screw



Wrench



Terminal

BLEIAP10248

Free combination

Types of installation:



Material: Extruded aluminum
Dimension: 33.6×75mm
Length: MAX 6m



FINISH




Anod. aluminum



white



Black

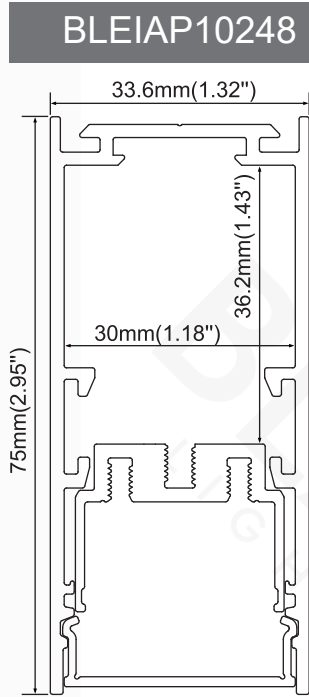

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



Internal Clip



Outside clip



Blind cover



Safety wire



Steel wire



Reflector: 15°, 30°, 45°




90° Horizontal connector




180° Connector




LED module

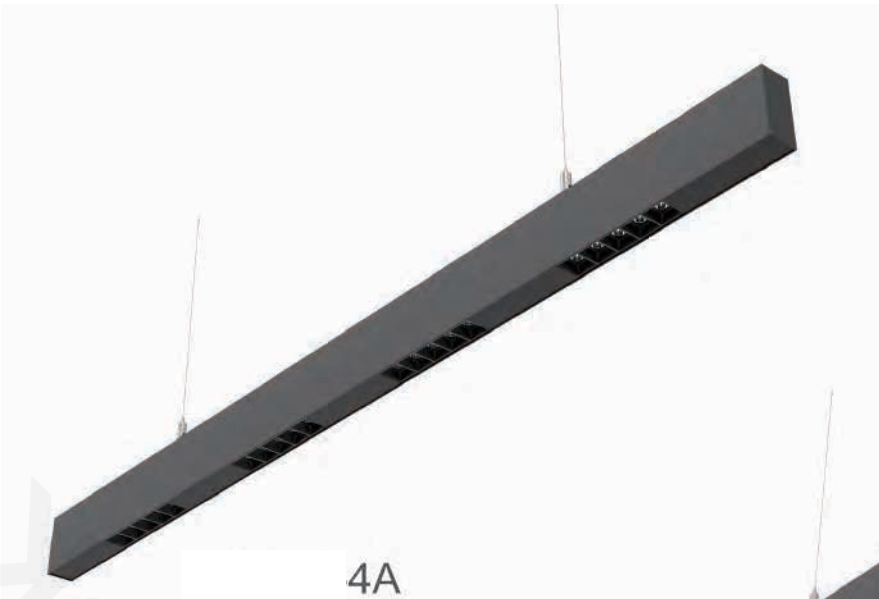

4A

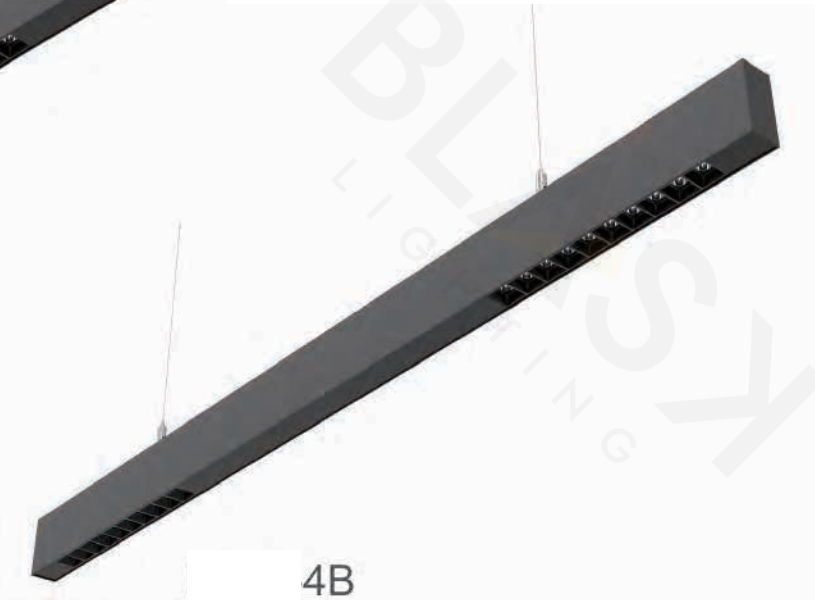

4B

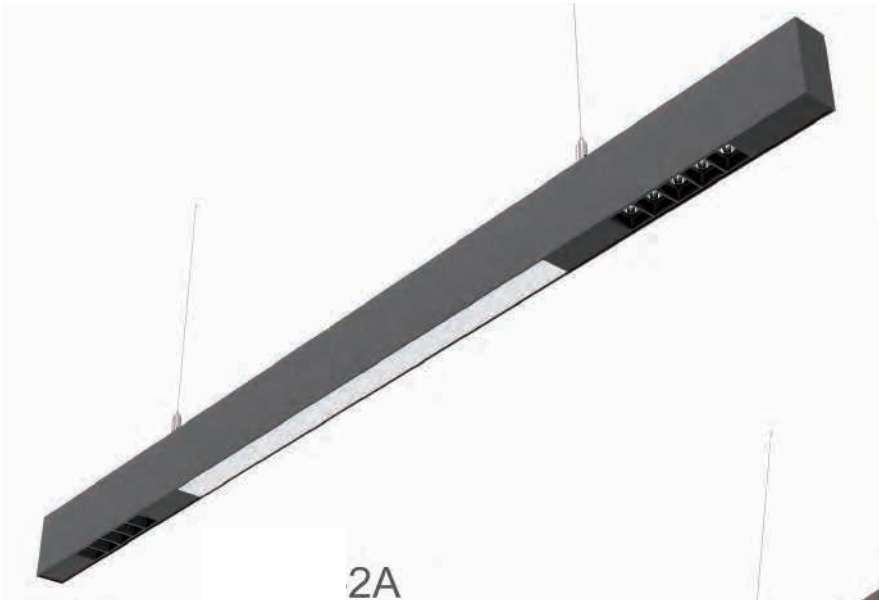

2A




8A

Types of installation:



Material: Extruded aluminum
imension: 48.6×32.5mm
Length: MAX 6m

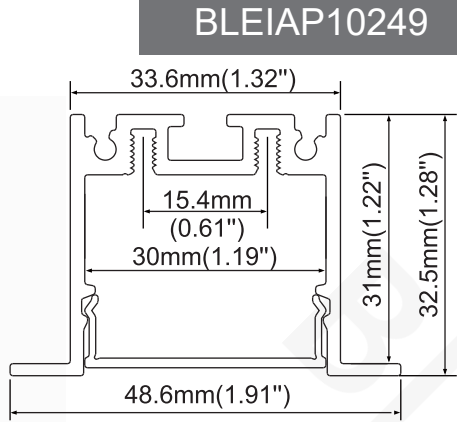

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Blind cover



Reflector: 15°, 30°, 45°




Spring clip

Types of installation:



Material: Extruded aluminum
Dimension: 73.6×32.5mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10250

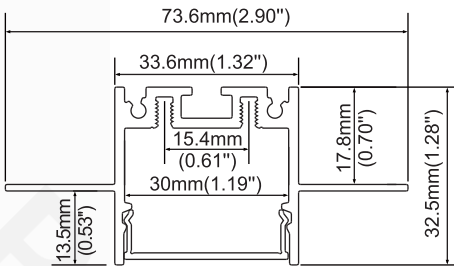

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Reflector: 15°, 30°, 45°




Blind cover

Types of installation:



Material: Extruded aluminum
Dimension: 41.4×75mm
Length: MAX 6m

BLEIAP10251

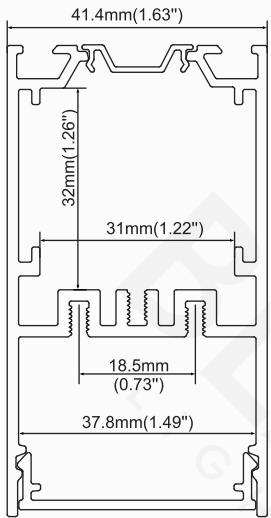

IP20

FINISH



Anod. aluminum



white



Black

END CAPS




End Caps

DIFFUSERS



PC frosted



Transparent cover



Anti glare cover

ACCESSORIES



Mounting clip
(metal)



Steel wire



Blind cover



Lens



Reflector



LED Board

Free combination



2A



2B




6A




PC


BLEIAP10252

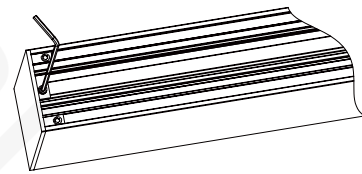

Step 01:
Lock the end caps

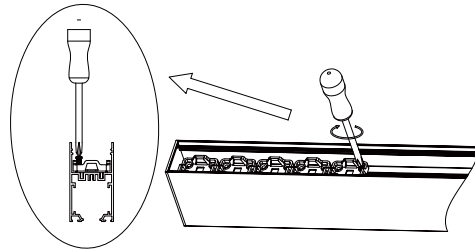

Step 02:
Fix the base of the reflector



Step 03:
Snap the reflector on the top of the base




Step 04:
Press the blind cover into the profile




Step 05:
Fix the driver on the back of the profile



Step 06:
Press the aluminum cover into the backside

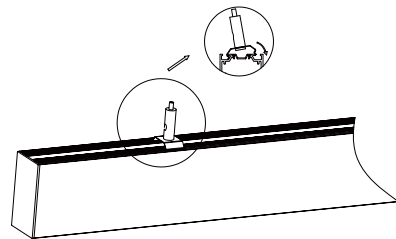

Step 07:
Install the outside clip

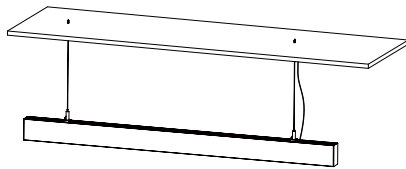

Step 08:
Hang the fixtures on the ceiling



Types of installation:



Material: Extruded aluminum
Dimension: 56.5×36mm
Length: MAX 6m



IP20

FINISH



Anod. aluminum




white



Black

BLEIAP10253



Optics:



END CAPS



End Caps

DIFFUSERS




PC frosted

ACCESSORIES



Spring clip

Types of installation:



Material: Extruded aluminum
Dimension: 41×36mm
Length: MAX 6m



IP20

FINISH



Anod. aluminum




white




Black

BLEIAP10254



Optics:



END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES




Steel wire


Types of installation:




Material: Extruded aluminum
Dimension: 81.5×36mm
Length: MAX 6m
Compatible with 12.5mm drywall

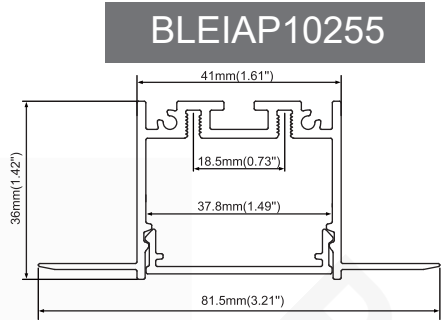

Optics:

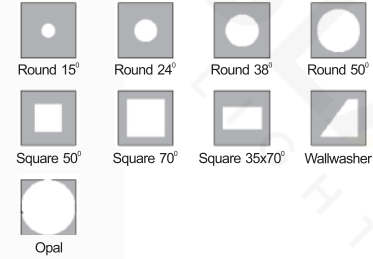

FINISH




Types of installation:




Material: Extruded aluminum
Dimension: 53.8×80mm
Length: MAX 6m

BLEIAP10256

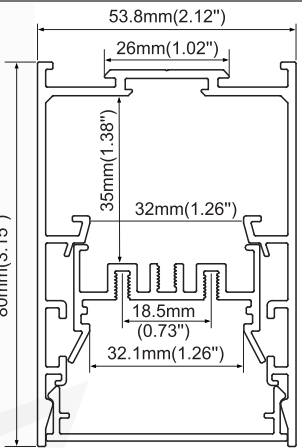

FINISH



END CAPS



End Caps

DIFFUSERS



PC frosted

END CAPS



Magnet end caps


DIFFUSERS



PC frosted



Large lens



Anti glare cover



Prismatic

ACCESSORIES



Internal Clip



Outside clip



High reflective louver



Safety wire



Steel wire



Reflector:15°,30°,45°



Blind cover



180° Connector



90° Horizontal connector

BLEIAP10256


Free combination




LS50-2A



LS50-2B

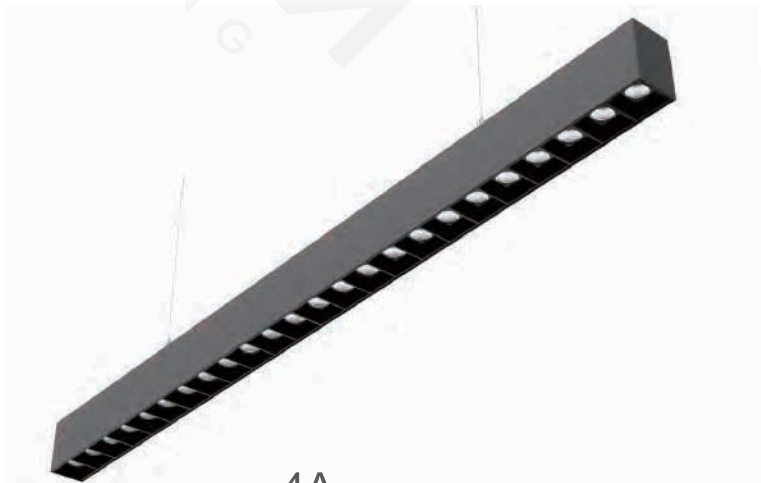

4A

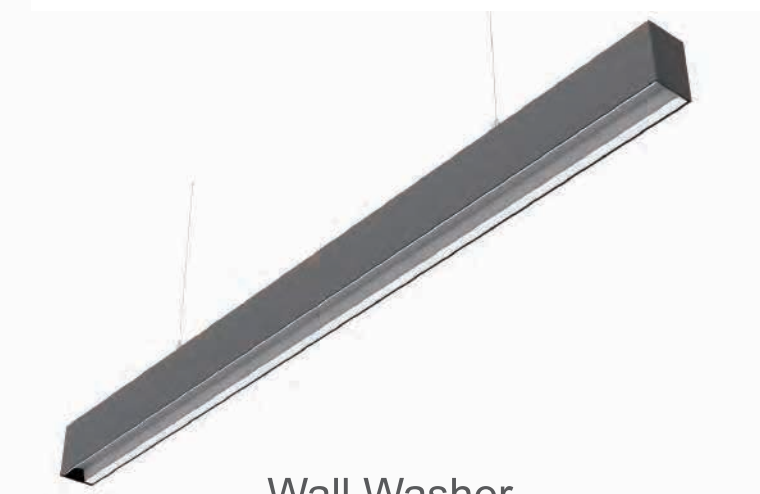

Wall Washer




Reflective Louver



Prismatic Cover



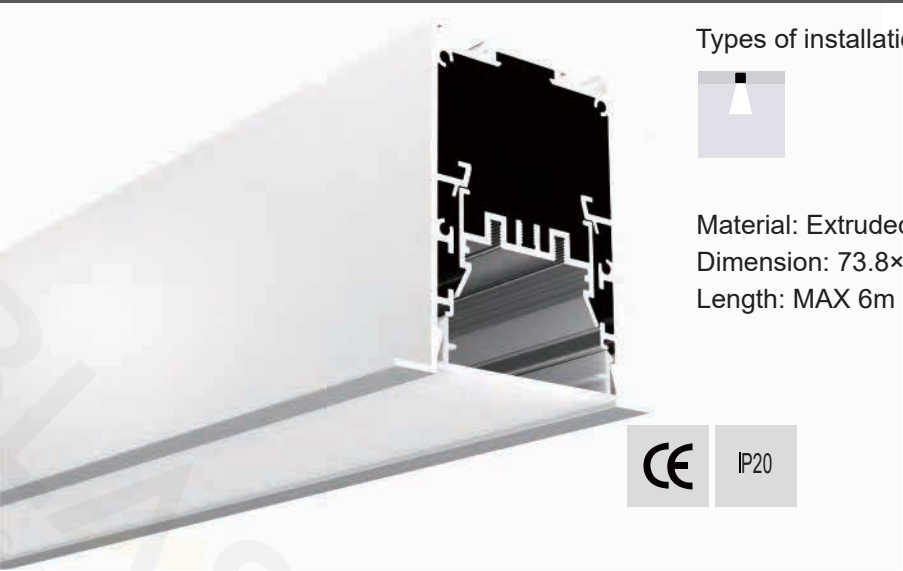


Types of installation:



Material: Extruded aluminum
Dimension: 73.8×80mm
Length: MAX 6m



BLEIAP10257

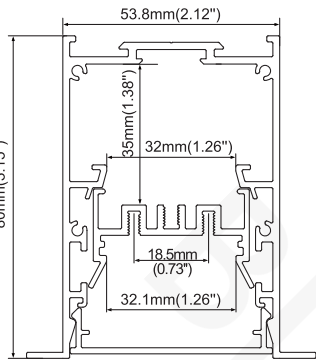

FINISH



Anod. aluminum white Black


END CAPS



End Caps

All of the accessories will be the same as LS50 except for END CAPS


Types of installation:

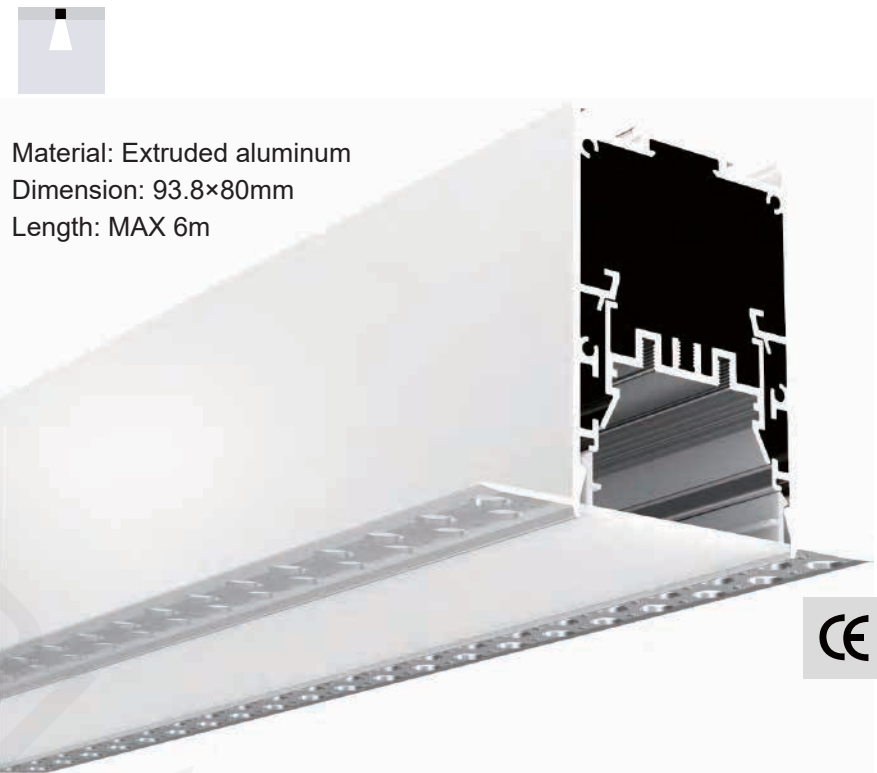

Material: Extruded aluminum
Dimension: 93.8×80mm
Length: MAX 6m



BLEIAP10258

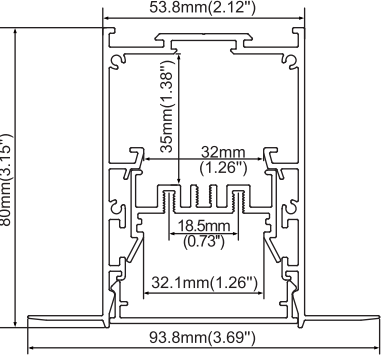

FINISH




Anod. aluminum white Black

END CAPS



End Caps

All of the accessories will be the same as LS50 except for END CAPS

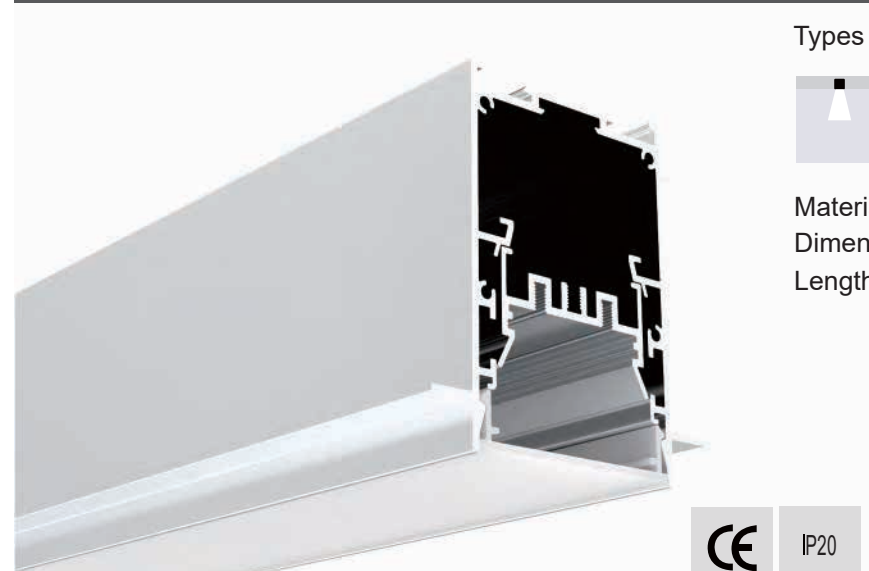


Types of installation:



Material: Extruded aluminum
Dimension: 73.8×80mm
Length: MAX 6m



BLEIAP10259

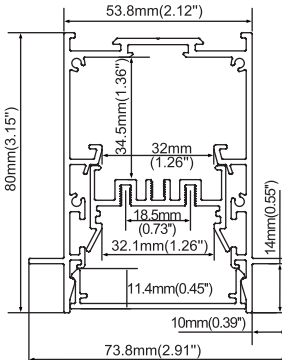

FINISH




Anod. aluminum white Black

END CAPS



End Caps

All of the accessories will be the same as LS50 except for END CAPS

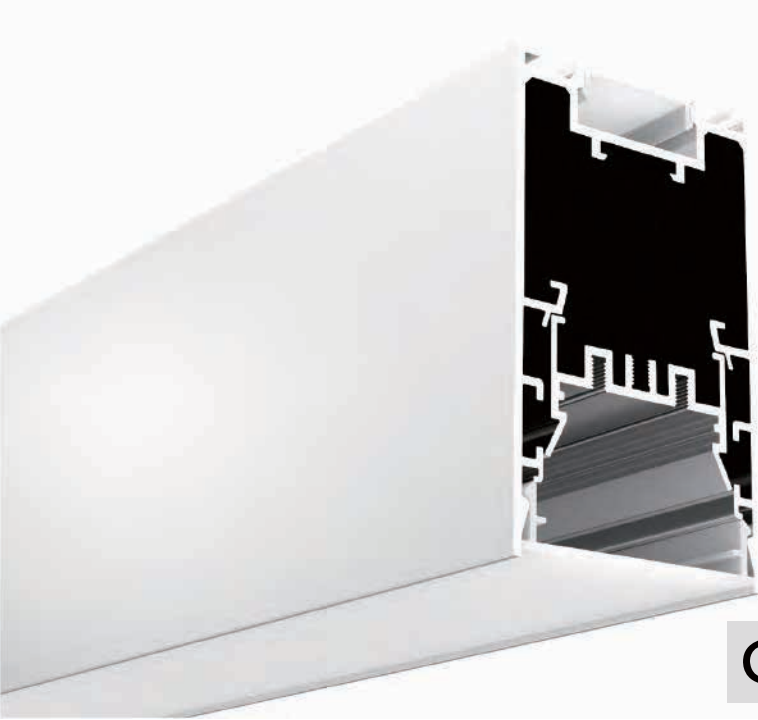


Types of installation:



Material: Extruded aluminum
Dimension: 53.8×90mm
Length: MAX 6m



BLEIAP10260

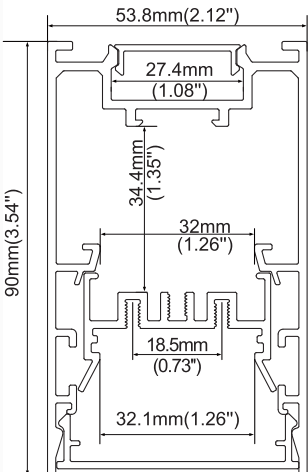

FINISH



Anod. aluminum white Black

END CAPS



ACCESSORIES



End Caps


Hanging clip

All of the accessories will be the same as LS50 except for END CAPS


Types of installation:



Material: Extruded aluminum
Dimension: 53.8×80mm
Length: MAX 6m

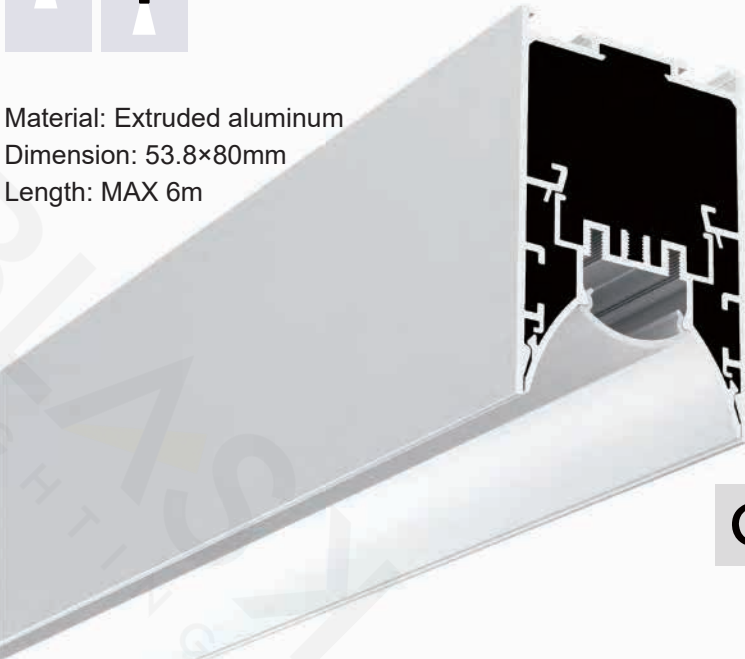

BLEIAP10261

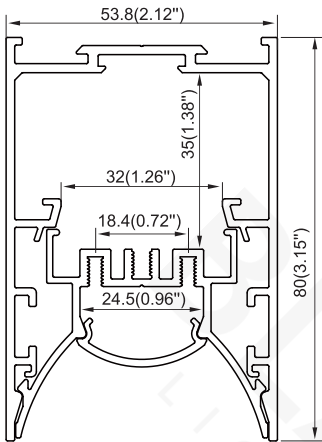

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused




Prismatic

ACCESSORIES



Internal Clip



Wall washer lens



Outside clip



Symmetrical lens







Steel wire



Lens 40° degrees



Lens 60° degrees

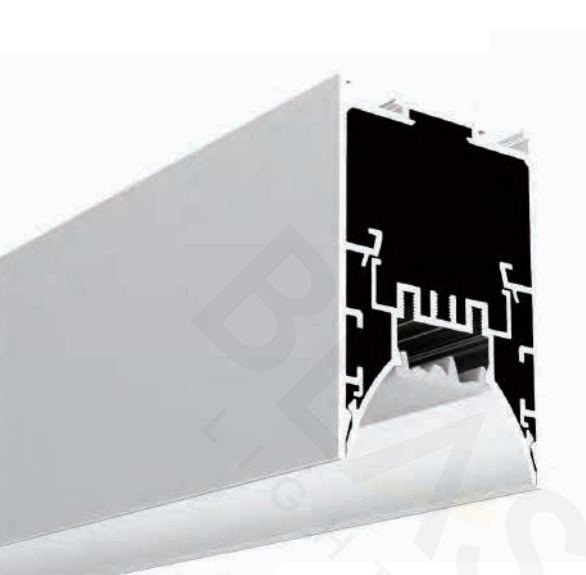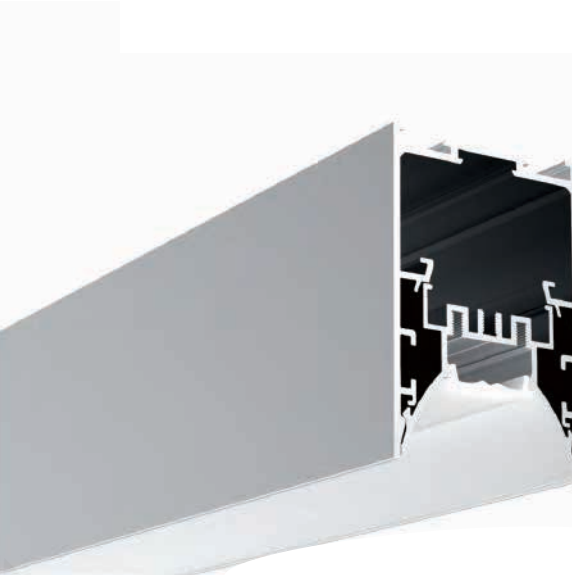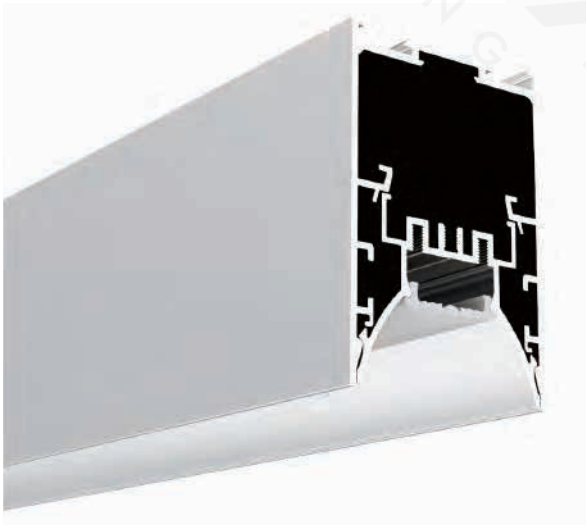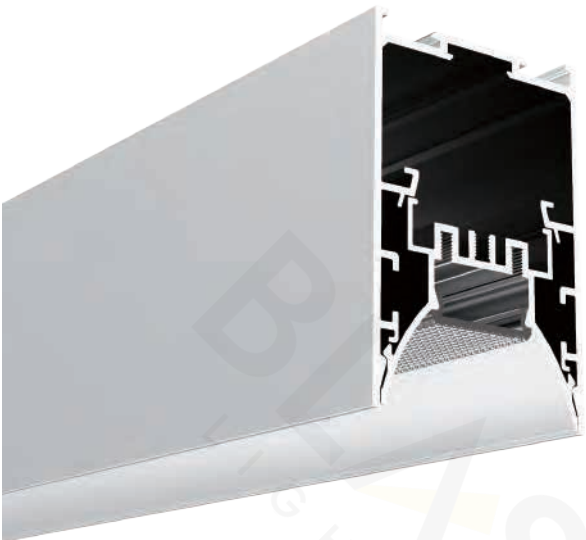


Types of installation:



Material: Extruded aluminum
Dimension: 72.3×58.9mm
Length: MAX 6m
Compatible with 12.5mm drywall


BLEIAP10262

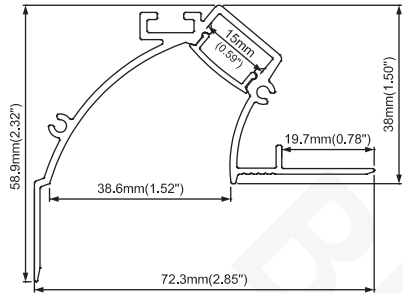

FINISH



white

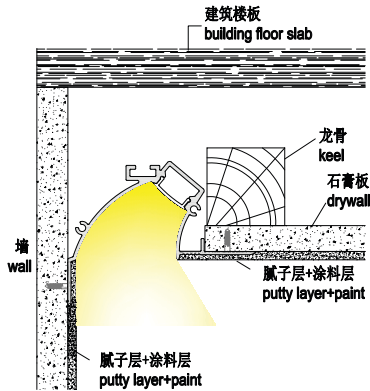

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector


Disposable cover

Types of installation:



Material: Extruded aluminum
Dimension: 88×23.7mm
Length: MAX 6m


BLEIAP10263

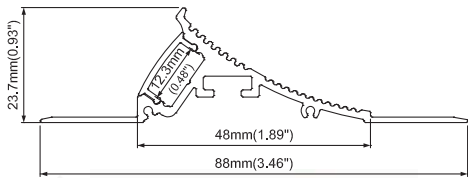

FINISH



white

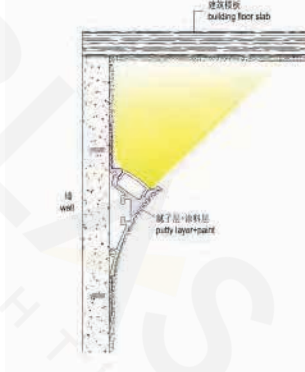

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector




180° Connector

Disposable cover

Types of installation:



BLEIAP10264

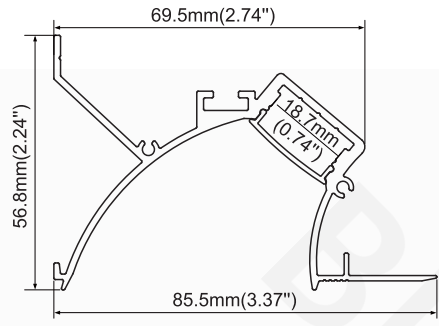

Material: Extruded aluminum
Dimension: 85.5×56.8mm
Length: MAX 6m
Compatible with 12.5mm drywall



IP20

FINISH



white

END CAPS



End Caps

DIFFUSERS




PC diffused
PC semi clear


ACCESSORIES



Disposable cover

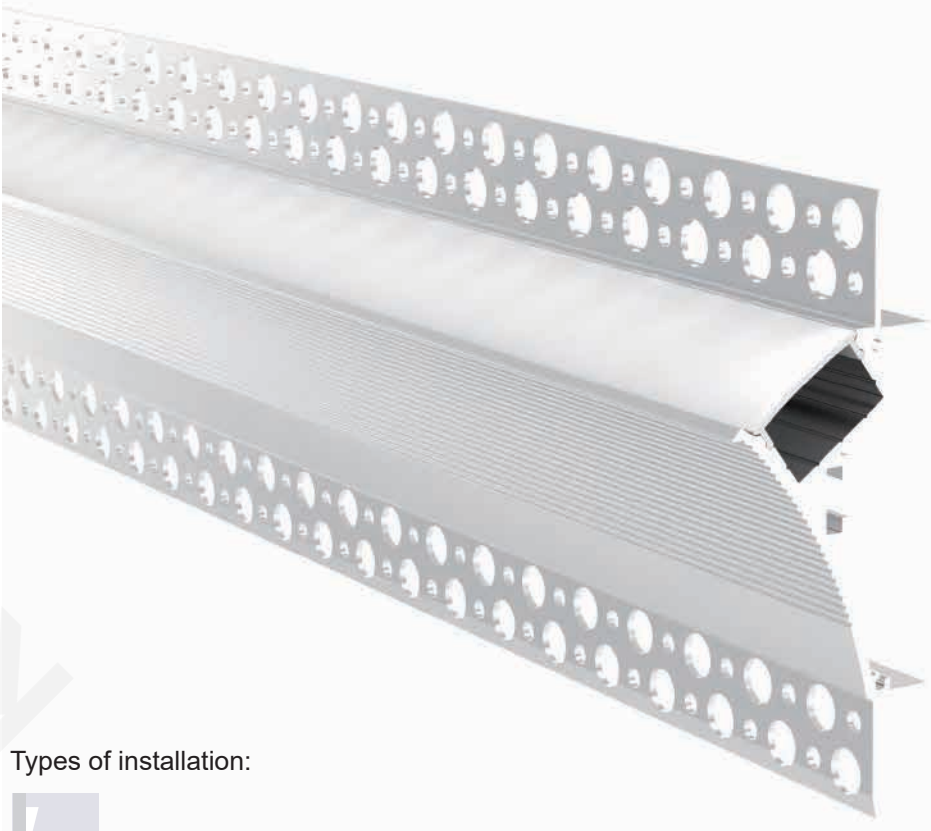

BLEIAP10265

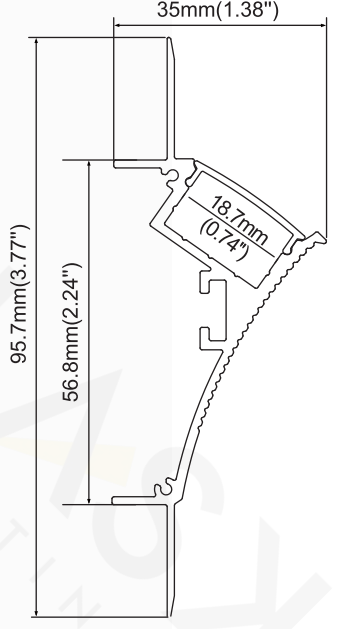

Types of installation:



IP20

FINISH



white

Material: Extruded aluminum
Dimension: 35×95.7mm
Length: MAX 6m
Compatible with 12.5mm drywall

END CAPS



End Caps

DIFFUSERS




PC diffused

ACCESSORIES



Disposable cover

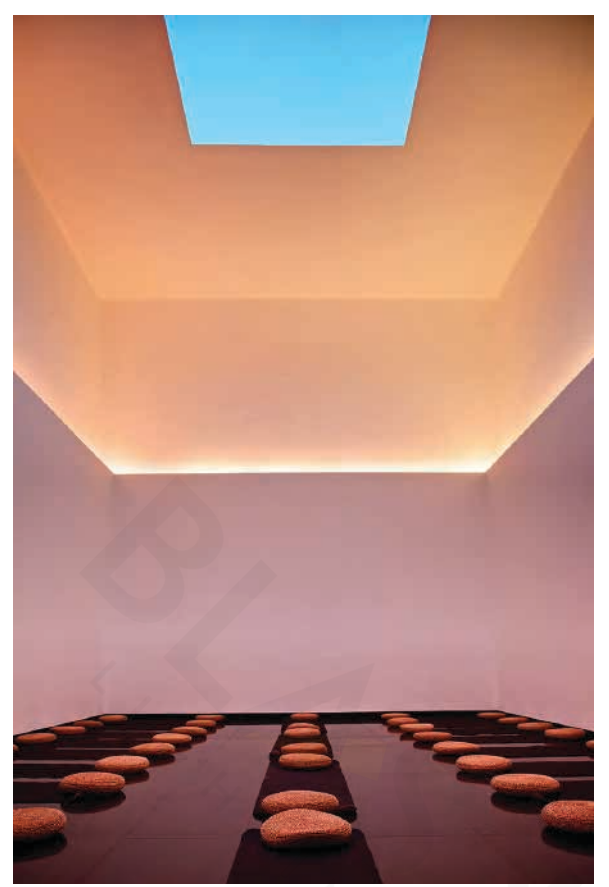



Types of installation:



Material: Extruded aluminum
Dimension: 42×35mm
Length: MAX 6m



BLEIAP10266

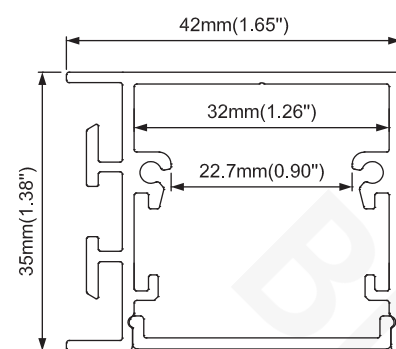

FINISH



Anod. aluminum



white



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Mounting clip (metal)



Types of installation:



Material: Extruded aluminum
Dimension: 40.1×22mm
Length: MAX 6m
Compatible with 8mm tile



BLEIAP10267

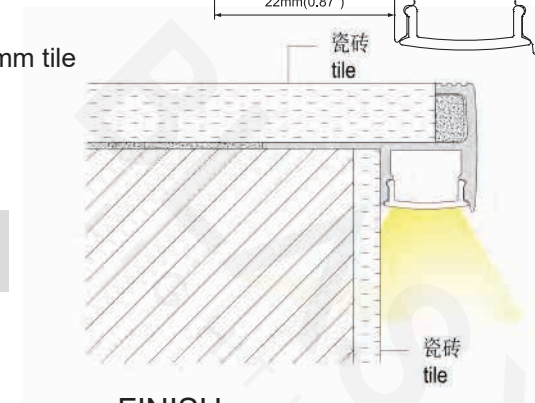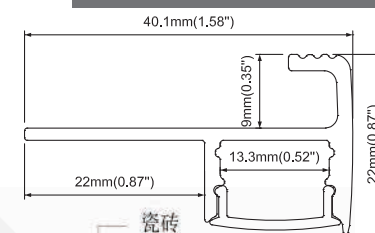

FINISH



Anod. aluminum



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES




Disposable cover


Types of installation:



Material: Extruded aluminum
Dimension: 40.1×24mm
Length: MAX 6m
Compatible with 10mm tile

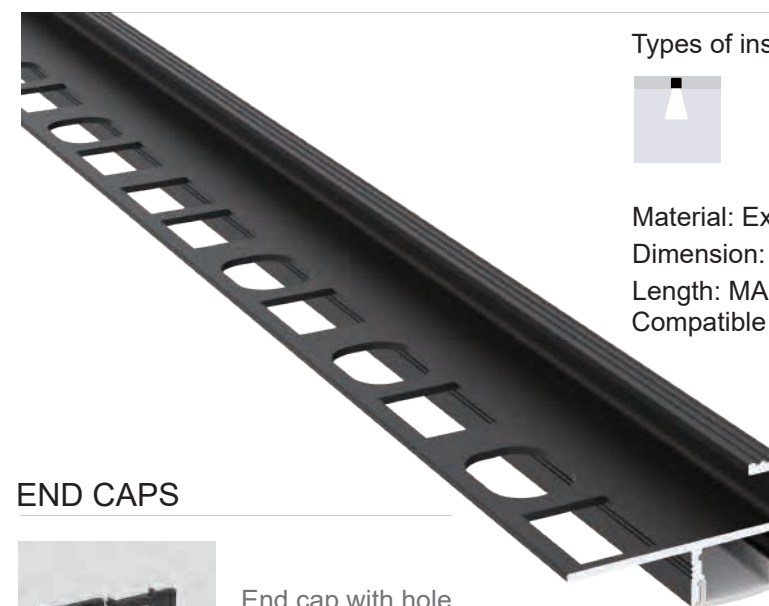

BLEIAP10268

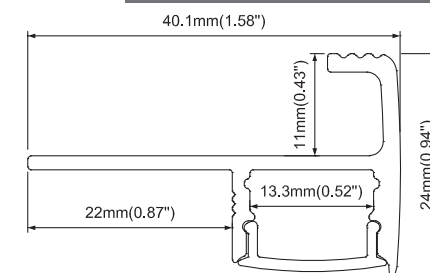

FINISH



Anod. aluminum



Black

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused

ACCESSORIES



Disposable cover



Types of installation:



Material: Extruded aluminum
Dimension: 14.8×38.5mm
Length: MAX 6m
Compatible with 12.5mm drywall



BLEIAP10269

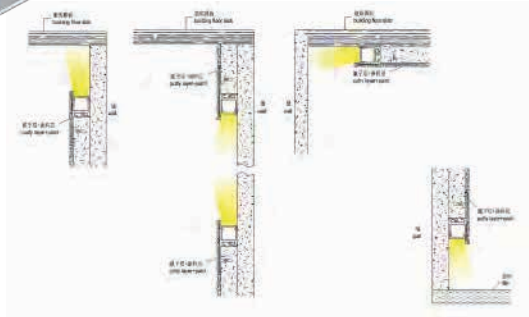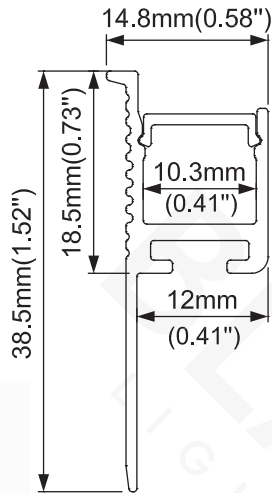

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover



Types of installation:



Material: Extruded aluminum
Dimension: 14.8×90.8mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10270



FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector




90° Vertical connector



180° Connector



Disposable cover

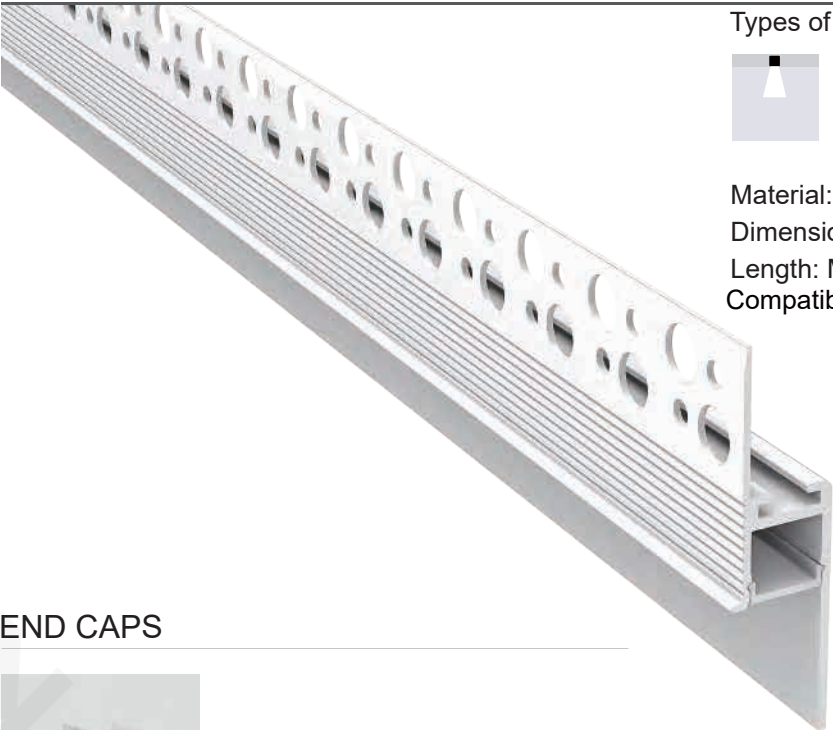


Types of installation:



Material: Extruded aluminum
Dimension: 14.5×75mm
Length: MAX 6m
Compatible with 12.5mm drywall

BLEIAP10271

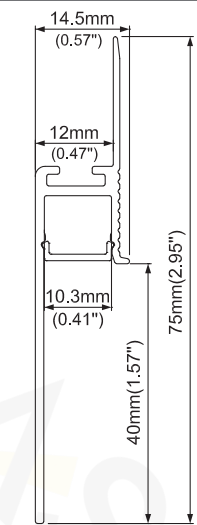

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector





90° Vertical connector



180° Connector





Disposable cover

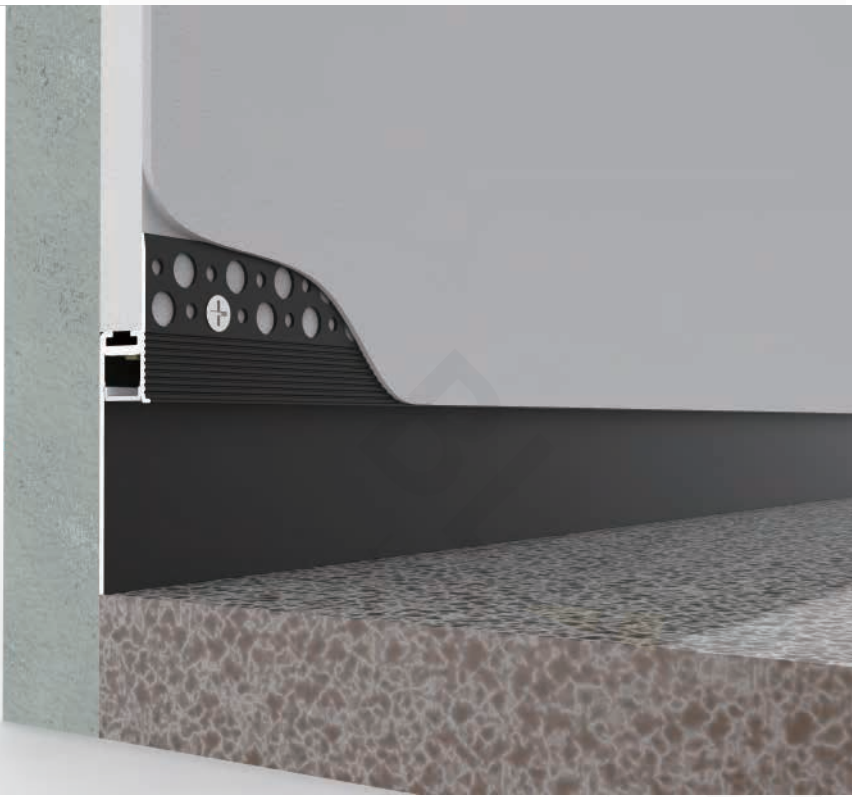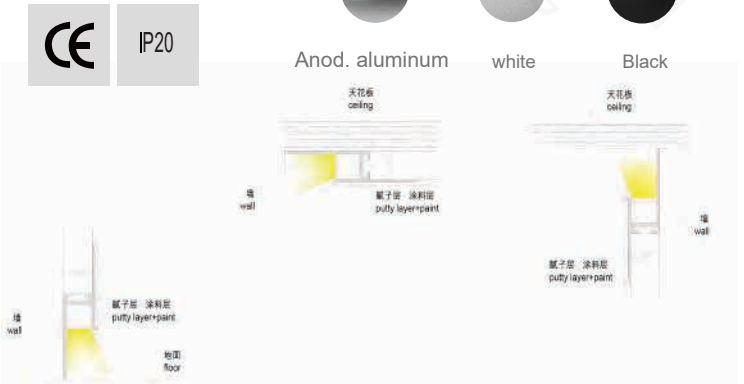

Types of installation:



Material: Extruded aluminum
Dimension: 23.5×57.8mm
Length: MAX 6m

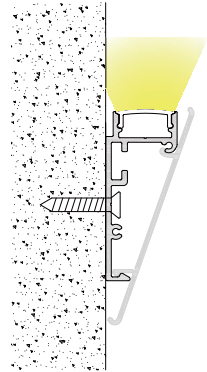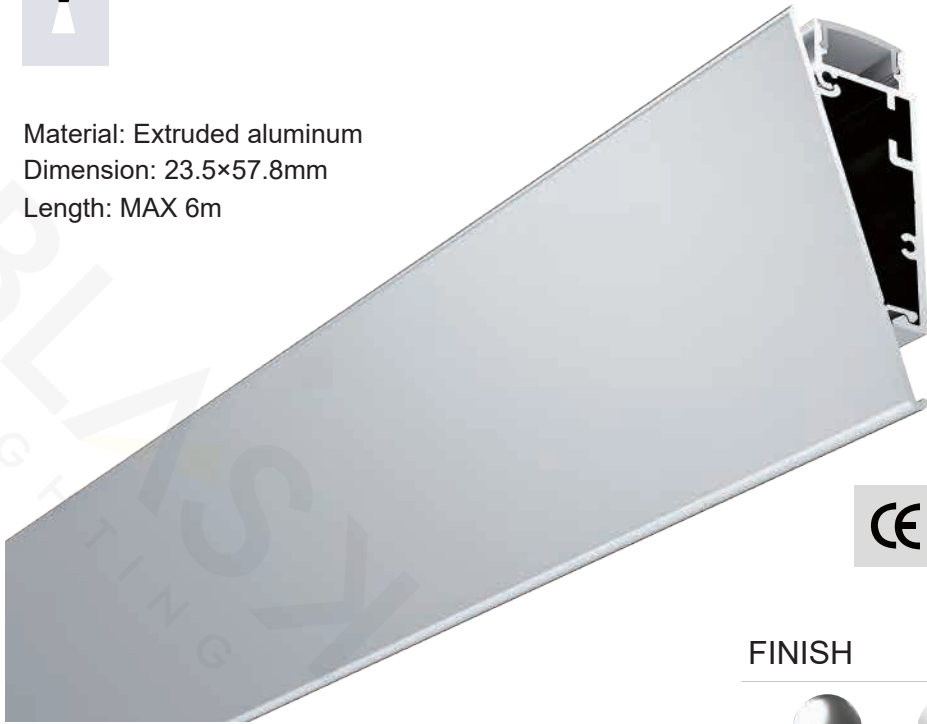

BLEIAP10272



IP20

FINISH



Anod. aluminum



white



Black



Bronze



Golden

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




90° Horizontal connector



90° Vertical connector



180° Connector

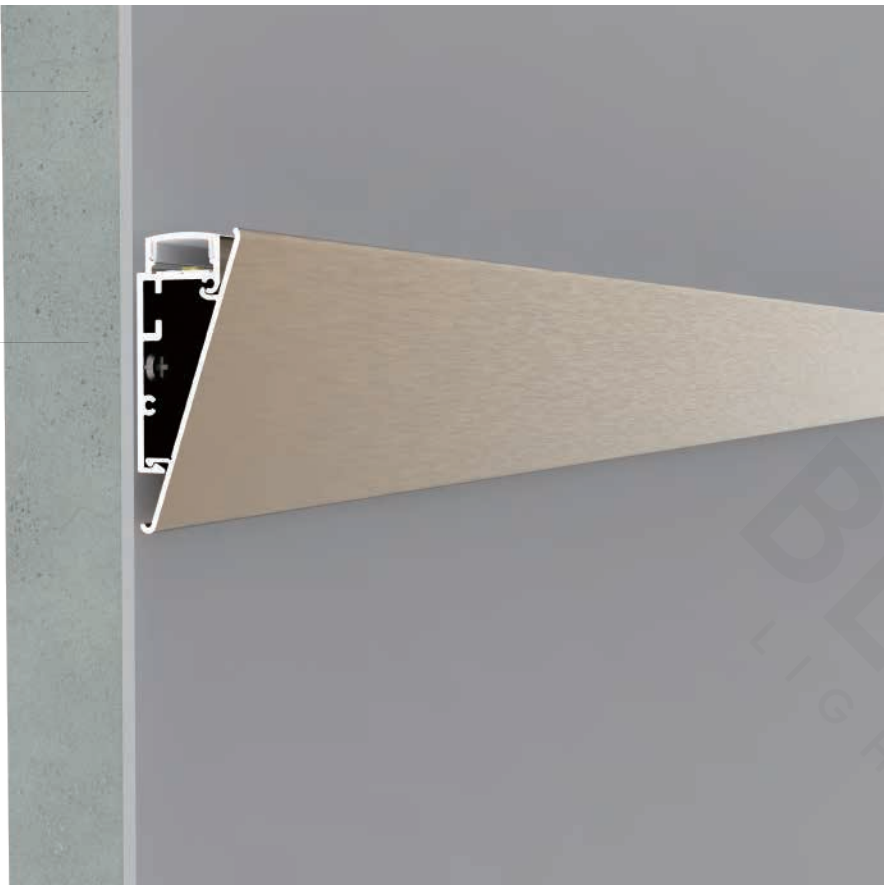


Types of installation:



Material: Extruded aluminum
Dimension: 36.9×60mm
Length: MAX 6m



BLEIAP10273

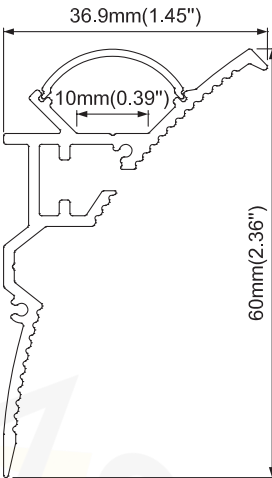

IP20

FINISH



white

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




90° Horizontal connector



90° Vertical connector




180° Connector

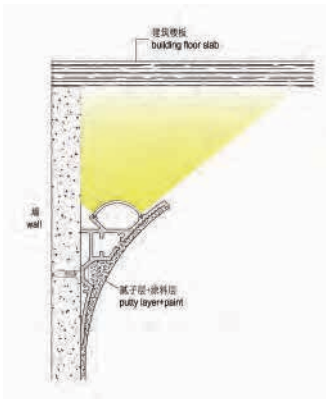

Types of installation:



Material: Extruded aluminum
Dimension: 76.2×76.2mm
Length: MAX 6m

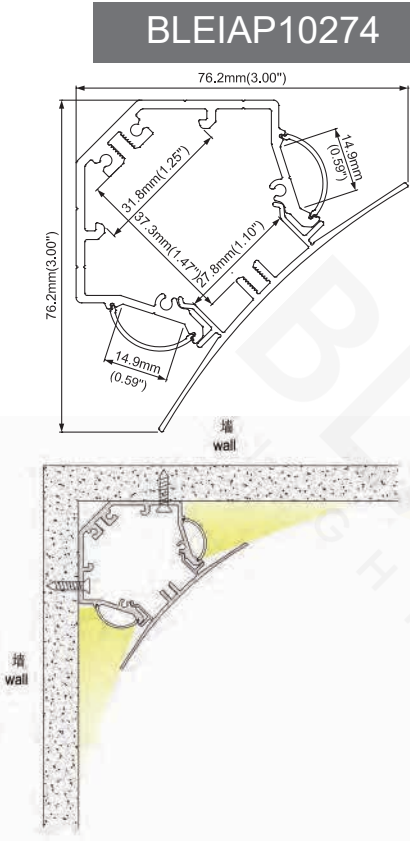

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC diffused





Types of installation:



Material: Extruded aluminum
Dimension: 38.7×39mm
Length: MAX 6m



BLEIAP10275

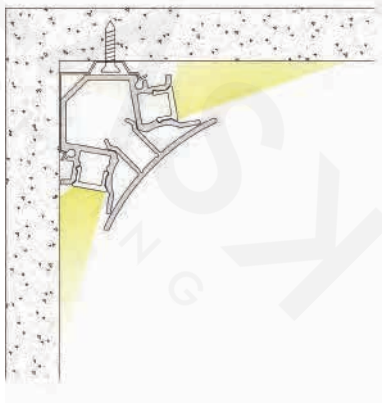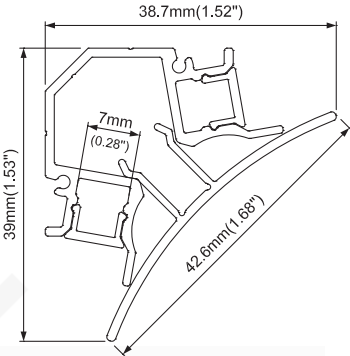

FINISH



Anod. aluminum white Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES




Mounting clip (metal)





FINISH



END CAPS





End Caps


DIFFUSERS



PC diffused

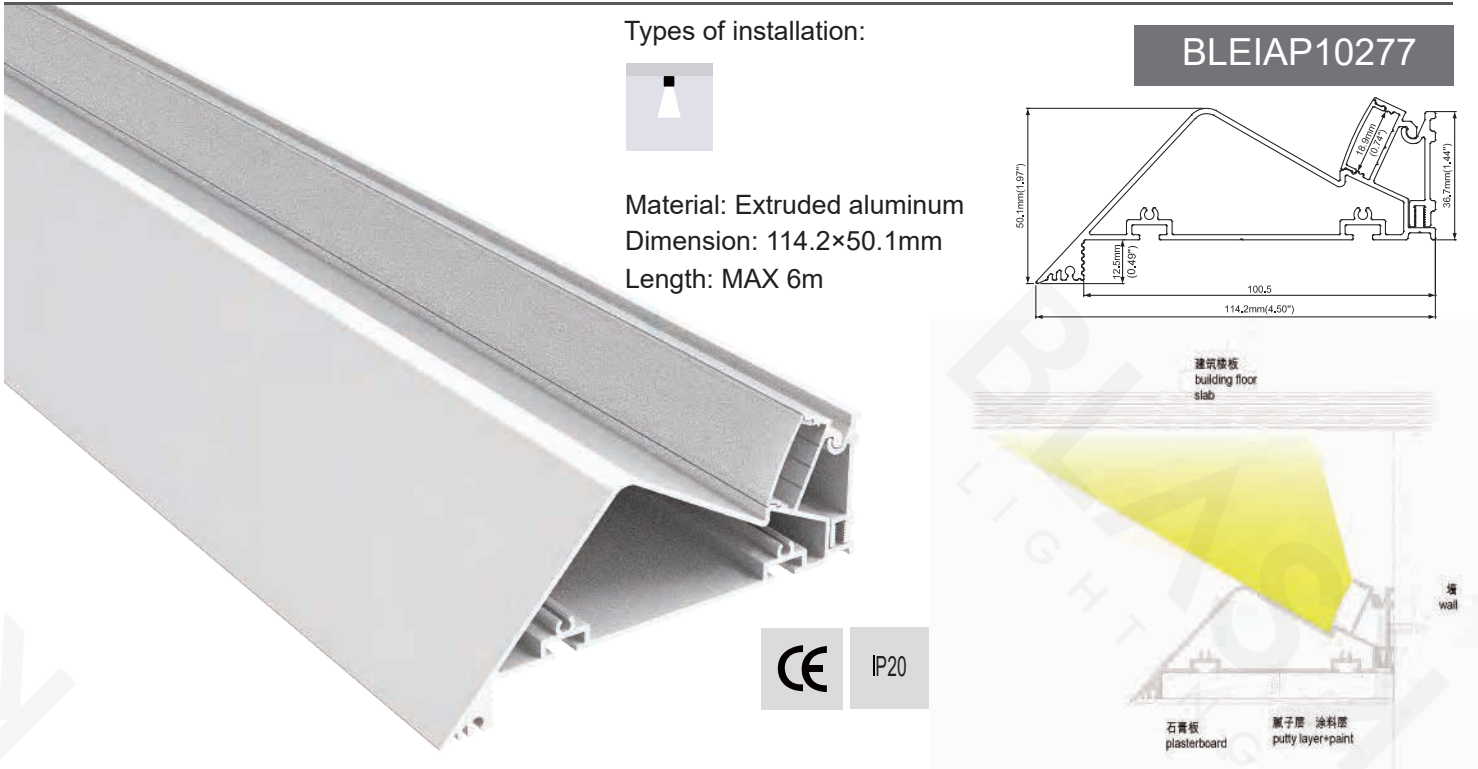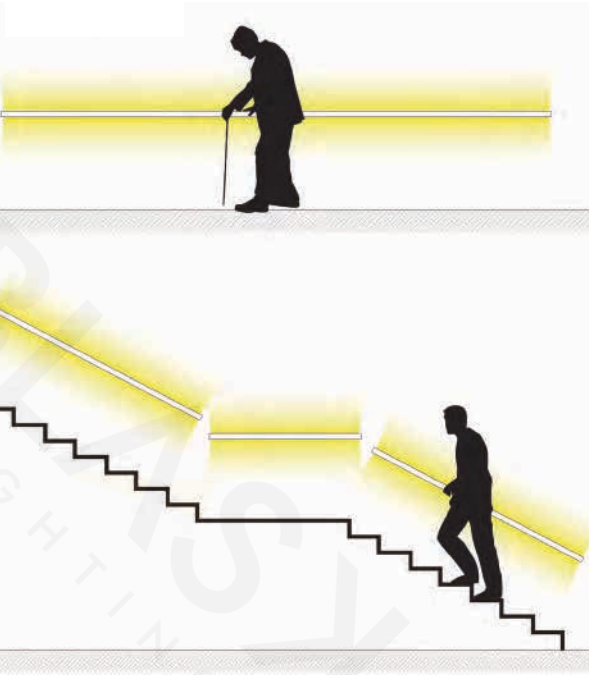

FINISH



END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Connector



90° Vertical connector




180° Connector




Types of installation:



Material: Extruded aluminum
Dimension: 104.6×66mm
Length: MAX 6m

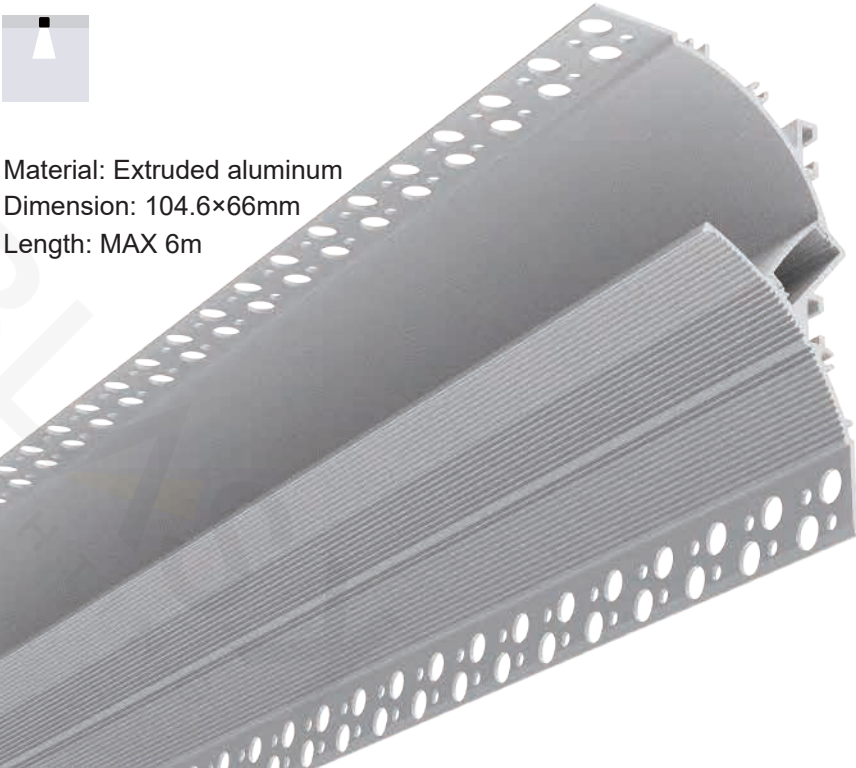


BLEIAP10278

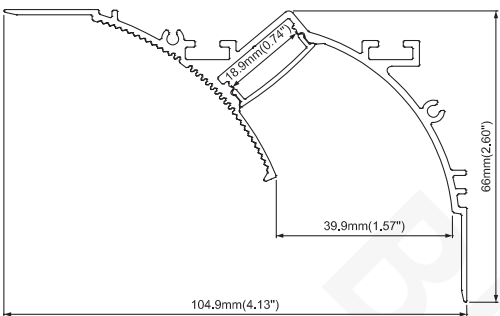

FINISH



white

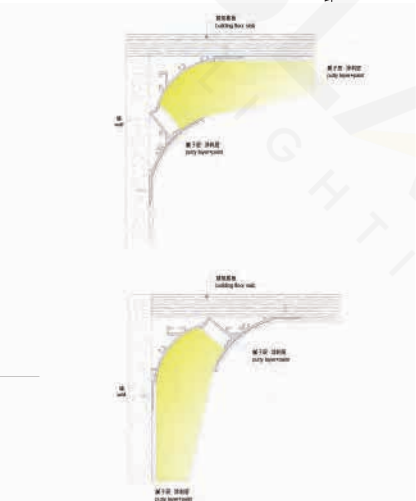

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector



Disposable cover




Types of installation:



Material: Extruded aluminum
Dimension: 15.4×32.2mm
Length: MAX 6m



BLEIAP10279

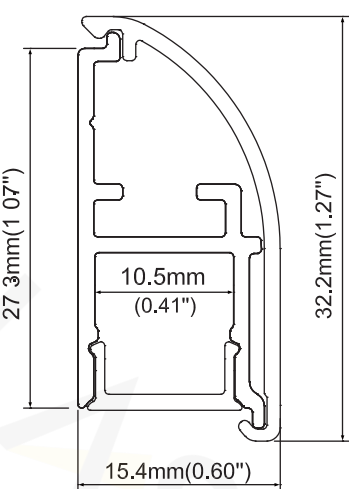

FINISH




Anod. aluminum



white



Black

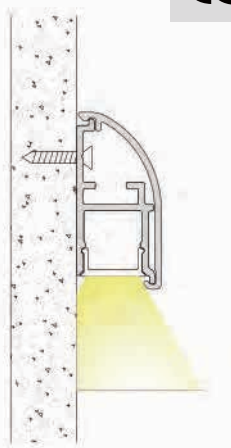

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Horizontal connector



90° Vertical connector



180° Connector




Types of installation:



Material: Extruded aluminum
Dimension: 23.5×22.6mm
Length: MAX.6m



BLEIAP10280

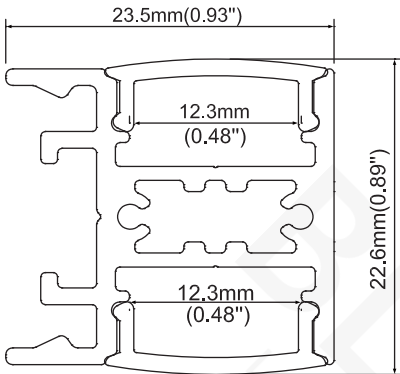

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC diffused

ACCESSORIES



90° Connector




90° Vertical connector




180° Connector



Mounting clip (metal)

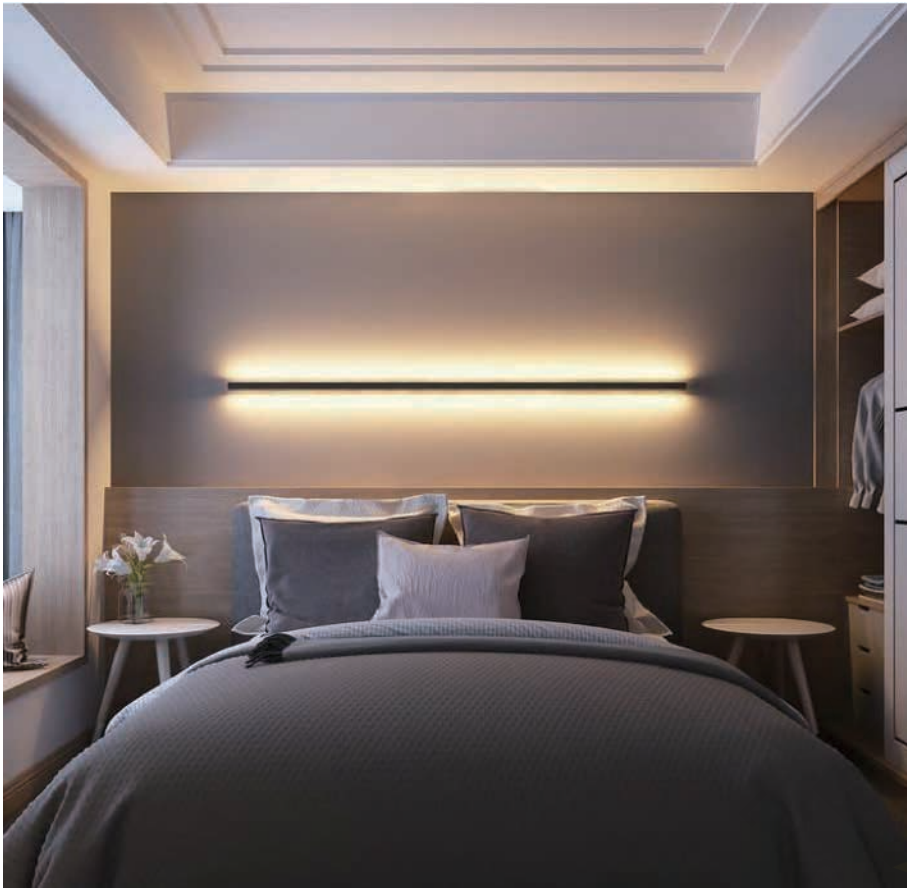

BLEIAP10281

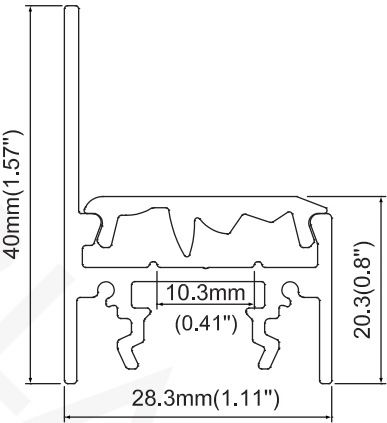

Types of installation:



Material: Extruded aluminum
Dimension: 28.3×40mm
Length: MAX.6m

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

ACCESSORIES



Mounting clip (metal)




Spring clip





Lens



BLEIAP10282

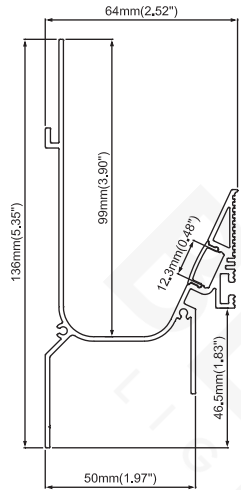

FINISH

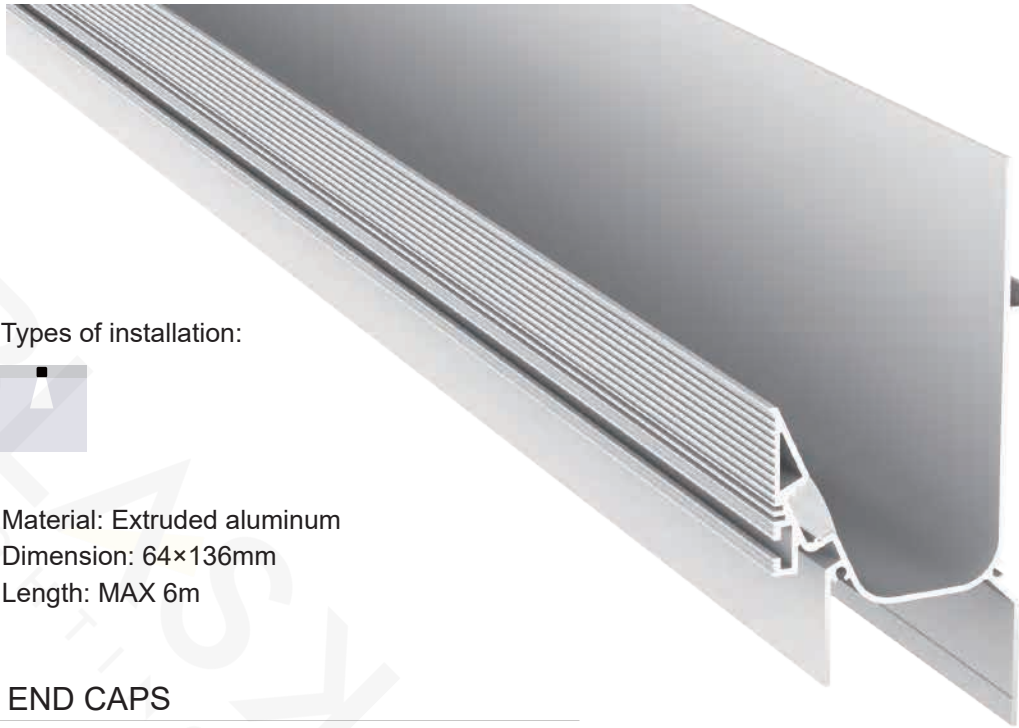

Types of installation:



Material: Extruded aluminum
Dimension: 64×136mm
Length: MAX 6m

END CAPS



End cap with hole
End cap without hole




DIFFUSERS




PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

ACCESSORIES



90° Inside Connector



90° Outside Connector




180° Connector




Clip



BLEIAP10283

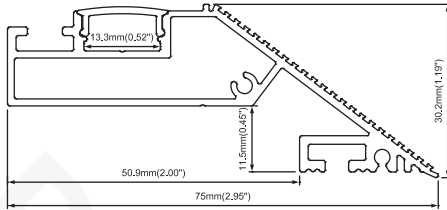

FINISH



Types of installation:



Material: Extruded aluminum
Dimension: 75×30.17mm
Length: MAX 6m

END CAPS



End caps

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

ACCESSORIES





90° Outside Connector




90° Inside Connector



180° Connector

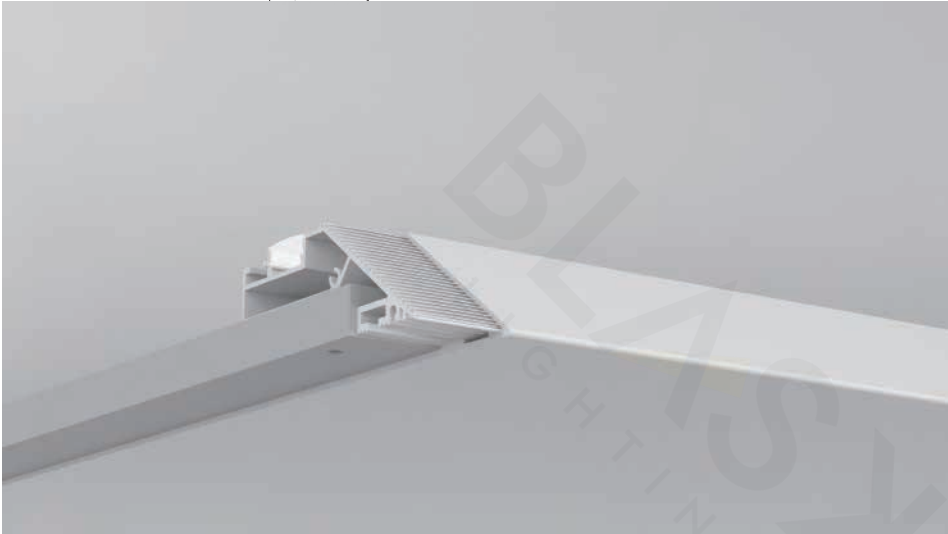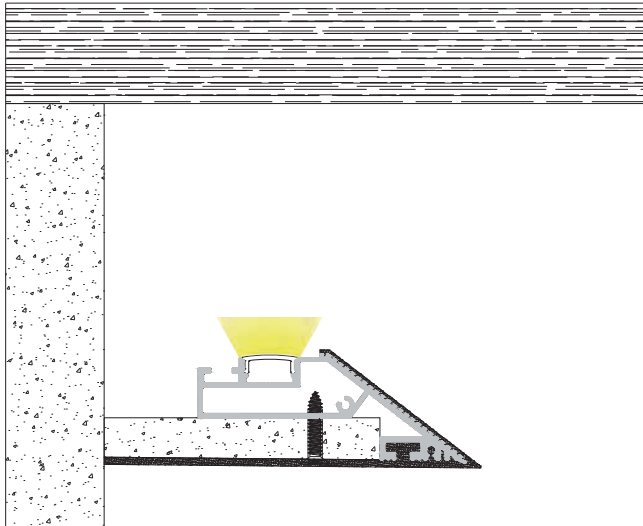

BLEIAP10284

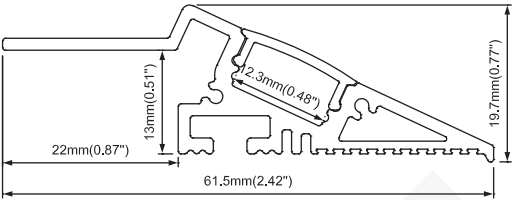

Types of installation:



Material: Extruded aluminum
Dimension: 61.5×19.7mm
Length: MAX 6m

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

ACCESSORIES




90° Inside Connector



90° Outside Connector



180° Connector

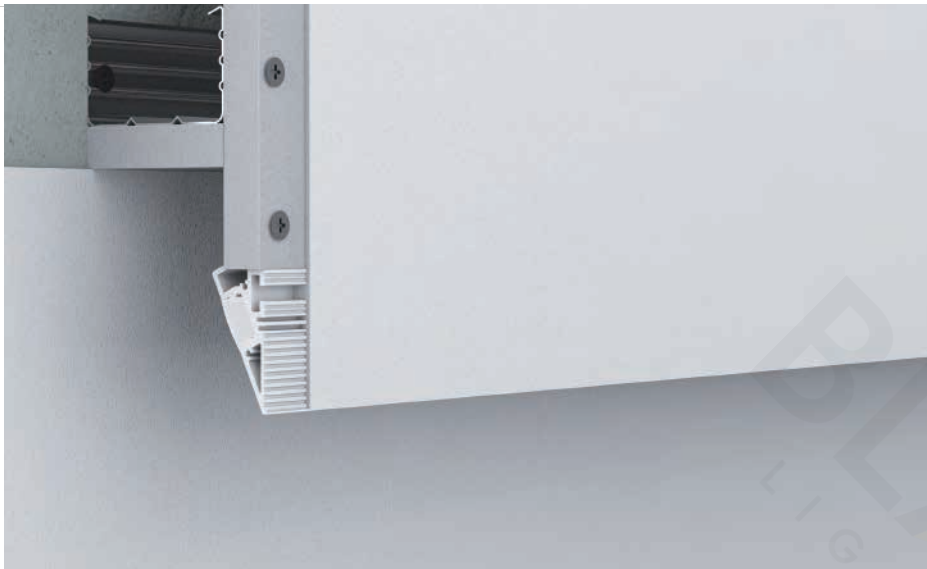


FINISH



Anod. aluminum




white

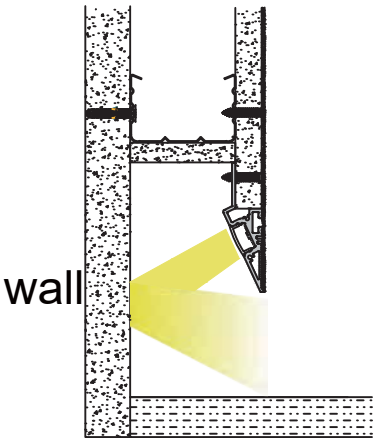

wall

BLEIAP10285

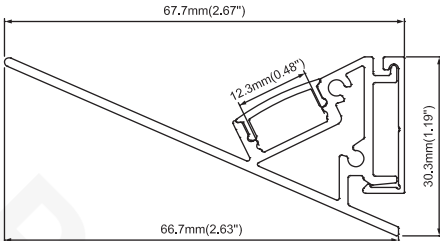

Types of installation:



Material: Extruded aluminum
Dimension: 67.7×30.3mm
Length: MAX 6m

END CAPS



End caps

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

FINISH





Anod. aluminum




white



Black

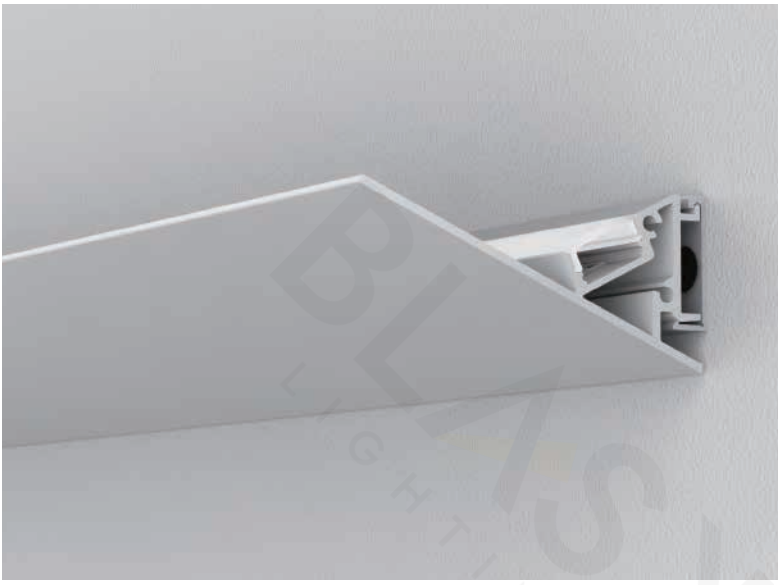

BLEIAP10286

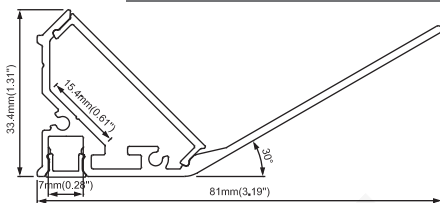


Types of installation:



Material: Extruded aluminum
Dimension: 81×33.4mm
Length: MAX 6m



FINISH



END CAPS



End caps

DIFFUSERS



PC diffused



PC diffused

ACCESSORIES



90° Horizontal connector




90° Vertical connector



180° Connector



BLEIAP10287

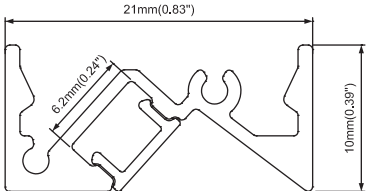

Types of installation:



Material: Extruded aluminum
Dimension: 21×10mm
Length: MAX 6m



FINISH



END CAPS



End caps

DIFFUSERS




PC frosted

ACCESSORIES



Mounting clip (metal)

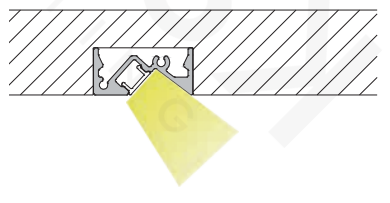




Types of installation:



Material: Extruded aluminum
Dimension: 12×12mm
Length: MAX 6m



FINISH



END CAPS



End caps

ACCESSORIES



3M tape



Types of installation:



Material: Extruded aluminum
Dimension: 69.3×68mm
Length: MAX 6m



FINISH



END CAPS



End caps



plastic
End caps



silicone pad

ACCESSORIES




Antifouling cover



Aluminium
PCB tray




Waterproof Cable
Grommet



Aluminium
profile



Clip

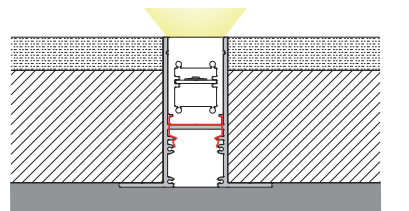



Types of installation:



Material: Extruded aluminum
Dimension: 40.25×26mm
Length: MAX 6m
Compatible with 12.5mm drywall

END CAPS




End cap with hole
End cap without hole

DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

ACCESSORIES




90° Inside Connector



90° Outside Connector



180° Connector

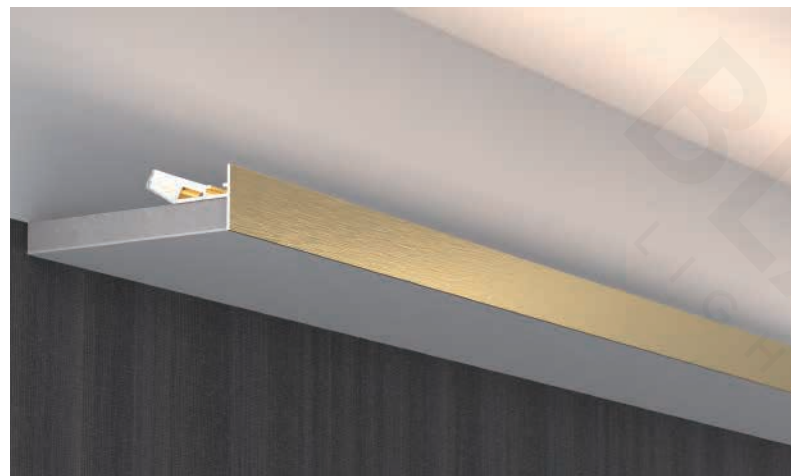

Types of installation:



Material: Extruded aluminum
Dimension: 36.3×29.9mm
Length: MAX 6m
Compatible with 12.5mm drywall

END CAPS






End cap with hole
End cap without hole


DIFFUSERS



PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused

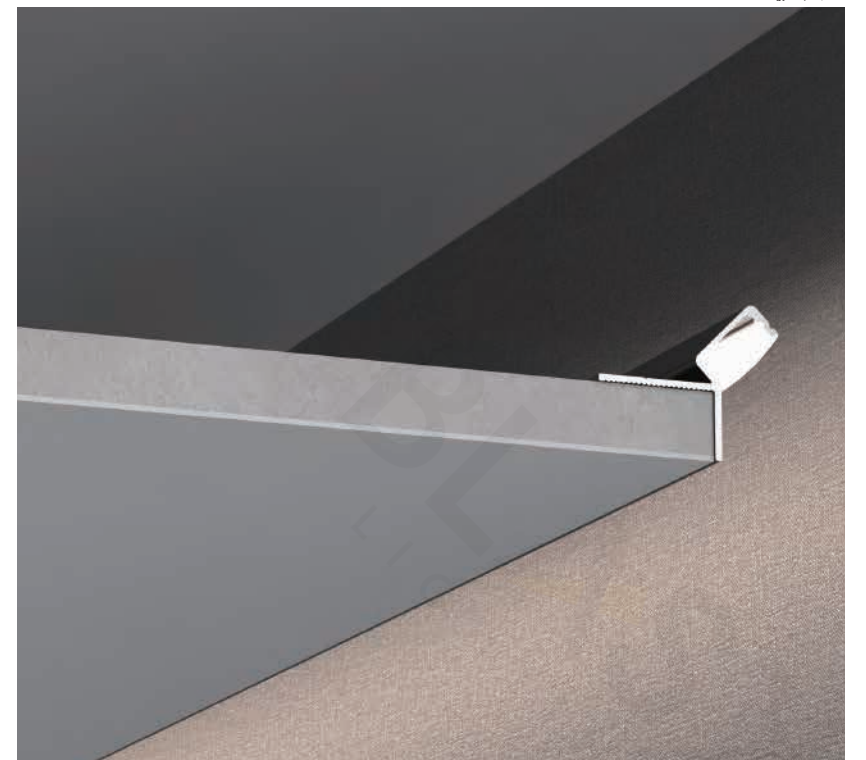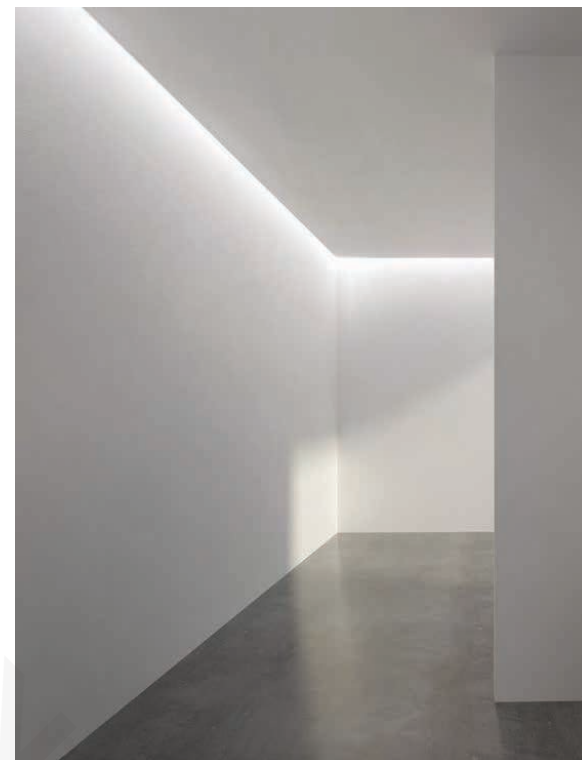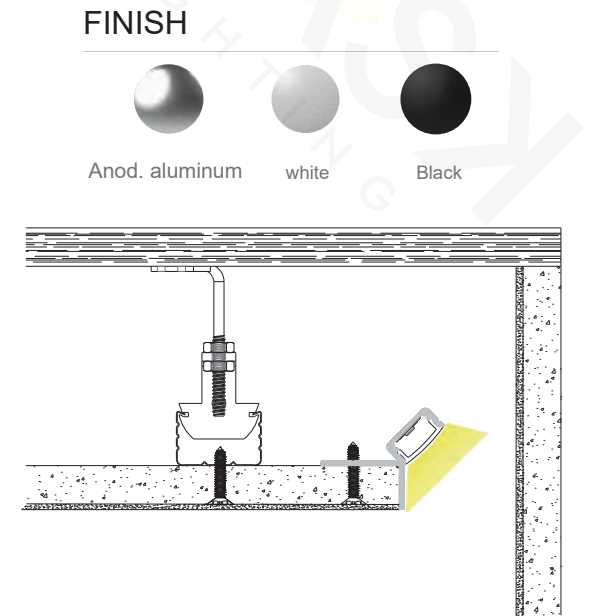

BLEIAP10292

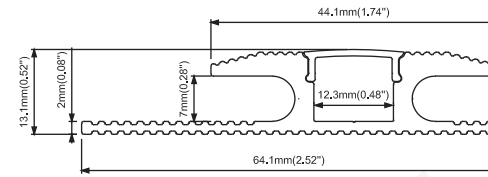

Types of installation:



Material: Extruded aluminum
Dimension: 64.1×13.1mm
Length: MAX 6m

END CAPS



End cap with hole
End cap without hole



FINISH



Anod. aluminum



Black

DIFFUSERS




PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused




Black PC

carpet

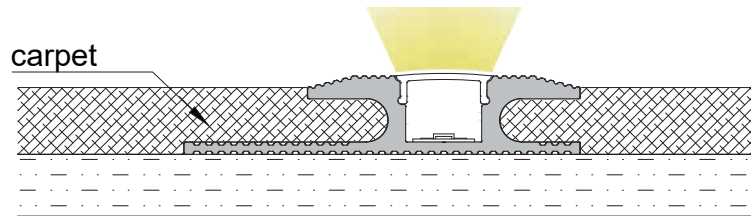

BLEIAP10293

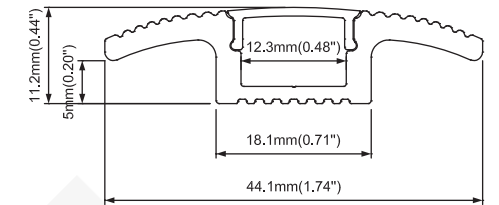

Types of installation:



Material: Extruded aluminum
Dimension: 44.1×11.2mm
Length: MAX 6m

END CAPS



End cap with hole
End cap without hole



FINISH



Anod. aluminum



Black

DIFFUSERS




PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused




Black PC

carpet

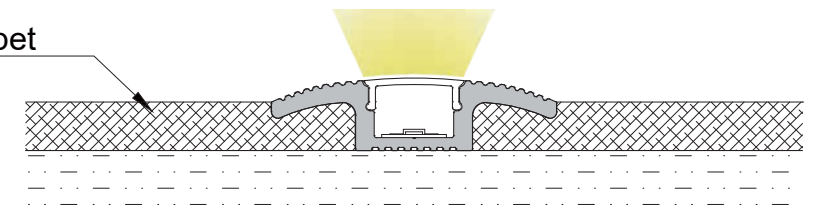

BLEIAP10294



Types of installation:



Material: Extruded aluminum
Dimension: 62.1×11.2mm
Length: MAX 6m

END CAPS



End cap with hole
End cap without hole

DIFFUSERS




PMMA opal matte
PMMA semi-clear
PMMA clear
PC diffused



Black PC

carpet

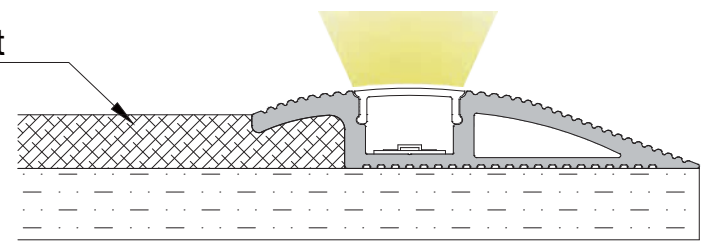

FINISH




Anod. aluminum Black

Types of installation:



Material: Extruded aluminum
Dimension: 23×26.2mm
Length: MAX 6m


BLEIAP10295

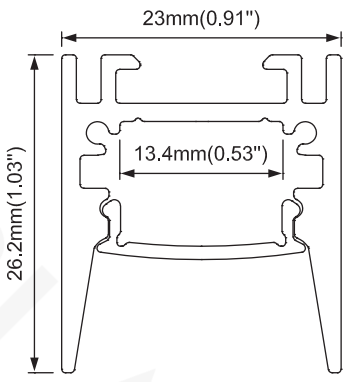

FINISH



Anod. aluminum white Black

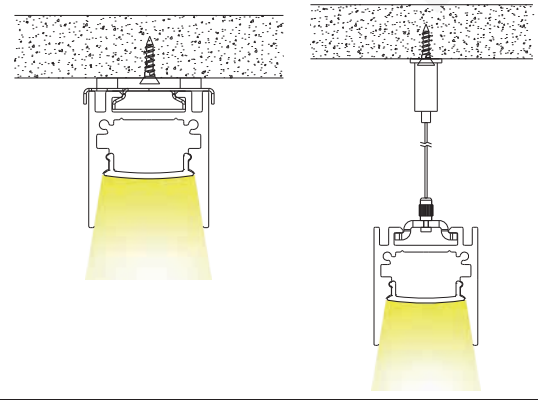

END CAPS



End cap with hole
End cap without hole

DIFFUSERS



PC diffused



Prismatic



Black PC

ACCESSORIES



90° Horizontal connector



180° Connector



90° Vertical connector




Hanging bracket



Steel wire



Mounting clip (surface)

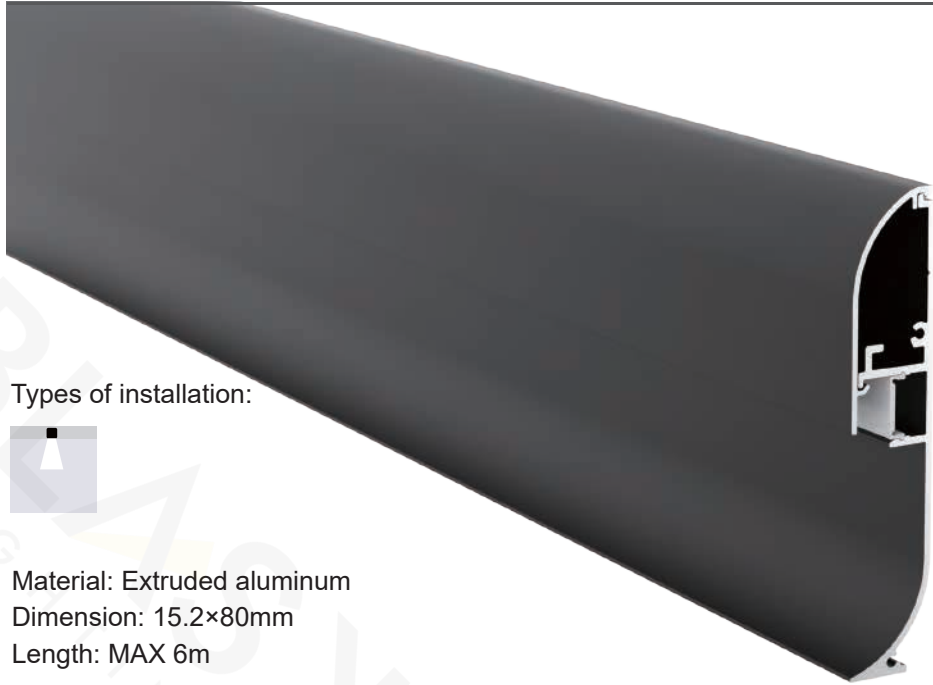

Types of installation:



Material: Extruded aluminum
Dimension: 15.2×80mm
Length: MAX 6m

END CAPS



End caps

DIFFUSERS



PC diffused

ACCESSORIES




90° Outside Connector




90° Inside Connector




180° Connector

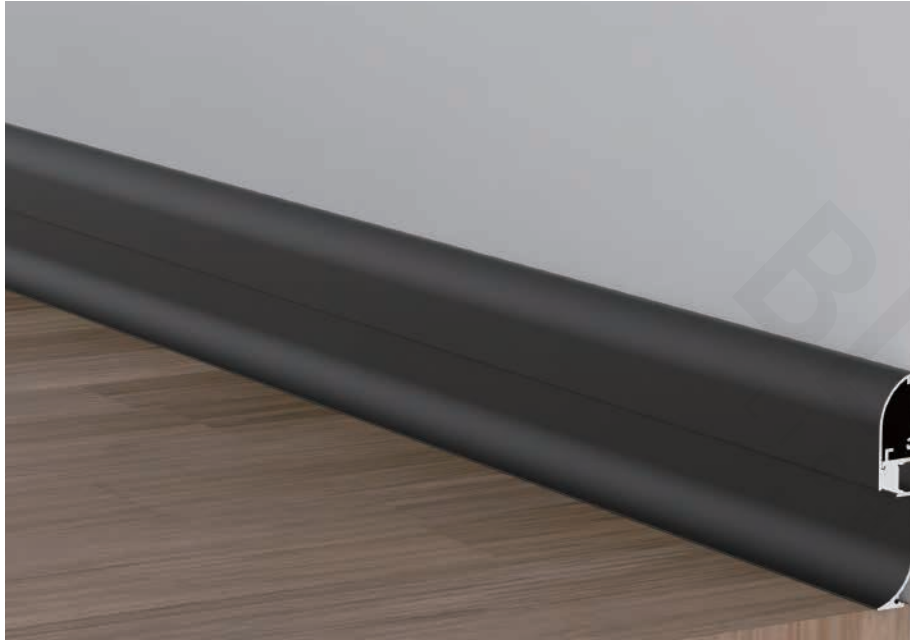

BLEIAP10296




FINISH



Anod. aluminum

white

Black

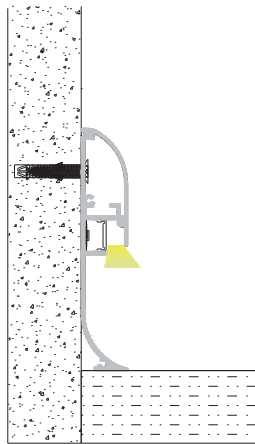


Track system





Types of installation:




Material: Extruded aluminum
Dimension: 46.3×78mm
Length: MAX 6m

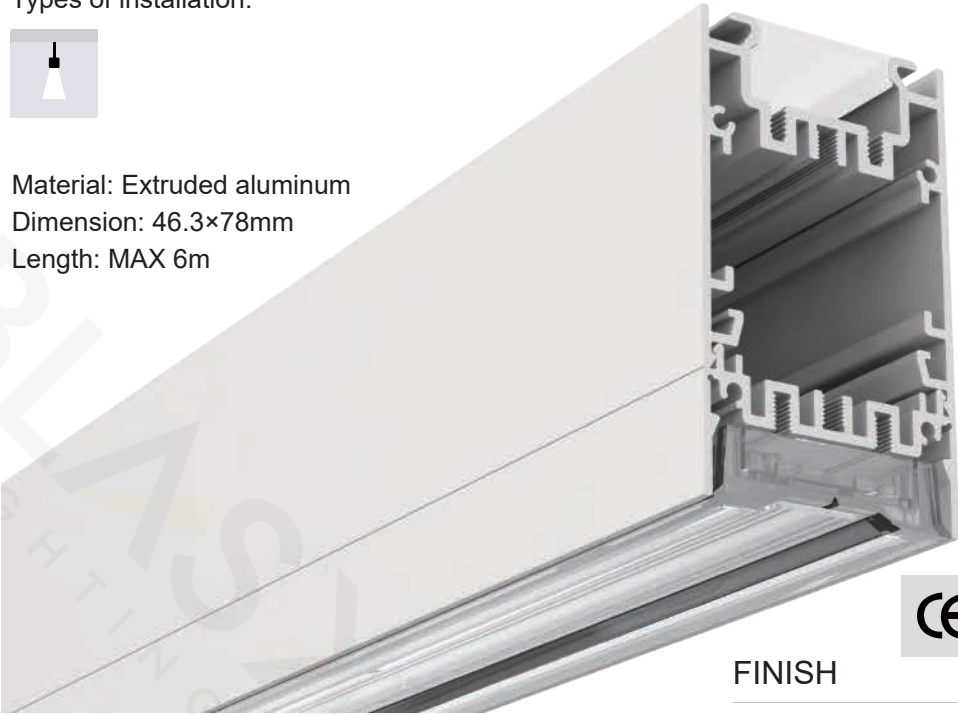

BLEIAP10297

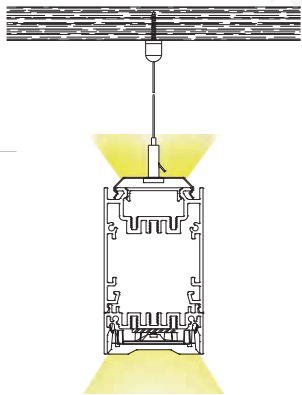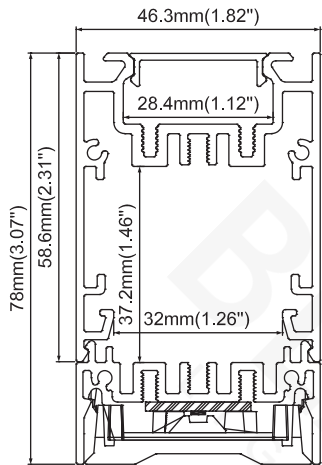

FINISH



END CAPS



End caps

DIFFUSERS



Linear Optics
VS LIGHTING SOLUTIONS



PC frosted

ACCESSORIES



Blind cover



Safety wire



Connector X



Mounting clip
(metal)



Connector T



Connector L



Steel wire




LED
module


Types of installation:




Material: Extruded aluminum
Dimension: 46.3×78mm
Length: MAX 6m

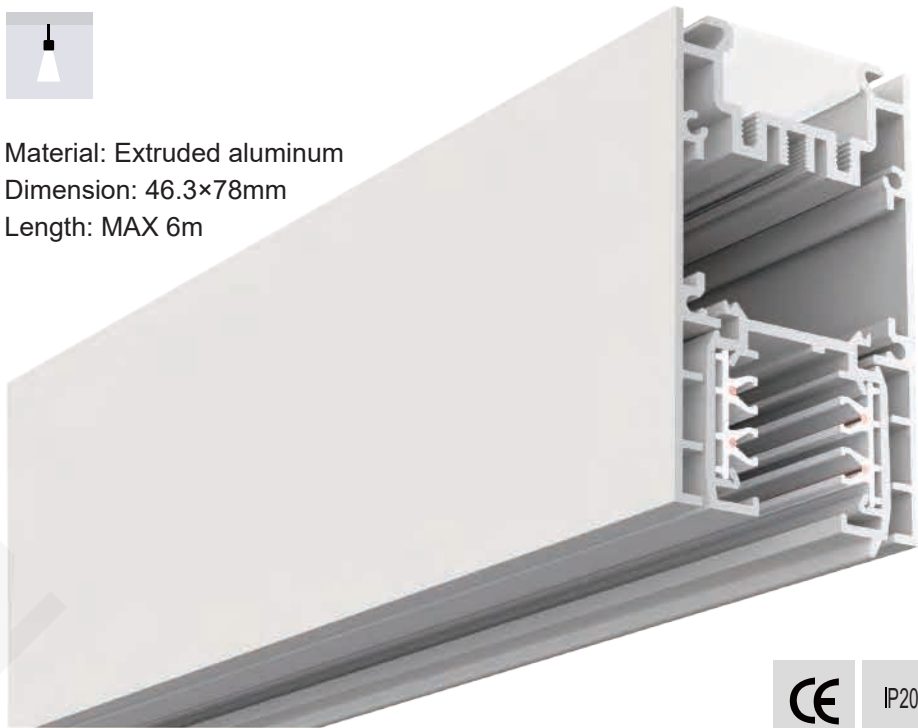

BLEIAP10298

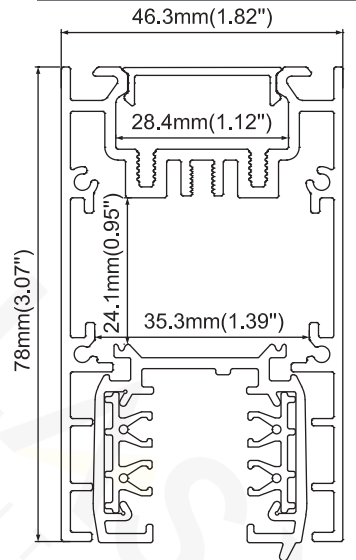

FINISH



END CAPS



End caps

DIFFUSERS



PC frosted

ACCESSORIES



Mounting clip
(metal)



TRACK



Spot lighting
(15° 24° 36°)



Safety wire



Steel wire



Clip




Connector X



Connector T



Connector L

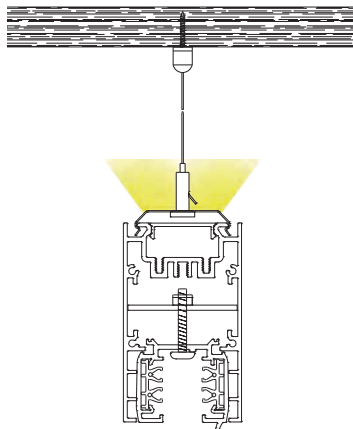


Types of installation:



Material: Extruded aluminum
Dimension: 59.8×78mm
Length: MAX 6m




BLEIAP10299

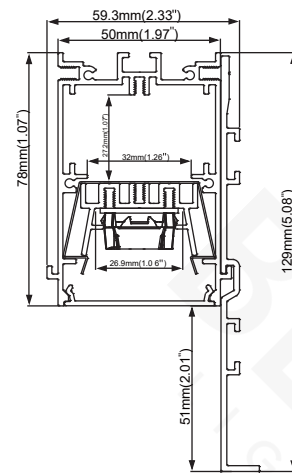

FINISH




Anod. aluminum white Black

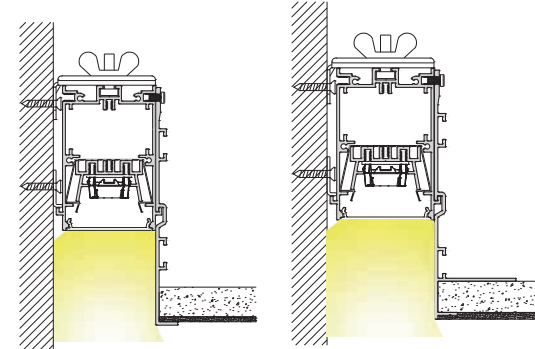

END CAPS



End caps



DIFFUSERS



PC clear



Linear Optics
LEDiL

ACCESSORIES



Clip




Safety wire



Recessed Trim



Recessed Trimless

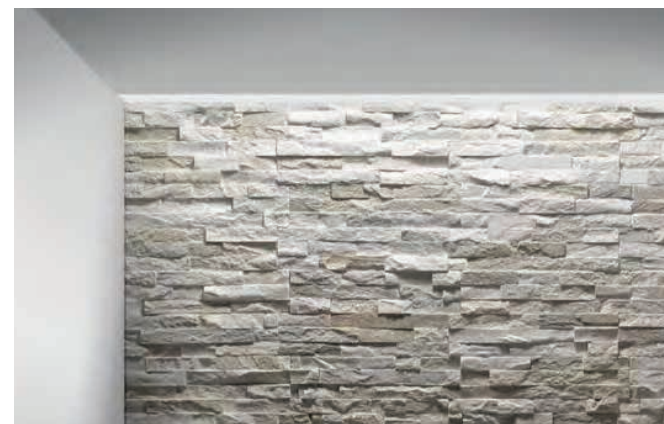


Types of installation:



Material: Extruded aluminum
Dimension: 46.3×60mm
Length: MAX.6m



BLEIAP10300

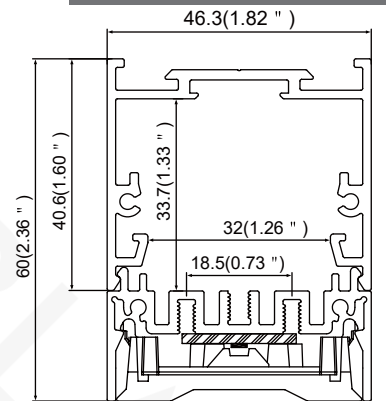

FINISH



Anod. aluminum white Black



END CAPS



End Caps

ACCESSORIES



VS lens



Connector L




Connector T




Connector I



Safety wire

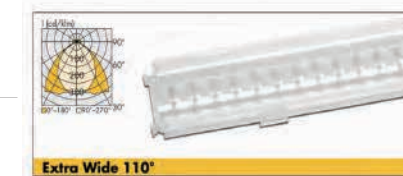

Extra Wide 110°

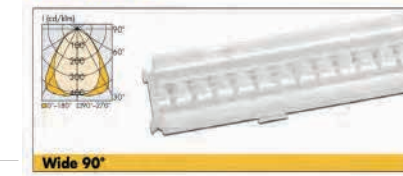

Wide 90°



Diffuse 100°



Medium 60°



Medium 60° UGR



Narrow 30°



Retail SYM 1



Retail SYM 2




Retail ASYM

Types of installation:



Material:Extruded aluminum
Dimension:55×80mm
Length:MAX.6m

BLEIAP10301

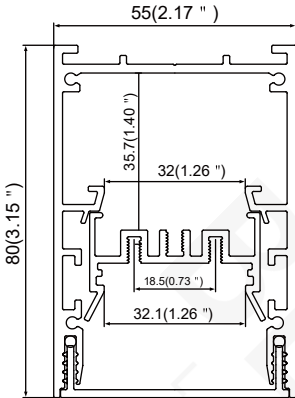

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Steel wire




Hanging clip

Types of installation:



Material:Extruded aluminum
Dimension:79×80mm
Length:MAX.6m

BLEIAP10302

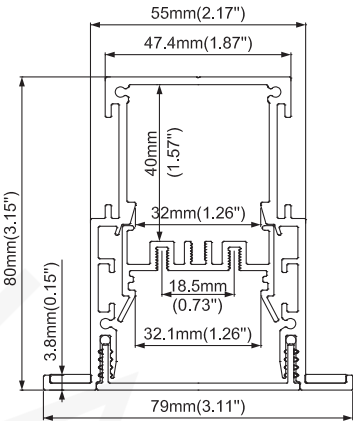

FINISH



Anod. aluminum



white



Black

END CAPS



End Caps

DIFFUSERS



PC frosted

ACCESSORIES



Internal Clip



Types of installation:



Material: Extruded aluminum
Dimension: 25.4×25.4mm
Length: MAX 6m







FINISH



white

Black

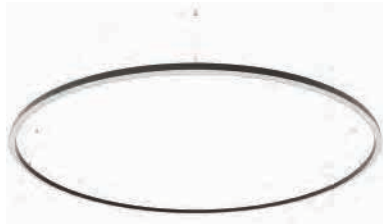

DIFFUSERS



PMMA frosted

ACCESSORIES




Connetor



Slider



Steel wire

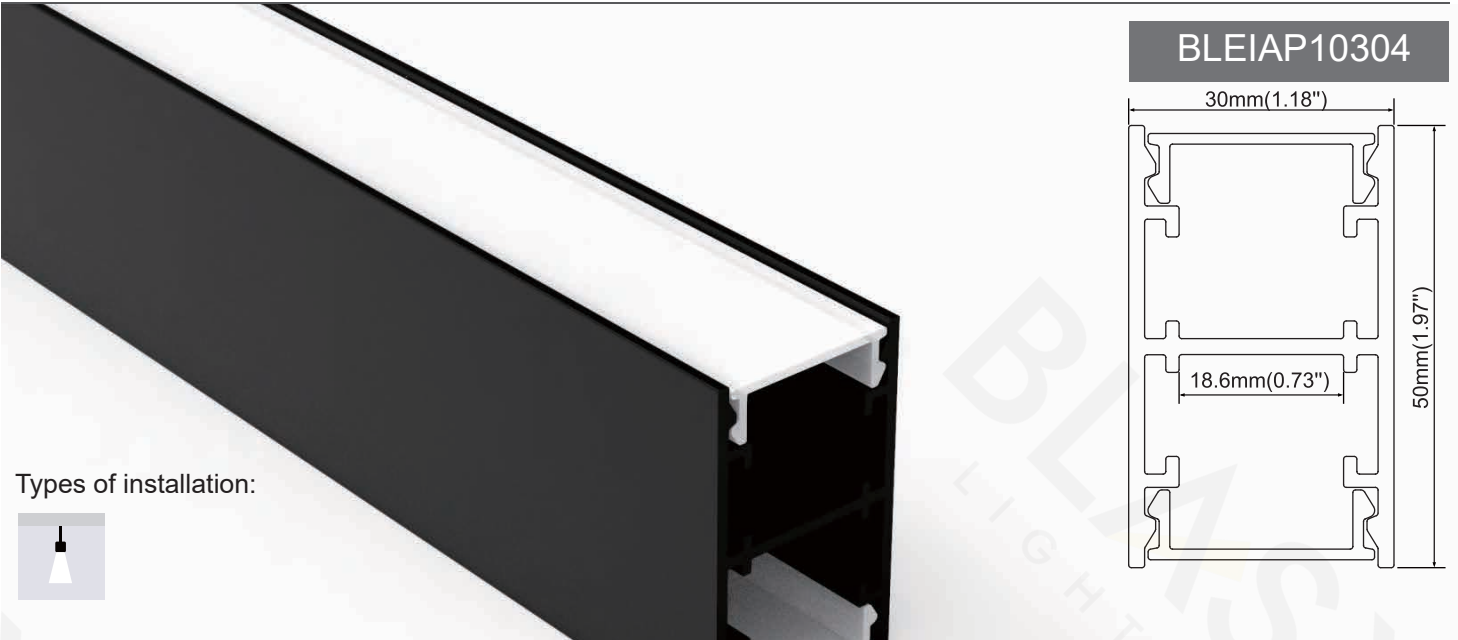

Types of installation:



Material: Extruded aluminum
Dimension: 30×50mm
Length: MAX 6m








FINISH




white

Black



DIFFUSERS



PMMA frosted

ACCESSORIES



Hanging bracket



Connector



Steel wire



BLEIAP10305

53.6mm(2.11")

41.4mm(1.63")

50mm(1.97")

60.4mm(2.38")



IP20

FINISH



white

Black

Types of installation:



Material: Extruded aluminum
Dimension: 53.6×60.4mm
Length: MAX 6m



DIFFUSERS



PMMA frosted

ACCESSORIES




Hanging bracket




Connector



Steel wire



Step 01:
Slide the U shape hanging
clip into the profile

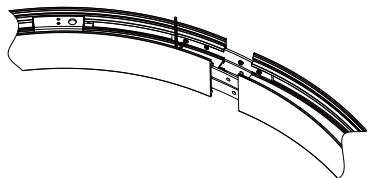


Step 02:
Connecting the curved
profile by connector




Step 03:
Stick the led board inside
the profile(down light)



Step 04:
Press the curved cover into
the profile(down light)




Step 05:
Stick the led board inside
the profile(up light)




Step 06:
Lock the U shape clip




Step 07:
Press the curved cover(after drilling
the hole) into the profile(up light)



Step 08:
Fix the U shape clip on
suitable position by screws




Step 09:
Hang the circle by the steel wire



Step 10:
Connecting the driver

BLEIAP10306

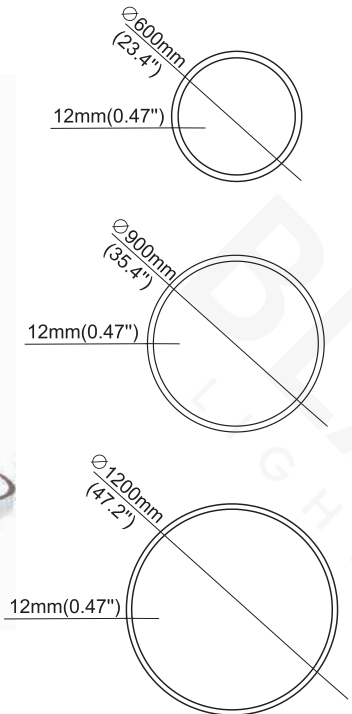

Types of installation:




Material: Extruded aluminum
Dimension: 12×30mm
Length: MAX 6m

FINISH



Black

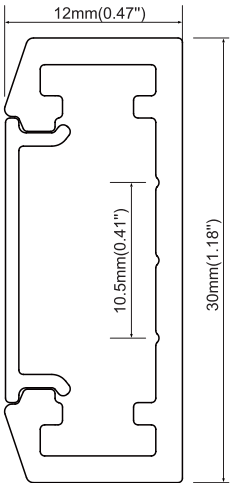

IP20

DIFFUSERS



PC diffused


ACCESSORIES



Steel wire



BLEIAP10307

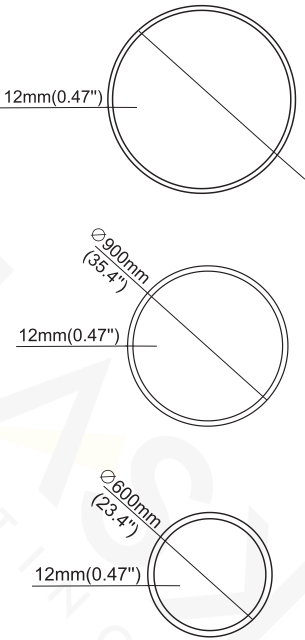

Types of installation:




Material: Extruded aluminum
Dimension: 12×30mm
Length: MAX 6m

FINISH



Black

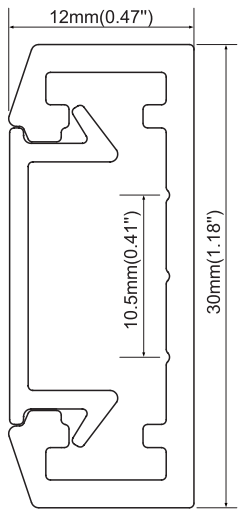

IP20

DIFFUSERS



PC diffused


ACCESSORIES



Steel wire



BLEIAP10308



Aluminum board for heat dissipation
12x2mm
about 14W/M

FINISH




Anod. aluminum



IP20

BLEIAP10309

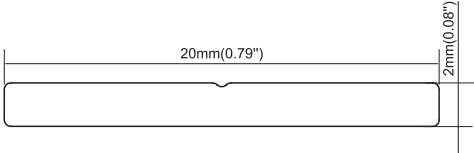

Aluminum board for heat dissipation
20x2mm
about 20W/M

FINISH




Anod. aluminum



IP20

BLEIAP10310

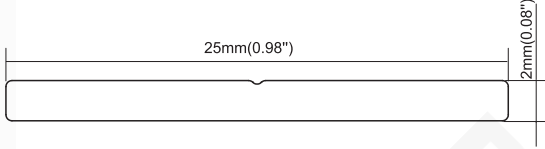

Aluminum board for heat dissipation
25x2mm
about 30W/M

FINISH



Anod. aluminum




IP20

Types of installation:



Material: Extruded aluminum
Dimension: 50x50.3mm
Length: MAX 6m

BLEIAP10311

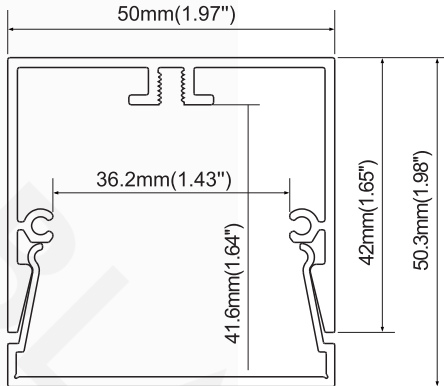

IP20

FINISH



Anod. aluminum



white




Black


END CAPS




End Caps




Step 01



Step 02



Step 03



Step 04




Step 05




BLEIAP10312

Round driver box for circles

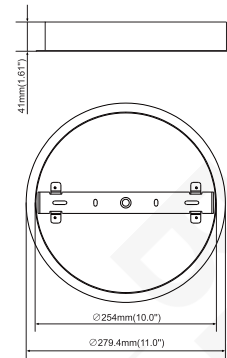


BLEIAP10313

Round driver box for circles





BLEIAP10314

Round driver box for circles



BLEIAP10315

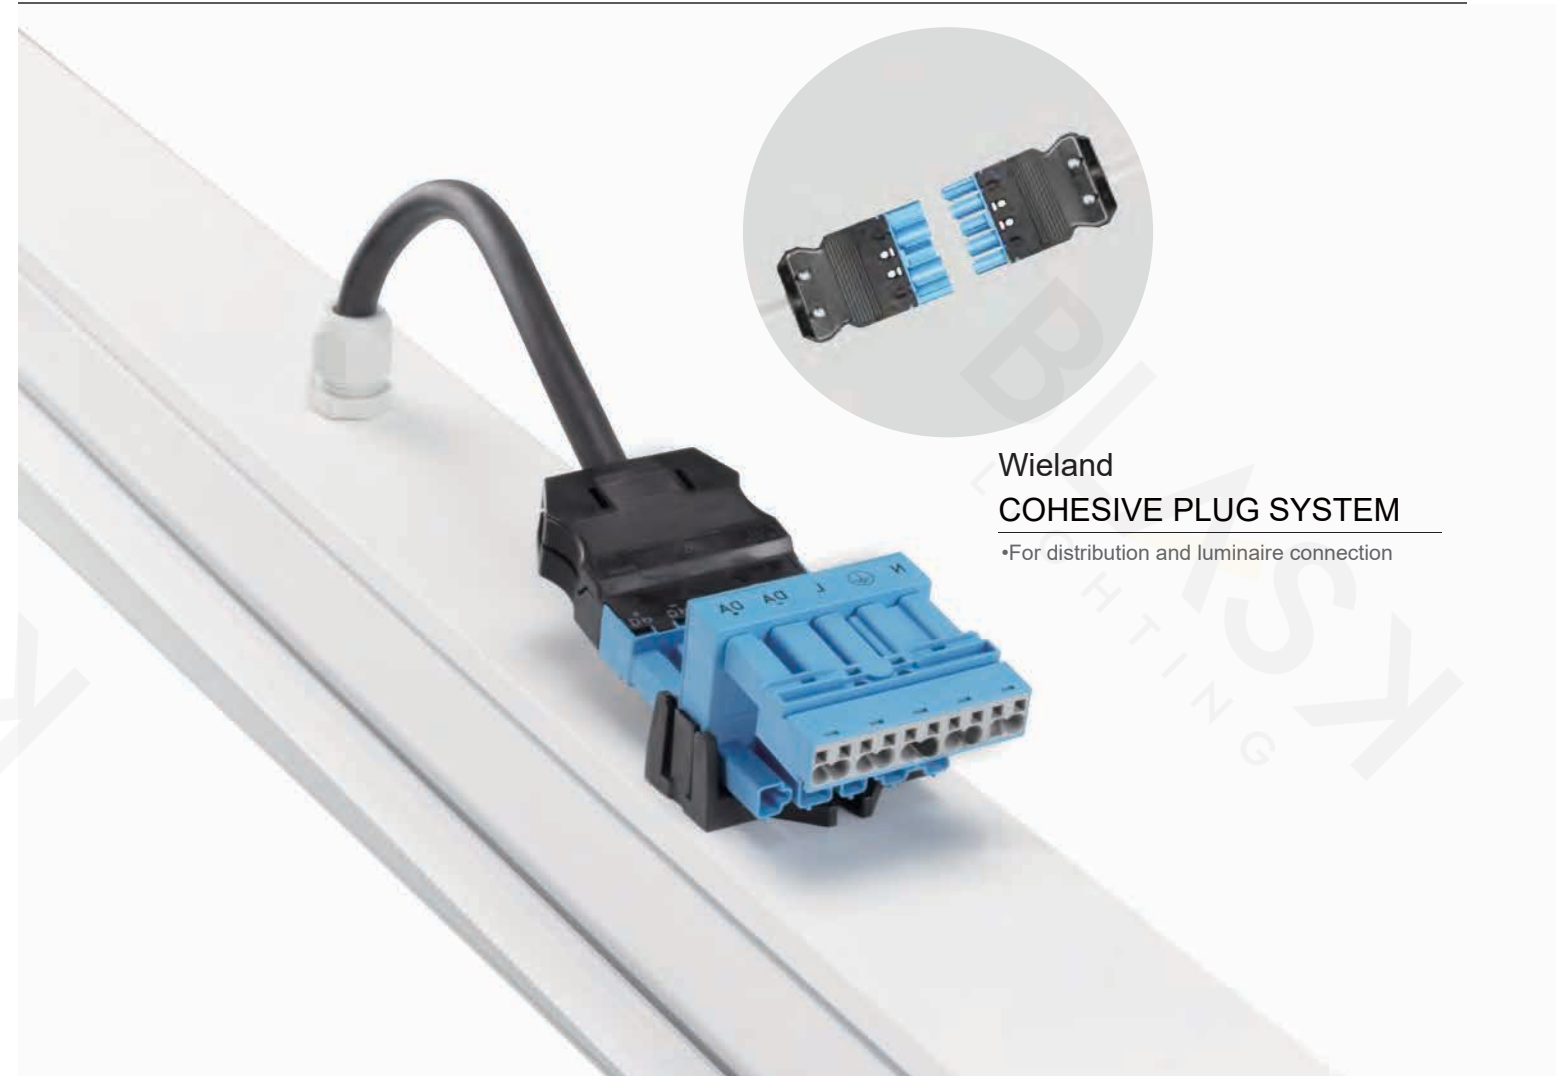

Wieland COHESIVE PLUG SYSTEM

•For distribution and luminaire connection

APPLICATIONS

The electrical connection of luminaires usually calls for the time-consuming method of opening the luminaire, dismantling and stripping the power supply and control cable, and, if applicable, inserting the illuminants on site. With pluggable pre-assembled luminaires, the effort required for on-site assembly can be reduced quite considerably.


SOLUTIONS

- Industrially pre-assembled components.
- Easy to plug together on site.
- For mains application (3-pole) and DALI application (5-pole).
- Flexibility to the point in time of luminaire assembly: conventional connection or pluggable


ADVANTAGES

- Fast, easy, and safe installation.
- Standardized interfaces for fast replacement.
- High functional reliability through prevention of mismatching.
- Simple adjustment of the installation to local conditions


LED Module For BLEIAP10036 SERIES


	600	900	1270	1800
				
Connection type	1/4 circle joining together	1/8 circle joining together	1/8 circle joining together	1/8 circle joining together
Power(W)	7.2W	5.4W	7.2W	10.8W
Input Voltage(V)	36V	36V	36V	36V
Input Current(mA)	200mA	150mA	200mA	300mA
Light Output	1008lm	756lm	1008lm	1512lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED	2835 SMD LED	2835 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram	Samsung/Osram


LED Module For BLEIAP10304 SERIES

	600	900	1200	1800
				
Connection type	1/4 circle joining together	1/8 circle joining together	1/8 circle joining together	1/8 circle joining together
Power(W)	7.2W	5.4W	7.2W	10.8W
Input Voltage(V)	36V	36V	36V	36V
Input Current(mA)	200mA	150mA	200mA	300mA
Light Output	1008lm	756lm	1008lm	1512lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED	2835 SMD LED	2835 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram	Samsung/Osram

LED Module For BLEIAP10305 SERIES

	900	1270	1800
			
Connection type	1/8 circle joining together	1/8 circle joining together	1/8 circle joining together
Power(W)	5.4W	8.1W	10.8W
Input Voltage(V)	36V	36V	36V
Input Current(mA)	150mA	225mA	300mA
Light Output	756lm	1134lm	1512lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED	2835 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram

	BLEILS10316	BLEILS10317	BLEILS10318
			
Size(mm)	1000×12×5	995×24×6	1185×24×6
Power(W)	30W	30W	40W
Input Voltage(V)	30V	30V	27V
Input Current(mA)	1.0A	1.0A	1.5A
Light Output	4200lm	4200lm	5600lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED	5630 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram

	FOR BLEIAP10250	FOR BLEIAP10251	FOR BLEIAP10256
			
Size (mm)	132.5X20X6mm	190X30X6	285X31X6mm
Power(W)	6W	9W	14W
Input Voltage(V)	15V	15V	18V
Input Current(mA)	0.4A	0.6A	0.8A
Light Output	660lm	990lm	1260lm
Color Temperature	3000K/4000k	3000K/4000k	3000K/4000k
CRI	80+/90+	80+/90+	80+/90+
LED Type	3030 SMD LED	3030 SMD LED	3030 SMD LED
LED Brand	Osram	Osram	Osram

LED Module: For BLEIAP10232, BLEIAP10233

		
Size (mm)	280X30X6	1140X30X6
Power(W)	7.2W	29W
Input Voltage(V)	42V	42V
Input Current(mA)	0.175A	0.7A
Light Output	1000lm	4060lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram

LED Module: Rigid Board

	BLEIRB10319	BLEIRB10320	BLEIRB10321
			
Size	560*24*5mm	560*51.5*5mm	560*68.5*5mm
Power	14W	21W	27W
Light Output	1980lm	2950lm	3900lm
CRI	80+/90+	80+/90+	80+/90+
Color temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram


LED Module: Flexible PCB

	BLEIFPCB10322	BLEIFPCB10323	BLEIFPCB10324
			
Size	5000*12* 1.2mm	2500*24*1.2mm	2500*51.5*1.2mm
Power/meter	14W	28W	34W
Light Output/meter	1190lm	2380lm	2890lm
CRI	80+/90+	80+/90+	80+/90+
Color temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
Voltage input	DC24V	DC24V	DC24V
Cutting unit	100mm	100mm	100mm
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram


Constant Voltage Driver

				
Input Voltage(V)	220V-240V	220-240V	220-240V	220V-240V
Output Voltage(V)	24V	24V	24V	24V
Output Current(mA)	0-1.25A	0-2.5A	0-3.3A	0-8.3A
Power Max	30W	60W	80W	200W
Efficiency	88%	88%	88%	88%
Power Factor	≥0.95	≥0.95	≥0.95	≥0.95
Size (mm)	210x30x21	280x30x21	280x30x21	360x37x30

Constant Current Driver-Osram

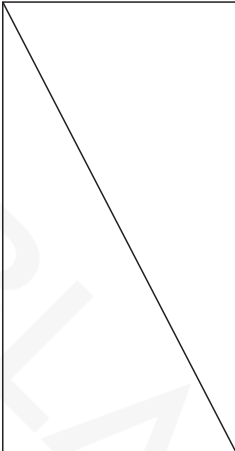				
	Voltage input	220-240VAC	220-240VAC	220-240VAC
	Voltage output	23-51VDC	23-51VDC	23-54VDC
	Current output	200mA/250mA/300mA/350mA	500mA/600mA/700mA/800mA	900mA/1050mA/1100mA/1200mA
	Power Max	17.8W	40.8W	64.8W
	Efficacy	84%	85%	87%
	PF	0.98	0.98	0.98
	Size	210×30×21	210×30×21	210×30×21

Constant Current Driver-Philips

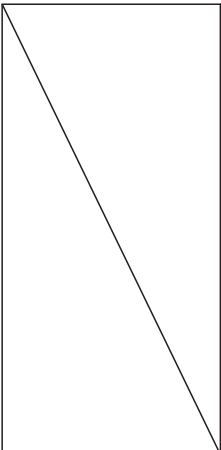	36W Non-dimmable	75W Non-dimmable	36W DALI	75W DALI
				
	Part Number	Xitanium 36W/0.3-1A,54V,230V	Xitanium 75W/0.7-2A, 54V 230V	Xitanium 36W 0.3-1A,54V TD 230V
	Size (mm)	360x30x21	360x30x21	360x30x21
	Input Voltage(V)	202-254V	202-254V	202-254V
	Power Factor	≥0.9	≥0.9	≥0.9
	Output Current(mA)	300-1000	700-2000	300-1000
	Output Voltage(V)	27-54V	27-54V	27-54V
	Output Power Range(W)	11-37	21-75	11-37
	Maximum Power(W)	36	75	36